

Chlordane 8.0 Miscible for Termites

Insecticide

EPA Reg No 279-538

EPA Est. 279-

Active Ingredients:

*Technical Chlordane
Xylene range aromatic solvent

Inert Ingredients:
By Wt

72.00%

23.00%

5.00%

100.00%

*Equivalent to 43.2% Octachloro-4,7-methanotetrahydroindane and 28.8% related compounds
Containing 8 lbs. Technical Chlordane per gallon

FOR PROFESSIONAL USE ONLY

KEEP OUT OF REACH OF CHILDREN WARNING

STATEMENT OF PRACTICAL TREATMENT

If Swallowed: drink one or two glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Get medical attention.

If on Skin: wash with soap and water.

If in Eyes: flush with water for 15 minutes. Contact a physician.

For Emergency Assistance Call: 716-735-3765

See Other Panels for Additional Precautionary Information

PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals

Warning

May be fatal if swallowed. Do not breathe vapor, dust, or spray mist. Do not get in eyes, on skin or clothing. In case of contact wash immediately with soap and water.

Do not apply this material to livestock or household pets. Avoid contamination of feed and foodstuff.

A Committee of the National Academy of Sciences has stated that there are no adequate data to show that these compounds are carcinogenic in humans, but because of their carcinogenicity in certain mouse strains and the extensive similarity of the carcinogenic action of chemicals in animals and in humans, the Committee concluded that Chlordane, Heptachlor, and/or their metabolites may be carcinogenic in humans.

Environmental Hazards

This product is toxic to fish, shrimp, crabs, birds and other wildlife. Birds and other wildlife in treated areas may be killed. Keep out of lakes, streams, ponds, tidal marshes and estuaries. Do not apply where runoff is likely to occur. Do not apply when weather conditions favor drift from areas treated. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

Physical or Chemical Hazards

Do not use in undiluted form. Do not use, pour, spill or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Storage and Disposal

Do not store below 10°F. Do not contaminate water, food or feed by storage or disposal. Pesticide spray mixture or rinsate that cannot be used or chemically reprocessed should be disposed of in a landfill approved for pesticides or buried in a safe place away from water supplies. To dispose of container, triple rinse (or equivalent) and dispose in approved landfill or bury in a safe place away from water supplies. Do not cut or weld this container. Open dumping is prohibited. Consult Federal, State or local disposal authorities for approved alternative procedures.

SUBTERRANEAN TERMITE CONTROL— FOR PROFESSIONAL USE ONLY

*Mix 1 part Chlordane 8.0 Miscible per 12 gallons water for the following uses.

Preconstruction Treatment
Slab-On-Ground Construction:

(1) Apply an over-all treatment under entire surface of floor slab including porch floors and entrance platforms. Apply at rate of 1 gallon per 10 square feet, except if fill under slab is gravel or other coarse absorbent material, apply at rate of 1 1/2 gallons per 10 square feet.

(2) Apply to critical areas to a depth of 1 foot but not below the top of the footing, along both sides of foundation wall, along interior foundation walls, and around plumbing at the rate of 4 gallons per 10 linear feet. Chemical should be mixed with the soil as it is being replaced in the trench.

(3) Apply to voids of unit masonry foundation walls at or near bottom of foundation at rate of 1 gallon per 5 linear feet.

(4) Under slab-on-ground porch floors and entrance platforms, apply overall treatment at rate of 1 gallon per 10 square feet.

Buildings with Crawl Spaces:

(1) Apply 2 gallons per 5 linear feet to critical areas only under the house, such as along the outside of foundation walls, around piers, sewer pipes, conduits, etc. Trench according to directions in part (2) below.

(2) Along the outside of foundation walls, dig a narrow trench no deeper than the top of the footings, if the trench is less than 15 inches in depth to the top of the footings, apply 1 GALLON PER 5 LINEAR FEET. Replace the soil and apply another 1 GALLON PER 5 LINEAR FEET to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 GALLONS PER 5 LINEAR FEET. Replace the soil and apply another 2 GALLONS PER 5 LINEAR FEET to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a maximum depth required alongside those foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to 30 inch depth, make the trench 12 to 15 inches deep and rod to footing, spacing the holes about 1 foot apart.


(3) Apply 1 GALLON PER 10 SQUARE FEET of soil surface under attached porches, entrance platforms, utility entrances, and similar situations where slab or fill is at the grade level. Where crawl spaces exist, treat as described in part (1) above.

(4) Treat all voids in hollow masonry units of the foundation at the rate of at least 1 GALLON PER 5 LINEAR FEET of wall. It is best to apply the chemical near the footing.

FMC

FMC Corporation
Agricultural Chemical Group
2000 Market Street
Philadelphia PA 19103

PA 583

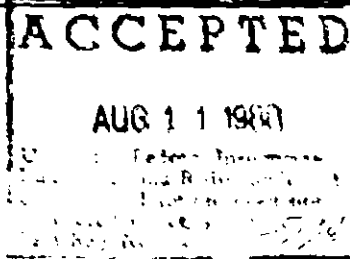

Buildings with Basements:

- (1) Apply 1 GALLON PER 10 SQUARE FEET as an over-all treatment under the basement floorings, as well as under attached porches, entrance platforms, utility entrances, and similar situations where slab falls at the grade level. In case of washed gravel cinders or similar coarse material, increase the dosage by at least one-half. Where crawl spaces exist, treat as described in part (2) below.
- (2) Apply 7 GALLONS PER 5 LINEAR FEET to critical areas only under the basement floorings, as well as porches and entrances having crawl spaces, such as along the inside of foundation walls around sewer pipes, conduits, pipes, etc. Trench according to directions in part (3) below.
- (3) Along the outside of foundation walls, dig a narrow trench no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 GALLON PER 5 LINEAR FEET. Replace the soil and apply another 1 GALLON PER 5 LINEAR FEET to the back fill. Cover the back fill with a thin layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 GALLONS PER 5 LINEAR FEET. Replace the soil and apply another 2 GALLONS PER 5 LINEAR FEET to the back fill. Cover the back fill with a thin layer of soil. A trench 30 inches deep is a maximum depth required alongside foundations where the top of the footings is greater than 30 inches deep. In lieu of trenching to a 30 inch depth, make the trench 12 to 15 inches deep and rod to footing, spacing holes about 1 foot apart.
- (4) Treat all voids in hollow masonry units of the foundation at the rate of 1 GALLON PER 5 LINEAR FEET of wall. It is best to apply the chemical near the footing.

Dealers Should Sell in Original Packages Only.

Terms of Sale or Use On purchase of this product buyer and user agree to the following conditions:

Warranty FMC makes no warranty, expressed or implied, concerning the use of this product other than indicated on the label. Except as so warranted, the product is sold as is. Buyer and user assume all risk of use and handling and of storage of this material when such use and handling and of storage is contrary to label instructions.

Directions and Recommendations Follow directions carefully. Timing and method of application, weather and crop conditions, mixture with other chemicals but specially recommended, and other influencing factors in the use of this product are beyond the control of the seller and are assumed by buyer at his own risk.

Use of Product FMC's recommendations for the use of this product are based upon tests believed to be reliable. The use of this product being beyond the control of the manufacturer, no guarantee, expressed or implied, is made as to the effects of such or the results to be obtained if not used in accordance with directions or established safe practice.

Damages Buyer's or user's exclusive remedy for damages for breach of warranty or negligence shall be limited to direct damages not exceeding the purchase price paid and shall not include consequential damages.

(237-5 80-1-A)