



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY  
AND POLLUTION PREVENTION

March 28, 2017

Alexis Chapman  
Dow Chemical Company  
1501 Larkin Center Drive  
Midland, MI 48674

Subject: Label Amendment – Adding Industrial Recirculating Cooling Water and  
Evaporative Condenser Use with Feeder System  
Product Name: Bioban BP-Plus Preservative  
EPA Registration Number: 464-675  
Application Date: December 28, 2016  
Decision Number: 525287

Dear Ms. Chapman:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance

Page 2 of 2  
EPA Reg. No. 464-675  
Decision No. 525287

with FIFRA section 6. If you have any questions, please contact Terria Northern by phone at 703-347-0265, or via email at [northern.terria@epa.gov](mailto:northern.terria@epa.gov).

Sincerely,

A handwritten signature in black ink, appearing to read "John Hebert" with a stylized flourish at the end.

John Hebert, Chief  
Regulatory Management Branch I  
Antimicrobials Division (7510P)  
Office of Pesticide Programs

Enclosure: Stamped label

BIOBAN BP-PLUS Preservative  
MASTER LABEL  
December 1, 2016


### BIOBAN™ BP-PLUS Preservative

#### Active Ingredient(s)

2-Bromo-2-nitropropane-1, 3-diol...99.0%

Inert Ingredient(s).....1.0%

Total 100.0%

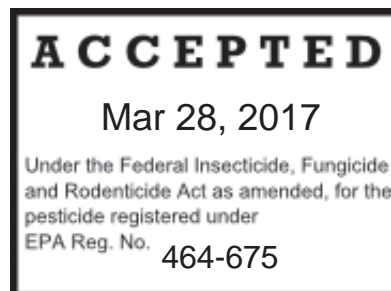

E.P.A. Registration No. 464-675

E.P.A. Est. No. XXXX-XX-XX

**KEEP OUT OF REACH OF CHILDREN**

### DANGER

<b>FIRST AID</b>	
<b>IF IN EYES</b>	<ul style="list-style-type: none"><li>• Wash immediately and continuously with flowing water for at least 30 minutes.</li><li>• Remove contact lenses if present, after the first 5 minutes and continue washing.</li><li>• Obtain prompt medical consultation, preferably from an ophthalmologist.</li></ul>
<b>IF SWALLOWED</b>	<ul style="list-style-type: none"><li>• Call a poison control center or doctor immediately for treatment advice.</li><li>• Have person sip a glass of water if able to swallow.</li><li>• Do not induce vomiting unless told to do so by the poison control center or doctor.</li><li>• Do not give anything by mouth to an unconscious person.</li></ul>
<b>IF ON SKIN OR CLOTHING:</b>	<ul style="list-style-type: none"><li>• Take off contaminated clothing.</li><li>• Rinse skin immediately with plenty of water for 15-20 minutes.</li><li>• Call a poison control center or doctor for treatment.</li></ul>
<b>IF INHALED:</b>	<ul style="list-style-type: none"><li>• Move person to fresh air.</li><li>• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible.</li><li>• Call a poison control center or doctor for further treatment.</li></ul>
<b>HOT LINE NUMBER</b>	
IN CASE OF AN EMERGENCY endangering life or property involving this product, call collect (989) 636-4400. Have the product container or label with you when calling a Poison Control Center or doctor or going for treatment.	
<b>NOTE TO PHYSICIAN:</b> Probable mucosal damage may contraindicate the use of gastric lavage.	

### PRECAUTIONARY STATEMENTS

#### Hazards to Humans and Domestic Animals

CORROSIVE. CAUSES IRREVERSIBLE EYE DAMAGE AND SKIN IRRITATION. MAY BE FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN. HARMFUL IF INHALED. PROLONGED OR FREQUENTLY REPEATED SKIN CONTACT MAY CAUSE ALLERGIC REACTIONS IN SOME INDIVIDUALS.

Do not get in eyes, on skin, or on clothing. Do not breathe dust. Wear goggles and chemical resistant rubber gloves. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove contaminated clothing and wash clothing before reuse.

**Physical and Chemical Hazards:** Avoid contact with metal equipment such as scoops, mills or sleeves.

#### **ENGINEERING CONTROLS:**

When handlers use feeder devices the handler requirements may be reduced or modified to long-sleeve shirt and long pants, shoes, socks, gloves and safety glasses with side shields.

#### **ENVIRONMENTAL HAZARDS**

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of waste.

#### **STORAGE AND DISPOSAL**

Do not contaminate water, food, or feed by storage or disposal.

**Pesticide Storage: Keep away from heat.**

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative of the nearest EPA Regional Office for guidance.

#### **CONTAINER DISPOSAL:**

##### ***Optional statement when nonrefillable container is used***

**Nonrefillable Container:** Do not reuse or refill this container. Completely empty **container** by shaking and tapping sides and bottom to loosen clinging particles. Empty residue into application equipment. Then offer for recycling if available, or dispose of **container** in a sanitary landfill, or by incineration, or if allowed by state and local authorities, by burning. If burned, stay out of smoke. If **container** is contaminated and cannot be reused, dispose of it in the manner required for **the container**.

##### ***Optional statement when refillable container is used***

**Refillable Container:** Completely empty **container** by shaking and tapping sides and bottom to loosen clinging particles. Empty residue into application equipment. Then offer for recycling if available, or dispose of **container** in a sanitary landfill, or by incineration, or if allowed by state and local authorities, by burning. If burned, stay out of smoke. If **container** is contaminated and cannot be reused, dispose of it in the manner required for **the container**.

See Directions for Use Label Adjacent to the BIOBAN BP-PLUS Preservative Drum Label

[Directions for Use Label]

Directions for Use label to be used with BIOBAN BP-PLUS Preservative Drum Label

**IN CASE OF AN EMERGENCY** endangering life or property involving this product, call collect (989) 636-4400. Have the product container or label with you when calling a Poison Control Center or doctor or going for treatment.

**DIRECTIONS FOR USE:** It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

#### **GENERAL USE DIRECTIONS**

To control the growth of slime-forming, spoilage, odor-causing and corrosion inducing bacteria and algae in industrial applications.

#### **Not For Control Of Algae In The State Of California.**

BIOBAN BP-PLUS Preservative can be dosed directly by preparing a stock solution immediately prior to application either by open pouring (not cooling water treatment) or by metered pump. For product preservation BIOBAN BP-PLUS Preservative is best added after any heating stage or when the product has cooled below 40°C. This product may be used in terrestrial and off-shore drilling muds and packer fluids. Do not apply by open pouring of liquid to cooling water systems; a metering pump delivery system is required for this use and application method.

Applicators and other handlers must wear:

Coveralls, overlong-sleeved shirt and long pants

Goggles and face shield.

Socks plus shoes.

Chemical resistant gloves.

Dust/mist filtering respirator (MSHA / NIOSH) approval number prefix (TC-21C), or a NIOSH approved respirator with any N, R, P, or HE prefilter).

When handlers use feeder devices the handler requirements may be reduced or modified to long-sleeve shirt and long pants, shoes, socks, gloves and safety glasses with side shields.

Follow manufacturer's instruction for cleaning/maintaining personal PPE. If there are no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry. Discard clothing or other absorbent materials that have been drenched or heavily contaminated with this product's concentrate. Do not reuse them.

#### **INDUSTRIAL RECIRCULATING WATER COOLING AND EVAPORATIVE CONDENSERS**

To control slime-forming bacteria and algae in industrial recirculation cooling towers and evaporative condensers, BIOBAN BP-PLUS Preservative may be added as the solid directly into the sump or basin or it may be added to the cooling water return at suitable point. The BIOBAN BP-PLUS Preservative should be added at a point where there is adequate flow or turbulence to ensure quick dissolution (e.g. the pump outlet from the tower sump).

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative may be slug-dosed once or twice weekly as a normal routine. Where contamination is heavy, more frequent dosing may be required. BIOBAN BP-PLUS Preservative should be shock-dosed at between 0.21-0.84 lb/1000 gallons depending on the condition of the tower, the quality of raw water input, and the amount of bleed off.

#### **INDUSTRIAL RECIRCULATING COOLING WATER AND EVAPORATIVE CONDENSERS**

##### **When used with The Dow Chemical Company Feeder System and canister packaging**

To control slime-forming bacteria and algae in industrial recirculation cooling **water** and evaporative condensers, BIOBAN BP-PLUS Preservative may be added using the appropriate **(Dow/Nalco)** feed system. The BIOBAN BP-PLUS Preservative should be added at a point where there is adequate flow or turbulence to ensure quick dissolution.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative may be slug-dosed once or twice weekly as a normal routine. Where contamination is heavy, more frequent dosing may be required. BIOBAN BP-PLUS Preservative should be shock-dosed at between 0.21-0.84 lb/1000 gallons depending on the condition of the tower, the quality of raw water input, and the amount of bleed off.

#### **PRODUCED WATER**

To inhibit the growth of slime-forming or corrosion-inducing sulfate-reducing bacteria in formation water produced by wells together with oil or gas, BIOBAN BP-PLUS Preservative may be used as the solid or pre-dissolved in a quantity of warm water or alcohol, then injected into the water-containing oil or gas stream at any convenient point. It should be injected as slug doses, not continuous feed.

**FREQUENCY AND DOSE:** Depending on the severity and rapidity of contamination, BIOBAN BP-PLUS Preservative should be slug-dosed from once a week to once a month with 0.018-0.036 lb per barrel.

#### **INDUSTRIAL PROCESS WATER**

Use BIOBAN BP-PLUS Preservative to effectively control bacterial and algal growth in industrial process water, including closed circuit machine cooling (injection molding, etc.) and stored (non-potable) water, as well as to reduce the biofouling of pipework, heat exchangers, condenser tubes, and to minimize microbially produced corrosion. Dosing should be carried out into the sump/tank of the process water system. Shock dosing is preferred. It is not necessary to dilute BIOBAN BP-PLUS Preservative concentrate prior to dosing. BIOBAN BP-PLUS Preservative can also be used as an intermittent, flush treatment during regular maintenance cleaning of tank and equipment.

**FREQUENCY AND DOSE:** In open systems, shock dosing should be carried out on a once weekly to once monthly basis depending on the degree of contamination. In closed circuit systems, less frequent dosing (once or twice monthly) would be sufficient. Dosing should be carried out to give an initial concentration of 50 ppm (0.42 lb /1000 gallons). When the above treatment has been successful, dosing can be lowered to a minimum of 10 ppm BIOBAN BP-PLUS Preservative (0.08 lb /1000 gallons). For intermittent treatment of industrial process waters during routine maintenance, BIOBAN BP-PLUS Preservative should be used at 100 ppm (0.84 lb /1000 gallons) and a contact time of at least one hour.

#### **DRILLING FLUIDS AND WORKOVER AND COMPLETION FLUIDS**

To inhibit growth of cellulolytic, slime-forming or sulfate-reducing bacteria in oil and gas well drilling muds and brines. BIOBAN BP-PLUS Preservative may be used as the solid or pre-dissolved in a quantity of warm water, then dosed directly into the mud or brine.

**FREQUENCY AND DOSE:** A single slug dose one to three times each 24 hours. Dosing may be less frequent where the contamination is low. Each slug dose should be 0.018 to 0.036 lb per barrel total mud volume.

## **WATERFLOOD**

To inhibit the growth of anaerobic and aerobic bacteria in all waterflood base fluids used in recovery of oil and gas reservoirs, add BIOBAN BP-PLUS Preservative as a dry product or pre-dissolve in any base fluid, or inject directly at the well head.

**FREQUENCY AND DOSE:** A BIOBAN BP-PLUS Preservative should be added continuously to waterflood fluids or slug-dosed, depending on the bottom hold temperature and fluid chemistry at the rate of 25-100 ppm (0.009-0.036 lb per barrel) depending on the quality of the base fluid.

## **INJECTION FLUIDS**

To control contamination and corrosion from bacterial sources in fluids/waste fluids that are disposed of through injection into an approved well following approved guidelines, add BIOBAN BP-PLUS Preservative as a dry product or pre-dissolved in each volume of fluid prior to injection.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be added at a rate of 50-100 ppm (0.018-0.036 lb per barrel) based on the water percent of the injection fluid.

## **ENHANCED OIL RECOVERY (EOR) FLUIDS**

For the effective control of bacterial growth and eliminating degradation of EOR gels and fluids used in the oil and gas industry, add BIOBAN BP-PLUS Preservative during mixing as a dry product or pre-dissolve or add by injection during the EOR process.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be added throughout the EOR operation at the rate of 50-100 ppm (0.018-0.036 lb per barrel) depending on the quality of the makeup water.

## **WELL SQUEEZE FLUIDS**

For the effective control of aerobic and anaerobic bacteria in squeeze fluids and downhole well bore areas, add BIOBAN BP-PLUS Preservative during pre-mixing of the well squeeze fluid or (in the case of direct mix injection systems) an aqueous solution may be added by direct injection at the well head during the well squeeze procedure.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be used for each well squeeze operation to ensure best results. Add BIOBAN BP-PLUS Preservative at a rate of 0.21-1.68 lb /1000 gallons, depending on the quality of the makeup water.

## **FRACTURING FLUIDS**

BIOBAN BP-PLUS Preservative may be added during pre-mixing of the fracturing fluid or (in the case of direct mix injection systems) an aqueous solution may be added by direct injection at the head during the fracturing procedure. BIOBAN BP-PLUS Preservative reduces bacterial contamination and degradation of fracturing gels and fluids used as well stimulants in the oil and gas industry.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be used for each fracturing operation to ensure best results. BIOBAN BP-PLUS Preservative should be added at a rate of 0.42-0.84 lb /1000 gallons depending on the quality of the makeup water.

## **PAPER MILL PROCESS WATER**

To control slime-forming bacteria in paper or paperboard process water systems. BIOBAN BP-PLUS Preservative may be dosed as the solid at a convenient point early in the process system. Suitable dosing points are the machine chest, constant head box, or backwater loop system.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be shock-dosed once, twice, or three times daily in quantities sufficient to meet the required dose based on the daily production of finished products. Dose at between 0.02-0.5 lb per ton of finished paper or paperboard depending on the complexity of the system, quality of the raw paper and type and degree of contamination.

### **PAPER MILLS-BULK PULP**

To preserve bulk quantities of pulp in paper and paperboard manufacturing systems or to prevent foul odors and general biodeterioration of stock when it is stored in bulk for any significant period of time, add BIOBAN BP-PLUS Preservative as the solid or pre-dissolve in a quantity of warm water, then dose directly into the hydropulper, machine chest, or stock chest.

**FREQUENCY AND DOSE:** In general, a single slug dose will provide protection for up to 3 days or longer depending upon the initial level of contamination in the stock. In situations where contamination is high, repeat dosing every 1-7 days may be required. BIOBAN BP-PLUS Preservative should be dosed at between 0.09-0.44 lb per ton of stock (0.42-1.7 lb / 1000 gallons) depending on the type and degree of contamination.

### **ABSORBENT CLAYS, CORN COBS AND GROUND WOOD**

Impregnate absorbent clays, corn cobs, or ground wood with BIOBAN BP-PLUS Preservative to inhibit the growth of odor-causing bacteria. The suggested application rate is 25-200 ppm (0.04-0.32 oz av. per 100 pounds of absorbent material).

### **PAINTS, WATER BASED COATING APPLICATION TANKS AND LATEX**

To provide in-can preservation and prevent bacterial spoilage during storage of acrylic, styrene-acrylic, polyvinyl acetate and other latex emulsion concentrates and latex emulsion based paints. Also to prevent spoilage of in-service paint application tanks. Add BIOBAN BP-PLUS Preservative at any convenient point during the manufacturing process. Ideally it should be added as a final step just prior to packing of the product in bulk or sales packs. If a heating stage is involved in the manufacture, add BIOBAN BP-PLUS Preservative after this stage when the product is cooled to below 40°C. Addition to application tanks should be by slug dosing the tank as needed to prevent bacterial spoilage.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be dosed at 25-500 ppm based on the final formulation volume (0.21-4.2 pt/1000 gallons).

### **ADHESIVES**

For control of microbial contamination, add 0.1 to 1.0 lb of BIOBAN BP-PLUS Preservative per 1000 lb total formulation weight. The addition is best accomplished by pre-dissolving the product in any water to be incorporated into the formulation.

### **CONSUMER, HOUSEHOLD AND INSTITUTIONAL PRODUCTS**

To inhibit bacterial spoilage during the shelf-life and use of consumer, household, and institutional products, including dishwashing liquids, laundry detergents, fabric softeners, surface cleaners, cleaning wipes and polishes, and car care products, this product may be added at any convenient point during the manufacturing process. Ideally it should be added as a final step just prior to packing of the product into bulk or sales packs. If a heating stage is involved in the manufacture of a product add this product after this stage when the product has cooled to below 40°C.

**FREQUENCY AND DOSE:** This product should be dosed at 25 to 500 ppm based on the final formulation volume (0.21-4.2 lb/ 1000 gallons).

### **WATER-BASED PRINTING INKS AND FOUNT SOLUTIONS**

[Not registered for this use in the state of California- optional statement]

To inhibit the growth of spoilage bacteria during the storage and use of water-based printing inks and fount solutions. For in-can preservation, add BIOBAN BP-PLUS Preservative at any convenient point



during the manufacturing process. Ideally, it should be added as a final step after any heating stage and when the product has cooled to below 40°C. To control bacterial spoilage during the use of fount solutions, BIOBAN BP-PLUS Preservative should be shock-dosed at a suitable point in the fount reservoir where there is adequate flow or turbulence to ensure quick dissolution. BIOBAN BP-PLUS Preservative may be shock-dosed once or twice weekly as a normal routine. Where conditions indicate, more frequent shock-dosing may be required.

**IN-CAN PRESERVATION:** BIOBAN BP-PLUS Preservative should be shock-dosed at 100 to 500 ppm based on the final formulation volume (0.384 to 4.2 pt /1000 gallons).

**FOUNT SOLUTIONS:** BIOBAN BP-PLUS Preservative should be shock-dosed at between 25 and 100 ppm (0.21 to 0.84 pt/1000 gallons) depending on the contamination levels in the fount reservoir.

### **PIPELINE MAINTENANCE**

[Not registered for this use in the state of California- optional statement]

To control aerobic and anaerobic bacteria, particularly sulfate-reducing bacteria, growth in oil and gas related production piping and transportation systems, pre-dissolve BIOBAN BP-PLUS Preservative in warm water or in a carrier solvent to give up to 20% concentrate. This concentrate can be injected directly into the pipeline or may be added to the hydrocarbon phase. Using a carrier solvent for addition of the BIOBAN BP-PLUS Preservative into the hydrocarbon phase will provide long-term water concentrations by a diffusion process.

**FREQUENCY AND DOSE:** Carrier additions will vary with the degree of contamination and volume of fluids through the pipeline. Slug treatments are recommended and can vary from daily to monthly to control growth. BIOBAN BP-PLUS Preservative should be dosed at a rate which will achieve concentrations of 25-200 ppm in the aqueous phase. When using a carrier solvent, higher concentrations may be used to allow diffusion into the aqueous phase. Dose will depend on the volume of crude or oil and the expected water fraction.

### **WATER BOTTOMS IN HYDROCARBON STORAGE SYSTEMS AND TRANSPORTATION TANKS**

[Not registered for this use in the state of California- optional statement]

For effective preservative control of bacterial contamination in water bottoms in crude and refined hydrocarbon storage systems.

Above and below ground storage tanks and large marine systems are all suitable for treatment. BIOBAN BP-PLUS Preservative may be pre-dissolved in warm water to give up to a 20% concentrate. This concentrate can be injected directly into the warm bottom or may be sprayed over the surface of the hydrocarbon phase and allowed to percolate through. Using a carrier solvent for addition of BIOBAN BP-PLUS Preservative into the hydrocarbon phase will provide long-term water concentrations by a diffusion process.

**FREQUENCY AND DOSE:** Direct addition to the water phase should be carried out every 30-60 days. Using a carrier solvent for addition to the hydrocarbon phase will provide long term water concentrations depending on frequency of hydrocarbon movement, draining of water bottom, other factors. BIOBAN BP-PLUS Preservative should be dosed at a rate which will achieve concentrations of 50 -100 ppm in the aqueous phase. When using a carrier solvent, higher concentrations may be used to allow diffusion into the aqueous phase.

### **RAW MATERIALS**

[Not registered for this use in the state of California- optional statement]

To inhibit bacterial spoilage during shelf-life storage and the use of raw materials when supplied for the manufacture of industrial and consumer products, this product may be added at any convenient point

during the manufacturing process. Ideally it should be added as a final step just prior to packing of the product in bulk or sales packs. If a heating stage is involved in the manufacture of a product add this product after this stage when the product has cooled to below 40°C.

**FREQUENCY AND DOSE:** This product should be dosed at 100 to 500 ppm based on the final formulation volume (0.84-4.2 lb /1000gallons).

#### **INDUSTRIAL AND/OR COMMERCIAL AIR WASHERS**

[Not registered for this use in the state of California- optional statement]

For the effective control of bacterial growth in air scrubbing units and to reduce built up slime deposits. Dosing should be carried out into the water pump of the scrubbing unit on a routine basis. Shock dosing is preferred. It is not necessary to dilute BIOBAN BP-PLUS Preservative concentrate prior to dosing. BIOBAN BP-PLUS Preservative can also be used as an intermittent flush treatment during regular maintenance/cleaning of the scrubbing unit.

**FREQUENCY AND DOSE:** Shock dosing should be carried out on a regular basis. Heavily fouled systems may require twice weekly treatment. Light to moderate contamination will require once weekly to once monthly additions. Dosing should be carried out to give an initial concentration of 50 ppm (0.42 lb /1000 gallons). When the above treatment has been successful, dosing can be lowered to a minimum of 25 ppm (0.21 lb 1000 gallons). For intermittent treatment of air-scrubbing systems during routine maintenance/cleaning BIOBAN BP-PLUS Preservative should be used at 100 ppm (0.84 lb /1000 gallons) and a contact time of at least one hour.

#### **INDUSTRIAL AND/OR COMMERCIAL AIR CONDITIONING AND HUMIDIFYING SYSTEMS**

[Not registered for this use in the state of California- optional statement]

For the effective control of bacterial growth in air conditioning and humidifying systems and to remove built up slime deposits. Dosing should be carried out into the conditioning water sump on a routine basis. Shock dosing is preferred. It is not necessary to dilute BIOBAN BP-PLUS Preservative concentrate prior to dosing. BIOBAN BP-PLUS Preservative also can be used as an intermittent flush treatment during regular maintenance/cleaning of the air conditioning units.

**FREQUENCY AND DOSE:** Shock dosing should be carried out on a once weekly to once monthly basis. Dosing should be carried out to give an initial concentration of 50 ppm (0.42 lb /1000 gallons). When the above treatment has been successful, dosing can be lowered to a minimum of 25 ppm (0.21 lb /1000 gallons). For intermittent treatment of air conditioning systems during routine maintenance BIOBAN BP-PLUS Preservative should be used at 100 ppm (0.84 lb /1000 gallons) and a contact time of at least one hour.

#### **STARCH, PIGMENT AND EXTENDER SLURRIES**

[Not registered for this use in the state of California- optional statement]

To inhibit the growth of spoilage bacteria during the manufacture, storage and distribution of water-based suspension concentrates, BIOBAN BP-PLUS Preservative may be dosed at or close to the end of the manufacturing process as the solid and pre-dissolved in a quantity of the process water. If the manufacturing process involves a heating stage, BIOBAN BP-PLUS Preservative should be added after this stage when the product has cooled to below 40°C.

**FREQUENCY AND DOSE:** BIOBAN BP-PLUS Preservative should be dosed at 100-500 ppm based on the final formulation volume (0.84-4.2 lb /1000 gallons).

#### **SURFACTANTS**

[Not registered for this use in the state of California- optional statement]

To inhibit bacterial spoilage during shelf storage and the use of bulk anionic, nonionic, amphoteric and cationic surfactants when supplied for the manufacture of industrial and consumer products, this product may be added at any convenient point during the manufacturing process. Ideally it should be added as a final step just prior to this packing of the product in bulk or sales packs. If a heating stage is involved in the manufacture of a product add this product after this stage when the product has cooled to below 40°C.

**FREQUENCY AND DOSE:** This product should be dosed at 25 to 500 ppm based on the final formulation volume (0.21-4.2 lb /1000 gallons).

#### **WATER BASED AGRICULTURAL PESTICIDE CONCENTRATES**

[Not registered for this use in the state of California- optional statement]

To inhibit bacterial spoilage during the shelf-life storage and use of water based agricultural pesticide concentrates, this product may be added at any convenient point during the manufacturing process. Ideally it should be added as a final step just prior to packing of the product in bulk or sales packs. If a heating stage is involved in the manufacture of a product add this product after this stage when the product has cooled to below 40°C.

**FREQUENCY AND DOSE:** This product should be closed at 100 to 500 ppm based on the final formulation volume (0.84-4.2 lb /1000 gallons).

#### **CHEMICAL TOILET DEODORANTS**

[Not registered for this use in the state of California- optional statement]

To inhibit the growth of odor-causing bacteria in chemical toilets. Deodorant concentrates should incorporate BIOBAN BP-PLUS Preservative at levels of 1-28% depending on the desired concentration level. To effectively control odor in a portable toilet, a level of 100-500 ppm BIOBAN BP-PLUS Preservative is recommended.

#### **LIMITED WARRANTY AND DISCLAIMER**

Seller warrants that the product conforms to its chemical description as contained on this label and is reasonably fit for the purposes stated on this label when used in accordance with directions under normal conditions of use. THE WARRANTIES MADE IN THIS PARAGRAPH ARE SELLER'S SOLE WARRANTIES WITH RESPECT TO THE PRODUCT AND ARE MADE EXPRESSLY IN LIEU OF AND EXCLUDE ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER EXPRESS OR IMPLIED REPRESENTATIONS AND WARRANTIES.

NET WT:

Lot:

Produced For [optional when manufactured by contract manufacturer]

DOW DIAMOND™

THE DOW CHEMICAL COMPANY

Midland, Michigan 48674

989-636-4400

™ Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow.