

(For center panel of label)

D-L-D X15
Water Emulsion Concentrate
For Commercial Operators

ACTIVE INGREDIENTS:	By weight
Dieldrin*	18.6%
Petroleum Hydrocarbons	73.4%

INERT INGREDIENTS	8.0%
	<hr/>
	100.0%


*Hexachloroepoxyoctahydro-endo-exo-dimethanonaphthalene	15.8%
*Related compounds	2.8%

Belco D-L-D X15 is an emulsible insecticide containing 1.5 pounds of Dieldrin per gallon. Belco D-L-D X15 can be used in conventional hydraulic sprayers, low-volume ground applicators and airplanes sprayers.

WARNING:

Keep Out of Reach of Children
See Other Warnings on Side Panel

Manufactured By

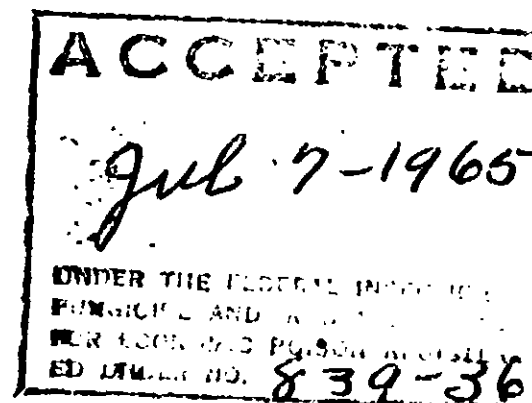

Comments

(For left and right-hand panels of label)

GENERAL DIRECTIONS:

Mixing Directions: Mix Belco D-L-D X15 with water by agitation; agitate the mixture while spraying. If allowed to stand, reagitae before use.

TERMITE CONTROL: Specific Directions for Commercial Operators: To control Termites add 1 gallon of Belco D-L-D X15 to 60 gallons of water (0.3% emulsion). Apply the resulting emulsion at the following rates:

(A) Buildings with Crawl Spaces:

(1) Apply 2 gallons per linear feet to critical areas only under the house, such as along the inside of foundation walls, around piers, sewer pipes, conduits, etc. Trench according to directions in part (2) below.

(2) Along the outside of foundation walls, dig a narrow trench, such trench to be dug no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per linear feet. Replace the soil and apply another 1 gallon per linear feet to the back fill. Cover the back fill with a layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a layer of soil. A trench 30 inches deep is a maximum depth required alongside those foundations where the top of the footings is greater than 30 inches deep.

(3) Apply 1 gallon per 10 square feet of soil surface under attached porches, entrance platforms, utility entrances and similar situations where slab or fill is at the grade level. Where crawl space exists, treat as described in Part (1) above.

Left and right-hand panels continued

(B) Buildings with Concrete Slab on the Ground:

(1) Apply 1 gallon per 10 square feet as an over-all treatment under the slab as well as under attached porches, entrance platforms, utility entrances and similar situations where slab or fill is at grade level.

(2) Apply 2 gallons per 5 linear feet to critical areas only under the slab, such as along the inside of foundation walls, around sewer pipes, conduits, etc. Trench as in part (3) below.

(3) Along the outside of foundation walls, dig a narrow trench no deeper than the top of the footings, but no deeper than 15 inches. Apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a layer of soil.

(C) Buildings with Basements:

(1) Apply 1 gallon per 10 square feet as an over-all treatment under the basement flooring, as well as under attached porches, entrance platforms, utility entrances and similar situation where slab fill is at the grade level. Where crawl spaces exist treat as described in part (2) below.

(2) Apply 2 gallons per 5 linear feet to critical areas only under the basement flooring, as well as porches and entrances having crawl spaces, such as along the inside of foundation walls, around sewer pipes, conduits, etc. Trench according to directions in part (3) below.

(3) Along the outside of foundation walls, dig a narrow trench, such trench to be dug no deeper than the top of the footings. If the trench is less than 15 inches in depth to the top of the footings, apply 1 gallon per 5 linear feet. Replace the soil and apply another 1 gallon per 5 linear feet to the back fill. Cover the back fill with a layer of soil. If the trench is more than 15 inches in depth to the top of the footings, apply 2 gallons per 5 linear feet. Replace the soil and apply another 2 gallons per 5 linear feet to the back fill. Cover the back fill with a layer of soil. A trench 30 inches deep is a maximum depth required alongside those foundations where the top of the footings is greater than 30 inches deep.

~~Do not apply or allow to drift to areas occupied by unprotected humans or beneficial animals. To protect fish and wildlife, do not contaminate streams, lakes or ponds with this material. During commercial or prolonged exposure in spray-mixing and loading operations, wear clean, synthetic rubber gloves and a mask or respirator of a type passed by the U. S. Department of Agriculture, for Dieldrin protection.~~ Use this product only for recommended purposes and at recommended dosages.

WARNING: HAZARDOUS IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN! DO NOT BREATHE SPRAY MIST. Do not get in eyes, on skin or clothing. In case of contact, remove contaminated clothing and flush skin or eyes with plenty of water. For eyes, get medical attention. Wash thoroughly with soap and water after handling and before eating or smoking; wear clean clothing. During commercial or prolonged exposure in spray-mixing and loading operations, wear clean synthetic rubber gloves and a mask or respirator of a type passed by the U. S. Department of Agriculture for Dieldrin protection. Do not apply or allow to drift to areas occupied by unprotected humans or beneficial animals. To protect fish and wildlife, do not contaminate streams, lakes or ponds with this material. Do not use or store concentrate before diluting near open flames or heat.

Continuation of right-hand panel

NOTICE OF WARRANTY: Bell Chemical Company warrants (its liability being limited to the purchase price of the product named on this label) that this product consists of the ingredients specified, but makes no other warranty or representation of any kind, expressed or implied, including any warranty or representation regarding the effect or result of this product's use, whether or not the product is used in accordance with directions, and shall have no responsibility whatsoever for injury to persons, or loss or damage to property, resulting from the handling, storage or use of this product. The user or buyer shall be deemed to have accepted these conditions, which may be varied only by agreement in writing signed by a duly authorized representative of the above-named Company.

U.S.D.A. Reg. #839-36

ACCEPTED WITH COMMENTS