




206

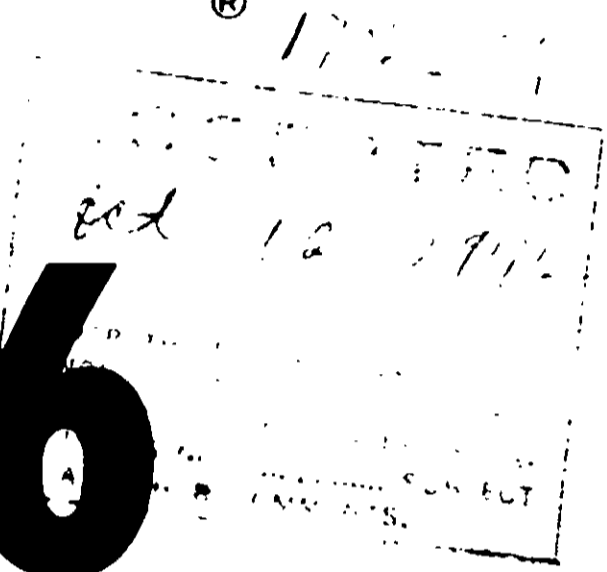

DIRECTIONS: For control of bacterial and fungal slime in industrial recirculating cooling water towers add 96-120 ppm Nalco 206 (4 to 5 quarts per 10,000 gallons of system water) to achieve control. Badly fouled systems may require precleaning. Repeat dosage as needed until desired degree of control is achieved. When control is evident add 24-60 ppm Nalco 206 (1 to 2½ quarts per 10,000 gallons of system water) weekly or as needed to maintain control.

Feed Nalco 206 directly from the drum to a point in the system where it will be uniformly mixed and evenly distributed such as the cooling tower sump. Technical assistance on individual site problems can be obtained from your Nalco Representative.

NOTE: NALCO 206 INTENDED FOR INDUSTRIAL USE ONLY. Do not apply to potable water or domestic water systems.

This product is toxic to fish. Do not discharge treated effluent where it will drain into lakes, streams or ponds.

Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product only as specified on this label.

Do not reuse container. Destroy when empty.

MICROORGANISM CONTROL CHEMICAL

ACTIVE INGREDIENTS: (% by weight)

Methylene bis(thiocyanate) 5.0%

INERT INGREDIENTS: 95.0%

Total 100.0%

Weight per gallon = 7.99 lb
EPA Registration No. 1706-59

WARNING: MAY BE HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN. IRRITATING TO SKIN AND EYES. Do not get in eyes, on skin, on clothing. Wear goggles or face shield and rubber gloves when handling. Do not take internally. Do not use, pour, spill or store near heat or open flame. Keep container closed when not in use. In case of contact, immediately wash skin with plenty of soap and water for at least 15 minutes; for eyes, immediately flush with large amounts of water for at least 15 minutes, and get medical attention. Remove and wash contaminated clothing before reuse.

NALCO CHEMICAL COMPANY
6216 WEST 66TH PLACE CHICAGO, ILLINOIS 60638

NET CONTENTS SHOWN ELSEWHERE ON CONTAINER