	DI recircu (3—4 b Badly until d
NALCO	add 10 system ment v cleanin
	Feed N in the tribute be pla proble
207 Feb 9, 1913	NOTE: Do not
BALL BRIQUETTE	This p effluen waters.
MICROORGANISM CONTROL CHEMICAL ACTIVE INGREDIENTS:	Do not waste. reuse ce
Methylene bis(thiocyanate)	D/ ABSOI SWAL
Total	or face immed minute at leas contan
<b>NALCO CHEMI</b> 6216 WEST 66TH PLACE	
NET CONTENTS SHOWN	ELSEWHER

**CTIONS:** For bacterial and fungal slime control in industrial ting cooling water systems add 45—50 ppm NALCO 207 lls per 10,000 gallons of system water) to achieve control. suled systems require precleaning. Repeat dosage as needed ired degree of control is achieved. When control is evident -25 ppm NALCO 207 (1—2 balls per 10,000 gallons of vater) weekly or as needed to maintain control. Begin treattion the system is in jeopardy of becoming affected or after systems whose efficiency is already impaired.

ALCO 207 directly from drum or with a ball feeder to a point ystem where it will be uniformly mixed and evenly dissuch as the cooling tower sump. Feeding equipment should ic or plastic lined. Technical assistance on individual site s can be obtained from your Nalco Representative.

NALCO 207 INTENDED FOR INDUSTRIAL USE ONLY. pply to potable water or domestic water systems.


duct is toxic to fish and wildlife. Do not discharge treated where it will drain into lakes, streams, ponds or public

contaminate water by cleaning of equipment or disposal of Apply this product only as specified on this label. Do not intainer. Destroy when empty.

**GER**: CAUSES EYE DAMAGE AND SKIN IRRITATION. PTION THROUGH SKIN HARMFUL. HARMFUL IF OWED. Do not get in eyes, on skin, on clothing. Wear goggles shield and rubber gloves when handling. In case of contact, tely wash skin with plenty of soap and water for at least 15 for eyes, immediately flush with large amounts of water for 15 minutes, and get medical attention. Remove and wash nated clothing before reuse.

## LCOMPANY CHICAGO, ILLINOIS 60638

ON CONTAINER

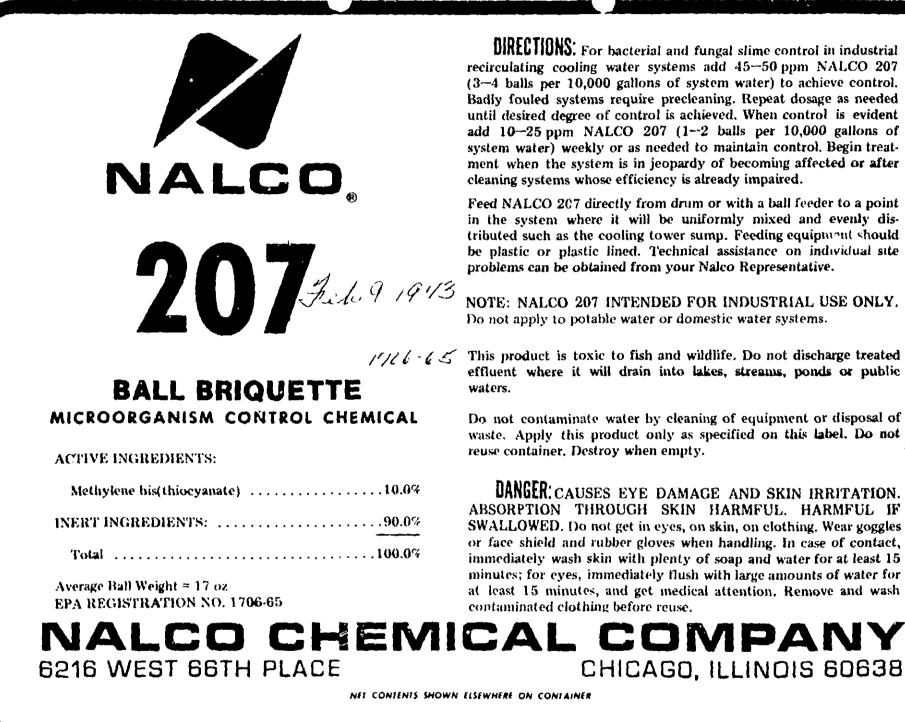

DIRECTIONS: For bacterial and fungal slime control in industrial recirculating cooling water systems add 45-50 ppm NALCO 207 (3-4 balls per 10,000 gallons of system water) to achieve control. Badly fouled systems require precleaning. Repeat dosage as needed until desired degree of control is achieved. When control is evident add 10-25 ppm NALCO 207 (1-2 balls per 10,000 gallons of system water) weekly or as needed to maintain control. Begin treatment when the system is in jeopardy of becoming affected or after cleaning systems whose efficiency is already impaired.

Feed NALCO 207 directly from drum or with a ball feeder to a point in the system where it will be uniformly mixed and evenly distributed such as the cooling tower sump. Feeding equipment should be plastic or plastic lined. Technical assistance on individual site problems can be obtained from your Nalco Representative.

NOTE: NALCO 207 INTENDED FOR INDUSTRIAL USE ONLY. Do not apply to potable water or domestic water systems.

17126-65 This product is toxic to fish and wildlife. Do not discharge treated effluent where it will drain into lakes, streams, ponds or public waters.

> Do not contaminate water by cleaning of equipment or disposal of waste. Apply this product only as specified on this label. Do not reuse container. Destroy when empty.

> DANGER: CAUSES EYE DAMAGE AND SKIN IRRITATION. ABSORPTION THROUGH SKIN HARMFUL. HARMFUL IF SWALLOWED. Do not get in eyes, on skin, on clothing. Wear goggles or face shield and rubber gloves when handling. In case of contact, immediately wash skin with plenty of soap and water for at least 15 minutes; for eyes, immediately flush with large amounts of water for at least 15 minutes, and get medical attention. Remove and wash contaminated clothing before reuse,

> > CHICAGO, ILLINOIS 60638

1

14 137.004.2