

REENTS

B

0566-83

PRECAUTIONARY STATEMENTS

DANGER

HAZARDS TO HUMANS

Corrosive. Causes irreversible eye damage and burns. Harmful if absorbed through skin, swallowed, or inhaled. Do not get on skin, in eyes, or on clothing. Wear safety glasses. Wear protective clothing such as long-sleeved cotton shirt, long pants, hat and gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse. May be fatal if swallowed or inhaled. Avoid breathing vapor or spray mist, or dust or chips from sanding. Use with adequate ventilation. While spraying and/or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

FIRST AID

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution, or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

C 2568-83

C. DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Regatta Sea Speed is designed to prevent the accumulation of slime, algae, grass and/or barnacles on ship's hulls. It may be used with equally good results in northern or southern coastal waters, and, with proper surface preparation, will perform well on wooden, fiberglass or metal hulls.

SURFACE PREPARATION

FIBERGLASS: Sand bottom thoroughly, using #100 grit paper. Wipe down with Regatta 3840 Fiberglass Solvent Wash to remove all dust and mold release agent. Alternatively, to avoid sanding, wash thoroughly with Regatta 3840 Fiberglass Solvent Wash and apply one THIN coat of 3351 Fiberglass No-Sand Primer. Allow to dry one hour before applying anti-fouling paint.

WOOD: Sand and clean well with 3802 Xyloc solvent.

METAL: Surface must be clean and rust free. Apply two coats of Regatta 3630/3631 Epoxydur black mastic, approximately four mils (100 microns) per coat. Allow 6 hours dry time between coats.

OLD PAINT: Surface must be completely cleaned of all foreign material and all loose, peeling, or chipping paint. Wipe entire surface with 3800 thinner.

APPLICATION

Sea Speed should be applied by conventional or airless spray to achieve maximum film smoothness. Use at least two coats achieving total film thickness of 4-5 mils (100 to 125 microns). One gallon will cover 300 sq. ft. at two mils thickness. Allow six hours between coats and at least eight hours after the final coat before launching.

STORAGE AND DISPOSAL

Pesticide, spray mixture, or solvent rinse that cannot be used according to label instructions must be disposed of according to Federal or approved state procedures under subtitle C of the Resource Conservation and Recovery Act.

Empty containers should be triple rinsed (or equivalent). Then offer for recycling or reconditioning or dispose of in a sanitary landfill, or by other approved state and local procedures.

D 3868-83

ANALYSIS

Pigment 41.8%


Cuprous Oxide	31.3%
Zinc Oxide	7.3%
Phthalo Blue	0.3%
Titanium Dioxide	2.5%
Bentonite Clay	0.5%

Vehicle 58.2%

Organometallic Polymer	38.1%
Stabilizer	1.0%
Aromatic Hydrocarbon	14.3%
Methyl Isobutyl Ketone	4.6%
Ethanol	0.1%

100.0% (B-363)

Regatta

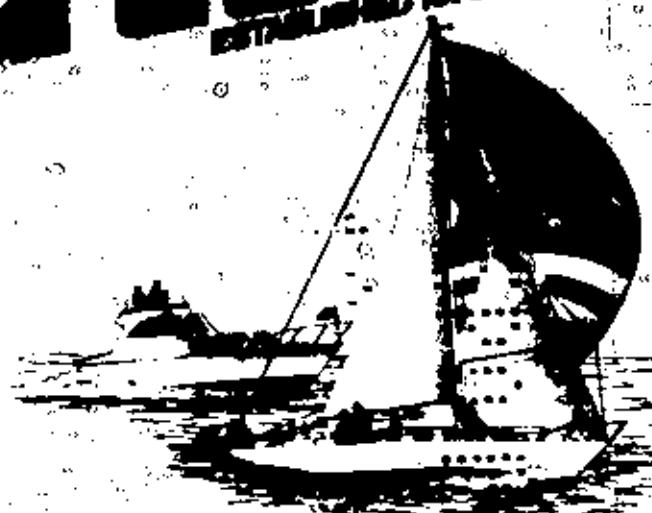

B
precations

A
LABEL FACE

BEST DOCUMENT AVAILABLE

C

DIRECTIONS

D

ANALYSIS

2569-83

OCT 18 1982

Conditional

3928 Regatta Box Speed Blue

Jotun-Baltimore Copper Paint Co.
340 Key Highway
Baltimore, MD 21239

This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
2. Make the labeling changes listed below before you release the product for shipment:
 - a. Add the phrase "EPA Registration No. 2569-83."
 - b. Place parenthesis "(" around "as part of a polymer" in the ingredient statement.
 - c. You did not account for the 98.3% purity of the cuprous oxide. Declare its percentage as 30.6%; otherwise you must submit a new confidential formula increasing the weight of this component to meet the label declaration.
 - d. The active ingredients must be carried to the same decimal point.
 - e. According to our calculations, the tributyltin methacrylate should be declared as 12.1%. Check your CMF. Correct the ingredient declaration or submit a new formula statement.

OCT 18 1982

256-63

- 2 -

2. You should move DANGER below the heading Hazards to Humans.

3. To the Precautionary Statements add:

PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

4. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


A stamped copy of the label is enclosed for your records.

Richard F. Mountfort *RFM*
Product Manager (23)
Pesticide-herbicide Branch
Registration Division (TR-747)

A

A. LABEL FACE

3028 REGATTA SEA SPEED
BLUE

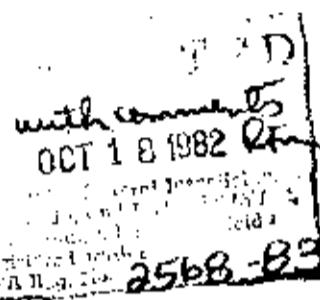

ACTIVE INGREDIENTS

Cuprous Oxide 31.2% 30.6%
Tributyltin methacrylate-
as part of a polymer 12.23% 12.44%

43.43%

56.57%
100.00%

INERT INGREDIENTS

Copper as metallic 26.32%
Tin as metallic 3.89%

CONTAINS PETROLEUM DISTILLATES

KEEP OUT OF REACH OF CHILDREN

DANGER

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

EPA Reg. No. 2568
EPA Est. No. 2568

Contents: One US Gallon
3.785 Liters

3028

BEST DOCUMENT AVAILABLE