

2568-96

2-27-2002

FEB 27 2002

1/4

Jotun Paints, Inc.  
P.O. Box 159  
9203 Highway 23  
Belle Chasse, LA 70037

Attn: Carol Rosler  
Regulatory/SHE Manager

Subject: Jotun Sovaklor Coastal System Antifouling V59R27 RED  
EPA Registration No. 2568-96  
Submission Dated October 31, 2001  
EPA Receive Date January 9, 2002

The submission, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended, is acceptable.

- a corrected Confidential Statement of Formula
- revised draft labels

General Comments

The revised CSF dated October 31, 2001 is in compliance with PR Notice 91-2, agrees with the label and is acceptable.

However, submit a revised CSF and adjust the upper certified limit of the Active Ingredient to the correct figure of 5.33%. You may request a higher limit if a justification for the value of 5.4% is submitted to the Agency for review and approval.

In future submissions, you must provide the units (pounds, kilograms, etc.) Of weight with the numerical value in Box 17 of the CSF.

CONCURRENCES							
SYMBOL							
SURNAME							
DATE							


2/4

Page 2

A stamped copy of the labeling is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,

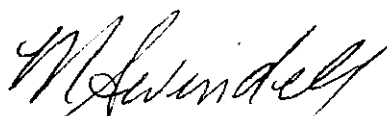

Marshall Swindell  
Product Manager 33  
Regulatory Management Branch 1  
Antimicrobial Division (7510C)

Enclosure

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS & DOMESTIC ANIMALS

## WARNING

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH THE SKIN.

AVOID CONTACT WITH EYES, SKIN AND CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS, AND A HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE VAPORS OR SPRAY MIST. WHEN USED IN ENCLOSED AREAS, SPRAYING PAINT OR SANDING BOAT SURFACE, WEAR APPROPRIATE, PROPERLY FITTED RESPIRATOR (NIOSH/MSHA APPROVED) DURING AND AFTER APPLICATION UNLESS AIR MONITORING DEMONSTRATES VAPOR MIST LEVELS ARE BELOW APPLICABLE LEVELS.

### ENVIRONMENTAL HAZARDS

THIS MATERIAL IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST GENERATED DURING PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT DEBRIS IN AN APPROVED LANDFILL.

### PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

### STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: HOLD EYELIDS OPEN AND FLUSH WITH A STEADY, GENTLE STREAM OF WATER FOR 15 MINUTES. GET MEDICAL ATTENTION. IF SWALLOWED: CALL A DOCTOR OR GET MEDICAL ATTENTION. DO NOT INDUCE VOMITING. DO NOT GIVE ANYTHING BY MOUTH TO AN UNCONSCIOUS PERSON. AVOID ALCOHOL. IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION IF IRRITATION PERSISTS. IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING, GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH TO MOUTH. GET MEDICAL ATTENTION.

### DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

### ANTIFOULING FOR METAL BOTTOMS:

TO CONTROL THE ATTACHMENT OF MARINE FOULING, IE, BARNACLES, GRASS, ALGAE, ETC. ON STEEL BOTTOMS IN SALT AND BRACKISH WATER WHICH WOULD SUSTAIN SUCH GROWTH. NOT RECOMMENDED FOR USE ON ALUMINUM. A MINIMUM OF TWO COATS IS RECOMMENDED FOR BEST PERFORMANCE.

### SURFACE PREPARATION:

BEFORE APPLICATION OF ANTI-FOULING, ALL SURFACES MUST BE DRY AND CLEANED OF DIRT, DUST, OIL, RUST, LOOSE PAINT, SALT RESIDUES AND OTHER CONTAMINANTS. STEEL MUST BE COATED WITH A SUITABLE PRIMER OR ANTICORROSIVE BARRIER COATS. FOLLOW RESPIRATOR MANUFACTURER'S DIRECTIONS FOR USE. REMOVE CONTAMINATED CLOTHING AND WASH CLOTHING BEFORE RE-USE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, OR USING TOBACCO.

### MIXING

BEFORE USE POWER MIX OR BOX THE PAINT UNTIL THE PRODUCT IS UNIFORM. STIR THE PAINT AT INTERVALS DURING APPLICATION TO MAINTAIN UNIFORMITY.

### APPLICATION:

APPLY BY BRUSH, ROLL, OR SPRAY. CONTENTS MAY BE APPLIED BY HOT SPRAY (TEMPERATURES NOT TO EXCEED 95 F) AIRLESS SPRAY OR REGULAR COLD SPRAY. APPLY A FULL WET COAT IN A DOUBLE CROSS HATCH PATTERN. DO NOT PAINT IN COLD OR DAMP WEATHER.


### THINNING:

NORMALLY NO THINNING REQUIRED. WHERE THINNING IS NECESSARY, USE THINNER 7-T-33, XYLENE.

### DRYING TIME:

AT 70 F AND 50% R.H. ALLOW AT LEAST 4 HOURS DRY TIME BETWEEN COATS, AND A MINIMUM OF 8 HOURS BEFORE REFLOATING.

REFER TO PRODUCT MATERIAL SAFETY DATA BULLETIN, AVAILABLE UPON REQUEST, FOR FURTHER SAFETY AND HANDLING INFORMATION.

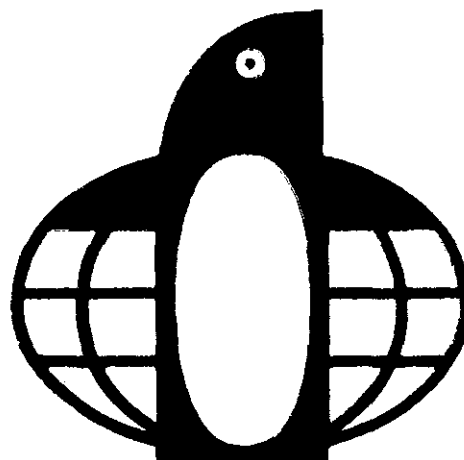


# JOTUN

THE VOC OF THIS PAINT IS 389.5 GRAMS/LITER (3.25 LBS./GAL.).

MEDICAL EMERGENCY NUMBER: 1-800-424-9300

 **WARNING**

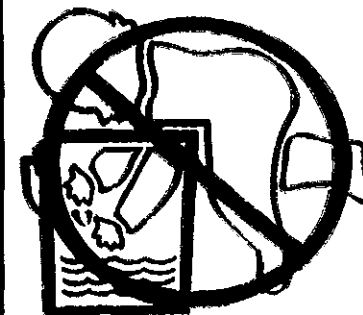


Children can fall into bucket and drown

Keep children away from buckets with even a small amount of water

Niños pueden caer adentro de el balde y ahogarse

Retire los niños de los baldes aunque solamente tengan un poco agua

h/w



# JOTUN



D.O.T. SHIPPING NAME: **PAINT**  
 D.O.T. HAZARD CLASS: **UN1263**  
 D.O.T. HAZARD IDENTIFICATION NUMBER: **FLAMMABLE LIQUID**

**V59R27**

E.P.A. REG. NO.: **2568-96**

E.P.A. EST. NO.: **002568-LA-001**

**Jotun Paints, Inc.**  
 9203 Highway 23  
 Belle Chasse, LA 70037

PROTECTIVE EQUIPMENT

### STORAGE AND DISPOSAL

DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. KEEP CONTAINER CLOSED WHEN NOT IN USE, IN CASE OF SPILLAGE, ABSORB WITH INERT MATERIAL AND DISPOSE OF IN ACCORDANCE WITH APPLICABLE REGULATIONS.

### PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDE, SPRAY MIXTURE OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

### CONTAINER DISPOSAL

TRIPLE RINSE, (OR EQUIVALENT) THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER APPROVED STATE AND LOCAL PROCEDURES.

**SOVAKLOR COASTAL SUPER  
 ACEBERV ICE ANTI-FOULING**

**ACCEBERV**  
 FEB 27 2002  
 Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 2568-96

**V59R27  
 RED**

ACTIVE INGREDIENT: CUPROUS OXIDE.....51.52%  
 INERT INGREDIENTS:.....48.48%  
 .....100.00%

KEEP OUT OF THE REACH OF CHILDREN.

## WARNING

**CONTAINS PETROLEUM DISTILLATES.  
 FOR COMMERCIAL USE ONLY. DO NOT USE IN OR  
 AROUND A HOUSEHOLD OR DWELLING.**

**NOT SOLD FOR USE IN AIR POLLUTION REGULATION  
 AREAS. PHOTOCHEMICALLY REACTIVE PER RULE 102.**

WARNING! SEE PRECAUTIONS ELSEWHERE ON LABEL (FR-22).

**Net 5.00 Gallons ( 18.925 Liters)**



h/h