

ACCEPTED

September 17, 1974
 UNDER THE FEDERAL INSECTICIDE
 FUNGICIDE AND RODENTICIDE ACT
 FOR ECONOMIC POISON REGISTERED
 UNDER NO. 2693-87

DANGER! EXTREMELY FLAMMABLE CONTENTS
 UNDER PRESSURE. DO NOT USE NEAR FIRE, HEATED
 SURFACES, SPARKS, OR FLAME. DO NOT PUNCTURE
 OR INCINERATE CONTAINER. EXPOSURE TO TEMPERA-
 TURES ABOVE 130°F MAY CAUSE BURSTING.

WARNING

May be fatal if swallowed. May be absorbed through skin.
 Causes skin irritation. Causes severe eye burns; wear
 goggles or face shield.

Use With Adequate Ventilation.

Do not get in eyes, on skin, or clothing. In case of skin con-
 tact remove contaminated clothing and immediately wash
 skin with soap and water. If irritation persists, get medical
 attention. Wash contaminated clothing before re-use. For
 eyes, flush with plenty of water and get medical attention.
 Avoid storage near food and fec. products.

DIRECTIONS

This paint is designed to be applied to outboard and outdrive units below the
 waterline for protection against fouling.

Previously Painted Surfaces - Clean surface of all foreign contaminants and
 sand existing paint prior to application of antifouling paint.

Bare Aluminum - Bring aluminum to a completely clean, degreased, bright sur-
 face. Apply one coat of 353-354 Interlux Primerwash. Allow to dry one hour.
 Then apply antifouling paint.

PAINT APPLICATION


1. Shake well. Listen for rattle of mixing ball. Continue shaking for at least one
 minute.
2. Hold container about 12 to 18 inches from unit when applying paint.
3. When paint is dry (approx. 15 minutes) apply at least one additional coat.
 A minimum of two full coats is required for good antifouling protection.
4. Be sure paint is completely dry before immersion. Under most conditions
 four hours is ample time.

E.P.A. REG. NO. 2693-87

DANGER
 KEEP OUT OF REACH OF CHILDREN
 See other warnings on back panel



Interlux®

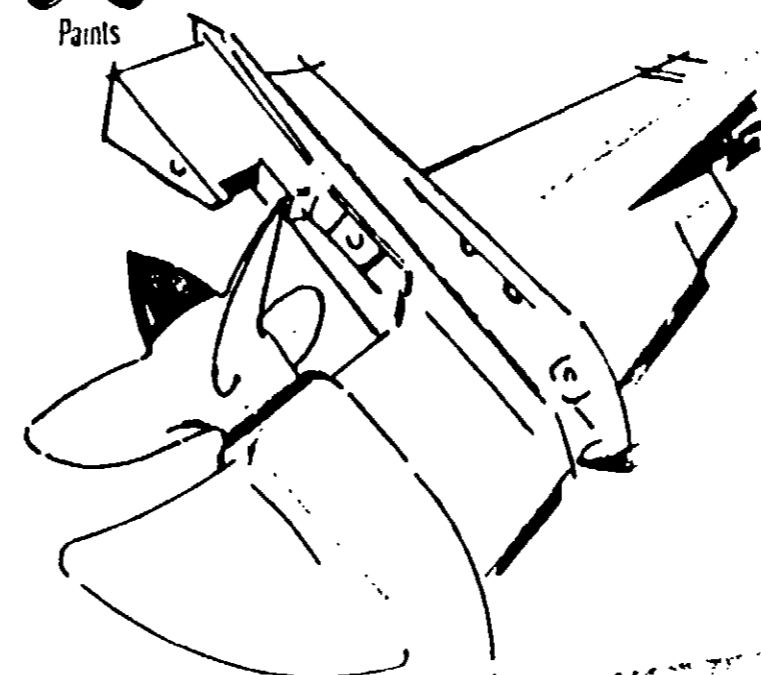

**OUTBOARD/OUTDRIVE
 ANTIFOULING PAINT**

WHITE 268

ACTIVE INGREDIENTS	PER CENT
Tributyltin Fluoride	5.6%
INERT INGREDIENTS	94.4%
ELEMENTAL TIN — 2.1%	100.0%

NET WEIGHT: 13 OZ. AVD.

VEHICLE	VEHICLE	PROPELLANT
14.2%	62.8%	23.6%
41.6%	1.1%	50.0%
14.0%	5.7%	50.0%
39.5%	4.0%	100.0%
4.9%	50.7%	
	10.0%	
	28.5%	
	100.0%	



International Paint Company, Inc.
 NEW YORK, N.Y. 10009 • SAN FRANCISCO, CAL. 94109 • NEW ORLEANS, LA. 70119