


143

2693 77

NET WEIGHT: 13 OZ. AVD

Interlux®

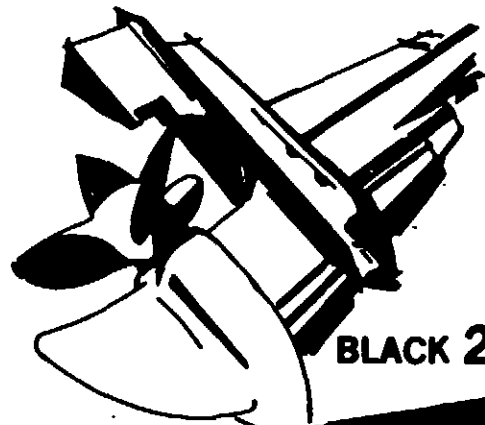

BLACK 267

OUTBOARD/OUTDRIVE ANTIFOULING PAINT

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS & DOMESTIC ANIMALS DANGER

Corrosive. Causes irreversible eye damage and skin burns. When handling wear full protective clothing, rubber gloves, goggles, face shield or other approved eye protection. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. Avoid contact with skin, eyes or clothing. Remove and wash contaminated clothing before reuse. Avoid breathing vapor, spray mist, dust or chips from sanding or blasting. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

FIRST AID: If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution, or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

If on skin, wash with plenty of soap and water. Get medical attention. If in eyes, flush with water for at least 15 minutes. Get medical attention immediately.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARD

EXTREMELY FLAMMABLE! Contents under pressure. Keep away from fire, sparks, and heated surfaces. Do not puncture or immerse container. Exposure to temperatures above 130°F may cause bursting.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

DISPOSAL

Do not use empty container. Wrap container and put in trash collection.

APPLICATION

This paint is designed to be applied to outboard and outdrive units below the waterline for protection against fouling.

PREVIOUSLY PAINTED SURFACES: Clean surface of all foreign contaminants and sand existing paint prior to application of antifouling paint.

BARE ALUMINUM: Bring aluminum to a completely clean, degreased, bright surface. Apply one coat of 353-354 VINYLUX PRIMEWASH or spray INTERLUX PRIME-KOTE 186. Allow to dry one hour. Then apply antifouling paint.

PAINT APPLICATION

1. Shake well. Listen for rattle of mixing ball. Continue shaking for at least one minute.
2. Hold container about 12 to 16 inches from unit when applying paint.
3. When paint is dry (approximately one hour) apply at least one additional coat. A minimum of two full coats is required for good antifouling protection.
4. Be sure paint is completely dry before immersion. Under most conditions four hours is ample time.

E. P. A. REG. NO. 2693-88-AA

E. P. A. EST. 10900-OH-1

NOT REVIEWED

In Accordance with PR Notice 88-04 for additional precautionary statements
Based on Draft Labeling Dates

ACTIVE INGREDIENTS	PERCENT
Tributyltin Fluoride	4.4%
INERT INGREDIENTS	95.6%
ELEMENTAL TIN	1.6%

CONTAINS PETROLEUM DISTILLATES
This product contains 0.30 lbs. Tributyltin Fluoride per gallon.
**KEEP OUT OF REACH OF CHILDREN
DANGER**

VEHICLE	80.1%
Chlorinated Paraffin	0.7%
Vanil Chloride Capillary	2.5%
Resin	77.9%
Aromatic Hydrocarbons	9.0%
Chlorinated Hydrocarbons	100.0%

PROPellant	12.2%
Propene	100.0%

INERT INGREDIENTS	PERCENT
Carbon Black	15.3%
Iron Oxide	20.7%
Tributyltin Fluoride	54.0%
Anti-Sinking Agents	4.0%
	100.0%

International Paint Company, Inc.



2693

243

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS
DANGER**

Corrosive. Causes irreversible eye damage and skin burns. When handling wear full protective clothing, rubber gloves, goggles, face shield or other approved eye protection. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. Avoid contact with skin, eyes or clothing. Remove and wash contaminated clothing before reuse. Avoid breathing vapor, spray mist, dust or chips from sanding or blasting. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

FIRST AID: If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage.

If on skin: wash with plenty of soap and water. Get medical attention. If in eyes, flush with water for at least 15 minutes. Get medical attention immediately.

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARD

EXTREMELY FLAMMABLE! Contents under pressure. Keep away from fire, sparks, and heated surfaces. Do not puncture or incinerate container. Exposure to temperatures above 130°F may cause bursting.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

DISPOSAL

Do not use empty container. Wrap container and put in trash collection.

APPLICATION

This paint is designed to be applied to outboard and outdrive units below the waterline or protection against fouling.

PREVIOUSLY PAINTED SURFACES—Clean surface of all foreign contaminants and sand existing paint prior to application of antifouling paint.

BARE ALUMINUM—Bring aluminum to a completely clean, degreased, bright surface. Apply one coat of 353/354 VINYLUX PRIMEWASH or spray INTERLUX PRIME KOTE 186. Allow to dry one hour. Then apply antifouling paint.


PAINT APPLICATION

1. Shake well. Listen for rattle of mixing ball. Continue shaking for at least one minute.
2. Hold container about 12 to 16 inches from unit when applying paint.
3. When paint is dry (approximately one hour) apply at least one additional coat. A minimum of two full coats is required for good antifouling protection.
4. Be sure paint is completely dry before immersion. Under most conditions four hours is ample time.

EPA REG NO. 2693-87-AA
EPA EST 10900-OH-1

NET WEIGHT: 13 OZ. AVD

Interlux®

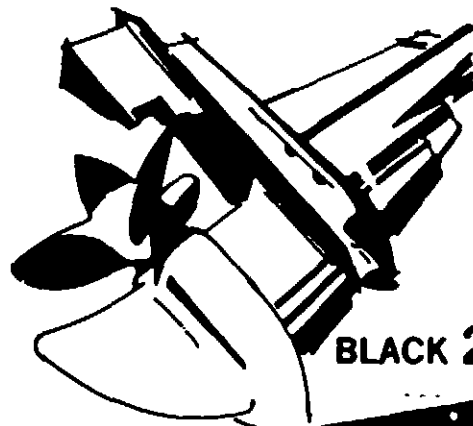

BLACK 267

NOT REVIEWED
 In Accordance with PR Notice 880-2,
 Based on Draft Labeling Amend. 10/17/82

**OUTBOARD/OUTDRIVE
ANTIFOULING PAINT**

VEHICLE	80.1%
Chlorinated Paraffin	0.7%
Vinyl Chloride Copolymer	2.6%
Resin	2.5%
Ketones	7.9%
Aromatic Hydrocarbons	6.3%
Chlorinated Hydrocarbons	4.0%
	100.0%

PROPellant	13.2%
Propene	100.0%

Pigment	7.7%
Long Chain Chlorinated Paraffin	13.2%
Triethylamine	23.7%
Triethylamine Fluoride	54.3%
Anti-Leaking Agents	4.0%
	100.0%

ACTIVE INGREDIENTS	PER CENT
Tributyltin Fluoride	4.4%
INERT INGREDIENTS	95.6%
	100.0%
ELEMENTAL TIN—	1.6%

CONTAINS PETROLEUM DISTILLATES
 This product contains 0.30 lbs. Tributyltin Fluoride per gallon.
KEEP OUT OF REACH OF CHILDREN
DANGER

See side panel for additional precautionary statements

FIRST AID: In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Remove contaminated clothing and shoes. Call a physician. Wash clothing before reuse. If swallowed induce vomiting by striking down throat or by giving soapy or strong salty water to drink. If breathing is difficult, remove to fresh air. Never give anything to an unconscious person. If breathing has stopped, if not breathing, give artificial respiration, preferably by mouth. If breathing is shallow, give oxygen and call a physician.

ENVIRONMENTAL HAZARD

PHYSICAL OR CHEMICAL HAZARD

EXTREMELY FLAMMABLE! Contents under pressure. Keep away from fire, sparks, and heated surfaces. Do not puncture or incinerate container. Exposure to temperatures above 130°F may cause bursting.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

DISPOSAL

Do not use empty container. Wrap container and put in trash collection.

APPLICATION

This paint is designed to be applied to outboard and outdrive units below the waterline for protection against fouling. **Previously Painted Surfaces**—Clean surface of all foreign contaminants and sand existing paint prior to application of antifouling paint. **Bare Aluminum**—Bring aluminum to a completely clean, degreased, bright surface. Apply one coat of 353/354 Viny-Lux Primewash or spray Interlux Prime-kote 186. Allow to dry one hour. Then apply antifouling paint.

PAINT APPLICATION

1. Shake well, listen for rattle of mixing ball. Continue shaking for at least one minute.
2. Hold container about 12 to 16 inches from unit when applying paint.
3. When paint is dry (approximately one hour) apply at least one additional coat. A minimum of two full coats is required for good antifouling protection.
4. Be sure paint is completely dry before immersion. Under most conditions four hours is ample time.

E. P. A. EST. 10900-OH-1



OCT 12 1982
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 2693-88-AA

CONTAINS PETROLEUM DISTILLATES

OUTBOARD/OUTDRIVE ANTIFOULING PAINT

BLACK 267

ACTIVE INGREDIENTS	PER CENT
Tributyltin Fluoride	4.4
INERT INGREDIENTS	95.6
ELEMENTAL TIN—1.6%	100.0%

This product contains 0.30 lbs. Tributyltin fluoride per gallon.
KEEP OUT OF REACH OF CHILDREN
DANGER
See side panel for additional precautionary statements
E. P. A. REG. NO. 2693-88-AA

International Paint Company, Inc.