



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

September 1, 2020

Vanessa Villagran
PSRA Specialist
International Paint, LLC
6001 Antoine Drive
Houston, TX 77091

Subject: Label Amendment – Updated formatting and directions for use
Product Name: Micron CSC Super with Bio-Lux Blue
EPA Registration Number: 2693-190
Application Date: January 29, 2020
Decision Number: 559920

Dear Ms. Villagran:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance

Page 2 of 2
EPA Reg. No. 2693-190
Decision No. 559920

with FIFRA section 6. If you have any questions, please contact Tara Flint via email at flint.tara@epa.gov.



Eric Miederhoff
Product Manager 31
Regulatory Management Branch I
Antimicrobials Division (7510P)
Office of Pesticide Programs


Enclosure

MICRON CSC® SUPER with BIO-LUX™ BLUE

[Biolux® Blocks Slime]
[Biolux® Boosts Performance by Controlling Slime]
[Antifouling Protection for All Conditions]
[Multi-Season, Self-Polishing, No Paint Buildup]

Alternate Brand Names (ABNs):

- [INTERLUX MICRON EXTRA 5690 BLUE]
- [INTERLUX MICRON EXTRA 5691 GREEN]
- [INTERLUX MICRON EXTRA 5692 RED]
- [INTERLUX MICRON EXTRA 5693 BLACK]
- [INTERLUX MICRON EXTRA 5695 BROWN]
- [INTERLUX MICRON EXTRA 5694 SHARK WHITE]
- [INTERLUX MICRON EXTRA 5696 DARK BLUE]
- [MICRON EXTRA VOC 5794 SHARK WHITE]
- [MICRON EXTRA VOC Y5790 BLUE]
- [MICRON EXTRA VOC Y5791 GREEN]
- [MICRON EXTRA VOC Y5792 RED]
- [MICRON EXTRA VOC Y5793 BLACK]
- [MICRON EXTRA 5690 BLUE]
- [MICRON EXTRA 5691 GREEN]
- [MICRON EXTRA 5692 RED]
- [MICRON EXTRA 5693 BLACK]
- [MICRON EXTRA 5694 SHARK WHITE]
- [MICRON EXTRA 5695 BROWN]
- [MICRON EXTRA 5696 DARK BLUE]
- [INTERLUX MICRON EXTRA VOC Y5790 BLUE]
- [INTERLUX MICRON EXTRA VOC Y5791 GREEN]
- [INTERLUX MICRON EXTRA VOC Y5792 RED]
- [INTERLUX MICRON EXTRA VOC Y5793 BLACK]

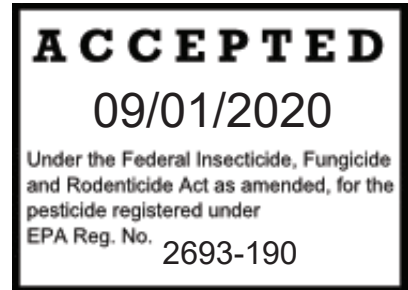

[GRAPHICS]

AkzoNobel



Micron, Biolux, Interlux and the AkzoNobel logo are trademarks of AkzoNobel. © AkzoNobel [XXXX- year label is printed].

 Interlux and the AkzoNobel logo
are trademarks of Akzo Nobel.



[FRONT PANEL]

Active Ingredients:	
Cuprous Oxide	= 38.62%
N-Cyclopropyl-N' -(1,1-dimethylethyl)-6-(methylthio)-1,3,5-triazine-2,4-diamine	= 2.00%
Other Ingredients:	= <u>59.38%</u>
	100.00%
Copper as Metallic	= 34.03%

EPA Registration No. 2693-190

EPA Establishment No. 2693-TX-1

KEEP OUT OF REACH OF CHILDREN

CAUTION

See side panel for additional Precautionary Statement

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

[DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of INTERNATIONAL PAINT, LLC., including surface preparations, proper application and environmental conditions. Therefore, INTERNATIONAL PAINT, LLC., cannot guarantee this product's suitability for your particular purpose of application. To the extent consistent with applicable law, INTERNATIONAL PAINT, LLC., EXPRESSLY DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE or otherwise that extend beyond the statements made on this label, and shall not be liable for special, incidental, or consequential damages resulting from the use or handling of this product, the exclusive remedy being the replacement of this product. To the extent consistent with applicable law, buyer/user assumes all risk of possession, handling, or use of this material when use and/or handling is contrary to label instructions.]

**International Paint LLC
6001 Antoine Drive
Houston, TX 77091**

[Interlux.com]

[SIDE PANEL]

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION

Harmful if absorbed through skin or inhaled. Causes moderate eye irritation. Avoid contact with eyes, skin or clothing. Wear protective clothing such as gloves, long-sleeved shirt, long pants, and hat. Avoid breathing spray mist. While painting or sanding or sandblasting boat surfaces, wear a minimum of a NIOSH-approved particulate filtering facepiece respirator with any N, R, or P filter; OR a NIOSH-approved elastomeric particulate respirator with any N, R, or P filter; OR a NIOSH-approved powered air purifying respirator with HE filters. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash clothing before reuse. May pose an aspiration pneumonia hazard.

FIRST AID	
If swallowed:	<ul style="list-style-type: none">• Call a poison control center or doctor immediately for treatment advice.• Have person sip a glass of water if able to swallow.• Do not induce vomiting unless told to do so by a poison control center or doctor.• Do not give anything by mouth to an unconscious person.
If on skin or clothing:	<ul style="list-style-type: none">• Take off contaminated clothing.• Rinse skin immediately with plenty of water for 15-20 minutes.• Call a poison control center or doctor for treatment advice.
If inhaled:	<ul style="list-style-type: none">• Move person to fresh air.• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.• Call a poison control center or doctor for further treatment advice.
If in eyes:	<p>Hold eye open and rinse slowly and gently with water for 15-20 minutes.</p> <ul style="list-style-type: none">• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.• Call a poison control center or doctor for treatment advice.
Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment. For medical emergencies, call the poison control center at 1-800-222-1222. For general information on this product, contact the National Pesticides Information Center (NPIC) at 1-800-858-7378, Monday through Friday, 8 AM to 12 PM PST, or at http://npic.orst.edu .	

ENVIRONMENTAL HAZARD

This material is toxic to fish: Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARD

COMBUSTIBLE: Do not use or store near heat or open flame.

[Subset A]

PRODUCT DESCRIPTION: [Micron® Extra with Biolux®, Micron® Extra, Alternate Name Brand, this product] is a multi-season, Controlled Solubility Copolymer antifouling paint that is specially formulated with dual antifouling properties - cuprous oxide and a booster called Biolux® Technology. The cuprous oxide works best against shell fouling, while the Biolux® Technology booster helps protect against weed, slime and algae growth. This product polishes at a controlled rate similar to a bar of soap, resulting in a reduced build-up of old coatings and minimized sanding at reapplication. This technology also allows the boat to be hauled and launched without recoating. This product is for use below the waterline on fiberglass, wood and properly primed metal boat hulls and parts, in fresh, salt and brackish waters. Do not use on aluminum.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

STORAGE: Exposure to air and extremes of temperature must be avoided. Keep the container firmly closed. Keep out of direct sunlight. Keep the containers in a dry, cool, well ventilated space away from sources of heat and ignition.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

[For Chemical Emergency, Spill, Leak, Exposure or Accident, Call Toll Free – Day or Night – CHEMTREC 1-800-424-9300. Medical Advisory Number – Contact your Local Poison Control Center or Call 1-800-854-6813.]

COMPATIBILITY: [Micron® Extra with Biolux®, Micron® Extra, Alternate Name Brand, this product] can be applied over most antifouling paints as long as the old coating is tightly adhered and in sound condition. When applying over conventional antifouling paints, thoroughly sand with [80,100, 120, 80-120] [grit, grade, grit wet and dry, grade wet or dry] sand paper. If applying over self-polishing typed copolymers antifouling, heavy sanding is required.

VOC: Less than 400 grams/liter (3.33 lbs./gallon)

THINNING: Thin only when necessary. Do not exceed 10% by volume.

THINNER: Brushing – [Brush-Ease 433™, Antifouling Thinner, Yacht Thinner, Boat Thinner, Acetone]
Spraying – [Special Thinner 216™, Antifouling Thinner, Yacht Thinner, Boat Thinner, Acetone]

DRY TIMES: Touch dry - 2 hours

77°F (25°C) Dry to overcoat - 16 hours minimum*

Dry to launch - 16 hours minimum*

THEORETICAL COVERAGE: 440 sq. ft./gallon. Yields 2 mils dry film thickness.

CLEAN-UP: Special Thinner 216™ or Brush-Ease 433™

APPLICATION TEMPERATURES: 50°F (10°C) and above. (Air and hull).

*If either hull or air temperature falls below 50°F (10°C) during the 16-hour dry time extend the dry time to a minimum of 36 hours.

APPLICATION SYSTEMS

Shake or mix well prior to use. Apply 2 full coats this product by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. If during application, the brush pulls or the roller drags, use [Interlux® Brush-Ease 433™, Antifouling Thinner, Boat Thinner, Yacht Thinner, Acetone] to improve handling. Certain areas of hull experience faster polishing than the other areas, these areas include the waterline, the leading edge of the keel, the rudder and the bow stem. It is suggested that additional attention is paid to these areas to ensure the proper amount of paint is applied to these areas.

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION:

Remove all traces of loose paint and contamination by sanding the entire surface with [80, 80-120, 100, 120] [grit, grade, wet or dry] sandpaper: wipe surface clean with [Special Thinner 216, Special Thinner, Thinner 216, Antifouling Thinner, Yacht Thinner, Boat Thinner, Acetone]. Apply 2 coats of [Micron® Extra with Biolux®, Micron® Extra, Alternate Brand Name, this product].

PREVIOUSLY PAINTED SURFACES - POOR CONDITION: Completely remove all old antifouling paint [by paint stripper, sanding, abrasive media blasting, sanding or abrasive media blasting] for [fiberglass, epoxy, wood, or, sandblasting steel surfaces to a near white metal]. Proceed with application system for bare system below.

BARE FIBERGLASS: It is very important that bare fiberglass be properly prepared in order to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following products: [Interlux Fiberglass Surface Prep YMA601V, Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Solvent Wash 202, Fiberglass Surface Prep, Solvent Wash, Acetone, Boat Prep] following the product label instructions. To be certain that all the contamination has been removed, run water over the surface; if the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surfaces has been properly cleaned, proceed with one of the application systems below.

No Sand System: Clean the surface using [Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Boat Prep] following the preparation procedure described. Apply one coat of [InterProtect 2000E, InterProtect HS, InterProtect, Sandless Primer] following the label instructions for applying the primer and overcoating with antifouling paint. Apply 2 coats of [Micron® Extra with Biolux®, Micron® Extra, Alternate Brand Name, this product] allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM: Clean the surface following the preparations procedure described. Sand the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Interlux Fiberglass Solvent Wash 202, Fiberglass Solvent Wash 202, Fiberglass Solvent Wash, Solvent Wash, Acetone, Boat Thinner, Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Surface Prep, Boat Surface Prep] to remove sanding residue. Repair any surface imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler, Epoxy Filler, Boat Filler]. Sand and wipe clean. Apply 2 coats of [Micron® Extra with Biolux®, Micron Extra, this product] allowing for appropriate dry times.

BARE WOOD: Sand the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Fiberglass Solvent Wash 202, Interlux Fiberglass Solvent Wash 202, Solvent Wash, Boat Thinner]. Repair imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler]. Apply the first coat of this product thinned 10% with [Special Thinner 216, Interlux Special Thinner 216, Special Thinner, Acetone, Interlux Brush Ease 433, Brush Ease 433, Brush Ease]. Fill seams with [Seam Compound 30, Seam Compound, Seam Filler], if necessary. Apply 2nd coat of [Micron® Extra with Biolux®, Micron Extra, this product] unthinned, following the overcoating times.

[UNDERWATER METALS: Contact the Interlux Technical Service Department at [Interlux.com, interluxtechnicalservice@akzonobel.com, 1-800-468-7589] for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.]

[NOTE: SHARK WHITE [5694, 5794] may change color at the waterline.]

[Color difference may occur between actual paint and color swatch on front of can.]

[Subset B - Label to be used with Lower VOC Formulas]

PRODUCT DESCRIPTION: This product is a multi-season, Controlled Solubility Copolymer antifouling paint that washes away (polishes) at a controlled rate similar to a bar of soap, resulting in a reduced build-up of old coatings and minimized sanding at reapplication. This product uses **Biolux®** Technology, a unique antifouling technology that incorporates organic boosting biocides into a special biocide release system, to block slime and algae growth. It is formulated to meet strict regulations in the country while providing excellent antifouling protection.

This product is for use below the waterline on fiberglass, wood and properly primed metal boat hulls and parts, in fresh, salt and brackish waters. Do not use on aluminum.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

STORAGE: Exposure to air and extremes of temperature must be avoided. Keep the container firmly closed. Keep out of direct sunlight. Keep the containers in a dry, cool, well ventilated space away from sources of heat and ignition.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

[For Chemical Emergency, Spill, Leak, Exposure or Accident, Call Toll Free – Day or Night – CHEMTREC 1-800-424-9300. Medical Advisory Number – Contact your Local Poison Control Center or Call 1-800-854-6813.]

COMPATIBILITY: This product can be applied over most hard, conventional antifouling paints as long as the old coating is tightly adhered, is in sound condition, and has been thoroughly sanded with 80 grit wet-or-dry sandpaper.

VOC: Less than 330 grams/liter (2.75 lbs./gallon)
THINNING: Thin only when necessary. Do not exceed 10% by volume.
THINNER: Brushing - Brush-Ease 433™
Spraying - Special Thinner 216™
DRY TIMES: Touch dry - 2 hours
77°F (25°C) Dry to overcoat - 16 hours minimum*
Dry to launch - 16 hours minimum*

THEORETICAL COVERAGE: 440 sq. ft./gallon. Yields 2 mils dry film thickness.

CLEAN-UP: Special Thinner 216™ or Brush-Ease 433™

APPLICATION TEMPERATURES: 50°F (10°C) and above. (Air and hull).

*If either hull or air temperature falls below 50°F (10°C) during the 16-hour dry time extend the dry time to a minimum of 24 hours.

[Note: THINNING: The addition of thinners may affect the VOC compliance of this product. Please check local regulations before adding thinners.]

PREPARATION

Shake or mix well prior to use. Apply 2 full coats (3 coats on bare wood) of MICRON CSC® SUPER with Biolux® by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. If during application, the brush pulls or the roller drags, use Interlux® Brush-Ease 433™ to improve handling. Certain areas of hull experience faster polishing than the other areas, these areas include the waterline, the leading edge of the keel, the rudder and the bow stem. It is suggested that an additional coat of paint be applied to these areas to ensure that this product does not wash away before the other areas of the bottom.

PREVIOUSLY PAINTED SURFACES - GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface well with 80 grit wet-or-dry sandpaper; wipe surface clean. Apply 2 coats of this product, allowing proper dry times.

PREVIOUSLY PAINTED SURFACES - POOR CONDITION: Completely remove all antifouling paint with Interlux® Interstrip® 299E for fiberglass or wood and by sandblasting steel surfaces to a near white metal. Proceed with application for bare work described below.

BARE FIBERGLASS: [Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry. Remove mold release wax using one of the following methods. Apply Fiberglass Surface Prep YMA601V with a maroon, 3M, Scotch-Brite® and scrub well. Flush with fresh water or wipe off with a clean, wet cloth ensuring that no traces of Fiberglass Surface Prep remain.]

[OR]

[Dampen cheesecloth with Interlux Fiberglass Solvent Wash 202. Wipe thoroughly to remove all surface contamination and cleaners. Wipe off with a clean, dry rag before liquid dries. Wipe only a few square feet at a time and change rags frequently. To be certain the contamination has been removed, run water over the surface, if the water beads up or separates, repeat one of the above methods. When the water sheets off, all contamination has been removed.

Repair all scratches, nicks and dings by sanding those areas with 80-grit sand paper then remove the sanding residue using Fiberglass Solvent Wash 202. Fill the repair areas with Interlux Watertite Epoxy Filler.]

[Please check local regulations for products available in your Air Management District.]

APPLICATION SYSTEMS

BARE FIBERGLASS - No Sand System: Contact your local Interlux Sales Representative or Interlux Technical Service at 1-800-468-7589 for the no-sand system that is available in your air district.

BARE FIBERGLASS - SANDING SYSTEM: Clean the surface following the preparation procedure described above. Repair any surface imperfections using Watertite Epoxy Filler. Sand and wipe clean. Sand the entire surface with 80-grit sandpaper until a flat matte finish is obtained. Wipe the sanding residue off the surface with Fiberglass Solvent Wash 202™. Apply 2 coats of this product.

BARE WOOD - Sand entire underwater surface with 80 grit sandpaper; wipe surface clean with Interlux® Brush-Ease 433™. Repair imperfections with Watertite Epoxy Filler; sand and wipe clean. Apply first coat of this product reduced 10% with Brush-Ease 433™ to penetrate into the wood. Fill seams with Interlux® Seam Compound 30. The addition of thinners may affect the VOC compliance of this product. Please check local regulations before adding thinners. Apply second and third coats of® this product unreduded. Allow proper dry times between coats.

[UNDERWATER METALS - Contact the Interlux® Technical Service Department at 1-800-468-7589 for details on how to properly prime underwater metals. Do not use on aluminum.]

[NOTE: Micron® Extra SHARK WHITE 5694 may change color at the waterline.],

[Color difference may occur between actual paint and color swatch on front of can.]