



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

February 7, 2022

Vanessa Villagran
PSRA Specialist for,
International Paint, LLC
6001 Antoine Drive
Houston, TX 77091

Subject: Label Amendment – Minor Labeling Revisions
Product Name: SuperYacht 800 Antifouling-White
EPA Registration Number: 2693-203
Application Date: February 18, 2020
Action Case Number: 00219941

Dear Ms. Villagran:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) lists examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Assurance.

Page 2 of 2
EPA Reg. No. 2693-203
Action Case Number: 00219941

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6. If you have any questions, please contact Karen M. Leavy by phone at (703)-308-6237, or via email at Leavy.Karen@epa.gov.

Sincerely,




For Eric Miederhoff
Product Manager Team 31
Regulatory Management Branch I
Antimicrobials Division (7510P)
Office of Pesticide Programs

Enclosure: Stamped Label

Superyacht 800 Antifouling White

[Biolux Blocks Slime]
[Developed for Aluminum, Compatible with Fiberglass]
[Biolux Boosts Performance by Controlling Slime]
[Premium Antifouling with Bright Clean Colors]

Active Ingredients:		
Cuprous Thiocyanate	=	16.95%
Zinc 2-Pyridinethiol 1-Oxide*	=	3.39%
Other Ingredients:	=	<u>79.66%</u>
COPPER AS METALLIC = 8.85%		100.00%

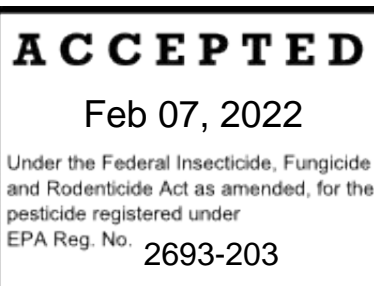

Contains petroleum distillates.
* Zinc Pyrithione

EPA Reg. No.: 2693-203
EPA Est. No.: 2693-TX-1

Alternate Brand Names (ABNs):

- [TRILUX® 33® YBA060 BLUE]
 - [TRILUX® 33® YBA061 GREEN]
 - [TRILUX® 33® YBA062 RED]
 - [TRILUX® 33® YBA063 BLACK]
 - [TRILUX® 33® YBA068 WHITE]
 - [TRILUX® 33®]
-

[GRAPHICS]

AkzoNobel

 **Interlux®**

 Interlux and the AkzoNobel logo
are trademarks of Akzo Nobel.

 Trilux, Biolux, Interlux and the AkzoNobel logo are trademarks of AkzoNobel. © AkzoNobel [XXXX- year label is printed].

[Front Panel]

KEEP OUT OF REACH OF CHILDREN

DANGER

See side panel for additional Precautionary Statement

[Note to Reviewer: In accordance with 40 CFR 156.68(d), all first aid statements, as prescribed, will appear on the front panel of the product label.]

FIRST AID	
If on skin or clothing:	<ul style="list-style-type: none">• Take off contaminated clothing.• Rinse skin immediately with plenty of water for 15-20 minutes.• Call a poison control center or doctor for treatment advice.
If in eyes:	<ul style="list-style-type: none">• Hold eye open and rinse slowly and gently with water for 15-20 minutes.• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.• Call a poison control center or doctor for treatment advice.
If inhaled:	<ul style="list-style-type: none">• Move person to fresh air.• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.• Call a poison control center or doctor for further treatment advice.
If swallowed:	<ul style="list-style-type: none">• Immediately call a poison control center or doctor.• Do not induce vomiting unless told to do so by a poison control center or doctor.• Do not give any liquid to the person.• Do not give anything by mouth to an unconscious person.
Other:	Have the product container or label with you when calling a poison control center or doctor or going for treatment. For medical emergencies, call the poison control center at 1-800-222-1222. For general information on this product, contact the National Pesticides Information Center (NPIC) at 1-800-858-7378, Monday through Friday, 8 AM to 12 PM PST, or at http://npic.orst.edu .

Note to Physician: Contains petroleum distillate - vomiting may cause aspiration pneumonia.

[DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of INTERNATIONAL PAINT, LLC., including surface preparations, proper application and environmental conditions. Therefore, INTERNATIONAL PAINT, LLC., cannot guarantee this product's suitability for your particular purpose of application. To the extent consistent with applicable law, INTERNATIONAL PAINT, LLC., EXPRESSLY DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE or otherwise that extend beyond the statements made on this label, and shall not be liable for special, incidental, or consequential damages resulting from the use or handling of this product, the exclusive remedy being the replacement of this product. To the extent consistent with applicable law, buyer/user assumes all risk of possession, handling, or use of this material when use and/or handling is contrary to label instructions.]

**International Paint LLC
6001 Antoine Drive
Houston, TX 77091**

[Interlux.com]

NET CONTENTS: ONE GALLON (3.785 LITERS)

[Side Panel]

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
KEEP OUT OF REACH OF CHILDREN
DANGER

Danger. Causes skin burns. Causes substantial but temporary eye injury. May be fatal if inhaled. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Do not breathe dust, vapor, spray mist. Wash thoroughly with soap and water after handling and before eating, drinking, or using tobacco. Remove contaminated clothing and wash clothing before reuse.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses, or face shield), long-sleeved shirt and long pants, socks and shoes. In addition to these minimum PPE, commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While painting or sanding or sandblasting boat surfaces, wear a minimum of a NIOSH-approved elastomeric half mask respirator with organic vapor (OV) cartridges and combination N, R or P filters; OR a NIOSH-approved gas mask with OV canisters; OR a NIOSH-approved powered air purifying respirator with OV cartridges and combination HE filters.

ENVIRONMENTAL HAZARDS:

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and particulate generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE! Keep away from heat and open flame.

[Trilux® 33®]
[Alternate Brand Name]

PRODUCT DESCRIPTION: [Trilux® 33®, this product] was developed for use on aluminum hulled vessels but can be used on fiberglass, wood and steel surfaces. [Trilux® 33®, this product] uses Biolux® Technology to control slime and algae growth and a resin system that allows for the controlled release of biocide. The performance of [Trilux® 33®, this product] is directly related to the amount of paint applied (Thin film thickness may lead to premature fouling). [Trilux® 33®, this product] is for use on recreational or commercial vessels below the waterline on underwater boat hulls and parts in fresh, salt and brackish water and can be brush or roller applied. Spray application is not recommended. [Trilux® 33®, this product] can be applied over most other antifouling paints provided they are in good condition and been cleaned and sanded. Follow the application instructions for previously painted surfaces.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

STORAGE: Exposure to air and extremes of temperature must be avoided. Keep the container firmly closed. Keep out of direct sunlight. Keep the containers in a dry, cool, well ventilated space away from sources of heat and ignition.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

[For Chemical Emergency, Spill, Leak, Exposure or Accident, Call Toll Free – Day or Night – CHEMTREC 1-800-424-9300. Medical Advisory Number – Contact your Local Poison Control Center or Call 1-800-854-6813.]

GENERAL APPLICATION PROCEDURES

General Application Procedures

Apply 2 full coats of [Trilux® 33®, this product] by brush or solvent resistant 3/8" nap roller. Do not apply thin coats. Keep in mind that the life of the paint is directly related to the amount of paint applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline and the bow stem polish faster than other areas. On these areas we suggest an additional coat of paint to ensure that [Trilux® 33®, this product] does not polish away before other areas of the bottom.

PREPARATION

BARE ALUMINUM - On small craft where sandblasting is not practical, i.e. aluminum pontoon boats, car top boats etc.; Wipe bare metal with [Special Thinner 216, Special Thinner, Yacht Thinner, Antifouling Thinner, Boat Thinner, Acetone] to remove oil and grease. Uniformly, sand surface to a bright finish with medium grit emery cloth. Wipe surface clean of dust. Immediately apply one thin coat of [InterProtect 2000E, InterProtect HS, InterProtect, Epoxy Primer] thinned [10-15%, 10%, 15%] with [Reducing Solvent2316N, Interlux Reducing Solvent 2333n, Epoxy Reducing Solvent]. Apply enough [InterProtect 2000E, InterProtect HS, InterProtect, Epoxy Primer] to obtain a [10, 7] mil dry film thickness. This usually takes [4-5, 2-3] coats to obtain this thickness, although the amount of paint is more important than the number of coats. Be sure to follow dry times on the [InterProtect 2000E, InterProtect HS, InterProtect, Epoxy Primer] label. When complete, apply two coats of [Trilux® 33®, this product]. If dry times for [InterProtect 2000E, InterProtect HS, InterProtect, Epoxy Primer] cannot be followed, use the following alternate system. Apply four coats of [Primocon, Metal Primer, Underwater Metal Primer] over the thinned first coat of [InterProtect 2000E, InterProtect HS, InterProtect, Epoxy Primer] On rivets and adjacent areas, apply a minimum of 5 coats of Primocon. Finish with two coats of [Trilux® 33®, this product].

ALUMINUM- PREVIOUSLY PAINTED WITH ANTIFOULING PAINT. Remove incompatible antifouling paint (soft, tin-based copolymers or cuprous oxide) and primer (epoxy primer may be left on if it is in good condition) to bare

aluminum and proceed with bare system above. If the [Trilux® 33®, this product] paint and primer system is in good condition, sand with 80-grit sandpaper. Wipe off sanding residue with [Special Thinner 216, Special Thinner, Antifouling Thinner, Yacht Thinner, Boat Thinner]. Any areas where the bare aluminum is exposed must be re-sanded with medium grit emery cloth and wiped clean. Immediately apply two coats of [Primocon, Metal Primer], InterProtect 2000E, InterProtect HS, InterProtect, Epoxy Primer] to bare areas. Then apply two additional coats of [Primocon, Metal Primer, Underwater Metal Primer] to the entire underwater surface. Apply two coats of [Trilux® 33®, this product].

ALUMINUM - PREVIOUSLY PAINTED WITH A FACTORY FINISH. Wipe surface clean to remove contaminants. Sand the surface with 120-grit sandpaper. Wipe the surface again to remove sanding residue. Immediately spot prime any bare areas with [Primocon, Metal Primer, Underwater Metal Primer]. Apply at least three full coats of [Primocon, Metal Primer, Underwater Metal Primer] (four coats to riveted areas), to the entire bottom, allowing appropriate dry times. After an overnight dry apply two coats of [Trilux® 33®, this product].

PREVIOUSLY PAINTED SURFACES

In Good Condition: Remove all traces of loose paint and contamination by sanding the entire surface well with [80, 80-120, 100, 120] [grit, grade, wet or dry] sandpaper; wipe surface clean with [Special Thinner 216, Special Thinner, Thinner 216, Yacht Thinner, Boat Thinner, Acetone]

In Poor Condition: Remove antifouling paint in poor condition with [by paint stripper, sanding, abrasive media blasting, sanding or abrasive media blasting]. Follow application systems as described.

PRIMING

All preparation for bare substrates is covered on the appropriate primer datasheet.

BARE FIBERGLASS - NO SAND SYSTEM: It is very important that bare fiberglass be properly prepared in order to prevent delamination of the antifouling paint. Begin by scrubbing the surface thoroughly with a stiff brush using soap and water to remove loose dirt and contamination. Flush with fresh water to remove the soap residue and allow to dry.

Remove mold release wax using one of the following products: [Interlux Fiberglass Surface Prep YMA601V, Interlux Fiberglass Solvent Wash 202, Fiberglass Surface Prep YMA601V, Fiberglass Solvent Wash 202, Fiberglass Surface Prep, Solvent Wash, Acetone, Boat Prep] following the product label instructions. To be certain that all the contamination has been removed, run water over the surface; if the water beads up or separates, clean again. When the water sheets off, all contamination has been removed. After the surfaces has been properly cleaned, proceed with one of the application systems below. Clean the surface following the preparation procedure described. Apply one coat of [InterProtect 2000E, InterProtect HS, InterProtect, Sandless Primer, Epoxy Primer] following the label instructions for applying the primer and overcoating with antifouling paint. Apply 2 coats of [Trilux® 33®, this product] allowing for the appropriate dry times.

BARE FIBERGLASS - SANDING SYSTEM: Be sure all wax and other contaminants are removed by cleaning the surface with [Fiberglass Solvent Wash 202, Solvent Wash Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Surface Prep, Boat Prep, or]. Clean the surface following the preparations procedure described. Sand the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry] sandpaper and wipe clean with [Interlux Fiberglass Solvent Wash 202, Fiberglass Solvent Wash 202, Fiberglass Solvent Wash, Solvent Wash, Acetone, Boat Thinner, Interlux Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep YMA601V, Fiberglass Surface Prep, Surface Prep, Boat Surface Prep] to remove sanding residue. Repair any surface imperfections with [Watertite, Watertite Epoxy Filler, Interfill, Interfill Epoxy Filler, Epoxy Filler, Boat Filler]. Sand and wipe clean.

BARE WOOD: Sand entire surface thoroughly to a smooth finish with [80-120, 80, 100, 120] [grit, grade, wet or dry]. Clean off the sanding residue using a damp rag. Prime with [Primocon, Metal Primer, Underwater Metal Primer]. Apply two coats of [Trilux® 33®, this product].

BARE METAL: Sandblast to a near white finish; wipe surface clean. Immediately apply one coat of [InterProtect 2000E, Interlux InterProtect 2000E, Interlux InterProtect HS, InterProtect HS, InterProtect] thinned 15% with [Interlux 2333n, Interlux 2316n, Brushing Reducer 2333n, Spray Reducer 2316n, Epoxy Reducer]. Apply [2,3,4] coats of [InterProtect 2000E, Interlux InterProtect 2000E, Interlux InterProtect HS, InterProtect HS, InterProtect, Primocon, Interlux Primocon, Underwater Metal Primer, Metal Primer, Boat Metal Primer]. Apply 2 coats of [Trilux® 33®, this product].

PREVIOUSLY PAINTED FIBERGLASS AND WOOD - GOOD CONDITION: Remove all traces of loose paint and contamination by sanding the entire surface with [80-120, 80, 100, 120] [grit, grade, wet or dry]. Wipe surface clean. Apply 1-2 coats of [Primocon, Underwater Metal Primer].

UNDERWATER METALS INCLUDING SHAFTS, PROPELLERS, TRIM TABS, STRUTS AND THRU-HULL FITTINGS: These areas require special attention to initial surface preparation in order to improve adhesion. Treat these areas the same as bare aluminum. The longevity of this system will probably not be equal to that of the remainder of the boat due to the RPM's these parts withstand. For more details contact Interlux Technical Service at [Interlux.com, interluxtechnicalservice@akzonobel.com, 1-800-468-7589].

APPLICATION

For applications by residential (non-commercial) users:

- Do not apply by airless spray
- Do not apply more than one coat of this product within 24 hours
- Apply only in outdoor, non-enclosed spaces

Apply two coats of [Trilux® 33®, this product] by brush or roller

Thinner: [Special Thinner 216, Special Thinner, Antifouling Thinner, Boat Thinner, Yacht Thinner, Acetone]

Coverage: 400 sq. ft./ Gallon

Dry Time: 6 hours @ 73°F. If cooler, wait longer.

BARE FIBERGLASS: Apply a minimum of two coats of [Trilux® 33®, this product].

BARE WOOD: Apply the first coat of [Trilux® 33®, this product] reduced with [Special Thinner 216, Special Thinner, Antifouling Thinner, Boat Thinner, Yacht Thinner, Acetone] (10% maximum) to penetrate the porous grain. Fill seams with [Seam Compound 30, Seam Compound, Seam Filler]. Apply second coat of [Trilux® 33®, this product] unreduced.

PREVIOUSLY PAINTED FIBERGLASS AND WOOD - GOOD CONDITION:

Apply two coats of [Trilux® 33®, this product].

NOTE: [Trilux® 33®, this product] white may show a green patina at the waterline, especially when applied in thin coats. This patina does not affect antifouling performance.

Important: Do not apply [Primocon, Metal Primer] or [Trilux® 33®, this product] above the true waterline.

[Color difference may occur between actual paint and color swatch on front of can.]

[MADE IN THE USA]