

1064

PM 21

4004 - 1

#3-OSMOSE CLEAR WATER REPELLENT

FRONT PANEL

OSMOSE

A BRUSH-ON CLEAR MOISTURE BARRIER & WOOD PRESERVATIVE

CLEAR
WATER REPELLENT
& WOOD PRESERVATIVE

PROTECTS & BEAUTIFIES

- [] DECKS
- [] SIDING
- [] FENCING
- [] OUTDOOR PROJECTS

WARNING: KEEP OUT OF REACH OF CHILDREN
SEE BACK PANEL FOR PRECAUTIONARY STATEMENTS

1 GALLON
3.785 LITERS

MEETS FED. SPEC. TT-W-572 B3.7

ACTIVE INGREDIENTS

Bis (Tri-n-butyltin) oxide.....0.3%

INERT INGREDIENTS.....99.7%

100.0%



LEFT SIDE PANEL

OSMOSE
CLEAR
WATER REPELLENT
& WOOD PRESERVATIVE

FOR RESIDENTIAL & COMMERCIAL CONSTRUCTION, HOME & GARDEN USE,
RECREATION & PARK USE.

RIGHT SIDE PANEL

OSMOSE
CLEAR
WATER REPELLENT
& WOOD PRESERVATIVE

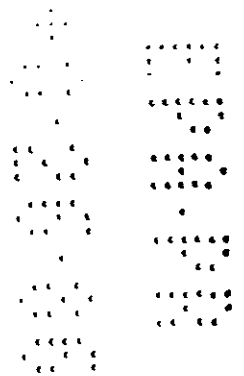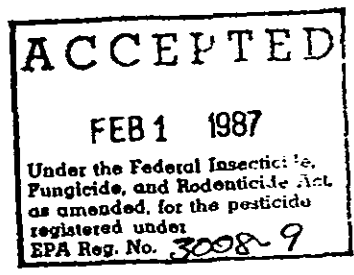

- []BLOCKS OUT WATER
- []PROTECTS AGAINST MOLD & MILDEW
- []BEAUTIFIES

BACK PANEL

DIRECTIONS FOR USE

Apply Osmose CLEAR WATER REPELLENT only as specified on this label. It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Osmose CLEAR WATER REPELLENT is a clear, penetrating, brush-on water repellent and wood preservative manufactured for use on any treated or untreated wood product. Osmose CLEAR WATER REPELLENT is registered with the Environmental Protection Agency (EPA) and exceeds the Federal specification for water repellency, TT-W-572-B Paragraph 3.7. This product is not intended to supplant or replace pressure treated wood.


[]SURFACE PREPARATION: Before application of Osmose WATER REPELLENT, make sure all areas are clean and dry. Remove all surface dirt, dust and other contaminants by washing with a detergent solution. Remove mildew with a solution of Trisodium Phosphate and ordinary household bleach mixed with water (1 cup TSP, 1 qt. bleach, 3 qts. water). Use caution to protect eyes and skin as this solution contains potentially harmful ingredients. After use, rinse area thoroughly with water and allow to dry before application of Osmose WATER REPELLENT.

[]MIX THOROUGHLY: Osmose WATER REPELLENT should be shaken or stirred before use. Do not dilute with additional solvents. For easier stirring, pour three-fourths of liquid into separate container, stir thoroughly, then, while stirring, slowly pour liquid back into original container. Stir occasionally during use.

[]APPLICATION: Brush Osmose WATER REPELLENT generously into wood for best results. Apply two coats on end grain. All surfaces must be clean and dry before application. To retain water repellent qualities of this product, reapply every one to two years. Allow new pressure treated wood installations to season, in warm weather, for 60 to 90 days prior to application of Osmose WATER REPELLENT.

[]COVERAGE: During normal application, one gallon of Osmose WATER REPELLENT will cover 250-300 square feet. The end grain of the wood will absorb more product, therefore, expect reduced coverage where an excessive amount of end grain is to be treated.

FOR MORE INFORMATION, ASK YOUR DEALER OR CALL 1-800-522-WOOD



(1-800-522-9663)

BACK PANEL (CONT.)

HEAD:

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS and DOMESTIC ANIMALS

WARNING! KEEP OUT OF REACH OF CHILDREN. HARMFUL OR FATAL IF SWALLOWED. EYE AND SKIN IRRITANT. USE ONLY IN A WELL-VENTILATED AREA. AVOID BREATHING VAPORS OR MIST. WEAR PROTECTIVE CLOTHING, EYE GOGGLES AND RUBBER GLOVES WHILE APPLYING WATER REPELLENTS AND DURING CLEAN-UP.

[] PRACTICAL TREATMENT:

IF SWALLOWED- Call a physician or poison center. Do not induce vomiting.

IF INHALED- Remove victim to fresh air. Apply respiration if indicated.

IF ON SKIN- Remove contaminated clothing and wash affected areas thoroughly with soap and water.

IF IN EYES- Flush eyes for at least 15 minutes with water. Call a physician immediately.

[] STORAGE AND DISPOSAL:

Do not contaminate water, food or feed by storage or disposal. Do not reuse empty container. Wrap container and put in trash collection.

[] ENVIRONMENTAL HAZARDS:

This product is toxic to fish and wildlife. Do not apply directly on lakes, streams, or ponds. Do not contaminate water by cleaning equipment or disposing of used containers.

[] PHYSICAL OR CHEMICAL HAZARDS:


Do not use, pour, spill, or store near heat or open flame. Potential spontaneous combustion hazard: soak clean up cloths in water and dispose of in a closed metal container.

[] CLEAN UP:

Clean brushes with mineral spirits or approved brush cleaner.

[] LIMITED WARRANTY:

When applied according to directions on this label, if this Osmose product cracks, peels or blisters within four (4) years after purchase, Osmose Wood Preserving, Inc., will furnish any necessary additional product, free of charge or will refund the purchase price. This warranty does not

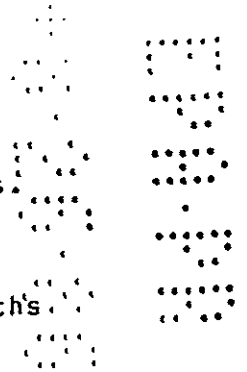

include labor, or cost of labor, for the application of this product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

OSMOSE WOOD PRESERVING, INC.

P.O. DRAWER 0, GRIFFIN, GA 30224-0248

MADE IN USA

(C)1986 Osmose. Osmose(r) is a registered trademark of Osmose Wood Preserving, Inc.

6

