

OXFORD ALGITROL 2

SWIMMING POOL ALGAECIDE AND SLIME CONTROL AGENT FOR RE-CIRCULATING WATER COOLING TOWERS

Helps keep water systems clear and free of visible slimes.

DIRECTIONS FOR USE

For best results, rid system of organic debris if possible. If soap or anionic detergent is used, rinse thoroughly before charging with ALGITROL 2.

1. Cooling towers Initial Dose: 1/2 quart per 8500 gallons of water to the sump.

Periodic Dose: 1/3 quart to 8500 gallons of water every 30 days as needed to the sump.

Users should be alarmed with the sudden appearance of a noticeable amount of organic debris in the system during the first week of operation. This is normal and is a good indication that ALGITROL 2 has attacked, penetrated and destroyed dead organic material which tends to adhere to metal and wooden surfaces as living matter.

2. Swimming Pools Initial Dose: 1 quart to 85,000 gallons of water.

Maintenance Dose: 1 quart to 85,000 gallons of water.

Initial Dose if used when filling pool at beginning of swimming season. If pool has no circulation, the initial dose should be repeated within 48 hours after the algae have been removed from the pool.

Maintenance dose should be applied weekly. If daily. If high temperatures prevail, the maintenance dose should be applied more frequently.

If makeup water is added at the rate of 10% of pool capacity, add one quart of ALGITROL 2 for each 17,000 gallons of fresh makeup water added per week. When the swimming season is over, add one quart of ALGITROL 2 to 85,000 gallons of water in the pool. This dose helps break down algae and slimes which have accumulated during the winter months.

This product is toxic to fish. Do not allow the treated effluent to enter streams or ponds.

ACTIVE INGREDIENTS: 17%
 N-Allyl-6-(2,14,30-C16,5-C12,5-C18) dimethyl benzyl ammonium chlorides 8.8%
 N-Allyl-6-(2,14,30-C16,5-C12,5-C18) dimethyl ethyl benzyl ammonium chlorides 8.5%
 INERT INGREDIENTS: 83%

DANGER

KEEP OUT OF REACH OF CHILDREN

Caution: Causes severe eye and skin damage. Do not get in eyes or on face or clothing. Wear goggles or face shield and rubber gloves when handling. Harmful to fish if swallowed. Avoid contact with food. Rinse empty container thoroughly with water and discard it.

FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, do not use ointment. Remove and discard contaminated clothing before leaving. If swallowed, do not induce vomiting. If inhaled, get fresh air. If on skin, wash with plenty of water. If on face, wash with plenty of water. Do not use emetics.

NOTE TO PHYSICIAN

For more information on this product, contact the manufacturer. For medical information, contact the manufacturer.

EPA Reg. No. 3635-168
 EPA Est. 3635-GA-1

NET CONTENTS _____ GALLONS

OXFORD


DESCRIPTION

When ALGITROL 2 is used as directed, it will aid in controlling and preventing the development of unsightly slime and algae growth which produce foul odors and reduce the efficiency of cooling towers. It will also prevent the development of green algae, green, Phormidium, cyanobacteria, black algae, Phormidium, and other swimming algae.

ALGITROL 2 is recommended with most commonly used swimming pool chemicals. Do not use with chlorine or other additives that should not be used in the presence of soap or anionic detergent.

ALGITROL 2 is not flammable. It should be stored in a cool and dry place. If it gets on your skin or clothes, wash with water. If it gets in your eyes, wash with water for 15 minutes.

ALGITROL 2 is not a pesticide. It is a disinfectant and a sanitizer.

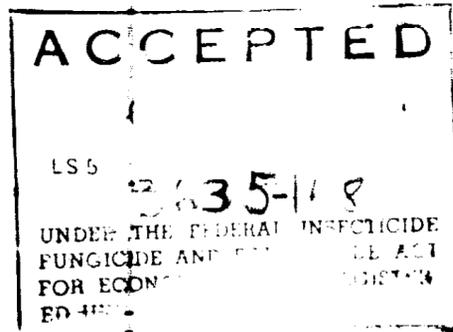

I.C.C.: Ind. Water Process Treating Compound Liquid

OXFORD[®] ALGITROL 2

SWIMMING POOL ALGAECIDE AND SLIME CONTROL AGENT FOR RE-CIRCULATING WATER COOLING TOWERS

Helps keep water systems clear and free of visible slimes.

DIRECTIONS FOR USE

For best results, rid system of organic debris if possible. If soap or anionic detergent is used, rinse thoroughly before charging with ALGITROL 2.

1. Cooling Towers Initial Dose: Use 1.2 quarts to 85,000 gallons of water to the sump.
Periodic Dose: 1.3 quarts to 85,000 gallons of water every 7 days or as needed to the sump.

Do not be alarmed with the sudden appearance of a considerable amount of organic debris in the system during the first week of operation. This is normal and is a good indication that ALGITROL 2 has effectively penetrated and dislodged dead organic material which tenaciously adheres to metal and wooden surfaces as living matter.

2. Swimming Pools Initial Dose: 1 quart to 85,000 gallons of water.

Maintenance Dose: 1 quart to 85,000 gallons of water.
Initial Dose: If used when filling pool or beginning swimming season. If pool has visible algae growth, the initial dose should be repeated within 48 hours after the algae has been removed from the pool.

Maintenance dose should be added at least once every 7 days. If high temperatures prevail or pool may be subject to heavy use, add maintenance dose more frequently.

If makeup water is added at the rate of 100,000 gallons a week of pool capacity, add one quart of ALGITROL 2 for each 17,000 gallons of fresh makeup water added per week. When the swimming season is over, add the amount of ALGITROL 2 to 85,000 gallons of water in the pool and let it sit in pool. This dose helps provide a measure of protection against algae growth during the winter months.

This Product is toxic to fish. Do not discharge treated effluent into lakes, streams or ponds.

ACTIVE INGREDIENTS: 17%
N-Alkyl 160 C14 30% C16 5% C12 5% C18 dimethyl benzyl ammonium chlorides 8.5% N-Alkyl 168 C12 32% C14 dimethyl ethyl benzyl ammonium chlorides 8.5%
INERT INGREDIENTS 83%

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes severe eye and skin damage. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food. Rinse empty container thoroughly with water and discard it.

FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse. If swallowed, do not induce vomiting. Do not take any food or drink. Get medical attention immediately. Do not take any medicine.

NOTE TO PHYSICIAN

Respiratory irritation may occur in the presence of dust or mist. It may cause irritation of the respiratory tract. Inhalation may be needed.

EPA Reg. No. 3635-168
EPA Est. 3635-GA-1

NET CONTENTS GALLONS 8.75

DESCRIPTION

When ALGITROL 2 is used as directed, it will aid in controlling and preventing the development of unsanitary slime conditions which cause foul odors and which may cause equipment breakdown. Will kill and prevent the development of Chlorella, pyrenoidosa (green), Prorocentrum, scenedesmus, Plectonidium, netzi (Square D algae), cyanobacteria (blue-green) and other swimming pool algae.

ALGITROL 2 is compatible with most commonly used swimming pool sanitizers. It will not cause corrosion inhibition additives, but should not be used in the presence of soap or anionic detergents.

ALGITROL 2 is not to be used on any pool which has been treated with water softeners. ALGITROL 2 is not to be used on any pool which has been treated with lime.

ALGITROL 2 is not to be used on any pool which has been treated with formaldehyde.

ACCE

LS 5

363
UNDER THE FED.
FUNGICIDE AND
FOR ECON.
BD-6422

I.C.C.: Ind. Water Process Treating Compound Liquid

OXFORD
CHEMICALS

A CONSOLIDATED FOODS COMPANY
RESPONSIVE TO CONSUMER NEEDS

© 1972 CONSOLIDATED FOODS CORPORATION
ALL RIGHTS RESERVED

P.O. BOX 80202, ATLANTA, GEORGIA 30351

OXFORD[®] ALGITROL 2

AND SLIME CONTROL AGENT FOR RE-CIRCULATING WATER COOLING TOWERS

Helps keep water systems clear and free of visible slimes.

ACTIVE INGREDIENTS 17%
N-Alkyl (60% C14, 30% C16, 5% C12, 5% C18) dimethyl-
benzyl ammonium chlorides, 8.5% N-Alkyl (68% C12, 32%
C14) dimethyl-ethyl-benzyl ammonium chlorides, 8.5%
INERT INGREDIENTS 83%

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes severe eye and skin damage. Do not get in eyes, nose or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food. Rinse empty container thoroughly with water and discard it.

FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove contaminated clothing before reuse. If swallowed, do not induce vomiting and drink promptly a large quantity of water. Whites, gelatin solution or other milk products may be used in large quantities of water. Avoid skin contact with slimes.

NOTE TO PHYSICIAN

For severe eye damage, consult a physician for the use of antibiotics. Measures against circulatory shock, respiratory depression and shock may be needed.

EPA Reg. No. 3635-168
EPA Est. 3635-GA-1

NET CONTENTS GALLONS 875

DESCRIPTION

When ALGITROL 2 is used as directed, it will aid in controlling and/or preventing the development of unsanitary slime conditions which are unsightly, produce foul odors and which are often the cause of equipment breakdown. Will kill and prevent the development of *Chlorella pyrenoidosa* (green), *Phormidium inundatum* (black algae), *Phormidium retzii* (Square D algae), *Lyngbya versicolor* (blue-green) and other swimming pool algae.


ALGITROL 2 is compatible with most commonly used swimming pool chemicals and with virtually all corrosion inhibition additives, but should not be used in the presence of soap or anionic detergents.

ALGITROL 2 is concentrated and should be flushed from skin and eyes with water if splashed on them. ALGITROL 2 is not a foodstuff and should not come in contact with food.

ALGITROL 2 is recommended for use in swimming pools and in industrial water cooling and heating systems.

REORDER FROM
OXFORD CHEMICALS
P. O. BOX 80202
ATLANTA, GEORGIA 30341

OR CALL COLLECT
AREA (404) 451-4311

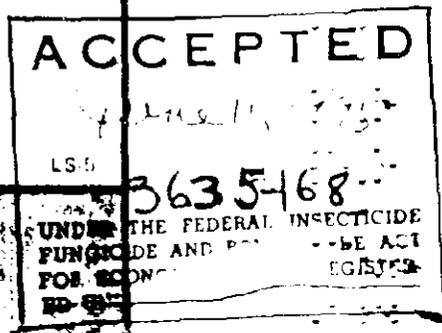

OXFORD
CHEMICALS



A CONSOLIDATED FOODS COMPANY
RESPONSIVE TO CONSUMER NEEDS

P. O. BOX 80202, ATLANTA, GEORGIA 30341

PSLBS-1