

ACCEPTED

DEC 27 1988

Under the Federal Insecticide, Fungicide, and
Rodenticide Act, as amended, for the
pesticide registered under
EPA Reg. No. 4808-1

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS AND DOMESTIC ANIMALS

CAUTION

HARMFUL IF SWALLOWED

Treatise should not be drunk, eaten, or used in streams, ponds, or public water.

"00" Wafers

METALWORKING FLUID BACTERIOSTAT

ACTIVE INGREDIENT
2-(Hydroxymethyl)-2-Nitro-1,3 Propane diol 98.5%

INERT INGREDIENTS 1.5%

KEEP OUT OF REACH OF CHILDREN

CAUTION

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, water or egg white. Call a physician.

IF IN EYES: Flush with running water for at least 15 minutes. Call a physician.

IF ON SKIN: Not applicable (treatment not required).

NET CONTENT EPA EST No. 4808-01-02
EPA Reg. No. 4808-1

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

TREATMENT

"00" Wafers are recommended for use:

1. To temporarily rejuvenate prematurely rancid metalworking fluid
 - a. Add one "00" Wafer per 25 gallons of mix.
2. As a supplement to a machine tool cleanout to inhibit bacterial growth
 - a) Drain metalworking fluid reservoir.
 - b) Clean with CIMCLEAN 30 cleaner according to directions on label.
 - c) Fill reservoir with fresh CIMCOOL metalworking fluid mix.
 - d) Add one "00" Wafer to each 25 gallons of mix in the initial charge.
 - e) Add one "00" Wafer to each 25 gallons of makeup mix once each week "additive" to help control rancidity in heavily contaminated metalworking systems.
 - f) Add one "00" Wafer to each 25 gallons of makeup mix once a week.

STORAGE AND DISPOSAL

PROHIBITIONS

Do not contaminate water, food, or feed by storage or disposal.

Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

HANDLING AND STORAGE

Somewhat hygroscopic. Store in a closed container.

DISPOSAL

The "00" Wafer ingredients are normally consumed during product use. Metalworking fluids containing "00" Wafers can be disposed of by ultrafiltration, acid-steam-polymer chemical treatment, or high temperature incineration.


CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or if allowed by state and local authorities, by burning. If burned, stay out of smoke.

CINCINNATI
MILACRON

Division of Milacron Machine Tool Company

MILACRON U.S.A.

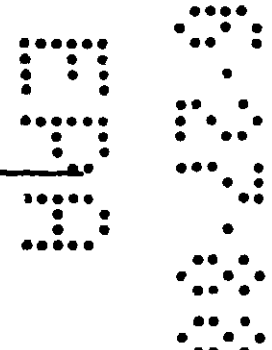

ACCEPTED

DEC 27 1988

Under the Fungicide, Insecticide, and
Rodenticide Act, as amended, for the
pesticide registered under
EPA Reg No. 4808-1

PRECAUTIONARY STATEMENTS

HAZARD TO HUMANS AND DOMESTIC ANIMALS

CAUTION

HARMFUL IF SWALLOWED

Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water.

"00" Powder

METALWORKING FLUID BACTERIOSTAT

ACTIVE INGREDIENT
2-(Hydroxymethyl)-2-Nitro-1,3-Propane diol 98.5%

INERT INGREDIENTS 1.5%

KEEP OUT OF REACH OF CHILDREN

CAUTION

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, water or egg white. Call a physician.

IF IN EYES: Flush with running water for at least 15 minutes. Call a physician.

IF ON SKIN: Not applicable (treatment not required).

NET CONTENTS EPA EST No. 4808-DH-02
EPA Reg. No. 4808-1

GROSS WEIGHT

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

TREATMENT

"00" Powder is recommended for use:

1. To temporarily re-activate previously rinsed metalworking fluid
 - a. Add 1 ounce of "00" Powder per 25 gallons of mix.
2. As a supplement to a machine tool cleaner to inhibit bacterial growth
 - a) Drain metalworking fluid reservoir.
 - b) Clean with CINCLEAN 30 cleaner according to directions on label.
 - c) Fill reservoir with fresh CINCOCOL metalworking fluid mix.
 - d) Add 1 ounce of "00" Powder to each 25 gallons of fluid in the initial charge.
 - e) Add 1 ounce of "00" Powder to each 25 gallons of makeup mix once a week.
3. As an "additive" to help control viscosity in heavily contaminated metalworking fluid reservoirs
 - a) Add 1 ounce of "00" Powder to each 25 gallons in the initial charge.
 - b) Add 1 ounce of "00" Powder to each 25 gallons of makeup mix once a week.

STORAGE AND DISPOSAL

PROHIBITIONS

Do not contaminate water, food, or feed by storage or disposal.

Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

HANDLING AND STORAGE

Somewhat hygroscopic. Store in a closed container.

DISPOSAL

The "00" Powder ingredients are normally consumed during product use. Metalworking fluids containing "00" Powder can be disposed of by ultraviolet acid-stain-polymer chemical treatment to 200 ppm or more concentration.

CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or punch and dispose of in a sanitary landfill, or incineration, or if allowed by state and local authorities, by burning. If burned, do not burn in open air.

PAPER AND PLASTIC BAGS: Completely empty bag into application equipment. Then dispose of empty bag in a sanitary landfill or by incineration, or if allowed by state and local authorities, by burning. If burned, do not burn in open air.

**CINCINATI
MILACRON**

Product Division, 1000 Main Street, Milacron, Cincinnati, Ohio 45229