

**PENTA WOOD PRESERVATIVE R** prevents dry rot - mildew - attack by termites, powder post beetles and carpenter ants.

Repels water - prevents splitting, checking and warping. Reduces swelling due to moisture absorption.

#### **DIRECTIONS FOR USE**

Use **PENTA WOOD PRESERVATIVE R** as it comes from the can. Wood must be free of bark, dry and well-seasoned. Always brush or spray two liberal coats. Soak two hours for lumber up to two inches thick. Heavier timbers and posts should soak overnight. Air dry 48 hours before painting.

#### **WARNING**

**COMBUSTIBLE MIXTURE--KEEP AWAY FROM HEAT, SPARKS AND OPEN FLAME. CONTAINS MINERAL SPIRITS & PENTACHLOROPHENOL. MAY CAUSE BURNS.**

Do not get in eyes, on skin or clothing. Avoid breathing of vapors. If swallowed, call a physician immediately; do not induce vomiting. In case of contact, immediately remove all contaminated clothing including shoes, and flush skin for at least 15 minutes. For eyes, get medical attention. Wash clothes before reuse. Wear rubber gloves and protective clothing when handling the freshly treated lumber. Do not transfer contents to unmarked containers. Close tightly when not in use.

This product will kill fish and wildlife. Keep out of ponds, lakes and streams. Do not contaminate water by cleaning of equipment, or disposal of wastes.

**FULTON CHEMICAL COMPANY**

Sumter, S.C. 29150

ACCEPTED  
6-11-71  
5357-7  
UNDER THE FEDERAL  
FUNGICIDE  
FOR F

**FULTON**

U.S.A. REG. NO. 5351-7

**WARNING: HARMFUL OR FATAL IF SWALLOWED. KEEP OUT OF THE REACH OF CHILDREN**

See Warning on Back Panel

**NET CONTENTS 1 GALLON**

**PENTA WOOD PRESERVATIVE R** prevents dry rot - mildew - attack by termites, powder post beetles and carpenter ants.

Repels water - prevents splitting, checking and warping. Reduces swelling due to moisture absorption.

**DIRECTIONS FOR USE**

Use **PENTA WOOD PRESERVATIVE R** as it comes from the can. Wood must be free of bark, dry and well-seasoned. Always brush or spray two liberal coats. Soak two hours for lumber up to two inches thick. Heavier timbers and posts should soak overnight. Air dry 48 hours before painting.


**WARNING**

**COMBUSTIBLE MIXTURE--KEEP AWAY FROM HEAT, SPARKS AND OPEN FLAME. CONTAINS MINERAL SPIRITS & PENTACHLOROPHENOL. MAY CAUSE BURNS.**

Do not get in eyes, on skin or clothing. Avoid breathing of vapors. If swallowed, call a physician immediately; do not induce vomiting. In case of contact, immediately remove a contaminated clothing including shoes, and flush skin for at least 15 minutes. For eyes, get medical attention. Wash clothes before reuse. Wear rubber gloves and protective clothing when handling the freshly treated lumber. Do not transfer contents to unmarked containers. Close tightly when not in use.

This product will kill fish and wildlife. Keep out of ponds, lakes and streams. Do not contaminate water by cleaning of equipment, or disposal of wastes.

**FULTON CHEMICAL COMPANY**  
Sumter, S.C. 29150

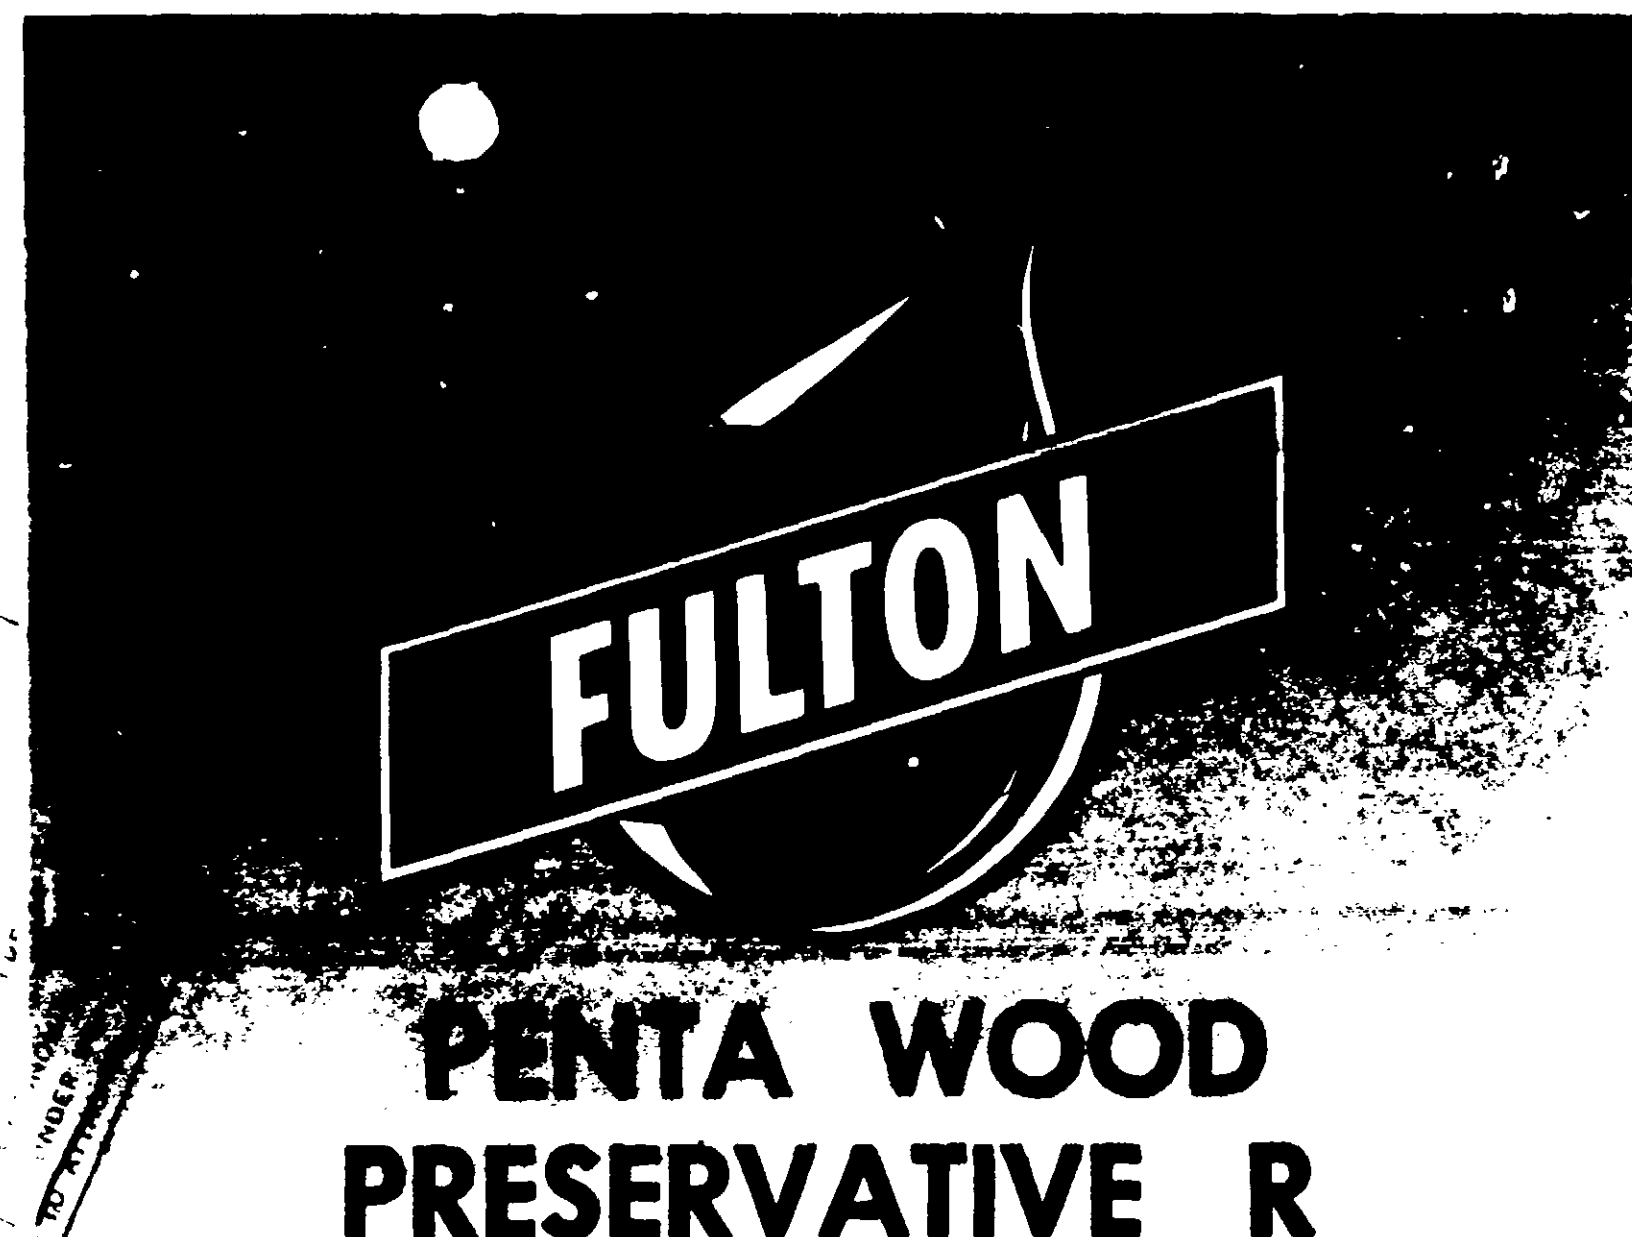

**PENTA WOOD PRESERVATIVE R**

41-4000

Active Ingredients .....	5.0 %
Pentachlorophenol .....	4.5
Related Chlorophenols .....	0.5
Inert Ingredients .....	95.0 %

U.S.D.A. REG NO. 5351-7

**WARNING: HARMFUL OR FATAL IF SWALLOWED. KEEP OUT OF THE REACH OF CHILDREN**

See Warning on Back Panel

LN 83

**NET CONTENTS 1 GALLON**