PENTA CONCENTRATE C-10 when mixed and applied according to directions prevents dry rot - mildew attack by termites, powder post beetles and carpenter ants.

Repels water - prevents splitting, checking and warping Reduces swelling due to moisture absorption.

DIRECTIONS FOR USE

To make a ready-to-use solution which contains 5% Technical Pentachlorophenol, mix one gallon of PENTA CONCENTRATE C-10 with 7 gallons of a light petroleum solvent such as kerosene, mineral spirits, diesel fuel or No. 2 Fuel Oil. If the surface to be treated will be painted after treatment, use only Mineral Spirits for diluting. Stir thoroughly.

Wood must be free of bark, dry and well-seasoned. After mixing as above, brush or spray two liberal coats. Soak two hours for lumber up to two inches thick. Heavier timbers and posts should soak overnight. Air dry for 48 hours before painting.


WARNING

COMBUSTIBLE MIXTURE--KEEP AWAY FROM HEAT, SPARKS AND OPEN FLAME. CONTAINS MINERAL SPIRITS & PEN-TACHLOROPHENOL. MAY CAUSE BURNS. Do not get in eyes, on skin or clothing. Avoid breathing of vapors. If swallowed, call a physician immediately; do not induce vomiting. In case of contact, immediately remove all contaminated clothing including shoes and flush skin for at least 15 minutes. For eyes, get medical attention. Wash clothes before reuse. Do not transfer contents to unmarked containers. Close tightly when not in use. Use same precautions with diluted solutions. Wear rubber gloves and protective clothing when handling the freshly treated lumber. Do not use mixing containers for foodstuffs.

This product will kill fish and wildlife. Keep out of pends, lakes and streams. Do not contaminate water by cleaning of equipment, or disposal of wastes.

NOT FOR USE OR STORAGE IN OR AROUND THE HOME.

FULTON CHEMICAL COMPANY Sumter, S.C. 29150

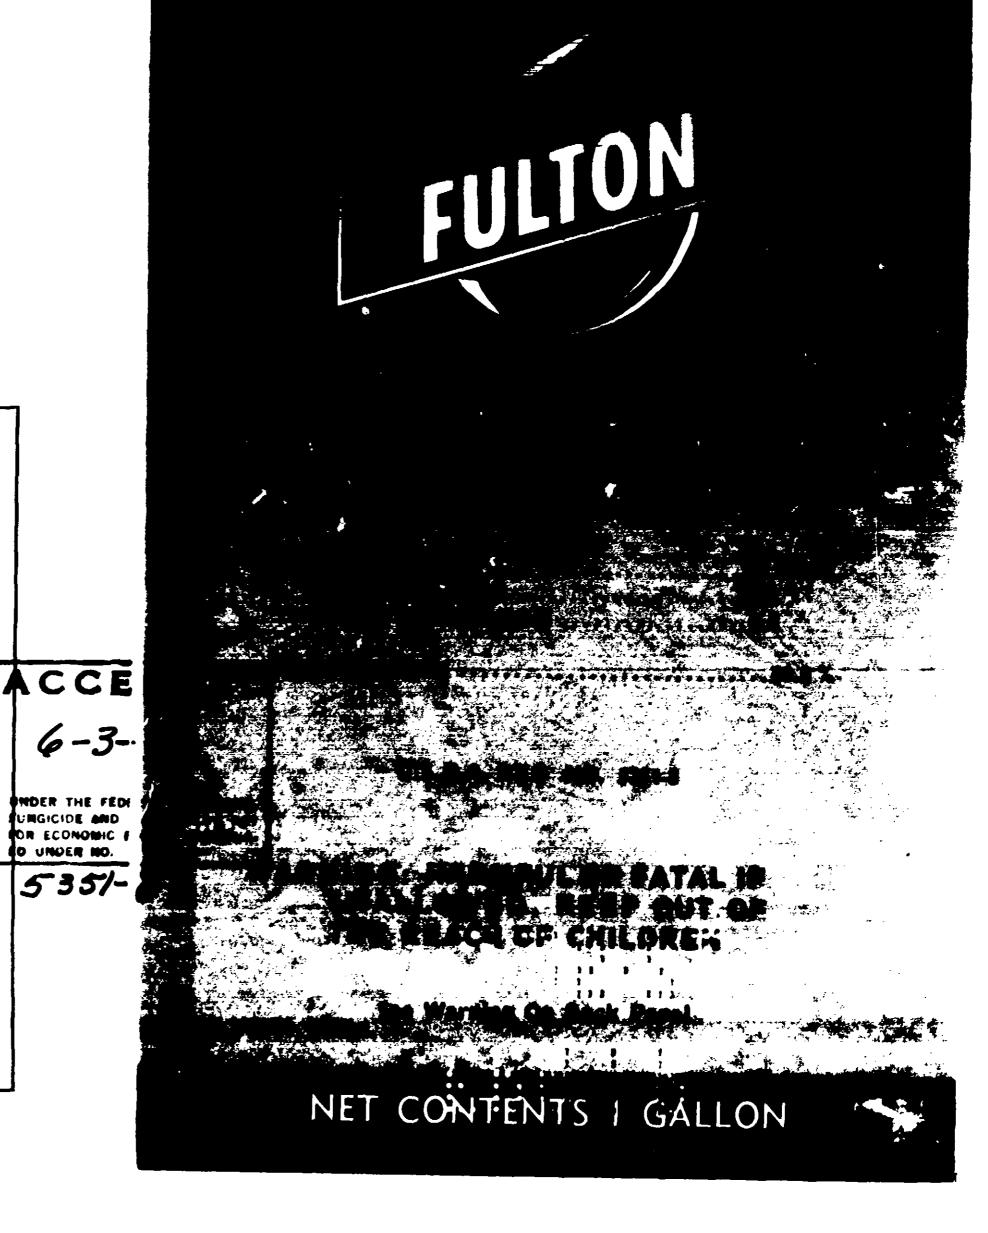

PENTA CONCENTRATE C-10 when mixed and applied according to directions prevents dry rot - mildew attack by termites, powder post beetles and carpenter ants.

Repels water - prevents splitting, checking and warping Reduces swelling due to moisture absorption.

DIRECTIONS FOR USE

To make a ready-to-use solution which contains 5% Technical Pentachlorophenol, mix one gallon of PENTA CONCENTRATE C-10 with 7 gallons of a light petroleum solvent such as kerosene, mineral spirits, diesel fuel or No. 2 Fuel Oil. If the surface to be treated will be painted after treatment, use only Mineral Spirits for diluting. Stir thoroughly.

Wood must be free of bark, dry and well-seasoned. After mixing as above, brush or spray two liberal coats. Soak two hours for lumber up to two inches thick. Heavier timbers and posts should soak overnight. Air dry for 48 hours before painting.

WARNING

COMBUSTIBLE MIXTURE-KEEP AWAY FROM HEAT, SPARKS AND OPEN FLAME. CONTAINS MINERAL SPIRITS & PEN-TACHLOROPHENOL. MAY CAUSE BURNS.

Do not get in eyes, on skin or clothing. Avoid breathing of vapors. If swallowed, call a physician immediately; do not induce vomiting. In case of contact, immediately remove all contaminated clothing including shoes and flush skin for at least 15 minutes. For eyes, get medical attention. Wash clothes before reuse. Do not transfer contents to unmarked containers. Close tightly when not in use. Use same precautions with diluted solutions. Wear rubber gloves and protective clothing when handling the freshly treated to unuca no lumber. Do not use mixing containers for foodstuffs.

This product will kill fish and wildlife. Keep out of pends, lakes and streams. Do not contaminate water by cleaning of equipment, or disposal of wastes.

NOT FOR USE OR STORAGE IN OR AROUND THE HOME.

FULTON CHEMICAL COMPANY

Sumter, S.C. 29150



41-4004

Active Ingr	edients	40.0 %
Pentact	ilorophenol	33.2
Related	Chlorophenois	6.8

CCEPTED

6-3-71

UNGICINE AND - JOE HILLINE ACT TH ECONOMIC I HOUR BESISTER

U.S.D.A. REG NO. 5351-8

nert Ingredients

5351-8

WARNING: HARMFUL OR FATAL IF SWALLOWED. KEEP OUT OF THE REACH OF CHILDREN

See Warning On Back Panel

LN 83

NET CONTENTS I GALLON