

FRONT PANEL

"OLYMPIC STOPS THE RAIN" TM Copy and Rainbow Artwork

OLYMPIC (R)

WOOD
PRESERVATIVE -
GREEN

o WATER REPELLENT

o WOOD PRESERVATIVE TO
FIGHT MILDEW, ROT AND TERMITE DAMAGE

o NATURAL LINSEED OIL FORMULA

o FOR EXTERIOR BELOW GROUND USE

One Gallon / 3.78 Liters

and

Five Gallon / 18.9 Liters

KEEP OUT OF REACH OF CHILDREN (12 pt.)
DANGER! (18 pt.) COMBUSTIBLE. MAY BE FATAL IF SWALLOWED. SKIN
IRRITANT. SEE BACK PANEL FOR STATEMENT OF PRACTICAL TREATMENT
AND ADDITIONAL PRECAUTIONARY STATEMENTS. (12 pt.)

ACTIVE INGREDIENTS

Copper Naphthenate.....21.22%
(equivalent to metallic copper 2%)


INERT INGREDIENTS.....78.78%

TOTAL 100.00%

Contains petroleum distillates

MEETS FED. SPEC TT-W-572B

EPA Reg. No. 7313-7 EPA Est. No. 7313-WA-1, 7131-IL-1, 7313-KY-1

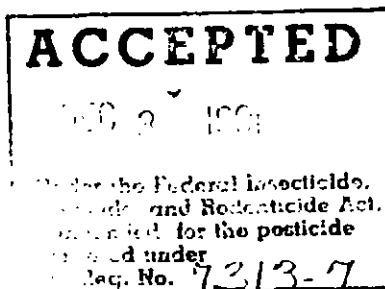

LEFT SIDE PANEL

LIMITED WARRANTY

OLYMPIC warrants your satisfaction with the application, appearance and performance properties of this product if it is properly applied to a properly prepared surface in accordance with label directions. OLYMPIC MAKES NO OTHER EXPRESS WARRANTIES. IN THE EVENT THE PRODUCT FAILS TO CONFORM TO THIS WARRANTY, OLYMPIC, AS ITS SOLE LIABILITY AND IN LIEU OF ANY DIRECT OR INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES, WILL, AT YOUR OPTION, FURNISH REPLACEMENT PRODUCT OR REFUND THE PURCHASE PRICE - LABOR OR COSTS OF LABOR FOR THE APPLICATION OF ANY PRODUCT SPECIFICALLY ARE EXCLUDED. You must supply proof of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. To make a claim under this warranty contact the store where you purchased the product or; OLYMPIC STAINS, One PPG Place, Pittsburgh, PA 15272.

RIGHT SIDE PANEL

For 51789 imprint:

| | | | |
|-----------|--------------|---------|---------|
| UPC Code: | One Gallon: | 7 15195 | 17891 4 |
| | Five Gallon: | 7 15195 | 17895 2 |

For 57589 imprint:

MAXIMUM VOC = 550 g/l (4.58 lbs/gal)

Calc. VOC = 542 g/l (4.52 lbs/gal)

| | | | |
|-----------|--------------|---------|---------|
| UPC Code: | One Gallon: | 7 15195 | 75891 8 |
| | Five Gallon: | 7 15195 | 75895 6 |

DIST. BY AND (C) 1990
PPG ARCHITECTURAL FINISHES, INC.
ONE PPG PLACE
PITTSBURGH, PA 15272
(412) 434-3131
MADE IN U.S.A.

BACK PANEL

NOTE: The following label warning should appear in a box with rounded corners at the top of the back panel.

(12 pt.) PRECAUTIONARY STATEMENT -- HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER (18 pt.)

(All headings in 12 pt. type)

May be fatal if swallowed. Causes eye and skin irritation. Avoid breathing vapor or spray mist. Use only in well ventilated areas. To avoid breathing vapors or spray mist, open windows and doors or use other means to ensure fresh air entry during application and drying. If you experience eye watering, headaches, nausea or dizziness, leave the area until symptoms cease. Do not drive, operate machinery or climb ladders while symptoms persist. Increase fresh air or wear properly fitted respiratory protection (NIOSH/MSHA T-23C with organic vapor cartridge) before resuming application. Do not get in eyes, on skin, or on clothing. Note: Wear goggles, rubber gloves, and protective clothing when applying or handling treated lumber. Remove contaminated clothing and wash before reuse. Do not drink alcohol while working with this product.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Do not induce vomiting. Drink large quantities of water and call a physician immediately.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.

IF IN EYES. Flush eyes with plenty of water, get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

For Emergency Medical and Spill Control Information, (304) 943-1300.

ENVIRONMENTAL HAZARDS: Do not contaminate water when disposing of equipment washwaters.

PHYSICAL/CHEMICAL HAZARDS: Combustible. Do not use or store near heat or open flame. To avoid spontaneous combustion, soak oily cloths in water after use or place in a closed metal container away from buildings and other combustible materials.

BEST AVAILABLE COPY

576

OLYMPIC (R) WOOD PRESERVATIVE - GREEN

Penetrating, Water Repellent Finish

- o Protects against costly water damage
- o Preserves wood while helping maintain its natural beauty.
- o Penetrates deep into the wood to strengthen wood fibers.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Apply this product only as specified on this label.

OLYMPIC (R) WOOD PRESERVATIVE - GREEN is specially formulated for EXTERIOR USE to treat wood used below ground level. It provides protection from mildew, rot and decay as well as termites and other wood destroying insects. Its water repellency also helps keep wood from warping and swelling. It meets TT-W-572B, the Federal specification for a water repellent wood preservative.

OLYMPIC (R) WOOD PRESERVATIVE - GREEN combines penetrating linseed oils with copper naphthenate, which imparts a characteristic green color. This coloration will gradually fade if exposed to weather. Finish coating with stain, paint, varnish or other clear products is not recommended on treated surfaces. On wood used above ground, use OLYMPIC (R) Wood Preservative Clear. For severe exposure to wood rot "pressure treated wood" offers maximum protection.

PREPARATION

SURFACE PREPARATION: Proper surface preparation is essential for Olympic Stains' limited warranty to apply. Surfaces must be clean, dry and free of mildew and bark. Remove dirt, dust, oil, soot or other contaminants by washing with a detergent solution. Rinse thoroughly and allow to dry before application.

MILDEW: Remove and inhibit regrowth of mildew by using MILDEW CHECK (R) Multi-Purpose Wash by OLYMPIC STAIN.

APPLICATION: Stir before using. Olympic Wood Preservative - Green should be applied liberally to achieve maximum performance. Dipping for several minutes is recommended. Two coats applied by brush or spray are acceptable. Treat ends and edges of boards thoroughly and separate while drying. DO NOT THIN OR INTERMIX WITH OTHER COATING PRODUCTS.

APPROXIMATE COVERAGE: Depending on texture, porosity and dryness of wood: 150 to 250 square feet per gallon.

TEMPERATURE RECOMMENDATIONS: Do not apply when the air, coating or surface temperature is below 50° F (10° C).

DRYING: OLYMPIC WOOD PRESERVATIVE - GREEN will require 24 to 48 hours to dry under ideal conditions.

CLEANUP: Clean brushes and other tools with mineral spirits.

STORAGE AND DISPOSAL

STORAGE: Do not use or store inside the home.

DISPOSAL: Securely wrap original container in several layers of newspaper and discard in trash. Do not reuse container. Rinse thoroughly before discarding in trash.

FOR ADDITIONAL INFORMATION - ASK YOUR DEALER OR REFER TO THE OLYMPIC INFORMATION MANUAL.

Label Date Code: (15091)