

# NORTHERN CREOSOTE


WOOD PRESERVING COMPOUND

**WARNING**  
KEEP OUT OF REACH OF CHILDREN

See warning on back panel for additional cautions.

Active Ingredients	100%
Petroleum Asphalt	3.5%
AWPA No. 1 Creosote	17.5%
Petroleum Distillate	79.0%

**Northern Yards, Inc.**  
2335 N. HARDING ST. PORTLAND, ORE 97217

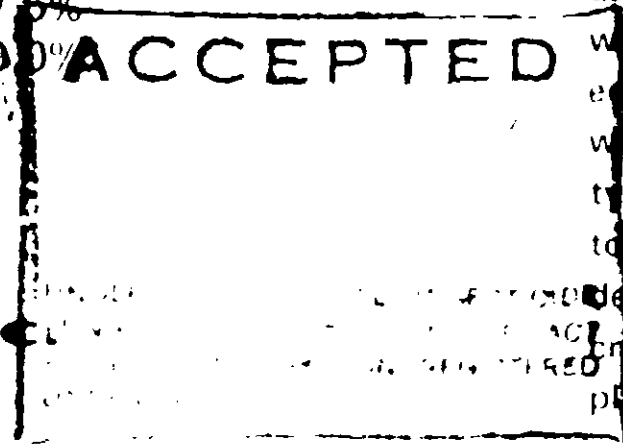

## WARNING

May be fatal if swallowed or absorbed through skin. Do not get in eyes, on skin or on clothing. Avoid prolonged breathing of the vapor. Wear rubber gloves when handling freshly treated lumber. **DO NOT USE, POUR, SPILL OR STORE NEAR HEAT OR OPEN FLAME.** Keep container closed when not in use. Do not contaminate water by cleaning of equipment, or disposal of wastes. Do not re-use empty drums or pails. Return to drum reconditioner or destroy by perforating or flushing or burying in safe place.

This Coal Tar Creosote Wood Preserving Compound combines water repellent and wood preserving properties. It may be used on many types of timber to delay the onset of decay or the entry of termites and other wood destroying pests. Frequent inspection and reapplication may be necessary to maintain protection against wood rot, decay, insects or other pests.

## DIRECTIONS

Shake or stir to mix contents before using. Posts must be free of bark, clean and dry. Posts should be soaked for 12 to 24 hours, depending upon seasoning of wood. Heavy timbers should be soaked 24 to 48 hours for best results. If applied with a paint brush apply at least two fluid coats. Compound dries in approximately 24 hours.

XNO 5897 1-1