

MIL-P-19451B Formula No. 105

ACTIVE INGREDIENTS

Cuprous Oxide 40.3%

INERT INGREDIENTS

Gum Rosin 19.0%

Blown Fish Oil 8.1%

Zinc Stearate 1.2%

Zinc Oxide 11.1%

Magnesium Silicate 3.8%

Xylene 16.5%

Total 100.0%

ANTIDOTE

12 Point

Give milk and white of egg beaten with water, then a tablespoon of salt in glass of warm water. If contact is made in eyes, flush with warm water. CALL A PHYSICIAN.

MAY BE FATAL IF SWALLOWED 12 Point

Do not breathe vapor. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling.

CAUTION COMBUSTIBLE 12 Point

Keep away from heat, sparks, and open flame. Use adequate ventilation. Do not smoke while painting.

Directions and Intended Use. - Formula No. 105, red anti-fouling paint, is intended for use on shipbottom exterior surfaces. It should be used alone or preferably over primer, pretreatment (Formula 117, MIL-P-15328) on wood or plastic and additionally over anticorrosive primer (Formula 14N, MIL-P-19453) and on metal surfaces. See Bureau of Ships Technical Manual Chapter 9190 for instructions on proper application methods.

Md. 14
WILLIAM ARMSTRONG SMITH CO.
EAST POINT, GEORGIA

and wholly owned subsidiary company
RELYNCE CHEMICAL COMPANY
RICHMOND, CALIFORNIA

armstrong smith

INDUSTRIAL COATINGS



RUST INHIBITIVE




CORROSION RESISTANT



8010-290-6651
MIL-P-19151B Formula No. 105

Paint. Anti-Fouling. Cold Plastic. Shipbottom. Red

Five Gallon Net Wt. 72.5 Pounds

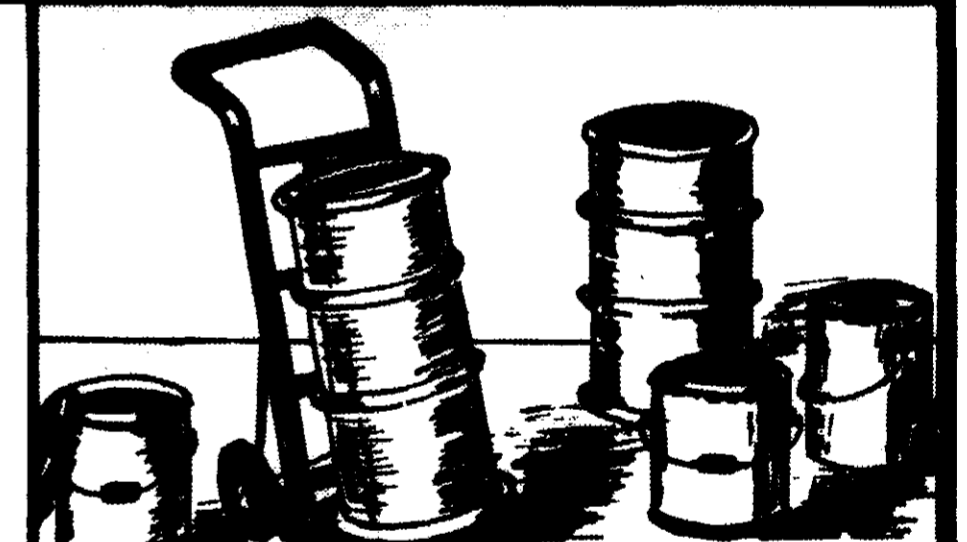

ABRASION RESISTANT



CHEMICAL RESISTANT



ACCEPTED

JUN 21 1967

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
ECONOMIC POISON REGISTER-
ED SUBJECT
REMARKS COMMENTS

Contract No.

P. O. No.

Date Mfd. Batch No.

WARNING

18 Point

KEEP OUT OF REACH OF CHILDREN 12 Point

See antidote and other warning statements on rear panel

Mfd. By
WILLIAM ARMSTRONG SMITH CO.
EAST POINT, GEORGIA

May 24, 1967