

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

OCT 26 1992

U.S. Yacht Paint Co., Inc.
P.O. Box 96
Roseland, N.J. 07068

Attention: Frank C. Kenyon

Subject: U.S. Yacht 673 Black Co-Poly Crab Pot Paint
EPA Registration No. 23566-17
Your Amendment Dated March 12, 1992


The amendment referred to above, submitted in connection with registration under section 3(c)(7)(A) of the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), to add buoys, and motor outdrives as a use sites is acceptable provided that you comply with the conditions below.

1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) and section 4 when the Agency requires all registrants of similar products to submit such data.
2. Submit five (5) copies of your final printed labeling before you release the product for shipment.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


A stamped copy of the label is enclosed for your records.

Sincerely yours,


 John H. Lee
 Product Manager 31
 Antimicrobial Programs Branch
 Registration Division (H7505C)

CONCURRENCES

SYMBOL							
SURNAME							
DATE							



RESTRICTED USE PESTICIDE
 DUE TO TOXICITY TO AQUATIC ORGANISMS INCLUDING SHELLFISH: FOR
 COMMERCIAL APPLICATORS AND FOR USE ONLY BY CERTIFIED COMMERCIAL APPL
 THE DIRECT SUPERVISION OF AN ON-SITE (AT THE WORK SITE) CER

U.S. YACHT PAINT

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. This product may be used lawfully only on aluminum and steel boats and submerged structures such as crab and lobster pots, motor outdrives, buoys, ~~_____~~. Users must comply with all applicable OSHA requirements.

STORAGE AND DISPOSAL

Store in a dry area away from heat and severe cold. Keep partially used containers tightly sealed. Do not contaminate water, food or feed by storage or disposal.

PESTICIDE DISPOSAL

Paint chips, spent abrasives, and any other waste material from removal of old paint must be disposed of in a sanitary landfill (or, if required by Federal, State or local regulation, handled as a hazardous waste). If possible, use all of the contents by application according to label instructions. Manage excess paint, rinsate and other applicable wastes in accordance with Federal, State and local requirements. Consult your State pesticide or environmental control agency, nearest EPA Regional Office, or RCRA/Superfund hotline (800-424-9346) for waste disposal guidance.

CONTAINER DISPOSAL

Triple rinse container if intended for recycling or reconditioning. Empty paint containers with small amounts of dried residue must be disposed of in a sanitary landfill (or, if required by Federal, State or local regulations, handled as a hazardous waste).

U S Yacht Paint Co Inc, Roseland, NJ 07068
 EPA Establishment No 23566-NC-1

Keep Out of Reach of Children

DANGER

SEE SIDE PANELS FOR
 ADDITIONAL PRECAUTIONARY STATEMENTS

CONTAINS
 PETROLEUM
 DISTILLATES

FOR
 COMMERCIAL
 USE ONLY

Active Ingredient:
 Tributyltin Meth-
 Acrylate, as part
 of a Polymer 6.08
 Inert Ingredients: 94.08
 Total: 100.08
 EPA Reg No 23566-17

CRAB & LOBSTER POT
 ALUMINUM & STEEL
 MOTOR OUTDRIVES



Under the Federal Insecticide, Fungicide, and Rodenticide Act
 is registered for the pesticide
 registered under EPA Reg. No.
 23566-17

BEST AVAILABLE COPY

**673 BLACK
 CO-POLY ANTIFOULING**

DE
FOR SALE ONLY TO CERTIFIED COM-
P APPLICATORS OR BY PERSONS UNDER
I CERTIFIED COMMERCIAL APPLICATOR

HT

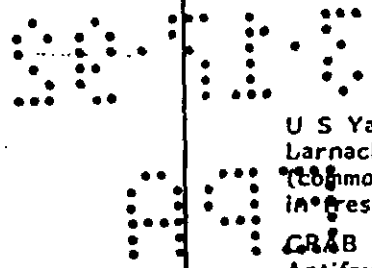

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS**

Danger. Corrosive. Causes eye and skin damage. Harmful if absorbed thru skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breath dust or vapor. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Adm. and the Natl. Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention. Note to physician: probable mucosal damage may contraindicate the use of gastric lavage.

IF IN EYES: Flush with plenty of water. Get medical attention.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to aquatic organisms, including fish and shellfish.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame.

Total tin content 1.9%

NET CONTENTS 1 GALLON

DIRECTIONS

U S Yacht Co-Poly Antifouling Paint retards the growth of algae, Larnacles, toredo worms, and the hydroid stage of the hydrozoa (commonly called "hair") in salt water; and algae and zebra mussels in fresh water.

CRAB POTS, LOBSTER POTS, BASS POTS: U S Yacht Co-Poly Antifouling Paint can be used on wood, webbing, galvanized wire and vinyl-coated wire. Paint adheres well to wood and to most vinyl-coated wire; test to be sure. Paint does not adhere well to new galvanized wire. Adhesion is better on galvanized wire that has been exposed to the weather for a couple of months; or exposed in salt water for a couple of weeks. Apply 1 coat to a pot by sprinkling with a garden-type watering-can in a catch-tank with a drain. Catch the drainage, and sprinkle another pot. Paint may be used full strength or thinned as much as 1-1, depending on the severity of fouling. Use mineral spirits for thinning and clean-up. Five gallons will paint 50-75 pots, depending on thinning. Pots can be used after overnight dry.

ALUMINUM BOATS, STEEL BOATS & SUBMERGED STRUCTURES (MOTOR OUTDRIVES, : U S Yacht Co-Poly Antifouling Paint is the only paint recommended for use on metals. Remove any oil by washing with paint thinner and blot dry. Repeat. Prepare surface with "Amchem" Cleaner and Etches (available at auto-supply stores), as follows: On aluminum, scuff-sand lightly, apply Alumaprep Cleaner, then Alodine Etch. On steel, sand, apply Metalprep Etch. On galvanize, sand, apply Galvaprep Etch. Apply 1-2 coats of paint full strength, do not sand. Allow overnight dry between coats and before launch or immersion. When repainting is needed, scrub clean, sand lightly, spot-coat any bare spots, apply 1-2 coats of paint.

BEST AVAILABLE COPY

2 POTS
EL BOATS

ES

ACCEPTED
with COMMENTS
in EPA Letter Dated:
OCT 26 1992
Under the Federal Insecticide,
Fungicide, and Rodenticide Act

NG