



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY  
AND POLLUTION PREVENTION

February 28, 2019

Mr. Kevin Kutcel  
Regulatory Agent for,  
New Nautical Coatings, Inc.  
14805 49<sup>th</sup> Street  
Clearwater, FL 33762

Subject: Notification per PRN 98-10 – As per the California Department of Pesticide Regulation to make labeling revisions  
Product Name: Sea Hawk Sharkskin Antifouling Paint  
EPA Registration Number: 44891-11  
Application Date: January 28, 2019  
Decision Number: 548089

Dear Mr. Kutcel:

The Agency is in receipt of your Application for Pesticide Notification under Pesticide Registration Notice (PRN) 98-10 for the above referenced product. The Antimicrobials Division (AD) has conducted a review of this request for its applicability under PRN 98-10 and finds that the action requested falls within the scope of PRN 98-10.

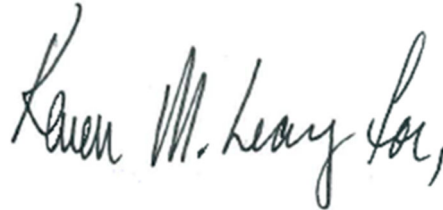
The label submitted with the application has been stamped “Notification” and will be placed in our records.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

Page 2 of 2  
EPA Reg. No. 44891-11  
Decision No. 548089

If you have any questions, you may contact Karen M. Leavy at (703)-308-6237 or via email at [Leavy.Karen@epa.gov](mailto:Leavy.Karen@epa.gov).

Sincerely,

A handwritten signature in black ink that reads "Karen M. Leavy, Esq.". The signature is written in a cursive style with a large initial 'K' and a trailing comma.

Eric Miederhoff  
Product Manager 31  
Regulatory Management Branch I  
Antimicrobials Division (7510P)  
Office of Pesticide Programs

Notes to reviewer are bracketed [ ]  
Statements in parenthesis are optional or alternative text ( )

**HIGHLIGHTED**

[Brand Names]  
Sea Hawk Sharkskin Antifouling Paint

[Alternative Brand Names]  
Sea Hawk Tropikote Pro Antifouling Coating  
Sharkskin  
Sea Hawk Sharkskin  
Tropikote Pro

**NOTIFICATION**

44891-11

The applicant has certified that no changes, other than those reported to the Agency have been made to the labeling. The Agency acknowledges this notification by letter dated:

02/28/2019

ACTIVE INGREDIENT  
Cuprous Oxide (CAS No. 1317-39-1).. 45.20%  
OTHER INGREDIENTS..... 54.80%  
TOTAL..... 100.00%  
Copper expressed as metallic 42.21%  
Contains petroleum distillates

**KEEP OUT OF REACH OF CHILDREN**

**WARNING**

**SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS  
AND FIRST AID**

**[OPTIONAL MARKETING STATEMENTS:]**

- (Sea Hawk)
- (Yacht Finishes)
- (Premium Quality)
- (Antifouling Coating)
- (Antifouling Bottom Paint)
- (Antifouling Paint)**
- (Hand Crafted in America!<sup>SM</sup>)
- (Hand Crafted in the USA)
- (American Owned and Hand Crafted)
- (USA Hand Crafted)
- (Hard Modified Epoxy)
- (Multi Season)
- (365 VOC)
- (VOC 365)
- (Reduced VOC Formulation)
- (330 grams/liter VOC)

(Contains 330 grams/liter VOC)  
(VOC 330 grams/liter)  
(330g/l VOC)  
(Contains 330 g/l)  
(VOC 330 g/l)  
(California Compliant)  
(CAVOC Code Compliant)  
(Premium Yacht Finishes)  
(Black 6145)  
(Blue 6142)  
(Red 6141)  
(Green 6143)

**(LIMITED WARRANTY:** The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty of this product, expressed or implied.)

[Optional Graphics]



**Yacht Finishes**



**PREMIUM QUALITY**



8 11577 01595 9

[ABOVE BAR CODE WILL APPEAR ON EACH CAN AND THE NUMBERS PROVIDED THE ABOVE WILL CORRESPOND WITH THE BAR CODE ISSUED FOR THAT PRODUCT.]



# SHARKSKIN



[Above will be used with contents and manufacturer depending on the size]

[Net Contents:] (5-gallon pail 18.927 ), (Gallon 3.785 Liters), (Quart 0.9463 Liters)

(Batch Code) [to appear on front or back panel of the label or immediate container depending on the container type/size]

#### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

#### GENERAL DESCRIPTION

Traditional, hard, modified epoxy antifoulant that controls the attachment of barnacles, algae, seagrass, green weed and other fouling organisms in fresh and salt water. This product is only for use on the surfaces of hulls on boats, vessels, barges, crab pots and lobster pots.

**SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION**

**PRODUCT INFORMATION**

Finish/Sheen: Semi-Gloss  
Converter: One Pack  
Copper Content: 45%  
Volume Solids: 62% ± 2%  
Mix Ratio: One Pack  
Shipping Weight: 22-24 Lbs./Gal.  
Flash Point: 80°F/27°C  
Theoretical Coverage: 320 Sq. Ft./Gal.

**APPLICATION DETAILS**

Sweat-In Time: Not applicable  
Thinner: 2033-2035  
Cleaner: Sea Hawk Xylene 7130

**Overcoating Interval    Drying Time (Hrs)**

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	1 Hrs	1 Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

**REGULATORY DATA**

**VOC:** 365 Grams/Liter (Standard Formulation) 330 Grams/Liter (Reduced VOC Formulation)

**LIMITATIONS:** Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 5°F (1°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100°F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of the coating.

**SURFACE PREPARATION:** Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SPI)

**New Construction: As yard procedures may vary, consult with your Sea Hawk Representative.**

**APPLICATION:** Apply two coats by brush, roller or spray

**EQUIPMENT**

**Brush:** China Bristle

**Roller:** Solvent resistant roller cover 3/8" pile smooth to medium. Prewash roller cover to remove loose fibers prior to use.

**Airless Spray:** Minimum 28:1 ratio pump; "0.021-0.026" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh filter.

**THINNING:** We do not recommend thinning. However, if thinning is necessary, thin up to a maximum of 10%, with Sea Hawk 2033-2035. {Sea Hawk 2053 for VOC 330 formulation}

**CLEANUP:** Clean all equipment immediately after use with Xylene. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

**SAFETY:** Read and observe all precautionary statements on this label.

### STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

**Storage:** Do not store near heat or open flame. Store in well ventilated area.

**Pesticide Disposal:** Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**Container Disposal:** Non-refillable container, do not reuse or refill this container Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

### PRECAUTIONARY STATEMENTS

#### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**WARNING.** May be fatal if swallowed or inhaled. Causes moderate skin and eye irritation. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not breathe vapors, spray mist, or dust or chips from sanding. Avoid contact with skin, eyes and clothing. While spraying paint or sanding boat surface, wear a mask or pesticide respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Wear protective clothing (long-sleeved cotton shirt, long pants and hat) and gloves (such as nitrile or butyl). Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

#### ENVIRONMENTAL HAZARDS

This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge.

Do not discharge effluent into sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

#### PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near heat or open flame.

<b>FIRST AID</b>	
<b>IF SWALLOWED:</b>	<ul style="list-style-type: none"> <li>• Immediately call a poison control center or doctor</li> <li>• Do not induce vomiting unless told to do so by a poison control center or doctor.</li> <li>• Do not give any liquid to the person.</li> <li>• Do not give anything by mouth to an unconscious person.</li> </ul>
<b>IF INHALED:</b>	<ul style="list-style-type: none"> <li>• Move person to fresh air.</li> <li>• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible.</li> <li>• Call a poison control center or doctor for further treatment advice.</li> </ul>
<b>IF IN EYES:</b>	<ul style="list-style-type: none"> <li>• Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li> <li>• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li> <li>• Call a poison control center or doctor for treatment advice.</li> </ul>
<b>IF ON SKIN OR CLOTHING:</b>	<ul style="list-style-type: none"> <li>• Take off contaminated clothing.</li> <li>• Rinse skin immediately with plenty of water for 15 – 20 minutes.</li> <li>• Call a poison control center or doctor for treatment advice.</li> </ul>
<p>Have the product container or label with you when calling a poison control center or doctor for treatment.</p> <p>For Hazardous Materials [or Dangerous Goods] Incident Spill, Leak, Fire, Exposure, or Accident Call CHEMTREC Day or Night. Within USA and Canada 1-800-424-9300. Outside USA and Canada (+1-703-741-5970) CHEMTREC. Account #15570.</p> <p>For Non Emergencies call New Nautical Coatings Inc., Within the USA and Canada 1-800-528-0997, Outside USA and Canada +1-727-523-8053.</p>	
<p><b>NOTE TO PHYSICIAN:</b> Contains petroleum distillate, vomiting may cause aspiration pneumonia.</p>	

**E.P.A. Reg. No. 44891-11 / E.P.A. Est. No. 44891-FL-1**