

# #7106 Wood Gard Exterior Wood Protective Finish

## ACTIVE INGREDIENTS:

Methylene bis(thiocyanate) . . . . . 0.2%  
2-(Thiocyanomethylthio)benzothiazole . . . . . 0.2%

INERT INGREDIENTS . . . . . 99.6%

This product weighs 7.2 pounds per gallon.

## KEEP OUT OF REACH OF CHILDREN WARNING

### PRECAUTIONARY STATEMENTS

#### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**WARNING:** Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed or absorbed through skin. Avoid breathing vapors or mist. This product may cause skin sensitization.

**STATEMENT OF PRACTICAL TREATMENT:** *In case of skin contact*, wash promptly and thoroughly with soap and water. *If product gets in eyes*, flush immediately with copious amounts of clean, cool water for 15 to 20 minutes. Get medical attention immediately. *If product is swallowed*, call a physician or Poison Control Center. Drink a large quantity of milk, egg whites, or gelatin solution, or if these are not available, drink large quantities of water. Avoid alcohol.

**NOTE TO PHYSICIAN:** Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression, and convulsion may be needed.

**ENVIRONMENTAL HAZARDS:** This pesticide is toxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

**PHYSICAL AND CHEMICAL HAZARDS:** Do not use or store near heat or open flame.

Manufactured by:  
DeHart Paint & Varnish Company  
906 E. Main St.  
Louisville, KY 40206

EPA REG. NO. \_\_\_\_\_ EPA Est. No. \_\_\_\_\_

NET CONTENTS \_\_\_\_\_

49140-2 PM 21 1961  
DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

#7106 Wood Gard Exterior Wood Protective Finish is a non-pigmented exterior wood finish for use on exterior unfinished woods exposed to weather and on woods prior to painting, extending the service life of wood. This wood finish is water repellent, repels termite attack, and protects against fungal rot, mildew, warping, and swelling. May be used on rough or smooth woods, such as siding, trim, doors, fencing, beams, decking, outside furniture, and other soil-contact wooden surfaces. It may not be used on wood that is intended for use on food, feed, potable water, living plants, livestock, or dairy animal contact surfaces. Since this product may be harmful to plants, desirable plants should be covered during application.


**SURFACE PENETRATION:** Wood must be clean and dry and free of other finishes. If mildew is present, scrub surface with Tri-Sodium Phosphate (T.S.P.) and household bleach solution. Flush with clear water and allow to dry.

**APPLICATION:** Apply #7106 Wood Gard Exterior Wood Protective Finish with brush, roller, spray, or by dipping to all surfaces including end and side grain. If added protection is desired, a second coat may be applied within 2 hours. Allow 24 hours drying time if painting.

If dip application method is used, allow wood to soak 3 to 5 minutes. Any excess material must be drained into dip tank.

Retreat wood every 1 to 3 years.

**COVERAGE:** Approximately 300 square feet per gallon, depending on condition and porosity of the wood. Do not apply to surface if temperature is below 50 °F.

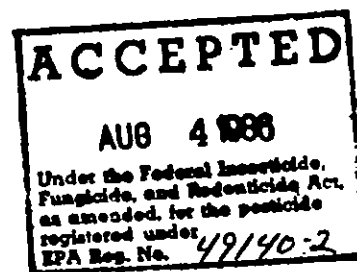

### STORAGE AND DISPOSAL

**STORAGE:** Keep container closed when not in use. Store in cool place. Leaking or damaged containers should be placed in a plastic bag and discarded in trash. All pesticides should be kept out of reach of children and stored away from food.

**DISPOSAL:** Do not reuse empty can. Wrap can and place in trash.