

## WQBELs Part IV: Calculating Chemical- specific WQBELs





NPDES Permit Writers' Course  
Online Training Curriculum



## Presenters

- *David Hair*  
Environmental Engineer  
US Environmental Protection Agency  
Washington, DC
- *Greg Currey*  
Environmental Engineer  
Tetra Tech, Incorporated  
Fairfax, Virginia



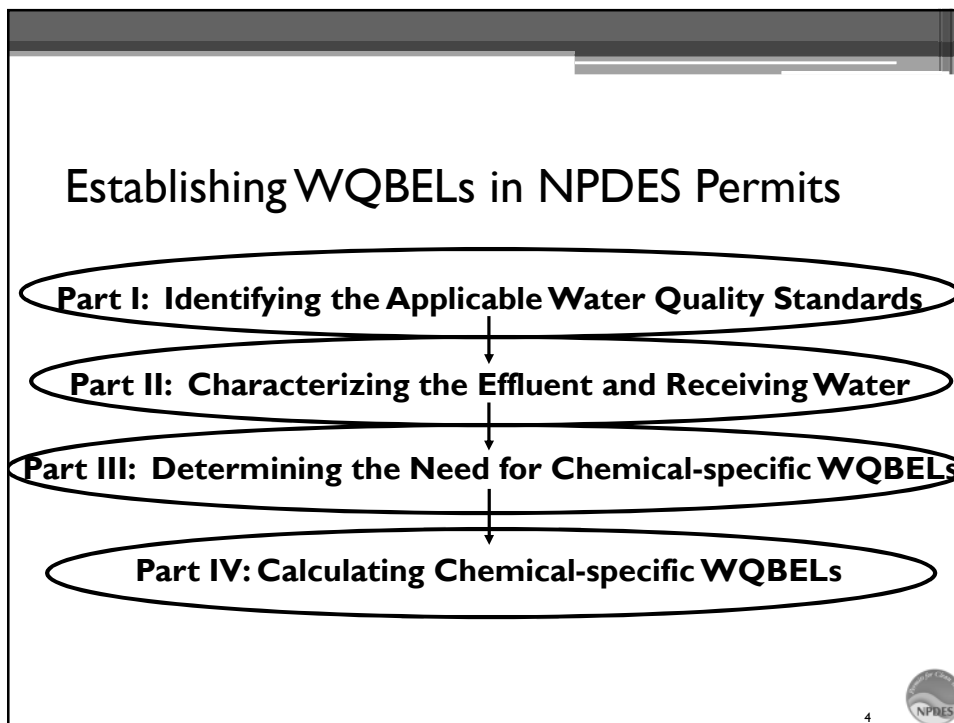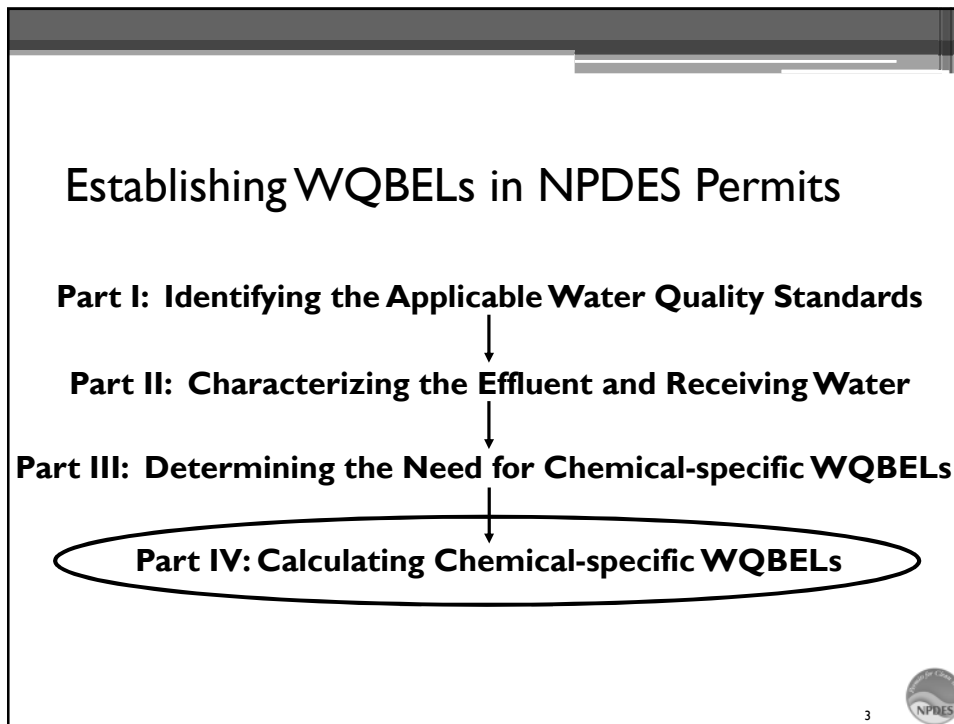

## Developing Chemical-specific WQBELs

### Water Quality Criteria

- Magnitude
- Duration
- Frequency



### Effluent Limitations

- Magnitude
- Averaging period

Permit writers calculate end-of-pipe water quality-based effluent limitations where necessary to ensure that water quality standards are attained in the receiving water.

5



## Developing Chemical-Specific WQBELs (aquatic life criteria)

**Step 1: Determine Acute and Chronic Wasteload Allocations (WLAs) (for Aquatic Life Criteria)**



**Step 2: Calculate Long-Term Average (LTA) for Each WLA**



**Step 3: Select Lowest LTA**



**Step 4: Calculate MDL and AML**



**Step 5: Document Decisions**

6



## Step I: Determine WLA(s)




7



## Step I: Determine WLA(s)—WLA from a TMDL or Watershed Analysis

**TMDL for Pristine Creek – Pollutant X**




- WLA = portion of the receiving water’s total maximum daily load (TMDL) allocated to a specific point source or an allocation to a point source determined from another watershed analysis

8



## Step I: Determine WLA(s)— Facility-specific WLA

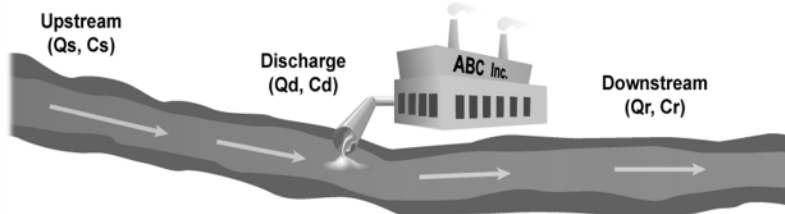


WLA = the maximum allowable pollutant concentration in the effluent from ABC, Inc. that, after accounting for available dilution under critical conditions, will meet an applicable water quality criterion

\* permitting authorities use various terms for what here is called a WLA

9



## Step I: Determine WLA(s)—Steady State Analysis Under Critical Conditions

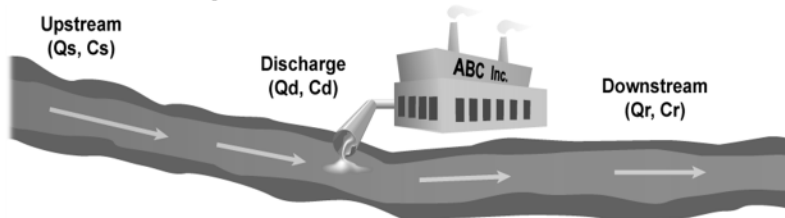

Mass-Balance Equation:  $Q_s C_s + Q_d C_d = Q_r C_r$

Determine the allowable discharge concentration (WLA):

$$C_d = \frac{Q_r C_r - Q_s C_s}{Q_d}$$


Note that  $Q_r = Q_s + Q_d$

10



### Step I: Determine WLA(s)—

What is the maximum allowable concentration of Pollutant X in the ABC, Inc. effluent?

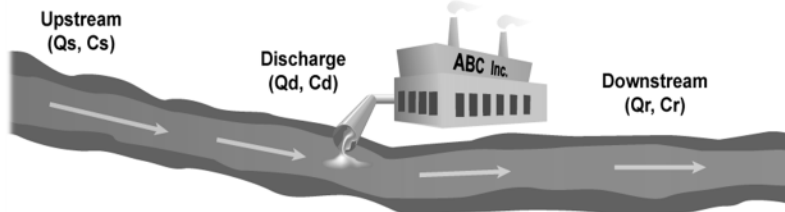

Qs = Critical upstream flow (1Q10) = 1.2 cfs  
 (7Q10) = 2.0 cfs ←

Qd = Critical discharge flow from ABC Inc. = 0.31 cfs

Cs = Critical upstream conc. of Pollutant X = 0.80 mg/L

Cr = Water Quality Criteria for Pollutant X  
 Acute Criterion for Pollutant X = 1.0 mg/L (applied at 1Q10)  
 Chronic Criterion for Pollutant X = 0.90 mg/L (applied at 7Q10)

$$Cd = \frac{QrCr - QsCs}{Qd}$$

11



### Acute WLA Calculations for Pollutant X

$$Cd(\text{acute}) = WLAa = \frac{Cr(Qd + Qs) - CsQs}{Qd}$$

$$Cd(\text{acute}) = WLAa = \frac{1.0 \text{ mg/L} (0.31 \text{ cfs} + 1.2 \text{ cfs}) - (0.80 \text{ mg/L})(1.2 \text{ cfs})}{0.31 \text{ cfs}}$$

$$WLAa = 1.8 \text{ mg/L}$$

12



## Chronic WLA Calculations for Pollutant X

$$Cd(\text{chronic}) = WLA_c = \frac{Cr(Q_d + Q_s) - C_s Q_s}{Q_d}$$

$$Cd(\text{chronic}) = WLA_c = \frac{0.9 \text{ mg/L} (0.31 \text{ cfs} + 2.0 \text{ cfs}) - (0.80 \text{ mg/L})(2.0 \text{ cfs})}{0.31 \text{ cfs}}$$

$$WLA_c = 1.5 \text{ mg/L}$$

13



## A WLA is Not a WQBEL

- A wasteload allocation (WLA) is not a water quality-based effluent limitation (WQBEL)
  - WLAs
    - derived from water quality criteria through TMDLs, watershed analyses, or facility-specific analyses
    - often have the same duration as criteria (e.g., 1-hour average, 4-day average)
  - WQBELs
    - typically must have daily and monthly (non-POTWs) or weekly and monthly (POTWs) averaging periods [40 CFR 122.45(d)]
    - TSD recommends WQBELs for toxic pollutants should be expressed as MDLs and AMLs for all types of facilities

14



## Calculating WQBELs from WLAs

- Approaches for developing short- and long-term WQBELs
  - TSD approach establishes a single performance requirement (a long-term average or LTA) used to derive both the MDL and AML
  - State permitting authorities may use alternate procedures; however, these procedures must result in both short- and long-term limits consistent with state water quality standards and § 122.45(d)

15



## Developing Chemical-Specific WQBELs (aquatic life criteria)

**Step 1: Determine Acute and Chronic Wasteload Allocations (WLAs) (for Aquatic Life Criteria)**

**Step 2: Calculate Long-Term Average (LTA) for Each WLA**

**Step 3: Select Lowest LTA**

**Step 4: Calculate MDL and AML**

**Step 5: Document Decisions**

16






## Step 2: Calculate LTAs

- Wasteload allocation (WLA) is “never to be exceeded”
- Assume a *lognormal* effluent distribution
- Characterize never to be exceeded by a *probability basis* (e.g., WLA is the 99th percentile concentration on the lognormal effluent distribution)

17




## Characterize the Desired Distribution by LTA and CV

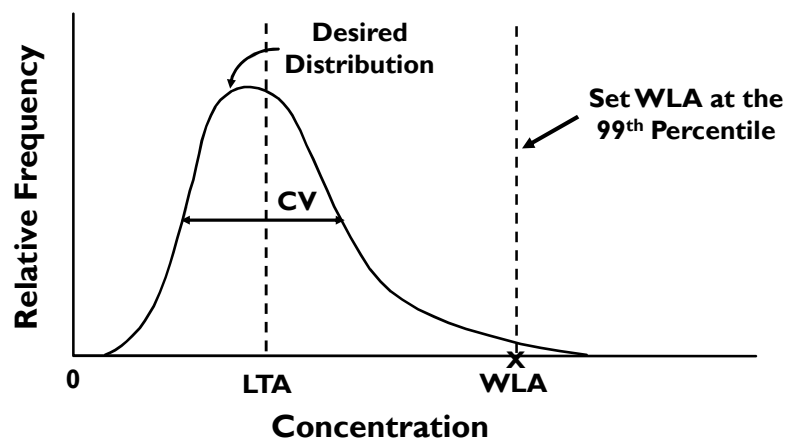

18



Example: WLAs for Pollutant X for ABC, Inc.

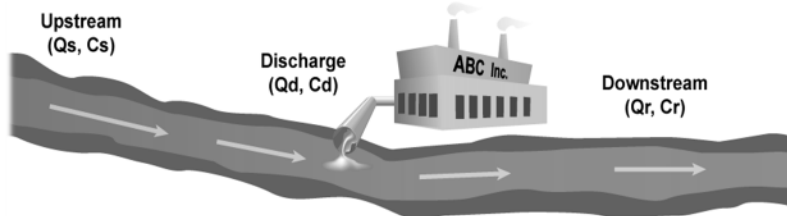

- Recall that we calculated WLAs for Pollutant X for ABC, Inc. using the simple mass-balance equation:


$$C_d = WLA = \frac{C_r Q_r - C_s Q_s}{Q_d}$$

$$\begin{aligned} C_d(\text{acute}) &= 1.8 \text{ mg/L} \\ C_d(\text{chronic}) &= 1.5 \text{ mg/L} \end{aligned}$$

19



Characterize the Desired Distribution by LTA and CV

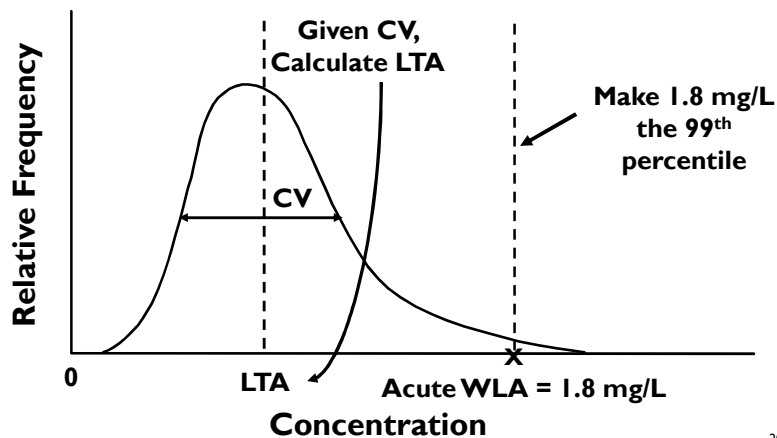

20



### Step 2: Calculate LTAs


CV	WLA multipliers	
	$e^{[0.5\sigma^2 - z\sigma]}$	
	95th percentile	99th percentile
0.1	0.853	0.797
0.2	0.736	0.643
0.3	0.644	0.527
0.4	0.571	0.440
0.5	0.514	0.373
0.6	0.468	0.321
0.7	0.432	0.281
0.8	0.403	0.249
0.9	0.379	0.224
1.0	0.360	0.204
1.1	0.344	0.187
1.2	0.330	0.174
1.3	0.319	0.162
1.4	0.310	0.153
1.5	0.302	0.144
1.6	0.296	0.137
1.7	0.290	0.131
1.8	0.285	0.126
1.9	0.281	0.121
2.0	0.277	0.117

### Acute

**CV** = 0.6  
**WLA(acute)** = 1.8 mg/L  
 = 99th percentile value  
**LTA(acute)** = 1.8 mg/L x 0.321  
 = 0.58 mg/L



### Example: WLAs for Pollutant X for ABC, Inc.

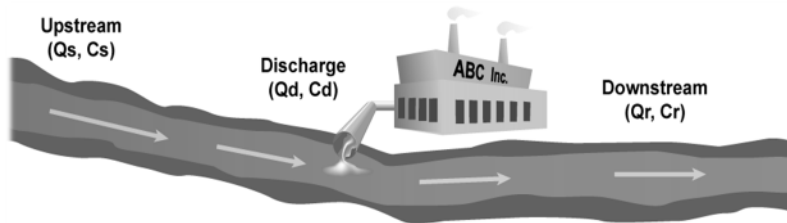

- Recall that we calculated WLAs for Pollutant X for ABC, Inc. using the simple mass-balance equation:

$$Cd = WLA = \frac{CrQr - CsQs}{Qd}$$

$$Cd(\text{acute}) = 1.8 \text{ mg/L}$$

$$Cd(\text{chronic}) = 1.5 \text{ mg/L}$$



## Step 2: Calculate LTAs

CV	WLA multipliers	
	$e^{[0.5 \sigma_4^2 - z\sigma_4]}$	
	95th percentile	99th percentile
0.1	0.922	0.891
0.2	0.853	0.797
0.3	0.791	0.715
0.4	0.736	0.643
0.5	0.687	0.581
0.6	0.644	0.527
0.7	0.606	0.481
0.8	0.571	0.440
0.9	0.541	0.404
1.0	0.514	0.373
1.1	0.490	0.345
1.2	0.468	0.321
1.3	0.449	0.300
1.4	0.432	0.281
1.5	0.417	0.264
1.6	0.403	0.249
1.7	0.390	0.236
1.8	0.379	0.224
1.9	0.369	0.214
2.0	0.360	0.204

### Chronic

CV = 0.6  
 WLA(chronic) = 1.5 mg/L  
 = 99th percentile value  
 LTA(chronic) = 1.5 mg/L x 0.527  
 = 0.79 mg/L

23



## Developing Chemical-Specific WQBELs (aquatic life criteria)

Step 1: Determine Acute and Chronic Wasteload Allocations (WLAs) (for Aquatic Life Criteria)

Step 2: Calculate Long-Term Average (LTA) for Each WLA

Step 3: Select Lowest LTA

Step 4: Calculate MDL and AML

Step 5: Document Decisions

24



### Step 3: Select Lowest LTA

- Selecting the lowest LTA:
  - assures meeting both WLAs (i.e., attains both acute and chronic criteria)
  - sets one basis for facility performance
- LTA(acute) = 0.58 mg/L
- LTA(chronic) = 0.79 mg/L

Select LTA(acute) = 0.58 mg/L as the basis for WQBELs

25



### Developing Chemical-Specific WQBELs (aquatic life criteria)

**Step 1: Determine Acute and Chronic Wasteload Allocations (WLAs) (for Aquatic Life Criteria)**



**Step 2: Calculate Long-Term Average (LTA) for Each WLA**



**Step 3: Select Lowest LTA**



**Step 4: Calculate MDL and AML**



**Step 5: Document Decisions**

26




## Step 4: Calculate MDL and AML

- Use the lognormal distribution to calculate the MDL and AML from the lowest LTA
- EPA's TSD procedure:
  - uses upper-bound estimates for both MDL and AML (like effluent guidelines)
    - MDL set at 99<sup>th</sup> percentile
    - AML set at 95<sup>th</sup> percentile
  - ties AML to planned monthly monitoring frequency

27



## Calculate MDL from the LTA

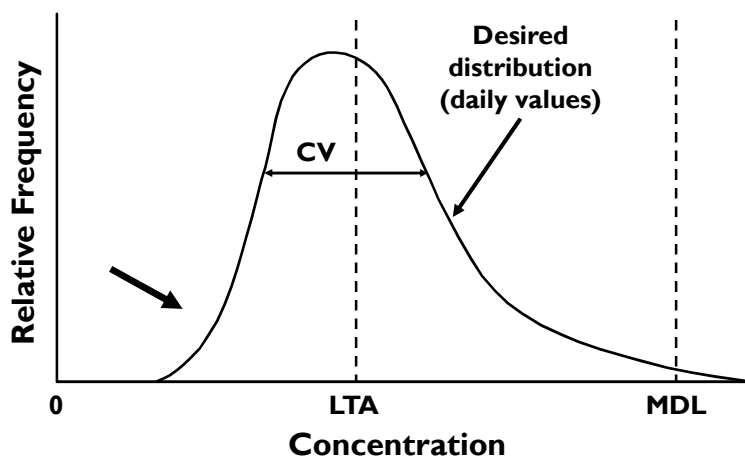

28



### Step 4: Calculate MDL and AML

CV	LTA multipliers	
	e $[z\sigma - 0.5 \sigma^2]$	
	95th percentile	99th percentile
0.1	1.17	1.25
0.2	1.36	1.55
0.3	1.55	1.90
0.4	1.75	2.27
0.5	1.95	2.68
0.6	2.13	3.11
0.7	2.31	3.56
0.8	2.48	4.01
0.9	2.64	4.46
1.0	2.78	4.90
1.1	2.91	5.34
1.2	3.03	5.76
1.3	3.13	6.17
1.4	3.23	6.56
1.5	3.31	6.93
1.6	3.38	7.29
1.7	3.45	7.63
1.8	3.51	7.95
1.9	3.56	8.26
2.0	3.60	8.55

### MDL


MDL = 99th percentile value

CV = 0.6

MDL = 0.58 mg/L x 3.11  
= 1.8 mg/L



### Calculate AML from the LTA

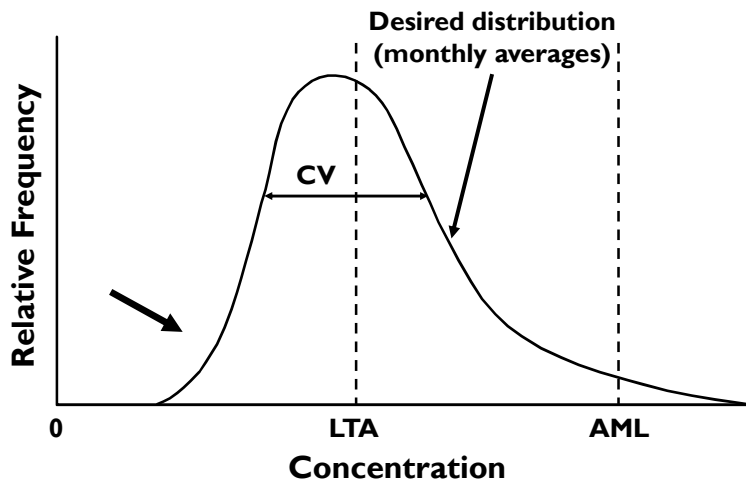

### Step 4: Calculate MDL and **AML**

CV	LTA multipliers									
	$e^{[z\sigma_n - 0.5\sigma_n^2]}$									
	95th percentile					99th percentile				
	n=1	n=2	n=4	n=8	n=30	n=1	n=2	n=4	n=8	n=30
0.1	1.17	1.12	1.08	1.06	1.03	1.25	1.18	1.12	1.08	1.04
0.2	1.36	1.25	1.17	1.12	1.06	1.56	1.37	1.25	1.18	1.08
0.3	1.55	1.38	1.26	1.18	1.09	1.90	1.59	1.40	1.27	1.13
0.4	1.75	1.52	1.36	1.25	1.12	2.27	1.83	1.55	1.37	1.18
0.5	1.96	1.66	1.45	1.31	1.16	2.68	2.09	1.72	1.48	1.23
0.6	2.13	1.90	1.55	1.38	1.19	3.11	2.37	1.90	1.59	1.28
0.7	2.31	1.94	1.65	1.45	1.22	3.56	2.66	2.08	1.71	1.33
0.8	2.48	2.07	1.75	1.52	1.26	4.01	2.96	2.27	1.83	1.39
0.9	2.64	2.20	1.85	1.59	1.29	4.46	3.28	2.48	1.96	1.44
1.0	2.78	2.33	1.95	1.66	1.33	4.90	3.59	2.68	2.09	1.50
1.1	2.91	2.45	2.04	1.73	1.36	5.34	3.91	2.90	2.23	1.56
1.2	3.03	2.56	2.13	1.80	1.39	5.76	4.23	3.11	2.37	1.62
1.3	3.13	2.67	2.23	1.87	1.43	6.17	4.55	3.34	2.52	1.68
1.4	3.23	2.77	2.31	1.94	1.47	6.56	4.86	3.56	2.66	1.74
1.5	3.31	2.86	2.40	2.00	1.50	6.93	5.17	3.78	2.81	1.80
1.6	3.38	2.95	2.48	2.07	1.54	7.29	5.47	4.01	2.96	1.87
1.7	3.45	3.03	2.56	2.14	1.57	7.63	5.77	4.23	3.12	1.93
1.8	3.51	3.10	2.64	2.20	1.61	7.95	6.06	4.46	3.28	2.00
1.9	3.56	3.17	2.71	2.27	1.64	8.26	6.34	4.68	3.43	2.07
2.0	3.60	3.23	2.78	2.33	1.68	8.55	6.61	4.90	3.59	2.14

**AML**

AML Value = 95<sup>th</sup> percentile

CV = 0.6

Number of Samples (n) = 8 (assume twice-weekly sampling)

AML = 0.58 mg/L x 1.38

AML = 0.80 mg/L

### Calculated WQBELs

We calculated the following WQBELs for Pollutant X:

**MDL = 1.8 mg/L**  
**AML = 0.80 mg/L**

***Are these the final effluent limitations for Pollutant X?***



## Final Check



- Compare:
  - WQBELs based on individual facility WLAs with
  - TBELs or other existing limitations with
  - WQBELs based on a TMDL or other watershed-based requirements
- The most stringent limitations for each parameter are the new, calculated final effluent limitations for that parameter
- Final effluent limitations in the permit must meet antidegradation and anti-backsliding requirements

33



## Developing Chemical-Specific WQBELs (aquatic life criteria)

**Step 1: Determine Acute and Chronic Wasteload Allocations (WLAs) (for Aquatic Life Criteria)**



**Step 2: Calculate Long-Term Average (LTA) for Each WLA**




**Step 3: Select Lowest LTA**



**Step 4: Calculate MDL and AML**



**Step 5: Document Decisions**



34



## Step 5: Document Decisions

- Document in the fact sheet or statement of basis:
  - statutory and regulatory citations
  - the process for determining the applicable wasteload allocations including:
    - selected water quality model
    - critical conditions
    - dilution allowance or mixing zone
  - the process used to calculate water quality-based effluent limitations (including showing calculations)
  - any antidegradation analysis or anti-backsliding analysis conducted and the basis for resulting decisions



35



## Feedback and Other Presentations

Questions or comments?

[npdeswebtraining@tetrattech.com](mailto:npdeswebtraining@tetrattech.com)

Join us for other online presentations on  
NPDES Permitting

[www.epa.gov/npdes/training](http://www.epa.gov/npdes/training)

39

