Docusign Envelope ID: 62113ED5-03C5-4D47-BB7F-24FA9F9C15B3

Vehicle Homologation and Compliance Laboratory
Environmental and Safety Compliance
Ford Motor Company

Allen Park Test

1500 Enterprise Drive Suite 3W-200
Allen Park, MI 48101

April 10th, 2025

Ms. Robin U. Lang, Chief
Emissions Compliance, Automotive Regulations and Science Division
Air Resources Board
4001 Iowa Ave
Riverside, CA 92507

Dear Ms. Lang:

Subject: 2026MY LDV and LDT Application for Certification: Common Section Initial Submission

This submittal contains the CBI and FOI versions of the Initial 2026MY Common Section for your review and approval. This submittal follows the CAP 2000 Guidance – recommended Part-1 Application format, based on the Part-1 application requirements found in 40CFR86.1844-01(d).

Sections included:

	INDEX
01.00.00.00	Correspondence & Communication
03.00.00.00	Evaporative / Refueling Family Description
04.00.00.00	Description of Durability Method
09.00.00.00	OBD Description
12.00.00.00	Description of Vehicles Covered by Certificate & Test Parameters
14.00.00.00	Request for Certification
15.00.00.00	Other Information
16.00.00.00	Confidential Information
17.00.00.00	California CARB Information
18.00.00.00	Revisions

The subject document contains confidential information (Sections 16 and 17) for which Ford requests confidential treatment. In the event you believe that all or part of that submitted information may not be entitled to confidential treatment, Ford asks that you provide reasonable notice of not less than ten working days prior to any contemplated disclosure. Please direct all notices to Evan Belser, Office of the General Counsel, Ford Motor Company, One American Road, 4th Floor, Dearborn, MI 48126; telephone 202-997-0217; email, ebelser1@ford.com.

If you have any questions with regard to this submittal, please contact David Perez dperez92@ford.com.

Based on my inquiry of those individuals with primary responsibility for the Air to Fuel Ratio Requirement, I certify under penalty of perjury that the attested statement regarding the Air to Fuel Ratio Requirement in Common Section 14.01.01.15 is, to the best of my knowledge and belief, true, accurate, and complete.

Sincerely,

DocuSigned by:
Lawrence H. Merritt, Jr.
DF6ED4749EAC46B...

Lawrence H. Merritt, Jr.
Manager, Emissions Certification, Homologation & Compliance
Vehicle Homologation & Compliance, E&SC

Docusign Envelope ID: 62113ED5-03C5-4D47-BB7F-24FA9F9C15B3

Vehicle Homologation and Compliance Laboratory
Environmental and Safety Engineering 200
Ford Motor Company

Allen Park Test
1500 Enterprise Drive, Suite 3W-
Allen Park, MI 48101

April 10th, 2025

Mr. Robert Peavyhouse
Certification Division
Mobile Source Air Pollution Control
U.S. Environmental Protection Agency
2000 Traverwood Drive
Ann Arbor, Michigan 48105

Dear Mr. Peavyhouse:

Subject: 2026MY LDV and LDT Application for Certification: Common Section Initial Submission

This submittal contains the CBI and FOI versions of the Initial 2026MY Common Section for your review and approval. This submittal follows the CAP 2000 Guidance – recommended Part-1 Application format, based on the Part-1 application requirements found in 40CFR86.1844-01(d).

Sections included:

	INDEX
01.00.00.00	Correspondence & Communication
03.00.00.00	Evaporative / Refueling Family Description
04.00.00.00	Description of Durability Method
09.00.00.00	OBD Description
12.00.00.00	Description of Vehicles Covered by Certificate & Test Parameters
14.00.00.00	Request for Certification
15.00.00.00	Other Information
16.00.00.00	Confidential Information
17.00.00.00	California CARB Information
18.00.00.00	Revisions

The subject document contains confidential information (Sections 16 and 17) for which Ford requests confidential treatment. In the event you believe that all or part of that submitted information may not be entitled to confidential treatment, Ford asks that you provide reasonable notice of not less than ten working days prior to any contemplated disclosure. Please direct all notices to Evan Belser, Office of the General Counsel, Ford Motor Company, One American Road, 4th Floor, Dearborn, MI 48126; telephone 202-997-0217; email, ebelser1@ford.com.

If you have any questions with regard to this submittal, please contact David Perez dperez92@ford.com.

Sincerely,

DocuSigned by:
Lawrence H. Merritt, Jr.
DF6ED4749EAC46B...

Lawrence H. Merritt, Jr.
Manager, Emissions Certification, Homologation & Compliance
Vehicle Homologation & Compliance, E&SC

2026MY Common Section Index

INDEX

Section Number	Information
§ 01	**CORRESPONDENCE & COMMUNICATION**
01.01.00.00	Mailing Information
01.01.01.00	Cognizant Technical Representative
01.01.02.00	Certificate Information
01.02.00.00	Facsimile Information
01.03.00.00	Liaison Information
01.04.00.00	On-Site Certification Engineering Observers at EPA
§ 03	**EVAPORATIVE / REFUELING FAMILY DESCRIPTION**
03.01.00.00	ORVR System Description
03.03.00.00	Typical Evaporative Emission System
03.04.00.00	Diesel Fuel System Schematic and Components
§ 04	**DESCRIPTION OF DURABILITY METHOD**
04.00.00.00	Alternate Durability Protocol
§ 09	**CORRESPONDENCE & COMMUNICATION**
09.01.00.00	MIL/OBD Description for Gasoline Vehicles
09.01.00.01	MIL/OBD Description for Hybrid Electric Vehicles
09.01.00.02	MIL/OBD Description for Diesel Vehicles
09.01.01.00	OBD Connector Location
09.01.02.00	OBD Group/Test Group Summary
§ 12	**DESCRIPTION OF VEHICLES COVERED BY CERTIFICATE & TEST PARAMETERS**
	Vehicle Road Load
12.01.01.00	Light Duty Vehicle RLD/CDT Summary
12.01.02.00	Light Duty Truck RLD/CDT Summary
12.01.05.01	Roadload Determination Procedure
12.01.05.02	Dyno Procedure At Less Than Ambient Cell Temperature
12.01.06.00	Certification Coastdown Procedure for Determining Road Load Horsepower
	Fuel Tank Parameters
12.02.01.01	Fuel Tank Information
12.02.02.00	Fuel Tank Temperature Profiles
12.02.02.01	Wind Tunnel FTTP Procedure
	Transmission Information
12.03.00.00	Transmissions Identification Chart
12.03.01.00	Transmissions - Automatic
12.03.02.00	Transmissions - Manual
	Shifting Instruction
12.04.01.01	Shifting Instruction - Light Duty Trucks
12.04.01.02	Shifting Instruction - Cars
12.04.01.03	Driver-Selectable Shift Modes

2026MY Common Section Index

INDEX

Section Number	Information
	Special Testing Procedures
12.04.02.01	Sensorless FFV Modified C-Prep
12.04.02.05	SHED Calibration
12.04.02.06	Road-speed modulated fan for testing
12.04.02.08	Special PCM Reflash Preconditioning Procedure
12.04.02.09	Additional Mileage Accumulation / Maintenance to Ensure Representativeness of EDVs
12.04.02.10	Mileage Accumulation Option to use the MCT as a Supplemental Cycle
12.04.02.11	Vehicle Testing Modes
§ 14	**REQUEST FOR CERTIFICATION**
14.01.00.00	Request for Certificate / Executive Order and Common Application Statements
14.01.01.01	Statement of Compliance
14.01.01.02	Statement of Device Safety
14.01.01.03	Statement of Compliance for Unregulated Pollutants
14.01.01.04	Statement of Compliance with Tier 3/LEV-III Leak Test
14.01.01.05	Statement of Particulate Emissions
14.01.01.06	Statement of Compliance for Warranty
14.01.01.07	Statement of Low Leak Exhaust
14.01.01.08	Statement of Formaldehyde Emissions
14.01.01.09	Use of NMOG/NMHC Ratio in Lieu of NMOG Testing
14.01.01.11	High Altitude Testing
14.01.01.12	91 RON (Knock Sensor)
14.01.01.13	Intermediate Temperature Defeat Device Avoidance
14.01.01.14	Fuel Spitback Emissions for ORVR Certified Vehicles
14.01.01.15	Air to Fuel Ratio Requirements
14.01.02.00	Unique CARB Requirements
14.01.02.00	California Fuel Fill Pipe Compliance
14.01.02.01	Environmental Performance Label Statement
14.01.02.02	California I/M Tests
14.01.02.03	ORVR Compliance Attestation for Complete Diesel Fueled Vehicles
§ 15	**OTHER INFORMATION**
15.01.00.00	Adjustable Parameters
15.01.01.00	Diesel Exhaust Fluid (DEF) Range Declaration
15.02.00.00	Heavy Duty Vehicle Speed Simulation Procedure
15.03.01.00	Fuel Recommendation
15.05.00.00	Crankcase Emission Control System
15.10.00.00	Service Manuals & Bulletins
§ 16	**CONFIDENTIAL INFORMATION**
16.01.00.00	Statement of Business Confidentiality
16.02.01.00	Catalytic Converter Description
16.03.01.00	Typical Catalyst Converter System Installation Chart
16.04.01.00	Coastdown Calculation Summary
16.05.00.xx	AECD Description - Gasoline
16.05.00.100	ELCM - HEV Evap Leak Check Monitor
16.05.00.101	Neutral Idle

2026MY Common Section Index

INDEX

Section Number	Information
16.05.01.00	AECD Description - Diesel (Chassis Cert)
16.05.02.00	AECD Description - Diesel (Dyno Cert)
16.05.03.00	Diesel Selective Catalytic Reduction (SCR) System Operation Description
16.05.05.00	AECD Description - 6.7L Diesel (Dyno Cert)
	OBD Representative Calibration Summary
16.06.02.01	FWD DI
16.06.02.02	PFI_DI_HEV_PHEV
16.06.02.03	DI FHEV PHEV
16.06.02.04	PFI
16.06.02.05	PFI DI
16.06.02.06	PFI DI FHEV PHEV
16.06.02.07	HEV PHEV
16.06.02.08	PFI HD
16.06.02.09	Diesel Bosch
16.06.02.10	Diesel Bosch
16.06.02.11	HD Diesel Bosh
16.06.02.12	TBD
16.06.02.13	TBD
16.06.02.14	TBD
16.06.02.15	TBD
16.06.02.16	TBD
16.06.02.17	TBD
16.06.02.18	TBD
16.10.00.00	Durability Procedure Description -- Chassis Cert
16.10.01.00	Durability Procedure Description -- HDGE
16.11.01.00	Compliance Phase-In Plan
16.11.02.00	Federal and Green States Phase-in Summary
16.11.03.00	CAP 2000 Test Groups
16.12.00.00	Ethanol FFV Test Fuels
16.12.01.00	Diesel Test Fuels
16.12.02.00	Test Engine Oils
	Evaporative Emissions DF Procedures
16.13.00.00	Evaporative and ORVR DF Calculations
16.13.01.01	R/L, H/S, Diurnal & ORVR DF Procedure
16.13.01.02	Evap/ORVR DF FUL Bench Aging Procedures
16.13.01.03	Evap/ORVR DF Mileage Procedures
16.13.01.04	Evap/ORVR DF 4K Bench Aging Procedures
16.13.02.00	Approved Materials
16.13.03.00	Evaporative / ORVR Family Descriptions
	Other Confidential DF Procedures
16.18.00.00	Heavy Duty Engine Service Accumulation Procedures
§ 17	**California Air Resources Board**
17.01.00.00	California ARB Fill Pipe Specifications
§ 18	**REVISIONS**
18.00.00.00	Revisions

01.00.00.00 CORRESPONDENCE and COMMUNICATIONS

01.01.00.00 Mailing Information

01.01.01.00 Cognizant Technical Representative

Listed below are the name, address and telephone number of Pete Hardigan, the Ford Motor Company cognizant technical representative. Also listed is contact information for Lawrence Merritt. At the time of publication, please provide guidance documents and other technical information to those individuals. Information exchanges related to emissions certification (e.g., Executive Orders and/or Certificates of Conformity) and OBD should be directed to Lawrence Merritt.

Michael Landry, Director
Sustainability, Environmental and Safety Engineering
Ford Motor Company
Suite 3W-200, Allen Park Test Laboratory
1500 Enterprise Drive
Allen Park, MI 48101

Telephone: (313)2694747
Email: mlandry@ford.com

Lawrence H. Merritt, Jr., Manager
Vehicle Environmental Engineering
Car & Truck Certification
Suite 3W-200, Allen Park Test Laboratory
1500 Enterprise Drive
Allen Park, MI 48101

Telephone: (313) 322-5548
email: lmerrit2@ford.com

01.01.02.00 Certificate Information

The corporate name and address that should be printed on the Certificate of Conformity or Executive Order is:

Ford Motor Company
The American Road
Dearborn, Michigan 48121-1899

01.02.00.00 Facsimile Information

The following telecopier telephone numbers are available for the transmittal of printed or written material to the Ford Motor Company Vehicle Environmental Engineering Office:

(313) 337-5935 Car and Truck Certification

01.03.00.00 Liaison Information

Persons Authorized to Communicate with EPA or ARB staff:

Name	Responsibility	Telephone No.	E-mail Address
Michael Landy	Director	(313) 2694747	mlandry@ford.com
Lawrence Merritt	Car & Truck Certification Manager	(313) 322-5548	lmerrit2@ford.com
Mike Fuher	Compliance and Fuel Economy Manager	(313) 323-0403	mfuher@ford.com
Jeffrey Glodich	LD Chassis Certification, Advanced Cert Specialty Manager	(313) 8451579	jglodich@ford.com
Julia Guernsey	Chassis Certification Specialty Manager	(313) 815-7516	Jguerns4@ford.com
Craig Smith	Diesel, HD Engine & VECI Specialty Manager	(313) 805-6345	csmith24@ford.com
Suzanne Stuber	OBD & Regulatory Compliance Specialty Manager	(630) 706-0930	sstuber@ford.com
Kenneth C. Middleton	Evaporative and Advanced Cert Supervisor	(313) 805-8233	kmiddle1@ford.com
Wade Witte	Car/LDV/MDPV Emissions Cert Durability Supervisor	(313) 805-7186	wwitte@ford.com
Eric Hunsanger	Car & Truck Cert Timing / Planning Supervisor	(313) 399-3858	ehunsang@ford.com
Greg Martin	HD Vehicle Cert Supervisor	(313) 805-4972	gmarti86@ford.com
Toni Shay	Fuel Economy Programs Supervisor	(313) 317-2219	tshay2@ford.com
Alex Cowher	Fuel Economy, vehicle roadloads and compliance testing Manager	(313) 236-0562	acowher2@ford.com
Darius Harrison	Test Technology & Database Control Supervisor	(313) 399-7526	dharri70@ford.com
Carly Gardiner	IUVP / OBD PVE Compliance Testing Supervisor	(734) 660-0147	cgardin6@ford.com
Michael Gabbert	OBD Certification Supervisor	(313) 323-7122	mgabbert@ford.com
Cassie Justice	Correlation Compliance and Analysis Supervisor	(313) 594-4191	cjusti14@ford.com
Todd Crompton	AECD Compliance Specialist	(313) 805-3612	tcrompto@ford.com
Michael Landt	Diagnostic Laboratory Supervisor	(248) 302-5069	mlandt1@ford.com

01.03.00.00 Liaison Information (cont'd)

Persons Authorized to Communicate with EPA or ARB staff:

Certification / Fuel Economy Engineers

Elisa K. LaRue	Fuel Economy Application Coordinator	(313) 322-3707	elarue1@ford.com
Suvarna Gadam	Heavy Duty Engine Liaison	(313) 333-0873	sgadam1@ford.com
Mike Chung	Heavy Duty Engine Liaison	(313) 407-2912	mchung14@ford.com
Reid Cuddy	Heavy Duty Vehicle Liaison	(313) 805-3619	rcuddy@ford.com
Edward Fredricks	Heavy Duty Vehicle Liaison	(313) 805-6647	efrederi@ford.com
Nicolas Snow	Heavy Duty Vehicle Liaison	(313) 319-6452	nsnow6@ford.com
Terry Cowher	Light Duty Vehicle Liaison	(313) 805-6360	tcowher@ford.com
Mark Pietron	Light Duty Vehicle Liaison	(313) 805-7139	mpietron@ford.com
Brennan Graham	Light Duty Vehicle Liaison	(313) 9207622	bgraha45@ford.com
David Perez	Light Duty Vehicle Liaison	+52-492-171-8199	dperez92@ford.com
Avi Friedman	Light Duty Vehicle Liaison	(313) 590-3505	afriedm4@ford.com
Tom Beierschmitt	Light Duty Vehicle Liaison	(313) 845-1884	tbeiers1@ford.com
Nicole Cuddy	Light Duty Vehicle Liaison	(313) 269-3818	ncuddy1@ford.com

Personnel Authorized to Communicate with EPA / ARB Staff in Regard to Advanced Certification, OBD and Program Timing Issues:

Name	Responsibility	Telephone No.	E-mail Address
Kenneth C. Middleton	FTTP Road Testing, Shift Schedules	(313) 805-8233	kmiddle1@ford.com
Eric Hunsanger	Environmental Planning	(313) 399-3858	ehunsang@ford.com
Joanne Temple	OBD Liaison	(313) 805-1089	jtemple4@ford.com
Jake Lefebvre	Evaporative Programs and ORVR Safety Liaison	(313) 268-4459	jlefebv7@ford.com

01.03.00.00 Liaison Information (cont'd)

Personnel Authorized to Communicate with EPA / ARB Staff in Regard to Test Procedures:

Name	Responsibility	Telephone No.	E-mail Address
Darius Harrison	Correlation Compliance and Analysis Supervisor	(313) 399-7526	dharri70@ford.com
Cassie Justice	Correlation Compliance and Analysis Supervisor	(313) 594-4191	cjusti14@ford.com

Personnel Authorized to Communicate with EPA / ARB Staff in Regard to In-Use Compliance:

Name	Responsibility	Telephone No.	E-mail Address
Carly Gardiner	In-Use Compliance Supervisor	(734) 660-0147	cgardin6@ford.com

01.04.00.00 On Site Certification Engineering Observer at EPA

To ensure that Ford Motor Company certification vehicles are processed through the EPA Laboratory in a manner consistent with established test schedules and procedures, a Certification Engineering representative has been assigned from the Certification Engineering Department. Additional Ford Motor Company personnel, not otherwise specified in this Application, may be on site to provide assistance to the vehicle Certification Engineering representative in the performance of his duties.

Authorized Certification Engineering Observers:

Name	Telephone No.	E-mail Address
Dave Szajner	(313) 594-7954	dszajner@ford.com
Jeffery Leijten	(313) 805-3498	jleijten@ford.com

Agent of Service:

The corporation Company
40600 Ann Arbor Road E
Suite 201
Plymouth, MI 48170
877-564-7529
MajorAccountTeam2@wolterskluwer.com

ORVR Fuel System Components: Figure 1 illustrates a generic Ford ORVR-equipped fuel system. The generic ORVR-equipped fuel system utilizes the following hardware:

- Specially Designed Filler Pipe - Ensures the formation of a dynamic liquid seal during vehicle refueling. The pipe may also come equipped with a vapor recirculation line to minimize vapor growth during refueling.

- Specially Designed Fill Control Valve - Limits fuel levels in the fuel tank and allows refueling vapors to travel through the valve into the vapor line. Some fill control valves act to separate entrained liquid fuel from fuel vapors passing through the valve.

- Vapor Recirculation Line - Routes a portion of refueling vapors to the top of the fuel filler pipe to limit amount of relatively fresh air being entrained by action of liquid seal. A fixed or variable size orifice controls the flow of recirculated vapors.

- Anti-spitback Device - Located in line with the fuel filler pipe, this device (usually a flapper door valve or fill tube check valve with a piston/spring/valve seat design) impedes spitback of liquid at the end of the refueling event.

- Carbon Canister - Used to store refueling vapors for use later in engine operation. Ford uses an integrated system to capture both evaporative and refueling emissions on all programs except NIRCOS (Non-Integrated Refueling Canister Only System) hybrids. On NIRCOS hybrids, Ford utilizes a non-integrated system which utilizes the canister for refueling emissions and a pressurized fuel tank for evaporative emissions.

- Carbon Canister Vent Valve – Systems are equipped with a solenoid that is normally open to allow fresh air to enter and exit the canisters as required by system performance. This valve closes to seal the system for the diagnostic system leak check. Hybrid programs utilize an Electronic Leak Check Module (ELCM) to conduct leak detection by monitoring flow through an orifice.

All fuel system designs, including those equipped to control refueling emissions, contain safety features required to ensure compliance with rollover and crash safety requirements.

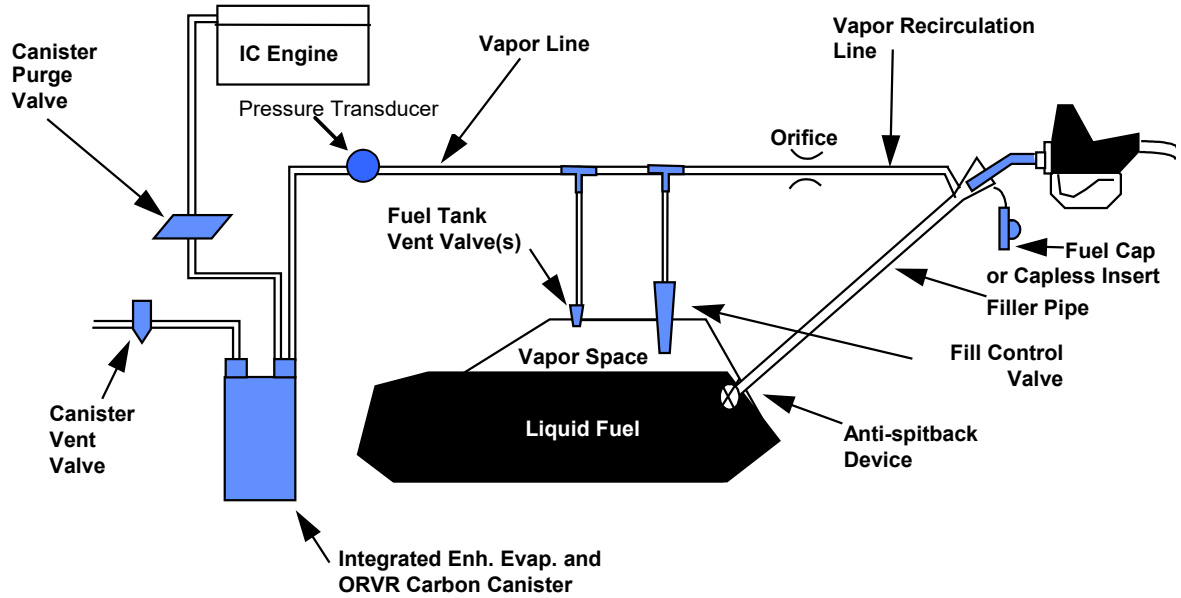


Figure 1. Generic ORVR-Equipped Ford Fuel System

ORVR System Description

Operation of ORVR System during Refueling: During refueling, the ORVR fuel system routes the majority of refueling vapors to a carbon canister, where they are adsorbed and stored for later use. A recirculation line guides a small portion of refueling vapors to the top of the fuel neck to displace relatively fresh air which otherwise would be drawn into the fuel tank by the action of the fuel flowing through the filler pipe. A fixed or variable diameter orifice located in the recirculation line restricts the quantity of fuel vapors being recirculated to ensure no vapors spill out the fuel filler inlet into the atmosphere.

Other vapor routes are blocked during vehicle refueling. A closed canister purge valve blocks vapors from traveling to the engine. A dynamic liquid seal constitutes the primary mechanism for blocking refueling vapors from escaping out the fuel filler pipe. The shape of the fuel filler pipe rapidly constricts shortly after the site of maximum fuel nozzle penetration. This constriction causes the fuel to flow in a manner such that no fuel vapor can escape to the atmosphere from the fuel tank through the fuel filler neck. Instead, the action of the incoming fuel draws fresh air (and recirculated vapor, where applicable) into the filler neck. Once refueling stops and the liquid seal is broken, an anti-spitback device -- such as a fill tube check valve -- acts to restrict fuel spitback and wellback.

Refueling shut off occurs due to a float rising in the fuel limiting vent valve. As the float rises, the valve closes the vapor pathway to the vapor lines. Pressure in the fuel tank builds, in turn, producing a pressure pulse that travels up the fuel filler neck. The pressure pulse in the filler neck causes liquid fuel to cover the shut-off port on the fuel-dispensing nozzle, thereby causing the nozzle to shut off.

Fuel Filler Inlet Design: Ford fuel filler inlets conform to California fuel filler inlet requirements, which in their geometric specifications meet ISO-13331-1995(E) with modifications specified in Title 13, California Code of Regulations, Section 2235. Ford fuel inlets also employ a fuel nozzle restrictor conforming to the requirements of 40 CFR §80.24. Ford has elected to discontinue the use of a metallic flapper valve on the fuel filler inlet restriction. The restriction hole of the newly designed nozzle inlet plate in the fuel pipe is strategically sized and located such that when the fuel nozzle is introduced in the fuel pipe to dispense fuel, it helps ensure the fuel nozzle contacts the fill pipe plate for grounding, bonding.

TYPICAL EVAPORATIVE EMISSION SYSTEM

DESCRIPTION OF EVAPORATIVE EMISSION CONTROL SYSTEM

The Evaporative Emission Control System consists of a sealed fuel tank assembly, a filler pipe, a fuel cap or capless insert, fuel tank vapor orifice(s) (fuel limiting vent valves and grade vent valves), materials that adsorb fuel vapors (such as carbon in a canister), and a canister purge valve.

DESCRIPTION OF CANISTER PURGE

The carbon canister is purged of fuel vapor during normal vehicle driving. The flow of fuel vapor to the engine is controlled by the canister purge valve. The canister purge valve is electronically actuated by the Powertrain Control Module (PCM).

EVAPORATIVE EMISSION COMPONENTS

TYPICAL CANISTER PURGE VALVE

The typical canister purge valve is used to control the purge of stored fuel vapor inside the carbon canister assembly. The canister purge valve is electronically controlled by the Powertrain Control Module (PCM). The canister purge valve is a normally closed valve. When the PCM actuates the canister purge valve, the engine vacuum is applied to the carbon canister(s), and the desorbed fuel vapor is drawn through the canister purge valve and into the engine for consumption.

TYPICAL CARBON CANISTER

The carbon canister contains activated carbon for the storage of fuel vapor. The carbon canister is purged of the stored fuel vapor by the operation of the canister purge valve.

Some vehicles may include an engine buffer canister, which also contains activated carbon for the storage of fuel vapor. The engine buffer canister is commonly located in series with the canister purge valve or integrated into the primary canister. The function of the engine buffer canister is not to control evaporative emissions; rather, it buffers the engine from high concentrations of fuel vapor during vehicle operation in order to prevent undesired air/fuel ratio fluctuations. As such, engine buffer canisters need not be loaded with butane/nitrogen mixtures prior to exhaust or evaporative emissions testing.

TYPICAL VAPOR BLOCKING VALVE (NON NIRCOS HYBRID)

The typical vapor blocking valve (VBV) is used to control the purge of stored fuel vapor inside the fuel tank assembly. The VBV is electronically controlled by the Powertrain Control Module (PCM). The VBV is a normally open valve. When the PCM actuates the VBV, the valve closes and the application of engine vacuum to the fuel tank's vapor dome is prevented.

TYPICAL FUEL TANK ISOLATION VALVE(S) (NIRCOS HYBRID ONLY)

The typical fuel tank isolation valve is used to close the NIRCOS (Non-Integrated Refueling Canister Only System) pressurized fuel tank in order to contain evaporative emissions. The FTIV is electronically controlled by the Powertrain Control Module (PCM). The fuel tank isolation valve is a normally closed valve. When the PCM actuates the FTIV, the valve opens in order to vent the fuel tank through the carbon canister to enable refueling.

Some NIRCOS Hybrids utilize two fuel tank isolation valves: the Refueling Valve (RV) and the Tank Pressure Control valve (TPC). The Refueling Valve relieves pressure in the fuel tank to the canister after the refueling button is pushed to begin vehicle refueling. The Tank Pressure Control valve opens for short durations while the vehicle is driving and purge is functioning to relieve pressure from the fuel tank to the engine (through the canister purge valve).

TYPICAL AIR INDUCTION SYSTEM (AIS) HYDROCARBON (HC) ADSORBER

Some vehicles may include an HC adsorber located in the engine AIS to capture fuel vapor from the intake manifold or crankcase after engine shutdown. The adsorber may contain activated carbon or other adsorptive material. This component is continuously purged during engine operation. In compliance with CARB's MAC 2001-03, and since the CFR only requires preconditioning of evaporative emission canisters, AIS HC adsorbers need not be preconditioned prior to testing.

TYPICAL FUEL LIMITING VENT VALVE (FLVV)

The FLVV is a three piece assembly consisting of the vent tube, vapor seal (which has an o-ring on both ends for leak protection), and the "check valve" which consists of a float with a spring assembly. The fuel limiting vent valve assembly provides two functions: (1) Limits fuel tank fill volume to the required refill volume, (2) roll-over protect the vent tube path for crash. The valve during normal vehicle driving is in an upright position.

During a roll-over condition, the FLVV spring closes the float to the vent tube to prevent liquid fuel from entering the vent.

TYPICAL GRADE VENT VALVE (GVV)

The grade vent valves (GVV) are typically mounted on the front and the rear top of the fuel tank. They are designed to prevent liquid from the fuel tank from entering the vapor stream, while allowing the fuel vapor to move through the evaporative emission control system.

The spring and float within each valve shuts off the vapor stream whenever liquid gasoline reaches the inlet port. The GVV reopens when the attitude of the fuel tank returns to horizontal and the liquid fuel drains from the area of the GVV. In the vertical position the open bottom float will lift and close. In the rolled over position the spring will push the float closed whenever the roll over angle permits liquid gasoline to reach the float. In the upside down position the weight of the float and the spring force will close the vapor path.

TYPICAL FILLER PIPE

The filler pipe assembly transfers liquid fuel from the fuel nozzle to the tank and has a "liquid seal" design. On some ORVR vehicles, a recirculation line connects from the main vapor line and supplies vapor from the tank to the top of the filler pipe to minimize the amount of fresh air that is drawn into the pipe.

At the top of the filler pipe, a fuel cap is installed, which seals the fuel tank assembly. The fuel cap includes a vacuum relief valve. On some vehicles, Ford utilizes a capless refueling system which seals the fuel tank without use of a fuel cap. Like the fuel cap, the capless refueling system includes vacuum relief capability.

TYPICAL FUEL TANK AUXILIARY PORT

Ford provides an auxiliary port on various fuel tank designs to allow the customer to connect aftermarket equipment to the Ford fuel tank using a standard SAE quickconnect. When Ford ships the vehicle, the auxiliary port is capped with a blanking cap which is designed to seal the auxiliary port for the entire full useful life of the vehicle (for customers who choose not to utilize the auxiliary port). The blanking cap is similar to the standard SAE quickconnect used for fuel line connections on the Ford vehicles (i.e., the blanking cap includes internal o-rings to address permeation; the end of the connector is sealed to close the port).

Ford provides a fuel tank auxiliary port on all of the following programs:

1. Ford E-Series (E-350/E-450) (all fuel tanks)

2. Ford F-Series Super Duty (F-250/F-350/F-450/F-550/F-600) (all Chassis Cab fuel tanks, including gas and diesel; excludes complete pick-up fuel tanks)

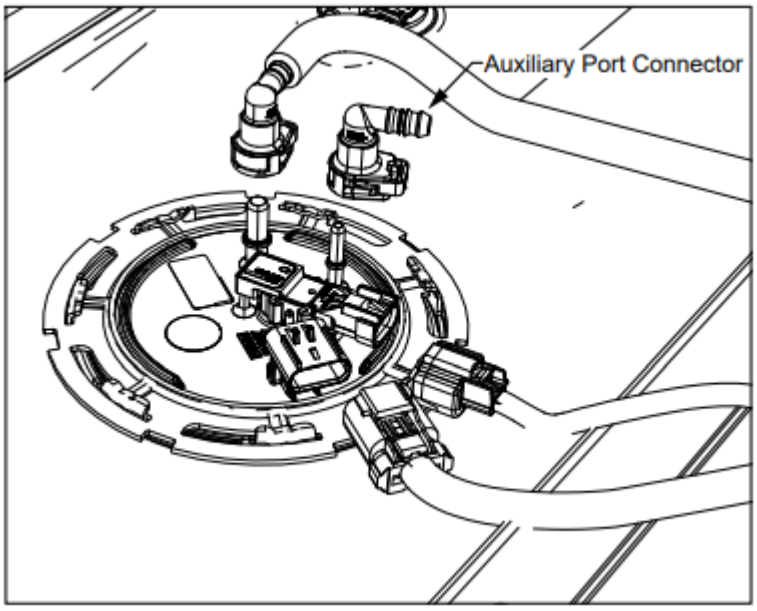
3. Ford F-Series F-650/F-750 (all fuel tanks, including gas and diesel)

4. Motorhome/Step-van (all fuel tanks)

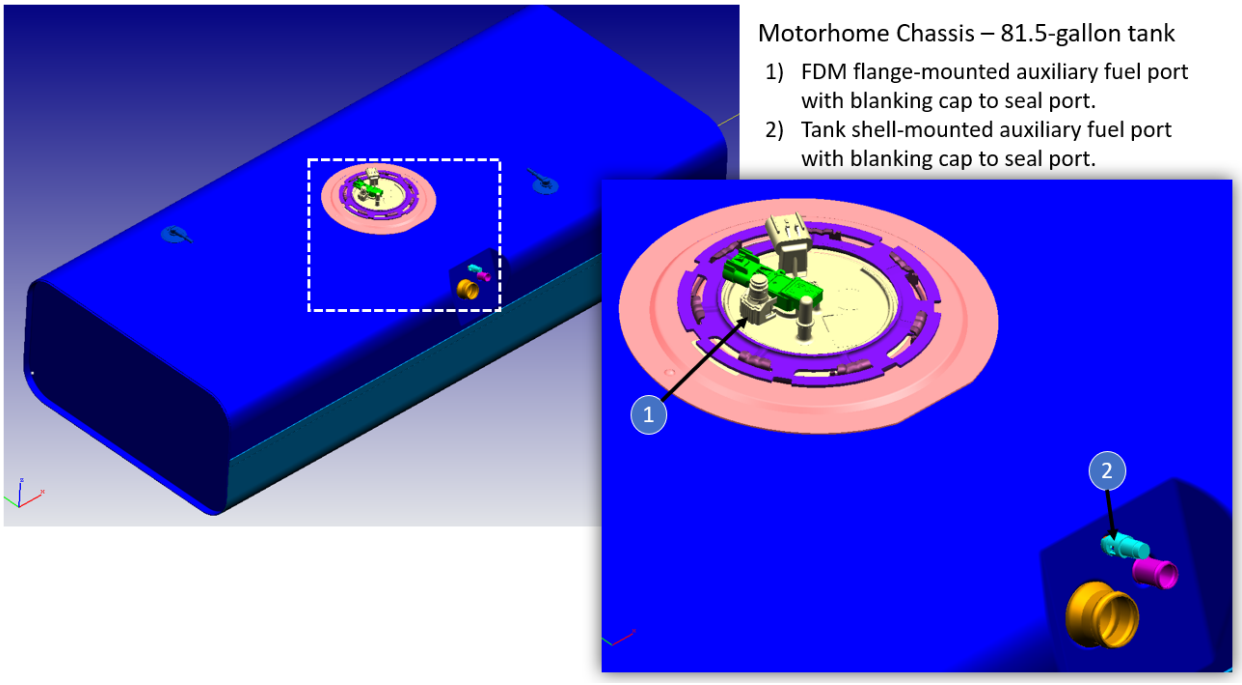
5. Ford Transit (all vehicle models and all fuel tanks, includes incomplete and complete Ford Transits)

Ford installs the auxiliary port in the gasoline/diesel fuel delivery module flange located on the top of the fuel tank for all programs which use a fuel tank auxiliary port.

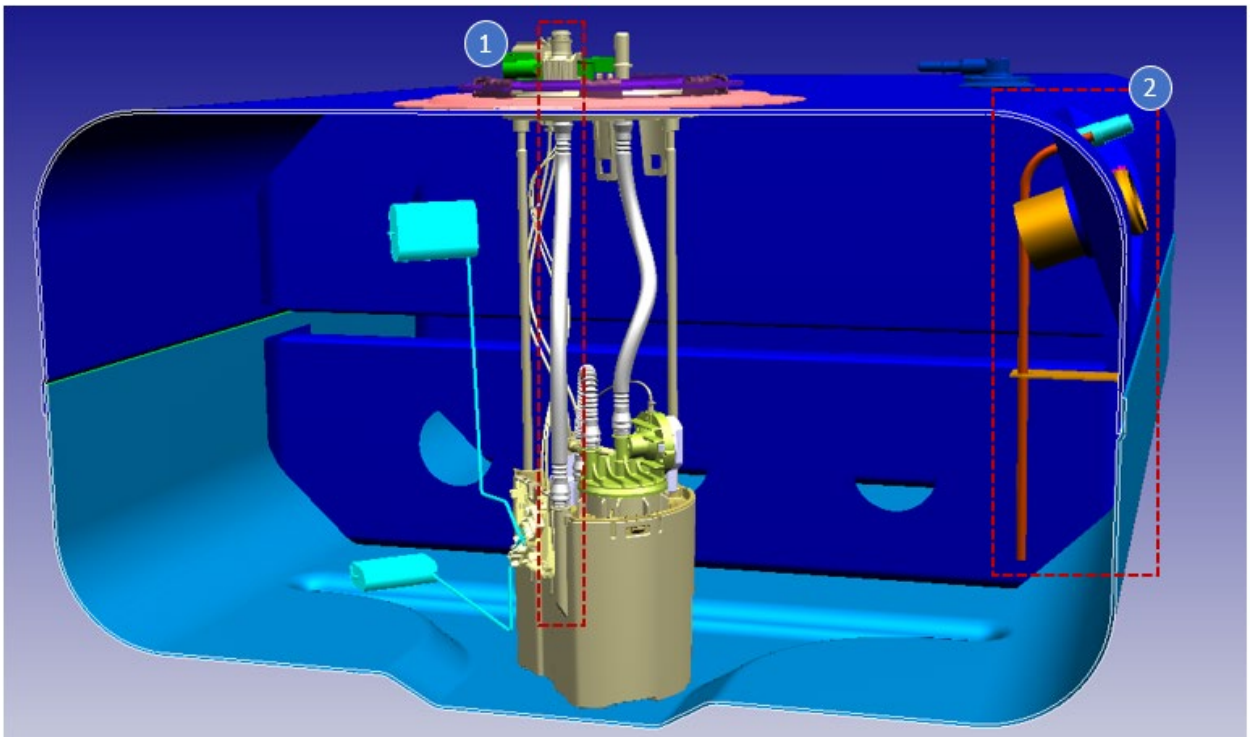
Example drawing showing the auxiliary port in the fuel delivery module flange and an auxiliary port connector from the Ford Aux. Fuel Port Service Kit:



The F53 Motorhome include a second auxiliary port (in addition to the port located in the fuel delivery module flange). Both auxiliary ports are capped with blanking caps when the chassis is shipped to the body builder.



Example drawing - cut-away view of fuel tank showing auxiliary ports:
1) FDM flange-mounted auxiliary fuel port
2) Tank shell-mounted auxiliary fuel port



Ford provides the following guidance to body builders in the "Ford General Body Builder Layout Book" regarding use of the fuel tank auxiliary port:

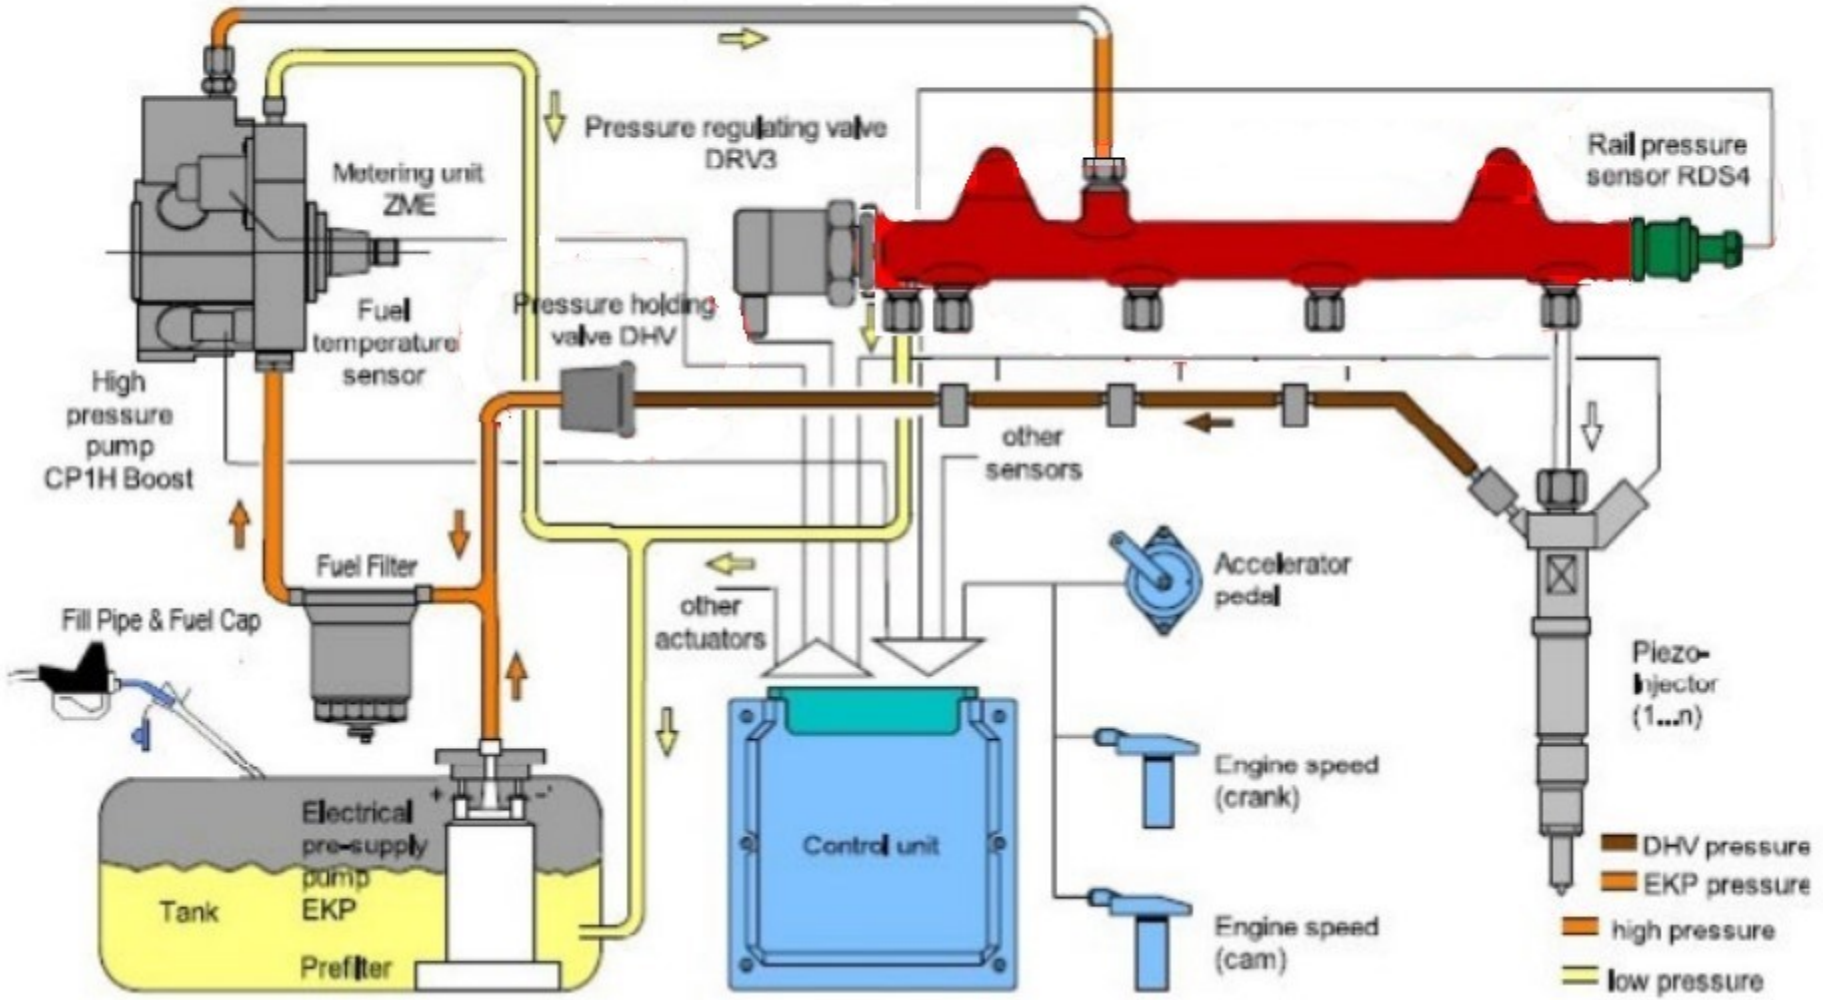
Fuel System Access for Auxiliary Fuel Powered Equipment

Precautions like those described in this Fuel System section should be taken in the design and positioning of a fuel system for auxiliary fuel-powered equipment. The auxiliary fuel-powered equipment should be securely mounted to withstand forces during crash situations. Final stage manufacturers or alterers utilizing the auxiliary fuel port must install an electrically actuated, normally closed solenoid valve into the fuel line leading to the auxiliary fuel powered equipment. The valve should remain open during the start and run cycle of the auxiliary equipment and must close immediately when the auxiliary equipment is turned off or is out of fuel.

If auxiliary fuel powered equipment is capable of operating while the vehicle is being driven, it is recommended to use the Upfitter Interface Module (where available) to control the aux fuel solenoid valve. Logic can be programmed (using the "Crash Event Status" signal, in conjunction with other vehicle signals and upfitter defined inputs) to provide proper equipment operation during normal vehicle usage and to shut off the aux fuel valve in a crash situation. See the "Design Recommendations - Electrical System - Upfitter Interface Module (UIM)" section for more information on the UIM and how it

can be utilized. All auxiliary fuel ports have a safety cap which must remain in place until a fuel consuming accessory is installed. It is recommended that all components related to auxiliary fuel equipment follow the guidance provided in the “Fuel Lines, Hoses and Pumps” section where applicable. See appropriate vehicle specific BBLB for more information regarding the location and use of auxiliary fuel ports where provided.

Diesel Fuel System Schematic



Diesel Fuel System Reportable Components

Reportable Diesel Components

Base #	Part Description
9A543	High Pressure Fuel Pump
9B262	Diesel Fuel Conditioning Module (DFCM)
9B395	High Pressure Fuel Pump
9C968	Fuel Pressure Regulator Control
9D280	Fuel Rail pressure sensor part of the rail assembly
9D350	Fuel Temp Sensor Assembly
9F593	Fuel Injectors
9F838	Fuel Rail Pressure Sensor
9F951	Fuel Temp Sensor
9G756	Fuel Temp Sensor
9J307	Fuel Volume Control Valve
9K546	Fuel Injector

ALTERNATE DURABILITY PROTOCOL

I Applicability

The following description is applicable to 2026 and subsequent model year passenger cars, trucks, and heavy-duty gasoline engines.

II REPORTING EQUIVALENCY FACTORS

Please see section 04.00.00.01 for equivalency factors.

III CALCULATION OF THE EQUIVALENCY FACTOR

Equivalency Factors provide a means for specifying relative stringency between emissions durability processes based on the Standard Road cycle (SRC) and another cycle, such as Ford's Fast AMA cycle. Inasmuch as Ford now uses only the SRC cycle, equivalency factors are stipulated as 1.0.

Ford uses a modified SRC as the basis for emissions durability, as allowed in 40 CFR 1823-08. Ford has modified the SRC slightly to run efficiently on a 5-mile track: Two lap segments of the SRC are completed for each for 5 mile circuit of Ford's track. Figure 1 compares the EPA 3.7-mile SRC with the SRC adjusted to the 5-mile track. It also illustrates Ford's Fast AMA cycle, which is no longer used. Figure 2 shows example catalyst temperatures from all three cycles.

It is the intention of Ford's bench aging process to replicate road based catalyst deterioration experienced on the SRC cycle by emissions matching and catalyst midbed time-at-temperature data obtained from catalysts and oxygen sensors. Aging cycle targets from accelerated fleet data are determined by calculating the hours necessary to achieve deterioration that reproduces full (or intermediate) useful life fleet average HC and NOx emissions for any engine/catalyst/HEGO system. Other considerations include catalyst inefficiency changes and fleet average deterioration rates (DFs).

One can replicate the Ford durability process by running the SRC drive cycle over the full useful life of a vehicle.

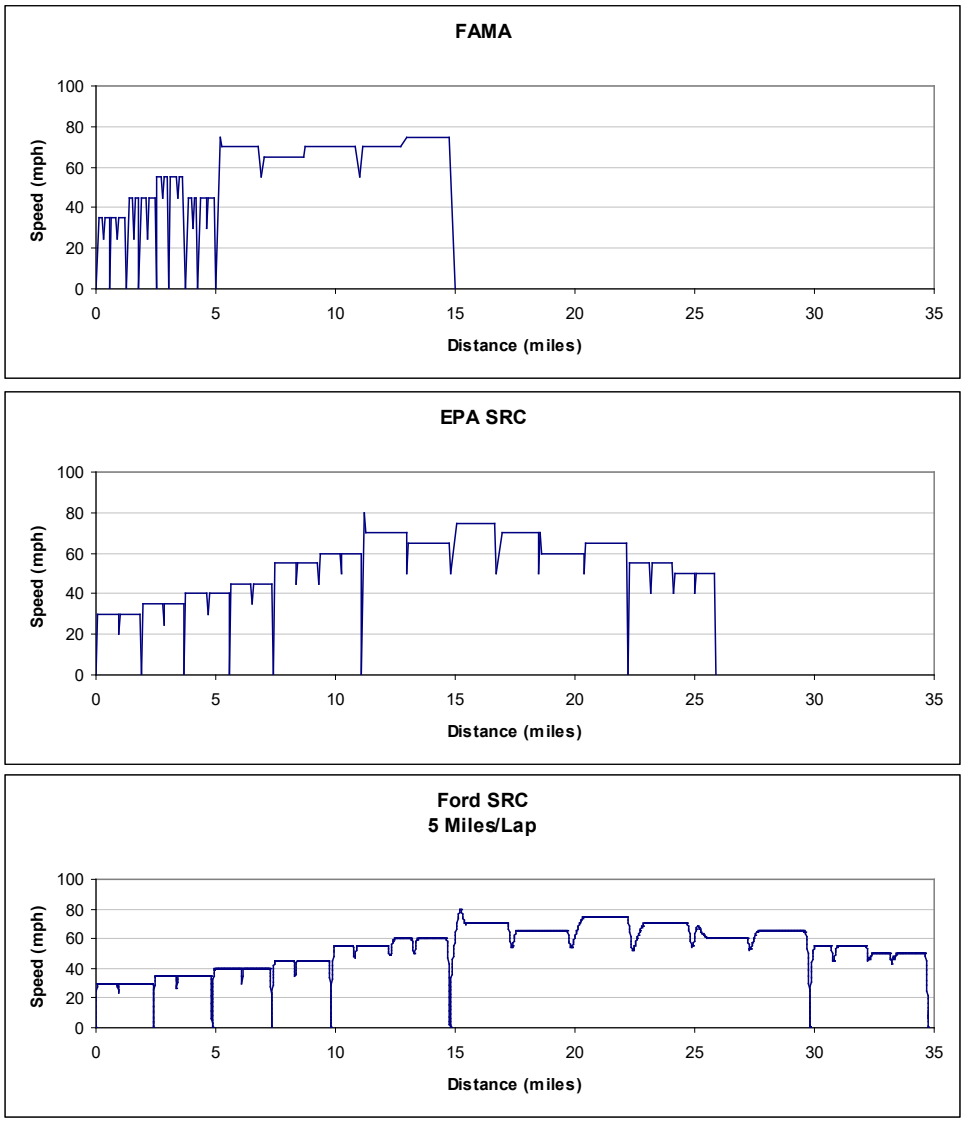


Figure 1 - Speed/Distance Comparison of Drive Cycles

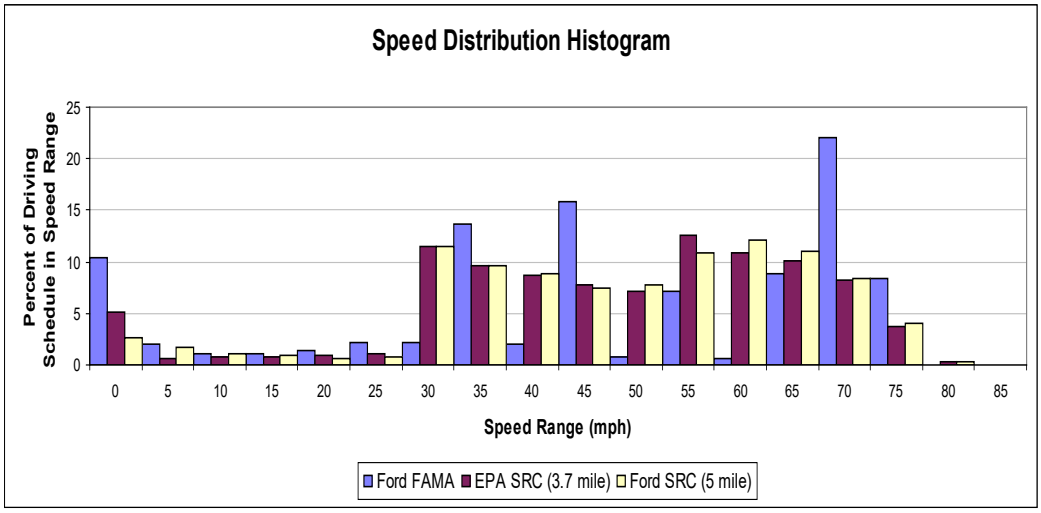


Figure 2 - Speed Histograms of Drive Cycles

Index for Single Roll Settings 2025 Model Year Car

Carline

Mustang

Mustang Mach-E

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 S650N

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 S650N TRLHP Chart	2026	S650N	6/9/2025	MQUENON	26S650N.3-0	10R80 Transmission Requires Coastdown Mode.

Vehicle Description							TRLHP Specification					
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/45R 18 ALS CONTINENTAL (PRO CONTACT TX) / D3HA6 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.2	19.60	32.83	0.2377	0.01880
							4000	12.3	20.04	33.59	0.2390	0.01882
							4250	12.6	20.90	35.10	0.2415	0.01886
							4500	12.8	21.73	36.62	0.2441	0.01889
							4750	13.0	22.53	38.13	0.2466	0.01893
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.1	19.76	32.18	0.2344	0.01884
							4000	12.2	20.20	32.94	0.2357	0.01886
							4250	12.5	21.06	34.47	0.2383	0.01889
							4500	12.7	21.89	36.00	0.2409	0.01892
							4750	12.9	22.70	37.52	0.2435	0.01895
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3875	12.4	19.26	32.89	0.2344	0.01949
							4000	12.6	19.68	33.75	0.2360	0.01951
							4250	12.8	20.47	35.48	0.2392	0.01955
							4500	13.1	21.23	37.22	0.2424	0.01959
							4750	13.4	21.96	38.97	0.2457	0.01963
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.1	18.93	32.86	0.2496	0.02110
							4250	13.3	19.76	34.39	0.2522	0.02113
							4500	13.5	20.56	35.92	0.2548	0.02116
							4750	13.8	21.33	37.45	0.2574	0.02119
							5000	14.0	22.09	38.97	0.2600	0.02122
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4000	13.4	18.46	33.67	0.2499	0.02175
							4250	13.7	19.24	35.40	0.2531	0.02179
							4500	13.9	19.97	37.14	0.2563	0.02183
							4750	14.2	20.68	38.89	0.2596	0.02187
							5000	14.5	21.36	40.65	0.2628	0.02191
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.1	18.88	31.91	0.3038	0.02048
							4250	13.3	19.72	33.43	0.3064	0.02051
							4500	13.6	20.52	34.96	0.3090	0.02054
							4750	13.8	21.29	36.49	0.3116	0.02057
							5000	14.0	22.04	38.02	0.3142	0.02060
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4000	13.4	18.42	32.71	0.3041	0.02114
							4250	13.7	19.19	34.44	0.3073	0.02118
							4500	14.0	19.93	36.18	0.3106	0.02122

							4750	14.2	20.64	37.93	0.3138	0.02126
							5000	14.5	21.32	39.69	0.3171	0.02130
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.2	19.71	31.22	0.2886	0.01823
							4000	12.3	20.16	31.98	0.2899	0.01824
							4250	12.5	21.02	33.51	0.2925	0.01827
							4500	12.7	21.85	35.04	0.2951	0.01830
							4750	13.0	22.65	36.57	0.2977	0.01833
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3875	12.5	19.22	31.93	0.2886	0.01887
							4000	12.6	19.63	32.79	0.2902	0.01889
							4250	12.9	20.43	34.52	0.2935	0.01893
							4500	13.1	21.19	36.26	0.2967	0.01897
							4750	13.4	21.91	38.02	0.2999	0.01901
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.73	FEDAV Brake System #5, 19"	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	4000	16.0	15.43	42.30	0.3552	0.02409
							4250	16.3	16.10	44.25	0.3581	0.02413
							4500	16.6	16.74	46.19	0.3610	0.02417
							4750	16.9	17.37	48.12	0.3638	0.02421
							5000	17.2	17.97	50.05	0.3667	0.02425
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.73	FEDAV Brake System #5, 19"	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	3875	15.2	15.76	41.39	0.3422	0.02221
							4000	15.4	16.12	42.37	0.3436	0.02223
							4250	15.6	16.80	44.32	0.3465	0.02227
							4500	15.9	17.46	46.26	0.3494	0.02231
							4750	16.2	18.10	48.20	0.3522	0.02235
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/45R 18 ALS CONTINENTAL (PRO CONTACT TX) / D3HA6 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.1	21.57	35.77	-0.1899	0.02283
							4000	11.2	22.04	36.53	-0.1886	0.02285
							4250	11.5	22.94	38.05	-0.1861	0.02289
							4500	11.7	23.80	39.56	-0.1835	0.02293
							4750	11.9	24.63	41.08	-0.1810	0.02297
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.76	35.12	-0.1932	0.02288
							4000	11.1	22.23	35.88	-0.1919	0.02289
							4250	11.4	23.13	37.41	-0.1893	0.02292
							4500	11.6	24.00	38.94	-0.1867	0.02295
							4750	11.8	24.84	40.47	-0.1841	0.02298
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3875	11.3	21.15	35.81	-0.1876	0.02344
							4000	11.5	21.58	36.68	-0.1860	0.02346
							4250	11.7	22.40	38.41	-0.1828	0.02350
							4500	12.0	23.19	40.15	-0.1795	0.02354
							4750	12.3	23.94	41.90	-0.1763	0.02358
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.69	35.81	-0.1780	0.02513
							4250	12.2	21.57	37.33	-0.1754	0.02516
							4500	12.4	22.41	38.86	-0.1728	0.02519
							4750	12.7	23.22	40.39	-0.1702	0.02522
							5000	12.9	24.00	41.92	-0.1676	0.02525
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4000	12.3	20.13	36.59	-0.1721	0.02571
							4250	12.6	20.93	38.33	-0.1689	0.02575
							4500	12.8	21.69	40.07	-0.1656	0.02579
							4750	13.1	22.43	41.82	-0.1624	0.02583
							5000	13.4	23.13	43.58	-0.1591	0.02587
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.64	34.85	-0.1238	0.02452
							4250	12.2	21.52	36.37	-0.1212	0.02455
							4500	12.5	22.36	37.90	-0.1186	0.02458
							4750	12.7	23.17	39.43	-0.1160	0.02460
							5000	12.9	23.95	40.96	-0.1134	0.02463
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4000	12.3	20.08	35.64	-0.1178	0.02509
							4250	12.6	20.88	37.37	-0.1146	0.02513
							4500	12.9	21.65	39.11	-0.1114	0.02517
							4750	13.1	22.38	40.86	-0.1081	0.02521
							5000	13.4	23.08	42.62	-0.1049	0.02525
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.70	34.16	-0.1389	0.02226
							4000	11.2	22.17	34.92	-0.1376	0.02227

							4250	11.4	23.08	36.45	-0.1350	0.02230
							4500	11.6	23.95	37.98	-0.1324	0.02233
							4750	11.9	24.78	39.51	-0.1298	0.02236
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3875	11.4	21.10	34.85	-0.1333	0.02282
							4000	11.5	21.53	35.72	-0.1317	0.02284
							4250	11.8	22.35	37.45	-0.1285	0.02288
							4500	12.0	23.13	39.19	-0.1253	0.02293
							4750	12.3	23.88	40.94	-0.1220	0.02297
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAV Brake System #5, 19"	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	4000	14.9	16.56	45.20	-0.0588	0.02793
							4250	15.2	17.25	47.15	-0.0559	0.02798
							4500	15.5	17.92	49.09	-0.0530	0.02802
							4750	15.8	18.57	51.03	-0.0502	0.02806
							5000	16.1	19.19	52.95	-0.0473	0.02810
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.64	34.85	-0.1238	0.02452
							4250	12.2	21.52	36.37	-0.1212	0.02455
							4500	12.5	22.36	37.90	-0.1186	0.02458
							4750	12.7	23.17	39.43	-0.1160	0.02460
							5000	12.9	23.95	40.96	-0.1134	0.02463
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4000	12.3	20.08	35.64	-0.1178	0.02509
							4250	12.6	20.88	37.37	-0.1146	0.02513
							4500	12.9	21.65	39.11	-0.1114	0.02517
							4750	13.1	22.38	40.86	-0.1081	0.02521
							5000	13.4	23.08	42.62	-0.1049	0.02525
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAV Brake System #5, 19"	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	3875	14.1	16.99	44.29	-0.0718	0.02605
							4000	14.3	17.35	45.27	-0.0704	0.02607
							4250	14.5	18.07	47.22	-0.0675	0.02611
							4500	14.8	18.75	49.17	-0.0646	0.02615
							4750	15.1	19.41	51.10	-0.0618	0.02619
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.70	34.16	-0.1389	0.02226
							4000	11.2	22.17	34.92	-0.1376	0.02227
							4250	11.4	23.08	36.45	-0.1350	0.02230
							4500	11.6	23.95	37.98	-0.1324	0.02233
							4750	11.9	24.78	39.51	-0.1298	0.02236
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3875	11.4	21.10	34.85	-0.1333	0.02282
							4000	11.5	21.53	35.72	-0.1317	0.02284
							4250	11.8	22.35	37.45	-0.1285	0.02288
							4500	12.0	23.13	39.19	-0.1253	0.02293
							4750	12.3	23.88	40.94	-0.1220	0.02297
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/45R 18 ALS CONTINENTAL (PRO CONTACT TX) / D3HA6 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.1	21.57	35.77	-0.1899	0.02283
							4000	11.2	22.04	36.53	-0.1886	0.02285
							4250	11.5	22.94	38.05	-0.1861	0.02289
							4500	11.7	23.80	39.56	-0.1835	0.02293
							4750	11.9	24.63	41.08	-0.1810	0.02297
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.76	35.12	-0.1932	0.02288
							4000	11.1	22.23	35.88	-0.1919	0.02289
							4250	11.4	23.13	37.41	-0.1893	0.02292
							4500	11.6	24.00	38.94	-0.1867	0.02295
							4750	11.8	24.84	40.47	-0.1841	0.02298
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3875	11.3	21.15	35.81	-0.1876	0.02344
							4000	11.5	21.58	36.68	-0.1860	0.02346
							4250	11.7	22.40	38.41	-0.1828	0.02350
							4500	12.0	23.19	40.15	-0.1795	0.02354
							4750	12.3	23.94	41.90	-0.1763	0.02358
USA | CANADA | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.69	35.81	-0.1780	0.02513
							4250	12.2	21.57	37.33	-0.1754	0.02516
							4500	12.4	22.41	38.86	-0.1728	0.02519
							4750	12.7	23.22	40.39	-0.1702	0.02522
							5000	12.9	24.00	41.92	-0.1676	0.02525
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4000	12.3	20.13	36.59	-0.1721	0.02571

							4250	12.6	20.93	38.33	-0.1689	0.02575
							4500	12.8	21.69	40.07	-0.1656	0.02579
							4750	13.1	22.43	41.82	-0.1624	0.02583
							5000	13.4	23.13	43.58	-0.1591	0.02587
USA | 2 DOOR CONVERTIBLE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS CONTINENTAL (PRO CONTACT RX) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.9	21.26	31.25	-0.1199	0.02266
							3875	11.0	21.72	31.99	-0.1158	0.02265
							4000	11.2	22.17	32.74	-0.1118	0.02264
							4250	11.4	23.04	34.26	-0.1035	0.02262
							4500	11.7	23.87	35.76	-0.0954	0.02260
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.4	20.31	33.59	-0.1024	0.02290
							3875	11.6	20.75	34.37	-0.0976	0.02288
							4000	11.7	21.17	35.16	-0.0929	0.02287
							4250	12.0	21.99	36.73	-0.0835	0.02285
							4500	12.2	22.78	38.31	-0.0741	0.02282
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3750	11.5	20.24	32.76	-0.0802	0.02291
							3875	11.6	20.65	33.60	-0.0742	0.02289
							4000	11.8	21.04	34.43	-0.0679	0.02288
							4250	12.1	21.80	36.12	-0.0555	0.02285
							4500	12.4	22.53	37.81	-0.0431	0.02281
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS CONTINENTAL (PRO CONTACT RX) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.1	22.89	30.20	-0.0965	0.02027
							3875	10.3	23.37	30.92	-0.0917	0.02025
							4000	10.4	23.83	31.64	-0.0867	0.02024
							4250	10.6	24.72	33.08	-0.0769	0.02021
							4500	10.9	25.58	34.54	-0.0671	0.02018
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.7	21.78	32.39	-0.0742	0.02049
							3875	10.8	22.22	33.15	-0.0685	0.02048
							4000	10.9	22.66	33.90	-0.0629	0.02046
							4250	11.2	23.51	35.40	-0.0517	0.02041
							4500	11.4	24.31	36.92	-0.0405	0.02038
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3750	10.7	21.67	31.53	-0.0501	0.02052
							3875	10.9	22.08	32.33	-0.0430	0.02050
							4000	11.0	22.49	33.14	-0.0357	0.02048
							4250	11.3	23.26	34.74	-0.0212	0.02044
							4500	11.6	24.00	36.36	-0.0067	0.02038
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (SPORT CONTACT 6) / D3IAE AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	12.2	19.09	37.12	-0.0966	0.02355
							3875	12.3	19.51	37.95	-0.0920	0.02353
							4000	12.4	19.92	38.76	-0.0874	0.02351
							4250	12.7	20.71	40.40	-0.0784	0.02348
							4500	13.0	21.47	42.02	-0.0693	0.02346
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - FEATURE CAR	MOD 5.0L-4V DOHC EFI NA GAS	10R80	RWD	3.55	FEDAV Brake System #5, 19" Feature Car	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	3875	13.9	17.24	44.33	-0.0741	0.02545
							4000	14.0	17.61	45.31	-0.0727	0.02547
							4250	14.3	18.33	47.26	-0.0698	0.02551
							4500	14.6	19.02	49.20	-0.0670	0.02555
							4750	14.9	19.68	51.14	-0.0641	0.02559
						NONDRIVEN: P305/30ZR19ALS PIRELLI (PZERO TROTEO RS) / D3DBF AT 33 PSI. || DRIVEN: P315/30ZR19ALS PIRELLI (PZERO TROTEO RS) / D3DBF AT 33 PSI.	3875	14.7	16.36	44.56	-0.1368	0.02887
							4000	14.8	16.72	45.61	-0.1367	0.02889
							4250	15.1	17.41	47.72	-0.1366	0.02895
							4500	15.4	18.07	49.83	-0.1364	0.02900
							4750	15.7	18.71	51.93	-0.1363	0.02906
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - FEATURE CAR	MOD 5.0L-4V DOHC EFI NA GAS	MT3160	RWD	3.73	FEDAV Brake System #5, 19" Feature Car	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	3875	15.2	15.82	40.93	0.3949	0.02118
							4000	15.3	16.17	41.91	0.3964	0.02120
							4250	15.6	16.86	43.86	0.3993	0.02124
							4500	15.9	17.52	45.81	0.4021	0.02128
							4750	16.2	18.16	47.74	0.4050	0.02133
						NONDRIVEN: P305/30ZR19ALS PIRELLI (PZERO TROTEO RS) / D3DBF AT 33 PSI. || DRIVEN: P315/30ZR19ALS PIRELLI (PZERO TROTEO RS) / D3DBF AT 33 PSI.	3875	16.0	15.02	41.06	0.3655	0.02414
							4000	16.1	15.36	42.12	0.3656	0.02417
							4250	16.4	16.02	44.23	0.3657	0.02423
							4500	16.7	16.66	46.33	0.3659	0.02428

							4750	17.0	17.27	48.43	0.3660	0.02433
CANADA | 2 DOOR CONVERTIBLE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS CONTINENTAL (PRO CONTACT RX) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.9	21.26	31.25	-0.1199	0.02266
							3875	11.0	21.72	31.99	-0.1158	0.02265
							4000	11.2	22.17	32.74	-0.1118	0.02264
							4250	11.4	23.04	34.26	-0.1035	0.02262
							4500	11.7	23.87	35.76	-0.0954	0.02260
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.4	20.31	33.59	-0.1024	0.02290
							3875	11.6	20.75	34.37	-0.0976	0.02288
							4000	11.7	21.17	35.16	-0.0929	0.02287
							4250	12.0	21.99	36.73	-0.0835	0.02285
							4500	12.2	22.78	38.31	-0.0741	0.02282
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3750	11.5	20.24	32.76	-0.0802	0.02291
							3875	11.6	20.65	33.60	-0.0742	0.02289
							4000	11.8	21.04	34.43	-0.0679	0.02288
							4250	12.1	21.80	36.12	-0.0555	0.02285
							4500	12.4	22.53	37.81	-0.0431	0.02281
CANADA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS CONTINENTAL (PRO CONTACT RX) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.1	22.89	30.20	-0.0965	0.02027
							3875	10.3	23.37	30.92	-0.0917	0.02025
							4000	10.4	23.83	31.64	-0.0867	0.02024
							4250	10.6	24.72	33.08	-0.0769	0.02021
							4500	10.9	25.58	34.54	-0.0671	0.02018
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.7	21.78	32.39	-0.0742	0.02049
							3875	10.8	22.22	33.15	-0.0685	0.02048
							4000	10.9	22.66	33.90	-0.0629	0.02046
							4250	11.2	23.51	35.40	-0.0517	0.02041
							4500	11.4	24.31	36.92	-0.0405	0.02038
						P265/35R 20 ALS GOODYEAR (F1) / D3IET AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3750	10.7	21.67	31.53	-0.0501	0.02052
							3875	10.9	22.08	32.33	-0.0430	0.02050
							4000	11.0	22.49	33.14	-0.0357	0.02048
							4250	11.3	23.26	34.74	-0.0212	0.02044
							4500	11.6	24.00	36.36	-0.0067	0.02038
CANADA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (SPORT CONTACT 6) / D3IAE AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	12.2	19.09	37.12	-0.0966	0.02355
							3875	12.3	19.51	37.95	-0.0920	0.02353
							4000	12.4	19.92	38.76	-0.0874	0.02351
							4250	12.7	20.71	40.40	-0.0784	0.02348
							4500	13.0	21.47	42.02	-0.0693	0.02346
MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.1	18.93	32.86	0.2496	0.02110
							4250	13.3	19.76	34.39	0.2522	0.02113
							4500	13.5	20.56	35.92	0.2548	0.02116
							4750	13.8	21.33	37.45	0.2574	0.02119
							5000	14.0	22.09	38.97	0.2600	0.02122
MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.1	19.76	32.18	0.2344	0.01884
							4000	12.2	20.20	32.94	0.2357	0.01886
							4250	12.5	21.06	34.47	0.2383	0.01889
							4500	12.7	21.89	36.00	0.2409	0.01892
							4750	12.9	22.70	37.52	0.2435	0.01895
MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.1	18.88	31.91	0.3038	0.02048
							4250	13.3	19.72	33.43	0.3064	0.02051
							4500	13.6	20.52	34.96	0.3090	0.02054
							4750	13.8	21.29	36.49	0.3116	0.02057
							5000	14.0	22.04	38.02	0.3142	0.02060
MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.2	19.71	31.22	0.2886	0.01823
							4000	12.3	20.16	31.98	0.2899	0.01824
							4250	12.5	21.02	33.51	0.2925	0.01827
							4500	12.7	21.85	35.04	0.2951	0.01830
							4750	13.0	22.65	36.57	0.2977	0.01833
MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.69	35.81	-0.1780	0.02513
							4250	12.2	21.57	37.33	-0.1754	0.02516
							4500	12.4	22.41	38.86	-0.1728	0.02519
							4750	12.7	23.22	40.39	-0.1702	0.02522
							5000	12.9	24.00	41.92	-0.1676	0.02525

MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.76	35.12	-0.1932	0.02288
							4000	11.1	22.23	35.88	-0.1919	0.02289
							4250	11.4	23.13	37.41	-0.1893	0.02292
							4500	11.6	24.00	38.94	-0.1867	0.02295
							4750	11.8	24.84	40.47	-0.1841	0.02298
MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.64	34.85	-0.1238	0.02452
							4250	12.2	21.52	36.37	-0.1212	0.02455
							4500	12.5	22.36	37.90	-0.1186	0.02458
							4750	12.7	23.17	39.43	-0.1160	0.02460
							5000	12.9	23.95	40.96	-0.1134	0.02463
MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.70	34.16	-0.1389	0.02226
							4000	11.2	22.17	34.92	-0.1376	0.02227
							4250	11.4	23.08	36.45	-0.1350	0.02230
							4500	11.6	23.95	37.98	-0.1324	0.02233
							4750	11.9	24.78	39.51	-0.1298	0.02236
MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.69	35.81	-0.1780	0.02513
							4250	12.2	21.57	37.33	-0.1754	0.02516
							4500	12.4	22.41	38.86	-0.1728	0.02519
							4750	12.7	23.22	40.39	-0.1702	0.02522
							5000	12.9	24.00	41.92	-0.1676	0.02525
MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.76	35.12	-0.1932	0.02288
							4000	11.1	22.23	35.88	-0.1919	0.02289
							4250	11.4	23.13	37.41	-0.1893	0.02292
							4500	11.6	24.00	38.94	-0.1867	0.02295
							4750	11.8	24.84	40.47	-0.1841	0.02298
MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.0	20.64	34.85	-0.1238	0.02452
							4250	12.2	21.52	36.37	-0.1212	0.02455
							4500	12.5	22.36	37.90	-0.1186	0.02458
							4750	12.7	23.17	39.43	-0.1160	0.02460
							5000	12.9	23.95	40.96	-0.1134	0.02463
MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.0	21.70	34.16	-0.1389	0.02226
							4000	11.2	22.17	34.92	-0.1376	0.02227
							4250	11.4	23.08	36.45	-0.1350	0.02230
							4500	11.6	23.95	37.98	-0.1324	0.02233
							4750	11.9	24.78	39.51	-0.1298	0.02236
MEXICO | 2 DOOR CONVERTIBLE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS CONTINENTAL (PRO CONTACT RX) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.9	21.26	31.25	-0.1199	0.02266
							3875	11.0	21.72	31.99	-0.1158	0.02265
							4000	11.2	22.17	32.74	-0.1118	0.02264
							4250	11.4	23.04	34.26	-0.1035	0.02262
							4500	11.7	23.87	35.76	-0.0954	0.02260
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.4	20.31	33.59	-0.1024	0.02290
							3875	11.6	20.75	34.37	-0.0976	0.02288
							4000	11.7	21.17	35.16	-0.0929	0.02287
							4250	12.0	21.99	36.73	-0.0835	0.02285
							4500	12.2	22.78	38.31	-0.0741	0.02282
MEXICO | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS CONTINENTAL (PRO CONTACT RX) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.1	22.89	30.20	-0.0965	0.02027
							3875	10.3	23.37	30.92	-0.0917	0.02025
							4000	10.4	23.83	31.64	-0.0867	0.02024
							4250	10.6	24.72	33.08	-0.0769	0.02021
							4500	10.9	25.58	34.54	-0.0671	0.02018
						P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.7	21.78	32.39	-0.0742	0.02049
							3875	10.8	22.22	33.15	-0.0685	0.02048
							4000	10.9	22.66	33.90	-0.0629	0.02046
							4250	11.2	23.51	35.40	-0.0517	0.02041
							4500	11.4	24.31	36.92	-0.0405	0.02038
MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - FEATURE CAR	MOD 5.0L-4V DOHC EFI NA GAS	10R80	RWD	3.55	FEDAV Brake System #5, 19" Feature Car	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	3875	13.9	17.24	44.33	-0.0741	0.02545
							4000	14.0	17.61	45.31	-0.0727	0.02547
							4250	14.3	18.33	47.26	-0.0698	0.02551
							4500	14.6	19.02	49.20	-0.0670	0.02555
							4750	14.9	19.68	51.14	-0.0641	0.02559

MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - FEATURE CAR	MOD 5.0L-4V DOHC EFI NA GAS	MT3160	RWD	3.73	FEDAV Brake System #5, 19" Feature Car	NONDRIVEN: P255/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI. || DRIVEN: P275/40R 19ALS PIRELLI (PZERO) / D3DBC AT 32 PSI.	3875	15.2	15.82	40.93	0.3949	0.02118
							4000	15.3	16.17	41.91	0.3964	0.02120
							4250	15.6	16.86	43.86	0.3993	0.02124
							4500	15.9	17.52	45.81	0.4021	0.02128
							4750	16.2	18.16	47.74	0.4050	0.02133
USA | 2 DOOR CONVERTIBLE | BASE VERSION - CAR | Bridgestone Potenza 235/50R18	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS BRIDGESTONE (POTENZA) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.3	20.54	33.03	-0.1300	0.02329
							3875	11.4	21.00	33.74	-0.1265	0.02329
							4000	11.5	21.46	34.46	-0.1230	0.02329
							4250	11.8	22.33	35.90	-0.1161	0.02330
							4500	12.0	23.17	37.33	-0.1092	0.02330
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Bridgestone Potenza 235/50R18	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS BRIDGESTONE (POTENZA) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.5	22.08	31.98	-0.1072	0.02088
							3875	10.6	22.57	32.67	-0.1030	0.02087
							4000	10.7	23.03	33.36	-0.0988	0.02087
							4250	11.0	23.94	34.74	-0.0903	0.02086
							4500	11.2	24.81	36.11	-0.0819	0.02086
CANADA | MEXICO | 2 DOOR CONVERTIBLE | BASE VERSION - CAR | Bridgestone Potenza 235/50R18	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS BRIDGESTONE (POTENZA) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.3	20.54	33.03	-0.1300	0.02329
							3875	11.4	21.00	33.74	-0.1265	0.02329
							4000	11.5	21.46	34.46	-0.1230	0.02329
							4250	11.8	22.33	35.90	-0.1161	0.02330
							4500	12.0	23.17	37.33	-0.1092	0.02330
CANADA | MEXICO | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Bridgestone Potenza 235/50R18	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P235/50R 18 ALS BRIDGESTONE (POTENZA) / D3HCF AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.5	22.08	31.98	-0.1072	0.02088
							3875	10.6	22.57	32.67	-0.1030	0.02087
							4000	10.7	23.03	33.36	-0.0988	0.02087
							4250	11.0	23.94	34.74	-0.0903	0.02086
							4500	11.2	24.81	36.11	-0.0819	0.02086
USA | CANADA | MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.5	18.32	35.10	0.2771	0.02094
							4250	13.7	19.13	36.65	0.2805	0.02097
							4500	14.0	19.89	38.21	0.2840	0.02101
							4750	14.2	20.64	39.76	0.2874	0.02105
							5000	14.5	21.36	41.31	0.2908	0.02108
USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.5	19.10	34.35	0.2615	0.01867
							4000	12.7	19.53	35.13	0.2632	0.01869
							4250	12.9	20.36	36.68	0.2667	0.01873
							4500	13.2	21.15	38.23	0.2701	0.01877
							4750	13.4	21.93	39.79	0.2735	0.01880
USA | CANADA | MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.5	18.28	34.14	0.3314	0.02032
							4250	13.8	19.09	35.69	0.3348	0.02035
							4500	14.0	19.86	37.25	0.3382	0.02039
							4750	14.3	20.60	38.80	0.3416	0.02043
							5000	14.5	21.33	40.35	0.3450	0.02046
USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.6	19.06	33.39	0.3158	0.01806
							4000	12.7	19.48	34.17	0.3175	0.01808
							4250	12.9	20.31	35.72	0.3209	0.01811
							4500	13.2	21.11	37.27	0.3243	0.01815
							4750	13.4	21.88	38.83	0.3278	0.01819
USA | CANADA | MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.4	19.97	38.04	-0.1505	0.02497
							4250	12.6	20.81	39.59	-0.1471	0.02501
							4500	12.9	21.62	41.15	-0.1436	0.02504
							4750	13.1	22.40	42.70	-0.1402	0.02508
							5000	13.4	23.15	44.25	-0.1368	0.02512
USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.4	20.97	37.29	-0.1661	0.02271
							4000	11.6	21.41	38.07	-0.1643	0.02273
							4250	11.8	22.28	39.62	-0.1609	0.02276
							4500	12.0	23.12	41.17	-0.1575	0.02280
							4750	12.3	23.91	42.73	-0.1541	0.02284
USA | CANADA | MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.4	19.93	37.08	-0.0962	0.02435
							4250	12.7	20.77	38.64	-0.0928	0.02439
							4500	12.9	21.57	40.19	-0.0894	0.02443
							4750	13.1	22.35	41.74	-0.0859	0.02446
							5000	13.4	23.10	43.29	-0.0825	0.02450

USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.5	20.92	36.33	-0.1118	0.02209
							4000	11.6	21.36	37.11	-0.1101	0.02211
							4250	11.8	22.23	38.66	-0.1067	0.02215
							4500	12.1	23.06	40.22	-0.1032	0.02218
							4750	12.3	23.86	41.77	-0.0998	0.02222
USA | CANADA | MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.4	19.97	38.04	-0.1505	0.02497
							4250	12.6	20.81	39.59	-0.1471	0.02501
							4500	12.9	21.62	41.15	-0.1436	0.02504
							4750	13.1	22.40	42.70	-0.1402	0.02508
							5000	13.4	23.15	44.25	-0.1368	0.02512
USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.4	20.97	37.29	-0.1661	0.02271
							4000	11.6	21.41	38.07	-0.1643	0.02273
							4250	11.8	22.28	39.62	-0.1609	0.02276
							4500	12.0	23.12	41.17	-0.1575	0.02280
							4750	12.3	23.91	42.73	-0.1541	0.02284
USA | CANADA | MEXICO | 2 DOOR CONVERTIBLE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	12.4	19.93	37.08	-0.0962	0.02435
							4250	12.7	20.77	38.64	-0.0928	0.02439
							4500	12.9	21.57	40.19	-0.0894	0.02443
							4750	13.1	22.35	41.74	-0.0859	0.02446
							5000	13.4	23.10	43.29	-0.0825	0.02450
USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/40R19	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.5	20.92	36.33	-0.1118	0.02209
							4000	11.6	21.36	37.11	-0.1101	0.02211
							4250	11.8	22.23	38.66	-0.1067	0.02215
							4500	12.1	23.06	40.22	-0.1032	0.02218
							4750	12.3	23.86	41.77	-0.0998	0.02222
USA | 2 DOOR CONVERTIBLE | BASE VERSION - CAR | Pirelli Pzero 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.9	19.52	35.68	-0.0940	0.02328
							3875	12.0	19.93	36.49	-0.0890	0.02327
							4000	12.2	20.34	37.31	-0.0839	0.02326
							4250	12.4	21.12	38.92	-0.0739	0.02325
							4500	12.7	21.87	40.55	-0.0638	0.02324
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Pirelli Pzero 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.1	20.88	34.44	-0.0648	0.02085
							3875	11.2	21.31	35.22	-0.0588	0.02084
							4000	11.4	21.72	36.00	-0.0528	0.02083
							4250	11.7	22.53	37.55	-0.0409	0.02080
							4500	11.9	23.30	39.11	-0.0290	0.02078
CANADA | MEXICO | 2 DOOR CONVERTIBLE | BASE VERSION - CAR | Pirelli Pzero 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.9	19.52	35.68	-0.0940	0.02328
							3875	12.0	19.93	36.49	-0.0890	0.02327
							4000	12.2	20.34	37.31	-0.0839	0.02326
							4250	12.4	21.12	38.92	-0.0739	0.02325
							4500	12.7	21.87	40.55	-0.0638	0.02324
CANADA | MEXICO | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Pirelli Pzero 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAR Brake System #1, 17"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.1	20.88	34.44	-0.0648	0.02085
							3875	11.2	21.31	35.22	-0.0588	0.02084
							4000	11.4	21.72	36.00	-0.0528	0.02083
							4250	11.7	22.53	37.55	-0.0409	0.02080
							4500	11.9	23.30	39.11	-0.0290	0.02078
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Goodyear F1 Asym6 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS GOODYEAR (F1 ASYM6) / D3IAE AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	12.4	18.73	37.73	-0.0747	0.02356
							3875	12.5	19.13	38.59	-0.0690	0.02354
							4000	12.7	19.51	39.47	-0.0633	0.02353
							4250	13.0	20.25	41.20	-0.0520	0.02350
							4500	13.3	20.96	42.94	-0.0407	0.02347
CANADA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Goodyear F1 Asym6 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.55	FEDAV Brake System #5, 19"	P255/40R 19 ALS GOODYEAR (F1 ASYM6) / D3IAE AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	12.4	18.73	37.73	-0.0747	0.02356
							3875	12.5	19.13	38.59	-0.0690	0.02354
							4000	12.7	19.51	39.47	-0.0633	0.02353
							4250	13.0	20.25	41.20	-0.0520	0.02350
							4500	13.3	20.96	42.94	-0.0407	0.02347
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/45R18	MOD 5.0L-4V DOHC SEFI NA	MT82	RWD	3.55	FEDAS Brake System #2, 18"	P255/45R 18 ALS PIRELLI (P ZERO) / D3HA6 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	12.3	19.52	32.87	0.2527	0.01864
							4000	12.4	19.96	33.60	0.2543	0.01866
							4250	12.6	20.83	35.06	0.2573	0.01869
							4500	12.8	21.66	36.53	0.2604	0.01873
							4750	13.1	22.46	37.99	0.2634	0.01877

USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/45R18	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.15	FEDAS Brake System #2, 18"	P255/45R 18 ALS PIRELLI (P ZERO) / D3HA6 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.2	21.47	35.81	-0.1749	0.02267
							4000	11.3	21.94	36.54	-0.1733	0.02269
							4250	11.5	22.84	38.01	-0.1703	0.02273
							4500	11.7	23.71	39.47	-0.1672	0.02277
							4750	12.0	24.55	40.93	-0.1642	0.02281
USA | CANADA | 2 DOOR COUPE-4 LITE | GT VERSION - CAR | Pirelli Pzero 255/45R18	MOD 5.0L-4V DOHC SEFI NA	10R80	RWD	3.55	FEDAS Brake System #2, 18"	P255/45R 18 ALS PIRELLI (P ZERO) / D3HA6 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3875	11.2	21.47	35.81	-0.1749	0.02267
							4000	11.3	21.94	36.54	-0.1733	0.02269
							4250	11.5	22.84	38.01	-0.1703	0.02273
							4500	11.7	23.71	39.47	-0.1672	0.02277
							4750	12.0	24.55	40.93	-0.1642	0.02281
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS CONTINENTAL (PRO CONTACT RX) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	10.6	21.80	32.02	-0.0512	0.02015
							3875	10.8	22.25	32.77	-0.0455	0.02013
							4000	10.9	22.69	33.53	-0.0400	0.02011
							4250	11.2	23.54	35.04	-0.0287	0.02006
							4500	11.4	24.34	36.54	-0.0175	0.02003
USA | 2 DOOR COUPE-4 LITE | BASE VERSION - CAR | Pirelli Pzero 255/40R19	2.3L 4V TIVCT DI TC 270 HP GAS	10R80	RWD	3.15	FEDAV Brake System #5, 19"	P255/40R 19 ALS PIRELLI (P ZERO) / D3IC8 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	3750	11.1	20.91	34.07	-0.0418	0.02050
							3875	11.2	21.33	34.84	-0.0358	0.02049
							4000	11.4	21.75	35.63	-0.0299	0.02048
							4250	11.7	22.56	37.18	-0.0179	0.02045
							4500	11.9	23.32	38.74	-0.0061	0.02042

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 S650 Performance

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 S650 Performance TRLHP Chart	2026	S650 Performance	10/20/2025	MQUENON	26S650N(5.2L).1-1	

Vehicle Description							TRLHP Specification					
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO	5.2L PREDATOR OHC SC PFI GAS	7SPDDCT	RWD	3.73	FBABA VENTILATED DISC BRAKES	NONDRIVEN: P305/30R 20ALS PIRELLI (PZERO R) / D3DBJ AT 32 PSI. || DRIVEN: P315/30R 20ALS PIRELLI (PZERO R) / D3DBJ AT 32 PSI.	4000	17.8	13.90	47.11	0.3379	0.02782
							4250	18.2	14.41	49.57	0.3377	0.02815
							4500	18.7	14.90	52.05	0.3369	0.02848
							4750	19.1	15.37	54.54	0.3354	0.02883
							5000	19.6	15.81	57.04	0.3333	0.02919
USA | CANADA | MEXICO | TRACK	5.2L PREDATOR OHC SC PFI GAS	7SPDDCT	RWD	3.73	FBAA2 CERAMIC BRAKE DISCS	NONDRIVEN: P305/30R 20ALS MICHELIN (PILOT SPORT CUP) / D3DBK AT 32 PSI. || DRIVEN: P315/30R 20ALS MICHELIN (PILOT SPORT CUP) / D3DBK AT 32 PSI.	4000	17.5	14.15	47.44	0.3842	0.02578
							4250	17.9	14.68	49.85	0.3842	0.02608
							4500	18.3	15.19	52.28	0.3835	0.02638
							4750	18.7	15.67	54.72	0.3823	0.02670
							5000	19.2	16.13	57.19	0.3805	0.02703

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 S832

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 S832 TRLHP Chart	2026	S832	07/22/2025	MQUENON	26S832N.3-0	

Vehicle Description							TRLHP Specification					
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO | 2 DOOR COUPE-4 LITE | GT VERSION - CAR	5.2L PREDATOR OHC SC PFI GAS	TR9080	RWD	3.55	S832 Brakes	NONDRIVEN: P325/30R 20ALS MICHELIN (PILOT SPORT CUP) / D3DBT AT 32 PSI. || DRIVEN: P345/30R 20ALS MICHELIN (PILOT SPORT CUP) / D3DBT AT 32 PSI.	4250	19.1	13.73	51.83	0.3203	0.03029
							4500	19.4	14.31	53.83	0.3252	0.03030
							4750	19.7	14.88	55.82	0.3301	0.03031
							5000	20.0	15.43	57.81	0.3349	0.03032
							5250	20.3	15.96	59.79	0.3398	0.03033

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 CX727

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 CX727 TRLHP Chart	2026	CX727	10/02/2025	MQUENON	26CX727N.3-0	BEV Transmission Requires Coastdown Mode

Vehicle Description								TRLHP Specification				
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | TRACTION BATTERY #3	ELECTRIC MOTOR #4 | TRACTION BATTERY #3	BASE 4X2	1EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P225/55R 19 ALS BRIDGESTONE (ALENZA A/S) / D3IJD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	10.8	25.67	26.48	0.1602	0.01875
							4750	11.0	26.61	27.64	0.1727	0.01863
							5000	11.2	27.51	28.82	0.1849	0.01852
							5250	11.5	28.36	30.00	0.1970	0.01842
							5500	11.7	29.18	31.19	0.2089	0.01833
USA | CANADA | TRACTION BATTERY #3	ELECTRIC MOTOR #5 | TRACTION BATTERY #3	BASE 4X4	2EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P225/55R 19 ALS MICHELIN (PRIMACY A/S) / D3IFX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	12.1	22.96	31.12	0.2759	0.01841
							4750	12.3	23.85	32.19	0.2920	0.01824
							5000	12.5	24.72	33.26	0.3077	0.01808
							5250	12.7	25.55	34.35	0.3231	0.01793
							5500	12.9	26.35	35.44	0.3381	0.01779
						P225/55R 19 ALS BRIDGESTONE (ALENZA A/S) / D3IJD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	11.8	23.69	29.37	0.2677	0.01816
							4750	11.9	24.61	30.43	0.2835	0.01798
							5000	12.1	25.49	31.51	0.2990	0.01782
							5250	12.3	26.34	32.60	0.3141	0.01767
							5500	12.5	27.16	33.70	0.3289	0.01752
USA | CANADA | MEXICO | TRACTION BATTERY #3 (Trail)	ELECTRIC MOTOR #5 | TRACTION BATTERY #3	BASE 4X4	2EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P235/55R 19 ALS MICHELIN (CROSS CLIMATE) / D3IGS AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	4500	13.7	20.29	36.14	0.3726	0.01924
							4750	14.1	20.91	37.73	0.3796	0.01947
							5000	14.4	21.49	39.33	0.3864	0.01970
							5250	14.7	22.05	40.94	0.3930	0.01994
							5500	15.1	22.57	42.56	0.3992	0.02019
USA | CANADA | TRACTION BATTERY #1 | GT VERSION - FEATURE CAR | POLICE PACKAGE	ELECTRIC MOTOR #7 | TRACTION BATTERY #1	GT 4X4	2EMOTOR	9.72	FBBAF 19" GT Perf Front, 17" Rear	P245/45R 20 ALS CONTINENTAL (CROSS CONT RX) / D3IB9 AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	13.9	21.17	36.58	0.3158	0.02070
							5000	14.2	21.80	38.09	0.3181	0.02097
							5250	14.5	22.40	39.61	0.3202	0.02125
							5500	14.8	22.97	41.15	0.3222	0.02153
							6000	15.4	24.04	44.25	0.3256	0.02210
USA | CANADA | TRACTION BATTERY #1 | GT VERSION - FEATURE CAR	ELECTRIC MOTOR #7 | TRACTION BATTERY #1	GT 4X4	2EMOTOR	9.72	FBBAF 19" GT Perf Front, 17" Rear	P245/45R 20 ALS CONTINENTAL (CROSS CONT RX) / D3IB9 AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	13.0	22.57	35.97	0.2227	0.02021
							5000	13.2	23.39	37.14	0.2418	0.01997
							5250	13.4	24.17	38.32	0.2603	0.01976
							5500	13.6	24.94	39.51	0.2783	0.01955
							6000	14.1	26.38	41.91	0.3130	0.01917
						P245/45R 20 ALS PIRELLI (PZERO) / D3IHE AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	13.4	21.97	37.88	0.2520	0.01992
							5000	13.6	22.74	39.13	0.2736	0.01967
							5250	13.8	23.48	40.38	0.2945	0.01943
							5500	14.1	24.20	41.63	0.3149	0.01921
							6000	14.5	25.55	44.16	0.3544	0.01880
USA | CANADA | MEXICO | TRACTION BATTERY #1 | GT VERSION - FEATURE CAR (Rally)	ELECTRIC MOTOR #7 | TRACTION BATTERY #1	GT 4X4	2EMOTOR	9.72	FBBAF 19" GT Perf Front, 17" Rear	P235/55R 19 ALS MICHELIN (CROSS CLIMATE) / D3IGS AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	4750	14.3	20.55	38.99	0.3476	0.02034
							5000	14.6	21.13	40.62	0.3525	0.02061
							5250	15.0	21.68	42.27	0.3572	0.02088
							5500	15.3	22.20	43.93	0.3616	0.02115
							6000	16.0	23.17	47.29	0.3698	0.02172
USA | CANADA | TRACTION BATTERY #5	ELECTRIC MOTOR #8 | TRACTION BATTERY #5	BASE 4X2	1EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P225/55R 19 ALS MICHELIN (PRIMACY A/S) / D3IFX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	11.2	24.81	28.32	0.1668	0.01901
							4750	11.4	25.72	29.49	0.1796	0.01890
							5000	11.6	26.59	30.66	0.1921	0.01880
							5250	11.8	27.43	31.84	0.2043	0.01870
							5500	12.1	28.23	33.02	0.2163	0.01862
						P225/55R 19 ALS BRIDGESTONE (ALENZA A/S) / D3IJD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	10.8	25.68	26.48	0.1601	0.01875

							4750	11.0	26.61	27.64	0.1726	0.01863
							5000	11.2	27.51	28.82	0.1849	0.01852
							5250	11.5	28.36	30.00	0.1970	0.01842
							5500	11.7	29.18	31.19	0.2089	0.01833
USA | CANADA | TRACTION BATTERY #5	ELECTRIC MOTOR #9 | TRACTION BATTERY #5	BASE 4X4	2EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P225/55R 19 ALS MICHELIN (PRIMACY A/S) / D3IFX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	12.3	23.85	32.19	0.2920	0.01824
							5000	12.5	24.72	33.26	0.3077	0.01808
							5250	12.7	25.55	34.35	0.3231	0.01793
							5500	12.9	26.35	35.44	0.3381	0.01779
							6000	13.3	27.87	37.62	0.3672	0.01754
						P225/55R 19 ALS BRIDGESTONE (ALENZA A/S) / D3IJD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	11.9	24.61	30.43	0.2835	0.01798
							5000	12.1	25.49	31.51	0.2990	0.01782
							5250	12.3	26.34	32.60	0.3141	0.01767
							5500	12.5	27.16	33.70	0.3289	0.01752
							6000	12.9	28.71	35.92	0.3579	0.01725
USA | CANADA | TRACTION BATTERY #5 (Trail)	ELECTRIC MOTOR #9 | TRACTION BATTERY #5	BASE 4X4	2EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P235/55R 19 ALS MICHELIN (CROSS CLIMATE) / D3IGS AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	4750	14.1	20.91	37.73	0.3796	0.01947
							5000	14.4	21.49	39.33	0.3864	0.01970
							5250	14.7	22.05	40.94	0.3930	0.01994
							5500	15.1	22.57	42.56	0.3992	0.02019
							6000	15.7	23.56	45.85	0.4107	0.02069
MEXICO | TRACTION BATTERY #3	ELECTRIC MOTOR #5 | TRACTION BATTERY #3	BASE 4X4	2EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P225/55R 19 ALS MICHELIN (PRIMACY A/S) / D3IFX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	12.1	22.96	31.12	0.2759	0.01841
							4750	12.3	23.85	32.19	0.2920	0.01824
							5000	12.5	24.72	33.26	0.3077	0.01808
							5250	12.7	25.55	34.35	0.3231	0.01793
							5500	12.9	26.35	35.44	0.3381	0.01779
						P225/55R 19 ALS BRIDGESTONE (ALENZA A/S) / D3IJD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	11.8	23.69	29.37	0.2677	0.01816
							4750	11.9	24.61	30.43	0.2835	0.01798
							5000	12.1	25.49	31.51	0.2990	0.01782
							5250	12.3	26.34	32.60	0.3141	0.01767
							5500	12.5	27.16	33.70	0.3289	0.01752
MEXICO | TRACTION BATTERY #1 | GT VERSION - FEATURE CAR	ELECTRIC MOTOR #7 | TRACTION BATTERY #1	GT 4X4	2EMOTOR	9.72	FBBAF 19" GT Perf Front, 17" Rear	P245/45R 20 ALS CONTINENTAL (CROSS CONT RX) / D3IB9 AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	13.0	22.57	35.97	0.2227	0.02021
							5000	13.2	23.39	37.14	0.2418	0.01997
							5250	13.4	24.17	38.32	0.2603	0.01976
							5500	13.6	24.94	39.51	0.2783	0.01955
							6000	14.1	26.38	41.91	0.3130	0.01917
						P245/45R 20 ALS PIRELLI (PZERO) / D3IHE AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4750	13.4	21.97	37.88	0.2520	0.01992
							5000	13.6	22.74	39.13	0.2736	0.01967
							5250	13.8	23.48	40.38	0.2945	0.01943
							5500	14.1	24.20	41.63	0.3149	0.01921
							6000	14.5	25.55	44.16	0.3544	0.01880
MEXICO | TRACTION BATTERY #5	ELECTRIC MOTOR #8 | TRACTION BATTERY #5	BASE 4X2	1EMOTOR	9.72	FBBAQ 18" Base Front and GT Base Front, 17" Rear	P225/55R 19 ALS MICHELIN (PRIMACY A/S) / D3IFX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	11.2	24.81	28.32	0.1668	0.01901
							4750	11.4	25.72	29.49	0.1796	0.01890
							5000	11.6	26.59	30.66	0.1921	0.01880
							5250	11.8	27.43	31.84	0.2043	0.01870
							5500	12.1	28.23	33.02	0.2163	0.01862
						P225/55R 19 ALS BRIDGESTONE (ALENZA A/S) / D3IJD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	10.8	25.68	26.48	0.1601	0.01875
							4750	11.0	26.61	27.64	0.1726	0.01863
							5000	11.2	27.51	28.82	0.1849	0.01852
							5250	11.5	28.36	30.00	0.1970	0.01842
							5500	11.7	29.18	31.19	0.2089	0.01833

Index for Single Roll Settings 2026 Model Year Truck

Carline

Edge

Bronco Sport

Escape

Corsair

Maverick

Aviator

Explorer

Nautilus

Expedition

Navigator

Bronco

Ranger

F-150

F-250/350/450/550/600

Transit Connect

Transit

E-Series

Motor Home/Step Van

F-650/750

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 CDX707N

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 CDX707N TRLHP Chart	2026	CDX707N	03/06/2025	NREDOUTE	26CDX707N.3-0	Special Coastdown mode is required for 8F35 & HF55 transmissions

Vehicle Description							TRLHP Specification					
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA	2.0L GTDI A	8F35	AWDDISC	3.81	FAJAC 4 Wheel Disc	P255/55R 20 ALS PIRELLI (SCORPION) / D3ICL AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	12.7	20.79	28.55	0.0911	0.02474
							4500	12.9	21.62	29.73	0.1035	0.02470
							4750	13.1	22.43	30.91	0.1160	0.02465
							5000	13.3	23.20	32.10	0.1286	0.02461
							5250	13.6	23.95	33.29	0.1413	0.02456
						P255/60R 19 ALS GOODYEAR (EAGLE TOURING) / D3IFN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	12.4	21.15	28.54	0.0418	0.02508
							4500	12.6	22.05	29.64	0.0501	0.02506
							4750	12.8	22.91	30.73	0.0585	0.02505
							5000	13.0	23.75	31.83	0.0668	0.02504
							5250	13.2	24.56	32.93	0.0751	0.02502
						P255/50R 21 ALS MICHELIN (PRIMACY) / D3IGY AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	12.6	20.89	29.36	0.0674	0.02471
							4500	12.8	21.70	30.66	0.0790	0.02467
							4750	13.1	22.49	31.97	0.0908	0.02462
							5000	13.3	23.24	33.29	0.1026	0.02458
							5250	13.6	23.96	34.62	0.1146	0.02454
						P255/45R 22 ALS GOODYEAR (EAGLE TOURING) / D3IHF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	12.8	20.60	29.37	0.0756	0.02508
							4500	13.0	21.44	30.53	0.0863	0.02505
							4750	13.2	22.26	31.69	0.0971	0.02501
							5000	13.4	23.06	32.85	0.1079	0.02497
							5250	13.6	23.83	34.02	0.1187	0.02493
USA | CANADA	2.0L GTDI B	HF55	1EMOTOR	3.37	FAJAC 4 Wheel Disc	P255/55R 20 ALS PIRELLI (SCORPION) / D3ICL AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	13.1	21.29	30.95	0.1159	0.02457
							4750	13.3	22.12	31.95	0.1375	0.02435
							5000	13.5	22.93	32.96	0.1588	0.02414
							5250	13.7	23.70	33.98	0.1798	0.02394
							5500	13.9	24.45	35.01	0.2004	0.02375
						P255/60R 19 ALS GOODYEAR (EAGLE TOURING) / D3IFN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	12.9	21.68	30.96	0.0596	0.02498
							4750	13.0	22.58	31.89	0.0767	0.02479
							5000	13.2	23.44	32.81	0.0933	0.02462
							5250	13.4	24.28	33.75	0.1096	0.02446
							5500	13.6	25.10	34.69	0.1256	0.02430
						P255/50R 21 ALS MICHELIN (PRIMACY) / D3IGY AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	13.0	21.37	31.71	0.0975	0.02447
							4750	13.3	22.19	32.82	0.1189	0.02425
							5000	13.5	22.98	33.95	0.1399	0.02403
							5250	13.7	23.73	35.09	0.1606	0.02383
							5500	13.9	24.46	36.24	0.1812	0.02363
						P255/45R 22 ALS GOODYEAR (EAGLE TOURING) / D3IHF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	13.2	21.11	31.74	0.0999	0.02490
							4750	13.4	21.96	32.71	0.1198	0.02469
							5000	13.6	22.79	33.70	0.1392	0.02448
							5250	13.8	23.59	34.69	0.1583	0.02429
							5500	14.0	24.35	35.69	0.1771	0.02411
MEXICO	2.0L GTDI A	8F35	AWDDISC	3.81	FAJAC 4 Wheel Disc	P255/50R 21 ALS MICHELIN (PRIMACY) / D3IGY AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	12.6	20.89	29.36	0.0674	0.02471
							4500	12.8	21.70	30.66	0.0790	0.02467
							4750	13.1	22.49	31.97	0.0908	0.02462
							5000	13.3	23.24	33.29	0.1026	0.02458
							5250	13.6	23.96	34.62	0.1146	0.02454
						P255/45R 22 ALS GOODYEAR (EAGLE TOURING) / D3IHF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	12.8	20.60	29.37	0.0756	0.02508
							4500	13.0	21.44	30.53	0.0863	0.02505
							4750	13.2	22.26	31.69	0.0971	0.02501
							5000	13.4	23.06	32.85	0.1079	0.02497
							5250	13.6	23.83	34.02	0.1187	0.02493
MEXICO	2.0L GTDI B	HF55	1EMOTOR	3.37	FAJAC 4 Wheel Disc	P255/50R 21 ALS MICHELIN (PRIMACY) / D3IGY AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	13.0	21.37	31.71	0.0975	0.02447
							4750	13.3	22.19	32.82	0.1189	0.02425
							5000	13.5	22.98	33.95	0.1399	0.02403
							5250	13.7	23.73	35.09	0.1606	0.02383
							5500	13.9	24.46	36.24	0.1812	0.02363
						P255/45R 22 ALS GOODYEAR (EAGLE TOURING) / D3IHF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	13.2	21.11	31.74	0.0999	0.02490
							4750	13.4	21.96	32.71	0.1198	0.02469
							5000	13.6	22.79	33.70	0.1392	0.02448
							5250	13.8	23.59	34.69	0.1583	0.02429
							5500	14.0	24.35	35.69	0.1771	0.02411

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 CX430

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 CX430 TRLHP Chart V4	2026	CX430	09/25/2025	DRODR245	26CX430-3-0	Special Coastdown mode is required for 8F transmissions

									TRLHP Specification					
Vehicle Description												3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA	1.5L DRAGON B	8F35AWD 1.5L NON-SQ	AWDDISC	3.8		FEABA Comfort Linings	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	12.6	18.43	25.41	0.0997	0.02567
								3875	12.7	18.86	26.07	0.1047	0.02566
								4000	12.8	19.29	26.74	0.1098	0.02564
								4250	13.1	20.12	28.08	0.1200	0.02562
								4500	13.3	20.92	29.43	0.1302	0.02560
							P225/65R 17 ALS CONTINENTAL (PRO CONTACT TX) / D3KFQ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	12.3	18.83	23.99	0.0829	0.02578
								3875	12.5	19.28	24.59	0.0870	0.02578
								4000	12.6	19.73	25.20	0.0911	0.02578
								4250	12.8	20.61	26.41	0.0994	0.02578
								4500	13.0	21.46	27.63	0.1078	0.02577
							P225/65R 17 AT CONTINENTAL (CROSSCONTACTATR) / D3KHT AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	13.3	17.52	28.72	0.1043	0.02619
								3875	13.4	17.95	29.38	0.1090	0.02618
								4000	13.5	18.36	30.04	0.1137	0.02618
								4250	13.7	19.18	31.36	0.1230	0.02617
								4500	14.0	19.96	32.68	0.1324	0.02616
USA | CANADA | SASQUATCH	1.5L DRAGON B	8F35AWD 1.5SQ & 2.0	AWDDISC	3.8		FEABA Comfort Linings	P235/65R 17 AT GOODYEAR (TERRITORY RT) / D3KBY AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	14.7	15.83	30.88	0.1128	0.02942
								3875	14.9	16.14	31.79	0.1159	0.02957
								4000	15.1	16.46	32.70	0.1189	0.02971
								4250	15.4	17.05	34.54	0.1245	0.03002
								4500	15.8	17.61	36.39	0.1296	0.03033
USA | CANADA | MEXICO | SASQUATCH	2.0L GTDI A	8F35AWD 1.5SQ & 2.0	AWDDISC	3.8		FEABA Comfort Linings	P235/65R 17 AT GOODYEAR (TERRITORY RT) / D3KBY AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	14.8	15.71	30.97	0.1080	0.02983

							3875	15.0	16.02	31.88	0.1110	0.02998
							4000	15.2	16.33	32.79	0.1139	0.03013
							4250	15.6	16.92	34.63	0.1192	0.03044
							4500	15.9	17.48	36.49	0.1242	0.03076
USA | CANADA | MEXICO	2.0L GTDI A	8F35AWD 1.5SQ & 2.0	AWDDISC	3.8	FEABA Comfort Linings	P225/65R 17 AT CONTINENTAL (CROSSCONTACTATR) / D3KHT AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	14.1	16.50	28.38	0.1245	0.02840
							3875	14.2	16.91	29.07	0.1284	0.02840
							4000	14.3	17.30	29.76	0.1323	0.02841
							4250	14.6	18.08	31.14	0.1402	0.02841
							4500	14.8	18.84	32.51	0.1480	0.02841
MEXICO	1.5L DRAGON B	8F35AWD 1.5L NON-SQ	AWDDISC	3.8	FEABA Comfort Linings	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	12.6	18.43	25.41	0.0997	0.02567
							3875	12.7	18.86	26.07	0.1047	0.02566
							4000	12.8	19.29	26.74	0.1098	0.02564
							4250	13.1	20.12	28.08	0.1200	0.02562
							4500	13.3	20.92	29.43	0.1302	0.02560
						P225/65R 17 ALS CONTINENTAL (PRO CONTACT TX) / D3KFQ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	12.3	18.83	23.99	0.0829	0.02578
							3875	12.5	19.28	24.59	0.0870	0.02578
							4000	12.6	19.73	25.20	0.0911	0.02578
							4250	12.8	20.61	26.41	0.0994	0.02578
							4500	13.0	21.46	27.63	0.1078	0.02577
						P225/65R 17 AT CONTINENTAL (CROSSCONTACTATR) / D3KHT AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3750	13.3	17.52	28.72	0.1043	0.02619
							3875	13.4	17.95	29.38	0.1090	0.02618
							4000	13.5	18.36	30.04	0.1137	0.02618
							4250	13.7	19.18	31.36	0.1230	0.02617
							4500	14.0	19.96	32.68	0.1324	0.02616

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 CX482N

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 CX482N TRLHP Chart V3.0	2026	CX482N	05/28/2025	DRODR245	26CX482N-3.0	Coastdown mode is required for 8F35 & HF45 transmissions.

									TRLHP Specification				
Vehicle Description												3 Term RL Force Coefficient	
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | 18x7.5 35psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH PHEV FWD	1EMOTOR	2.91		16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.3	17.58	21.45	0.2183	0.02407
								3625	12.4	18.08	22.05	0.2199	0.02406
								3750	12.5	18.57	22.65	0.2215	0.02405
								3875	12.6	19.05	23.25	0.2230	0.02405
								4000	12.7	19.52	23.86	0.2247	0.02405
								4250	12.9	20.44	25.07	0.2279	0.02405
								4500	13.1	21.34	26.29	0.2312	0.02405
USA | 18x7 33psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91		16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.6	17.27	24.15	0.1336	0.02534
								3625	12.7	17.76	24.77	0.1352	0.02534
								3750	12.7	18.24	25.39	0.1369	0.02533
								3875	12.8	18.70	26.01	0.1386	0.02533
								4000	12.9	19.17	26.64	0.1403	0.02532
								4250	13.1	20.07	27.89	0.1437	0.02532
								4500	13.3	20.94	29.15	0.1472	0.02532
USA | CANADA | MEXICO | 18x7.5 35psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91		16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.5	17.39	23.62	0.1321	0.02533
								3625	12.6	17.88	24.22	0.1337	0.02532
								3750	12.7	18.37	24.82	0.1353	0.02532
								3875	12.7	18.85	25.42	0.1369	0.02531
								4000	12.8	19.32	26.02	0.1385	0.02531
								4250	13.0	20.23	27.24	0.1418	0.02531
								4500	13.2	21.12	28.46	0.1452	0.02531

USA | CANADA | MEXICO | 19x7 33psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/55R 19 ALS BRIDGESTONE (ECOPIA H/L 422) / D3IFF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.6	17.18	24.64	0.1081	0.02586
							3625	12.7	17.66	25.28	0.1091	0.02586
							3750	12.8	18.14	25.92	0.1102	0.02586
							3875	12.9	18.60	26.57	0.1112	0.02586
							4000	13.0	19.07	27.21	0.1122	0.02586
							4250	13.2	19.97	28.51	0.1144	0.02586
							4500	13.4	20.84	29.81	0.1165	0.02587
USA | CANADA | MEXICO | 19x7.5 36psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/55R 19 ALS BRIDGESTONE (ECOPIA H/L 422) / D3IFF AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.5	17.33	23.94	0.1069	0.02584
							3625	12.6	17.82	24.56	0.1079	0.02584
							3750	12.7	18.30	25.17	0.1088	0.02584
							3875	12.8	18.78	25.79	0.1098	0.02584
							4000	12.9	19.25	26.41	0.1108	0.02584
							4250	13.1	20.17	27.65	0.1128	0.02584
							4500	13.2	21.06	28.90	0.1149	0.02585
USA | CANADA | MEXICO | 19x7 33psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/55R 19 ALS BRIDGESTONE (ECOPIA H/L 422) / D3IFF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.6	17.18	24.64	0.1081	0.02586
							3625	12.7	17.66	25.28	0.1091	0.02586
							3750	12.8	18.14	25.92	0.1102	0.02586
							3875	12.9	18.60	26.57	0.1112	0.02586
							4000	13.0	19.07	27.21	0.1122	0.02586
							4250	13.2	19.97	28.51	0.1144	0.02586
							4500	13.4	20.84	29.81	0.1165	0.02587
USA | CANADA | MEXICO | 17x7 33psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/65R 17 ALS CONTINENTAL (PROCONTACT TX) / D3KFQ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.9	16.83	27.55	0.1105	0.02542
							3625	13.0	17.31	28.22	0.1112	0.02541
							3750	13.1	17.77	28.89	0.1119	0.02541
							3875	13.2	18.23	29.56	0.1127	0.02542
							4000	13.3	18.68	30.23	0.1134	0.02542
							4250	13.4	19.57	31.57	0.1149	0.02542
							4500	13.6	20.42	32.91	0.1165	0.02544
USA | CANADA | 18x7 33psi	1.5L DRAGON B	8F35 FWD	FWD	3.81	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	11.9	18.30	21.10	0.1169	0.02479
							3625	12.0	18.80	21.72	0.1187	0.02480
							3750	12.1	19.28	22.35	0.1205	0.02481
							3875	12.2	19.76	22.97	0.1223	0.02483
							4000	12.3	20.23	23.60	0.1241	0.02484
							4250	12.5	21.14	24.86	0.1277	0.02487
							4500	12.7	22.02	26.12	0.1313	0.02490
USA | CANADA | 17x7 36psi	1.5L DRAGON B	8F35 FWD	FWD	3.81	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/65R 17 ALS MICHELIN (GAS) (PRIMACYTOUR A/S) / D3KER AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	11.5	18.88	19.62	0.0841	0.02496

							3625	11.6	19.40	20.20	0.0851	0.02498
							3750	11.7	19.91	20.79	0.0860	0.02500
							3875	11.8	20.41	21.37	0.0870	0.02502
							4000	11.9	20.90	21.96	0.0879	0.02504
							4250	12.0	21.87	23.15	0.0899	0.02508
							4500	12.2	22.80	24.34	0.0918	0.02512
						P225/65R 17 ALS CONTINENTAL (PROCONTACT TX) / D3KFQ AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.0	18.03	23.70	0.0927	0.02476
							3625	12.1	18.52	24.35	0.0935	0.02478
							3750	12.2	19.00	25.00	0.0943	0.02480
							3875	12.3	19.47	25.65	0.0951	0.02482
							4000	12.4	19.94	26.30	0.0959	0.02484
							4250	12.6	20.86	27.60	0.0976	0.02487
							4500	12.8	21.74	28.90	0.0992	0.02491
USA | CANADA | 18x7 33psi	1.5L DRAGON B	8F35 AWD	AWDDISC	3.81	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.1	17.99	23.19	0.0827	0.02524
							3625	12.2	18.48	23.81	0.0845	0.02526
							3750	12.3	18.96	24.43	0.0862	0.02527
							3875	12.4	19.43	25.06	0.0880	0.02528
							4000	12.5	19.89	25.69	0.0898	0.02530
							4250	12.7	20.80	26.94	0.0934	0.02533
							4500	12.9	21.68	28.21	0.0971	0.02535
USA | CANADA | 17x7 36psi	1.5L DRAGON B	8F35 AWD	AWDDISC	3.81	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/65R 17 ALS CONTINENTAL (PROCONTACT TX) / D3KFQ AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.2	17.72	25.79	0.0584	0.02522
							3625	12.3	18.21	26.44	0.0592	0.02524
							3750	12.4	18.69	27.09	0.0600	0.02526
							3875	12.5	19.15	27.75	0.0608	0.02528
							4000	12.6	19.62	28.40	0.0616	0.02529
							4250	12.8	20.52	29.70	0.0633	0.02533
							4500	13.0	21.40	31.00	0.0649	0.02537
USA | CANADA | 18x7 33psi	2.0L GTDI A	8F35 AWD	AWDDISC	3.47	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.0	18.07	23.19	0.0818	0.02511
							3625	12.1	18.56	23.82	0.0836	0.02512
							3750	12.2	19.04	24.44	0.0854	0.02513
							3875	12.3	19.51	25.06	0.0872	0.02515
							4000	12.4	19.98	25.69	0.0890	0.02516
							4250	12.6	20.88	26.95	0.0926	0.02519
							4500	12.8	21.76	28.21	0.0962	0.02522
USA | CANADA | 19x7 33psi	2.0L GTDI A	8F35 AWD	AWDDISC	3.47	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/55R 19 ALS BRIDGESTONE (ECOPIA H/L 422) / D3IFF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.1	17.96	23.67	0.0574	0.02562
							3625	12.2	18.45	24.32	0.0586	0.02563

							3750	12.3	18.93	24.96	0.0597	0.02565
							3875	12.4	19.40	25.61	0.0608	0.02567
							4000	12.5	19.86	26.26	0.0620	0.02569
							4250	12.7	20.77	27.56	0.0643	0.02572
							4500	12.9	21.64	28.87	0.0666	0.02576
USA | CANADA | 19x7.5 36psi	2.0L GTDI A	8F35 AWD	AWDDISC	3.47	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/55R 19 ALS BRIDGESTONE (ECOPIA H/L 422) / D3IFF AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.0	18.12	22.99	0.0562	0.02560
							3625	12.1	18.62	23.61	0.0573	0.02561
							3750	12.2	19.11	24.23	0.0584	0.02563
							3875	12.3	19.59	24.85	0.0595	0.02565
							4000	12.4	20.06	25.47	0.0606	0.02567
							4250	12.5	20.98	26.72	0.0628	0.02570
							4500	12.7	21.88	27.98	0.0650	0.02573
USA | CANADA | 19x7 33psi	2.0L GTDI A	8F35 AWD	AWDDISC	3.47	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/55R 19 ALS BRIDGESTONE (ECOPIA H/L 422) / D3IFF AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.1	17.96	23.67	0.0574	0.02562
							3625	12.2	18.45	24.32	0.0586	0.02563
							3750	12.3	18.93	24.96	0.0597	0.02565
							3875	12.4	19.40	25.61	0.0608	0.02567
							4000	12.5	19.86	26.26	0.0620	0.02569
							4250	12.7	20.77	27.56	0.0643	0.02572
							4500	12.9	21.64	28.87	0.0666	0.02576
CANADA | MEXICO | 18x7 33psi	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 TOSH FHEV AWD	1EMOTOR	2.91	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACY A/S) / D3HEZ AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	3500	12.6	17.27	24.15	0.1336	0.02534
							3625	12.7	17.76	24.77	0.1352	0.02534
							3750	12.7	18.24	25.39	0.1369	0.02533
							3875	12.8	18.70	26.01	0.1386	0.02533
							4000	12.9	19.17	26.64	0.1403	0.02532
							4250	13.1	20.07	27.89	0.1437	0.02532
							4500	13.3	20.94	29.15	0.1472	0.02532

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 CX483N

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 CX483N TRLHP Chart V3.0	2026	CX483N	05/23/2025	DRODR245	26CX483N-3.0	Coastdown mode is required for all 8F35 and HF45 transmissions.

									TRLHP Specification					
Vehicle Description												3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 AWD	1EMOTOR	2.91		APA CX483C PHEV, FNA CX483PHEV 17in 330 X 27 2FN 44	P245/45R 20 ALS CONTINENTAL (PHEV) (CROSSCONTACT LX) / D3IB9 AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	15.2	16.25	33.96	0.2646	0.02684
								4250	15.5	17.02	35.48	0.2677	0.02683
								4500	15.7	17.76	37.00	0.2709	0.02683
								4750	15.9	18.49	38.52	0.2741	0.02682
								5000	16.1	19.19	40.03	0.2773	0.02682
							P225/55R 19 ALS MICHELIN (PHEV) (PRIMACYTOUR A/S) / D3IFB AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	14.8	16.77	33.31	0.2419	0.02615
								4250	15.0	17.56	34.83	0.2442	0.02614
								4500	15.2	18.32	36.36	0.2465	0.02613
								4750	15.4	19.06	37.89	0.2488	0.02613
								5000	15.6	19.78	39.42	0.2512	0.02613
USA	2.0L GTDI A	8F35 FWD	FWD	3.81		16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACYTOUR A/S) / D3HEW AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.4	18.55	31.41	0.1373	0.02475
								4250	13.6	19.37	32.95	0.1403	0.02477
								4500	13.8	20.16	34.48	0.1432	0.02480
								4750	14.0	20.92	36.01	0.1462	0.02482
								5000	14.3	21.67	37.54	0.1491	0.02484
							P245/45R 20 ALS CONTINENTAL (GAS) (CROSSCONTACT LX) / D3IB9 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.7	18.05	30.93	0.1467	0.02586
								4250	14.0	18.85	32.48	0.1503	0.02589
								4500	14.2	19.62	34.02	0.1539	0.02592
								4750	14.4	20.36	35.57	0.1575	0.02595
								5000	14.7	21.08	37.11	0.1611	0.02598
							P225/55R 19 ALS MICHELIN (GAS) (PRIMACYTOUR A/S) / D3IFB AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.3	18.65	30.37	0.1253	0.02519

							4250	13.5	19.47	31.93	0.1280	0.02522
							4500	13.8	20.25	33.49	0.1308	0.02525
							4750	14.0	21.02	35.05	0.1335	0.02528
							5000	14.2	21.75	36.61	0.1362	0.02531
USA	2.0L GTDI A	8F35 AWD	AWDDISC	3.81	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACYTOUR A/S) / D3HEW AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.6	18.20	33.50	0.1039	0.02534
							4250	13.8	19.01	35.03	0.1069	0.02536
							4500	14.1	19.79	36.57	0.1098	0.02539
							4750	14.3	20.55	38.10	0.1128	0.02541
							5000	14.5	21.29	39.62	0.1157	0.02543
						P245/45R 20 ALS CONTINENTAL (GAS) (CROSSCONTACT LX) / D3IB9 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.9	17.76	33.01	0.1129	0.02638
							4250	14.2	18.55	34.56	0.1165	0.02641
							4500	14.4	19.31	36.11	0.1201	0.02644
							4750	14.7	20.04	37.65	0.1237	0.02647
							5000	14.9	20.76	39.19	0.1273	0.02650
						P225/55R 19 ALS MICHELIN (GAS) (PRIMACYTOUR A/S) / D3IFB AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.5	18.34	32.45	0.0916	0.02571
							4250	13.7	19.14	34.01	0.0943	0.02574
							4500	14.0	19.93	35.57	0.0970	0.02577
							4750	14.2	20.68	37.13	0.0997	0.02580
							5000	14.5	21.41	38.69	0.1024	0.02584
CANADA	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 AWD	1EMOTOR	2.91	APA CX483C PHEV, FNA CX483PHEV 17in 330 X 27 2FN 44	P245/45R 20 ALS CONTINENTAL (PHEV) (CROSSCONTACT LX) / D3IB9 AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	15.2	16.25	33.96	0.2646	0.02684
							4250	15.5	17.02	35.48	0.2677	0.02683
							4500	15.7	17.76	37.00	0.2709	0.02683
							4750	15.9	18.49	38.52	0.2741	0.02682
							5000	16.1	19.19	40.03	0.2773	0.02682
						P225/55R 19 ALS MICHELIN (PHEV) (PRIMACYTOUR A/S) / D3IFB AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	14.8	16.77	33.31	0.2419	0.02615
							4250	15.0	17.56	34.83	0.2442	0.02614
							4500	15.2	18.32	36.36	0.2465	0.02613
							4750	15.4	19.06	37.89	0.2488	0.02613
							5000	15.6	19.78	39.42	0.2512	0.02613
CANADA	2.0L GTDI A	8F35 AWD	AWDDISC	3.81	16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	P225/60R 18 ALS MICHELIN (PRIMACYTOUR A/S) / D3HEW AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.6	18.20	33.50	0.1039	0.02534
							4250	13.8	19.01	35.03	0.1069	0.02536
							4500	14.1	19.79	36.57	0.1098	0.02539
							4750	14.3	20.55	38.10	0.1128	0.02541
							5000	14.5	21.29	39.62	0.1157	0.02543
						P245/45R 20 ALS CONTINENTAL (GAS) (CROSSCONTACT LX) / D3IB9 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.9	17.76	33.01	0.1129	0.02638
							4250	14.2	18.55	34.56	0.1165	0.02641

							4500	14.4	19.31	36.11	0.1201	0.02644
							4750	14.7	20.04	37.65	0.1237	0.02647
							5000	14.9	20.76	39.19	0.1273	0.02650
						P225/55R 19 ALS MICHELIN (GAS) (PRIMACYTOUR A/S) / D3IFB AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.5	18.34	32.45	0.0916	0.02571
							4250	13.7	19.14	34.01	0.0943	0.02574
							4500	14.0	19.93	35.57	0.0970	0.02577
							4750	14.2	20.68	37.13	0.0997	0.02580
							5000	14.5	21.41	38.69	0.1024	0.02584
MEXICO	2.5L DURA D4 IVCT ATK HEV/PHEV	HF45 AWD	1EMOTOR	2.91		APA CX483C PHEV, FNA CX483PHEV 17in 330 X 27 2FN 44	4000	15.2	16.25	33.96	0.2646	0.02684
						P245/45R 20 ALS CONTINENTAL (PHEV) (CROSSCONTACT LX) / D3IB9 AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	15.5	17.02	35.48	0.2677	0.02683
							4500	15.7	17.76	37.00	0.2709	0.02683
							4750	15.9	18.49	38.52	0.2741	0.02682
							5000	16.1	19.19	40.03	0.2773	0.02682
						P225/55R 19 ALS MICHELIN (PHEV) (PRIMACYTOUR A/S) / D3IFB AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	14.8	16.77	33.31	0.2419	0.02615
							4250	15.0	17.56	34.83	0.2442	0.02614
							4500	15.2	18.32	36.36	0.2465	0.02613
							4750	15.4	19.06	37.89	0.2488	0.02613
							5000	15.6	19.78	39.42	0.2512	0.02613
MEXICO	2.0L GTDI A	8F35 FWD	FWD	3.81		16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	4000	13.4	18.55	31.41	0.1373	0.02475
						P225/60R 18 ALS MICHELIN (PRIMACYTOUR A/S) / D3HEW AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4250	13.6	19.37	32.95	0.1403	0.02477
							4500	13.8	20.16	34.48	0.1432	0.02480
							4750	14.0	20.92	36.01	0.1462	0.02482
							5000	14.3	21.67	37.54	0.1491	0.02484
						P245/45R 20 ALS CONTINENTAL (GAS) (CROSSCONTACT LX) / D3IB9 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.7	18.05	30.93	0.1467	0.02586
							4250	14.0	18.85	32.48	0.1503	0.02589
							4500	14.2	19.62	34.02	0.1539	0.02592
							4750	14.4	20.36	35.57	0.1575	0.02595
							5000	14.7	21.08	37.11	0.1611	0.02598
						P225/55R 19 ALS MICHELIN (GAS) (PRIMACYTOUR A/S) / D3IFB AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.3	18.65	30.37	0.1253	0.02519
							4250	13.5	19.47	31.93	0.1280	0.02522
							4500	13.8	20.25	33.49	0.1308	0.02525
							4750	14.0	21.02	35.05	0.1335	0.02528
							5000	14.2	21.75	36.61	0.1362	0.02531
MEXICO	2.0L GTDI A	8F35 AWD	AWDDISC	3.81		16in APA CX482 APA CX483 308x27 57mm Comfort lining, 302x11	4000	13.6	18.20	33.50	0.1039	0.02534
						P225/60R 18 ALS MICHELIN (PRIMACYTOUR A/S) / D3HEW AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4250	13.8	19.01	35.03	0.1069	0.02536
							4500	14.1	19.79	36.57	0.1098	0.02539

	4750	14.3	20.55	38.10	0.1128	0.02541
	5000	14.5	21.29	39.62	0.1157	0.02543
P245/45R 20 ALS CONTINENTAL (GAS) (CROSSCONTACT LX) / D3IB9 AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.9	17.76	33.01	0.1129	0.02638
	4250	14.2	18.55	34.56	0.1165	0.02641
	4500	14.4	19.31	36.11	0.1201	0.02644
	4750	14.7	20.04	37.65	0.1237	0.02647
	5000	14.9	20.76	39.19	0.1273	0.02650
P225/55R 19 ALS MICHELIN (GAS) (PRIMACYTOUR A/S) / D3IFB AT 32 DRIVEN PSI AND 32 NONDRIVEN PSI	4000	13.5	18.34	32.45	0.0916	0.02571
	4250	13.7	19.14	34.01	0.0943	0.02574
	4500	14.0	19.93	35.57	0.0970	0.02577
	4750	14.2	20.68	37.13	0.0997	0.02580
	5000	14.5	21.41	38.69	0.1024	0.02584

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P702BEV

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P702BEV TRLHP Chart	2026	P702BEV	09/17/2025	NREDOUTE	26P702N(BEV).3-0	Coastdown mode is required for testing. Contact manufacturer for track and dynamometer procedures

Vehicle Description								TRLHP Specification				
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | TRACTION BATTERY #2	ELECTRIC MOTOR #2 | TRACTION BATTERY #2 | (5P96S Dual Charger)	4X4 | LESS TRANSFER CASE	2EMOTOR	9.61	FAJAP F150 BEV	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	16.8	20.27	31.10	0.3253	0.03149
							6000	17.2	21.56	33.14	0.3645	0.03116
							6500	17.7	22.79	35.22	0.4025	0.03086
							7000	18.1	23.93	37.34	0.4397	0.03060
							7500	18.6	25.02	39.49	0.4762	0.03035
							8000	19.0	26.04	41.66	0.5122	0.03013
							8500	19.5	27.01	43.87	0.5479	0.02992
						P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IHL AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	16.6	20.57	29.97	0.3065	0.03158
							6000	16.9	21.95	31.89	0.3414	0.03122
							6500	17.3	23.26	33.85	0.3751	0.03089
							7000	17.7	24.49	35.84	0.4080	0.03060
							7500	18.1	25.67	37.85	0.4401	0.03032
							8000	18.5	26.79	39.90	0.4718	0.03006
							8500	18.9	27.85	41.97	0.5030	0.02982
USA | CANADA | TRACTION BATTERY #2	ELECTRIC MOTOR #4 | TRACTION BATTERY #2 | (5P96S Single Charger)	4X4 | LESS TRANSFER CASE	2EMOTOR	9.61	FAJAP F150 BEV	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	16.8	20.27	31.10	0.3253	0.03149
							6000	17.2	21.56	33.14	0.3645	0.03116
							6500	17.7	22.79	35.22	0.4025	0.03086
							7000	18.1	23.93	37.34	0.4397	0.03060
							7500	18.6	25.02	39.49	0.4762	0.03035
							8000	19.0	26.04	41.66	0.5122	0.03013
							8500	19.5	27.01	43.87	0.5479	0.02992
						P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5500	17.4	19.63	33.35	0.3269	0.03218
							6000	17.7	20.95	35.37	0.3627	0.03182
							6500	18.1	22.20	37.42	0.3970	0.03149
							7000	18.5	23.39	39.48	0.4302	0.03119
							7500	18.9	24.52	41.56	0.4626	0.03092
							8000	19.3	25.61	43.65	0.4942	0.03066
							8500	19.7	26.64	45.76	0.5252	0.03042
						P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IHL AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	16.6	20.57	29.97	0.3065	0.03158
							6000	16.9	21.95	31.89	0.3414	0.03122
							6500	17.3	23.26	33.85	0.3751	0.03089
							7000	17.7	24.49	35.84	0.4080	0.03060
							7500	18.1	25.67	37.85	0.4401	0.03032
							8000	18.5	26.79	39.90	0.4718	0.03006
							8500	18.9	27.85	41.97	0.5030	0.02982
USA | CANADA | TRACTION BATTERY #2 | PLATINUM SERIES	ELECTRIC MOTOR #4 | TRACTION BATTERY #2 | (5P96S Single Charger)	4X4 | LESS TRANSFER CASE	2EMOTOR	9.61	FAJAP F150 BEV	P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	17.2	19.85	31.65	0.3161	0.03251
							6000	17.5	21.19	33.62	0.3516	0.03213
							6500	17.9	22.47	35.61	0.3857	0.03178
							7000	18.3	23.69	37.63	0.4189	0.03146
							7500	18.7	24.85	39.68	0.4512	0.03117
							8000	19.1	25.95	41.74	0.4828	0.03090
							8500	19.5	27.00	43.83	0.5140	0.03064
USA | CANADA | TRACTION BATTERY #4 | SERIES 1	ELECTRIC MOTOR #5 | TRACTION BATTERY #4 | (5P90S)	4X4 | LESS TRANSFER CASE	2EMOTOR	9.61	FAJAP F150 BEV	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	17.0	20.04	31.34	0.3198	0.03208
							6000	17.4	21.33	33.39	0.3587	0.03174
							6500	17.9	22.54	35.49	0.3963	0.03145
							7000	18.3	23.69	37.62	0.4331	0.03118

USA | CANADA | TRACTION BATTERY #4	ELECTRIC MOTOR #5 | TRACTION BATTERY #4 | (5P90S)	4X4 | LESS TRANSFER CASE	2EMOTOR	9.61	FAJAP F150 BEV	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	7500	18.7	24.77	39.79	0.4692	0.03094
							8000	19.2	25.79	41.99	0.5047	0.03072
							8500	19.7	26.75	44.21	0.5399	0.03051
							5500	16.8	20.27	31.10	0.3253	0.03149
							6000	17.2	21.56	33.14	0.3645	0.03116
							6500	17.7	22.79	35.22	0.4025	0.03086
							7000	18.1	23.93	37.34	0.4397	0.03060
							7500	18.6	25.02	39.49	0.4762	0.03035
							8000	19.0	26.04	41.66	0.5122	0.03013
							8500	19.5	27.01	43.87	0.5479	0.02992
						P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5500	17.4	19.63	33.35	0.3269	0.03218
							6000	17.7	20.95	35.37	0.3627	0.03182
							6500	18.1	22.20	37.42	0.3970	0.03149
							7000	18.5	23.39	39.48	0.4302	0.03119
							7500	18.9	24.52	41.56	0.4626	0.03092
							8000	19.3	25.61	43.65	0.4942	0.03066
							8500	19.7	26.64	45.76	0.5252	0.03042
						P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IHL AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	16.6	20.57	29.97	0.3065	0.03158
							6000	16.9	21.95	31.89	0.3414	0.03122
							6500	17.3	23.26	33.85	0.3751	0.03089
							7000	17.7	24.49	35.84	0.4080	0.03060
							7500	18.1	25.67	37.85	0.4401	0.03032
							8000	18.5	26.79	39.90	0.4718	0.03006
							8500	18.9	27.85	41.97	0.5030	0.02982

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P702Raptor

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P702Raptor TRLHP Chart	2026	P702Raptor	09/18/2025	NREDOUTE	26P702N(Raptor).3-0	Special Coastdown mode required

Vehicle Description									TRLHP Specification				
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO | 3.5L 37inch Tire	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4TOD	4.1	9.75" AXLE SIZE	FAJAL F150 HD	LT315/80R 17 AT BFGOODRICH (ALL-TERRAIN) / D3KHM AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	5500	22.8	14.92	40.80	0.3624	0.04496
								6000	23.5	15.85	43.97	0.3972	0.04482
								6500	24.1	16.74	47.13	0.4319	0.04467
								7000	24.7	17.58	50.29	0.4665	0.04453
								7500	25.3	18.38	53.44	0.5012	0.04439
USA | CANADA | MEXICO | 3.5L 35inch tire	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4TOD	4.1	9.75" AXLE SIZE	FAJAL F150 HD	LT315/70R 17 AT BFGOODRICH (ALL-TERRAIN) / D3KJE AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	5500	23.6	14.46	53.57	0.1291	0.04668
								6000	24.2	15.37	56.89	0.1597	0.04658
								6500	24.8	16.23	60.22	0.1902	0.04649
								7000	25.4	17.05	63.55	0.2208	0.04640
								7500	26.0	17.83	66.87	0.2514	0.04631
USA | CANADA | MEXICO | 5.2L 37inch Tire	5.2L PREDATOR OHC SC PFI GAS	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4TOD	4.1	9.75" AXLE SIZE	FAJAL F150 HD	LT315/80R 17 AT BFGOODRICH (ALL-TERRAIN) / D3KHM AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	5500	22.8	14.92	40.80	0.3624	0.04496
								6000	23.5	15.85	43.97	0.3972	0.04482
								6500	24.1	16.74	47.13	0.4319	0.04467
								7000	24.7	17.58	50.29	0.4665	0.04453
								7500	25.3	18.38	53.44	0.5012	0.04439

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P702

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P702 TRLHP Chart	2026	P702	10/21/2025	NREDOUTE	26P702N.3-2	Special Coastdown mode required for 10R80 transmissions

Vehicle Description									TRLHP Specification				
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.15	8.8" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.6	18.06	20.86	0.2014	0.03141
								4500	14.8	18.83	21.96	0.2159	0.03136
								4750	15.0	19.58	23.05	0.2305	0.03130
								5000	15.3	20.30	24.15	0.2451	0.03125
								5250	15.5	21.00	25.24	0.2598	0.03120
								5500	15.7	21.68	26.34	0.2745	0.03115
								6000	16.2	22.98	28.55	0.3039	0.03104
								6500	16.6	24.20	30.76	0.3334	0.03094
								7000	17.1	25.36	32.98	0.3630	0.03083
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.6	18.00	19.55	0.1554	0.03302
								4500	14.9	18.75	20.69	0.1696	0.03301
								4750	15.1	19.46	21.85	0.1839	0.03301
								5000	15.4	20.15	23.02	0.1983	0.03300
								5250	15.6	20.81	24.20	0.2128	0.03299
								5500	15.9	21.45	25.38	0.2274	0.03299
								6000	16.4	22.67	27.78	0.2570	0.03297
								6500	16.9	23.80	30.21	0.2869	0.03296
								7000	17.5	24.85	32.67	0.3173	0.03295
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.40	27.27	0.2234	0.03283
								4500	16.3	17.06	28.60	0.2396	0.03280
								4750	16.6	17.72	29.93	0.2557	0.03276
								5000	16.9	18.35	31.24	0.2718	0.03273
								5250	17.2	18.96	32.56	0.2878	0.03269
								5500	17.4	19.55	33.87	0.3037	0.03265
								6000	18.0	20.69	36.48	0.3354	0.03258
								6500	18.5	21.76	39.07	0.3670	0.03251
								7000	19.0	22.78	41.64	0.3984	0.03244
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.8	17.81	20.40	0.1523	0.03322
								4500	15.0	18.57	21.53	0.1648	0.03319
								4750	15.3	19.31	22.66	0.1774	0.03316
								5000	15.5	20.02	23.81	0.1901	0.03313
								5250	15.7	20.72	24.95	0.2027	0.03309
								5500	15.9	21.39	26.11	0.2155	0.03306
								6000	16.4	22.68	28.43	0.2411	0.03300
								6500	16.9	23.89	30.76	0.2670	0.03293
								7000	17.3	25.03	33.12	0.2930	0.03286
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.0	18.87	19.11	0.1867	0.03054
								4500	14.2	19.67	20.13	0.2005	0.03051
								4750	14.4	20.45	21.16	0.2143	0.03047
								5000	14.6	21.20	22.19	0.2283	0.03043
								5250	14.8	21.93	23.22	0.2422	0.03040
								5500	15.1	22.64	24.26	0.2562	0.03036
								6000	15.5	23.98	26.35	0.2844	0.03029
								6500	15.9	25.25	28.45	0.3128	0.03021
								7000	16.4	26.45	30.57	0.3413	0.03014
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.91	25.72	0.2112	0.03223
								4500	15.8	17.62	26.92	0.2256	0.03220
								4750	16.1	18.32	28.12	0.2399	0.03217
								5000	16.3	18.99	29.30	0.2541	0.03214
								5250	16.6	19.65	30.49	0.2682	0.03211
								5500	16.8	20.29	31.66	0.2823	0.03208
								6000	17.3	21.51	34.00	0.3102	0.03202
								6500	17.7	22.68	36.31	0.3379	0.03196
								7000	18.2	23.79	38.61	0.3653	0.03191
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.15	8.8" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.72	21.18	0.1935	0.03228

								4500	15.1	18.48	22.29	0.2075	0.03223
								4750	15.3	19.22	23.40	0.2216	0.03218
								5000	15.5	19.94	24.51	0.2356	0.03213
								5250	15.8	20.63	25.63	0.2497	0.03209
								5500	16.0	21.30	26.74	0.2639	0.03204
								6000	16.5	22.59	28.98	0.2922	0.03194
								6500	16.9	23.81	31.23	0.3206	0.03184
								7000	17.4	24.96	33.48	0.3491	0.03175
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.00	27.85	0.2075	0.03411
								4500	16.7	16.66	29.21	0.2228	0.03408
								4750	17.0	17.30	30.56	0.2380	0.03405
								5000	17.3	17.93	31.91	0.2532	0.03402
								5250	17.6	18.53	33.25	0.2683	0.03399
								5500	17.8	19.12	34.59	0.2833	0.03396
								6000	18.4	20.24	37.26	0.3133	0.03390
								6500	18.9	21.31	39.90	0.3431	0.03385
								7000	19.4	22.32	42.53	0.3727	0.03379
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.33	20.79	0.1433	0.03446
								4500	15.4	18.08	21.95	0.1551	0.03444
								4750	15.7	18.81	23.11	0.1670	0.03441
								5000	15.9	19.52	24.27	0.1789	0.03438
								5250	16.1	20.20	25.44	0.1909	0.03436
								5500	16.3	20.86	26.62	0.2029	0.03433
								6000	16.8	22.14	28.98	0.2271	0.03427
								6500	17.3	23.33	31.37	0.2515	0.03422
								7000	17.7	24.46	33.77	0.2761	0.03416
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.33	19.49	0.1774	0.03182
								4500	14.6	19.11	20.53	0.1905	0.03179
								4750	14.8	19.88	21.58	0.2037	0.03176
								5000	15.0	20.62	22.64	0.2170	0.03172
								5250	15.3	21.34	23.69	0.2303	0.03169
								5500	15.5	22.03	24.75	0.2436	0.03166
								6000	15.9	23.36	26.88	0.2705	0.03159
								6500	16.4	24.61	29.03	0.2975	0.03153
								7000	16.8	25.80	31.19	0.3247	0.03146
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.49	26.27	0.1965	0.03350
								4500	16.2	17.20	27.49	0.2100	0.03347
								4750	16.5	17.88	28.71	0.2235	0.03345
								5000	16.7	18.54	29.93	0.2369	0.03343
								5250	17.0	19.19	31.13	0.2502	0.03340
								5500	17.2	19.82	32.33	0.2635	0.03338
								6000	17.7	21.03	34.72	0.2899	0.03333
								6500	18.1	22.18	37.08	0.3160	0.03329
								7000	18.6	23.28	39.43	0.3419	0.03324
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.6	18.03	20.86	0.2062	0.03139
								4500	14.8	18.80	21.95	0.2208	0.03134
								4750	15.1	19.54	23.04	0.2354	0.03129
								5000	15.3	20.27	24.14	0.2501	0.03123
								5250	15.5	20.97	25.23	0.2648	0.03118
								5500	15.8	21.64	26.33	0.2795	0.03113
								6000	16.2	22.94	28.54	0.3090	0.03102
								6500	16.7	24.17	30.75	0.3385	0.03092
								7000	17.1	25.33	32.96	0.3682	0.03081
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.97	19.54	0.1599	0.03300
								4500	14.9	18.72	20.69	0.1740	0.03299
								4750	15.2	19.43	21.85	0.1883	0.03299
								5000	15.4	20.12	23.01	0.2028	0.03298
								5250	15.7	20.78	24.19	0.2173	0.03297
								5500	15.9	21.43	25.37	0.2320	0.03296
								6000	16.4	22.64	27.77	0.2616	0.03295
								6500	16.9	23.77	30.20	0.2917	0.03293
								7000	17.5	24.82	32.66	0.3221	0.03292
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.37	27.26	0.2278	0.03281
								4500	16.4	17.05	28.59	0.2440	0.03277
								4750	16.6	17.69	29.91	0.2602	0.03274
								5000	16.9	18.33	31.23	0.2763	0.03270
								5250	17.2	18.94	32.54	0.2923	0.03266
								5500	17.4	19.53	33.85	0.3083	0.03263
								6000	18.0	20.67	36.46	0.3401	0.03255
								6500	18.5	21.74	39.04	0.3718	0.03248
								7000	19.0	22.76	41.62	0.4032	0.03241
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.8	17.78	20.39	0.1564	0.03321
								4500	15.1	18.54	21.52	0.1690	0.03318
								4750	15.3	19.28	22.66	0.1816	0.03314
								5000	15.5	20.00	23.80	0.1942	0.03311
								5250	15.7	20.69	24.95	0.2069	0.03308
								5500	16.0	21.37	26.10	0.2197	0.03304
								6000	16.4	22.65	28.42	0.2454	0.03298
								6500	16.9	23.86	30.75	0.2713	0.03291
								7000	17.3	25.00	33.11	0.2974	0.03284
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.0	18.83	19.10	0.1913	0.03054
								4500	14.2	19.63	20.13	0.2052	0.03050

								4750	14.4	20.41	21.15	0.2191	0.03046
								5000	14.7	21.16	22.18	0.2330	0.03042
								5250	14.9	21.89	23.22	0.2470	0.03039
								5500	15.1	22.59	24.25	0.2611	0.03035
								6000	15.5	23.94	26.34	0.2893	0.03027
								6500	16.0	25.21	28.44	0.3177	0.03019
								7000	16.4	26.41	30.55	0.3463	0.03012
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.89	25.71	0.2159	0.03221
								4500	15.8	17.60	26.91	0.2303	0.03217
								4750	16.1	18.30	28.10	0.2446	0.03214
								5000	16.3	18.97	29.29	0.2589	0.03211
								5250	16.6	19.63	30.47	0.2730	0.03208
								5500	16.8	20.26	31.64	0.2871	0.03205
								6000	17.3	21.49	33.98	0.3151	0.03199
								6500	17.8	22.66	36.29	0.3429	0.03193
								7000	18.2	23.76	38.58	0.3704	0.03188
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.69	21.17	0.1984	0.03226
								4500	15.1	18.45	22.28	0.2125	0.03221
								4750	15.3	19.19	23.39	0.2266	0.03216
								5000	15.6	19.90	24.50	0.2407	0.03211
								5250	15.8	20.59	25.61	0.2548	0.03207
								5500	16.0	21.27	26.73	0.2690	0.03202
								6000	16.5	22.55	28.97	0.2974	0.03192
								6500	16.9	23.77	31.21	0.3259	0.03182
								7000	17.4	24.92	33.46	0.3544	0.03172
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.98	27.84	0.2120	0.03408
								4500	16.8	16.64	29.20	0.2274	0.03405
								4750	17.0	17.29	30.55	0.2426	0.03402
								5000	17.3	17.91	31.90	0.2578	0.03399
								5250	17.6	18.51	33.24	0.2730	0.03396
								5500	17.8	19.10	34.57	0.2881	0.03393
								6000	18.4	20.22	37.24	0.3181	0.03387
								6500	18.9	21.29	39.88	0.3480	0.03381
								7000	19.4	22.30	42.51	0.3777	0.03375
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.30	20.79	0.1475	0.03445
								4500	15.5	18.06	21.94	0.1594	0.03442
								4750	15.7	18.78	23.10	0.1712	0.03439
								5000	15.9	19.49	24.27	0.1832	0.03436
								5250	16.1	20.17	25.44	0.1952	0.03434
								5500	16.4	20.84	26.61	0.2073	0.03431
								6000	16.8	22.11	28.98	0.2315	0.03425
								6500	17.3	23.30	31.36	0.2560	0.03419
								7000	17.8	24.43	33.76	0.2806	0.03414
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.29	19.49	0.1822	0.03181
								4500	14.6	19.08	20.53	0.1954	0.03177
								4750	14.8	19.84	21.58	0.2086	0.03174
								5000	15.1	20.58	22.63	0.2219	0.03171
								5250	15.3	21.30	23.68	0.2352	0.03168
								5500	15.5	21.99	24.74	0.2486	0.03164
								6000	15.9	23.32	26.87	0.2756	0.03158
								6500	16.4	24.58	29.02	0.3026	0.03151
								7000	16.8	25.76	31.17	0.3299	0.03144
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.47	26.25	0.2013	0.03347
								4500	16.2	17.17	27.48	0.2149	0.03345
								4750	16.5	17.85	28.70	0.2284	0.03342
								5000	16.7	18.52	29.91	0.2419	0.03340
								5250	17.0	19.16	31.12	0.2552	0.03338
								5500	17.2	19.79	32.32	0.2685	0.03335
								6000	17.7	21.01	34.70	0.2950	0.03330
								6500	18.2	22.16	37.06	0.3211	0.03326
								7000	18.6	23.26	39.41	0.3471	0.03321
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.6	18.02	19.72	0.1843	0.03233
								4500	14.9	18.79	20.83	0.1985	0.03227
								4750	15.1	19.53	21.95	0.2128	0.03222
								5000	15.3	20.25	23.07	0.2271	0.03216
								5250	15.5	20.95	24.19	0.2415	0.03210
								5500	15.8	21.64	25.31	0.2558	0.03204
								6000	16.2	22.93	27.56	0.2846	0.03193
								6500	16.7	24.16	29.82	0.3135	0.03181
								7000	17.1	25.32	32.08	0.3425	0.03170
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.99	18.50	0.1378	0.03382
								4500	14.9	18.74	19.67	0.1517	0.03381
								4750	15.2	19.45	20.85	0.1657	0.03380
								5000	15.4	20.14	22.04	0.1798	0.03379
								5250	15.6	20.81	23.24	0.1940	0.03377
								5500	15.9	21.45	24.45	0.2084	0.03376
								6000	16.4	22.66	26.90	0.2374	0.03374
								6500	16.9	23.79	29.37	0.2667	0.03372
								7000	17.5	24.85	31.88	0.2965	0.03369
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.40	26.48	0.2011	0.03359

								4500	16.3	17.07	27.83	0.2169	0.03355
								4750	16.6	17.72	29.18	0.2326	0.03351
								5000	16.9	18.35	30.53	0.2483	0.03347
								5250	17.2	18.97	31.87	0.2639	0.03343
								5500	17.4	19.56	33.21	0.2794	0.03339
								6000	18.0	20.70	35.86	0.3103	0.03331
								6500	18.5	21.77	38.51	0.3411	0.03324
								7000	19.0	22.79	41.13	0.3717	0.03316
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.8	17.81	19.35	0.1336	0.03401
								4500	15.0	18.58	20.50	0.1458	0.03397
								4750	15.3	19.32	21.66	0.1580	0.03394
								5000	15.5	20.04	22.82	0.1704	0.03390
								5250	15.7	20.73	23.99	0.1827	0.03387
								5500	15.9	21.40	25.17	0.1952	0.03383
								6000	16.4	22.69	27.53	0.2202	0.03376
								6500	16.9	23.90	29.91	0.2454	0.03369
								7000	17.3	25.05	32.30	0.2707	0.03361
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.0	18.81	17.93	0.1676	0.03154
								4500	14.2	19.62	18.97	0.1811	0.03149
								4750	14.5	20.39	20.02	0.1947	0.03145
								5000	14.7	21.14	21.07	0.2084	0.03141
								5250	14.9	21.87	22.12	0.2221	0.03137
								5500	15.1	22.57	23.18	0.2359	0.03133
								6000	15.5	23.93	25.31	0.2635	0.03124
								6500	16.0	25.20	27.46	0.2914	0.03115
								7000	16.4	26.39	29.61	0.3194	0.03107
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.90	24.83	0.1905	0.03304
								4500	15.8	17.61	26.06	0.2045	0.03301
								4750	16.1	18.31	27.28	0.2184	0.03297
								5000	16.3	18.98	28.49	0.2322	0.03294
								5250	16.6	19.64	29.70	0.2460	0.03291
								5500	16.8	20.28	30.90	0.2597	0.03287
								6000	17.3	21.50	33.28	0.2869	0.03281
								6500	17.8	22.67	35.64	0.3139	0.03274
								7000	18.2	23.79	37.98	0.3407	0.03267
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.68	20.00	0.1790	0.03316
								4500	15.1	18.44	21.13	0.1927	0.03310
								4750	15.4	19.18	22.26	0.2065	0.03305
								5000	15.6	19.89	23.40	0.2202	0.03300
								5250	15.8	20.58	24.53	0.2340	0.03295
								5500	16.0	21.26	25.67	0.2479	0.03289
								6000	16.5	22.54	27.96	0.2756	0.03279
								6500	16.9	23.76	30.25	0.3034	0.03268
								7000	17.4	24.92	32.54	0.3312	0.03257
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.01	27.01	0.1882	0.03482
								4500	16.7	16.67	28.40	0.2031	0.03479
								4750	17.0	17.31	29.78	0.2179	0.03476
								5000	17.3	17.93	31.15	0.2327	0.03472
								5250	17.5	18.54	32.52	0.2474	0.03469
								5500	17.8	19.13	33.88	0.2620	0.03466
								6000	18.4	20.25	36.60	0.2912	0.03459
								6500	18.9	21.32	39.30	0.3202	0.03453
								7000	19.4	22.33	41.98	0.3490	0.03446
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.34	19.71	0.1275	0.03521
								4500	15.4	18.09	20.88	0.1390	0.03518
								4750	15.7	18.82	22.06	0.1505	0.03515
								5000	15.9	19.52	23.25	0.1621	0.03512
								5250	16.1	20.21	24.44	0.1738	0.03509
								5500	16.3	20.87	25.63	0.1855	0.03506
								6000	16.8	22.15	28.04	0.2090	0.03499
								6500	17.3	23.34	30.47	0.2328	0.03493
								7000	17.7	24.47	32.91	0.2567	0.03487
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.28	18.26	0.1619	0.03275
								4500	14.6	19.06	19.32	0.1748	0.03272
								4750	14.9	19.82	20.39	0.1878	0.03268
								5000	15.1	20.57	21.46	0.2008	0.03264
								5250	15.3	21.28	22.54	0.2138	0.03260
								5500	15.5	21.98	23.62	0.2270	0.03257
								6000	16.0	23.31	25.79	0.2533	0.03249
								6500	16.4	24.57	27.98	0.2798	0.03241
								7000	16.8	25.75	30.18	0.3065	0.03234
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.48	25.33	0.1790	0.03426
								4500	16.2	17.19	26.58	0.1922	0.03423
								4750	16.5	17.87	27.83	0.2053	0.03421
								5000	16.7	18.53	29.06	0.2184	0.03418
								5250	17.0	19.18	30.30	0.2313	0.03415
								5500	17.2	19.81	31.52	0.2443	0.03412
								6000	17.7	21.02	33.95	0.2699	0.03407
								6500	18.2	22.18	36.37	0.2953	0.03401
								7000	18.6	23.28	38.76	0.3205	0.03396

USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	15.1	17.42	23.52	0.2536	0.03089
								4500	15.3	18.18	24.54	0.2706	0.03081
								4750	15.6	18.91	25.55	0.2877	0.03073
								5000	15.8	19.62	26.57	0.3049	0.03065
								5250	16.0	20.31	27.59	0.3220	0.03057
								5500	16.2	20.99	28.61	0.3392	0.03049
								6000	16.7	22.28	30.66	0.3737	0.03032
								6500	17.1	23.49	32.72	0.4083	0.03016
								7000	17.6	24.65	34.78	0.4429	0.02999
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.42	22.07	0.2054	0.03245
								4500	15.4	18.16	23.14	0.2221	0.03241
								4750	15.6	18.86	24.22	0.2390	0.03237
								5000	15.9	19.54	25.30	0.2560	0.03234
								5250	16.1	20.20	26.40	0.2731	0.03230
								5500	16.4	20.84	27.50	0.2904	0.03226
								6000	16.9	22.05	29.74	0.3254	0.03218
								6500	17.4	23.18	32.00	0.3608	0.03211
								7000	17.9	24.23	34.29	0.3967	0.03203
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.96	29.05	0.2934	0.03203
								4500	16.8	16.62	30.29	0.3126	0.03196
								4750	17.0	17.27	31.52	0.3317	0.03189
								5000	17.3	17.89	32.75	0.3507	0.03182
								5250	17.6	18.50	33.97	0.3697	0.03175
								5500	17.8	19.09	35.19	0.3886	0.03168
								6000	18.4	20.22	37.61	0.4262	0.03155
								6500	18.9	21.30	40.02	0.4635	0.03141
								7000	19.4	22.32	42.42	0.5007	0.03127
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.25	23.07	0.1952	0.03270
								4500	15.5	18.00	24.13	0.2100	0.03265
								4750	15.7	18.73	25.20	0.2249	0.03259
								5000	15.9	19.44	26.27	0.2399	0.03253
								5250	16.2	20.13	27.34	0.2549	0.03247
								5500	16.4	20.79	28.42	0.2700	0.03241
								6000	16.8	22.07	30.59	0.3004	0.03229
								6500	17.3	23.27	32.78	0.3310	0.03217
								7000	17.8	24.41	34.98	0.3619	0.03205
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.81	23.53	0.1849	0.03393
								4500	15.9	17.55	24.62	0.1990	0.03387
								4750	16.1	18.27	25.70	0.2132	0.03382
								5000	16.3	18.97	26.79	0.2274	0.03377
								5250	16.6	19.64	27.89	0.2417	0.03371
								5500	16.8	20.30	28.99	0.2561	0.03366
								6000	17.2	21.56	31.21	0.2850	0.03355
								6500	17.7	22.75	33.45	0.3142	0.03344
								7000	18.2	23.88	35.70	0.3436	0.03333
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.9	17.65	22.43	0.2218	0.03139
								4500	15.1	18.42	23.40	0.2373	0.03133
								4750	15.4	19.17	24.38	0.2529	0.03127
								5000	15.6	19.90	25.35	0.2685	0.03121
								5250	15.8	20.61	26.34	0.2842	0.03115
								5500	16.0	21.30	27.32	0.2999	0.03109
								6000	16.4	22.61	29.31	0.3316	0.03097
								6500	16.9	23.86	31.30	0.3634	0.03085
								7000	17.3	25.04	33.31	0.3954	0.03072
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.02	28.28	0.2644	0.03272
								4500	16.7	16.72	29.42	0.2808	0.03266
								4750	16.9	17.39	30.55	0.2970	0.03261
								5000	17.2	18.05	31.68	0.3132	0.03255
								5250	17.4	18.69	32.80	0.3293	0.03250
								5500	17.6	19.32	33.92	0.3453	0.03244
								6000	18.1	20.52	36.14	0.3770	0.03233
								6500	18.6	21.67	38.33	0.4085	0.03223
								7000	19.0	22.76	40.52	0.4398	0.03212
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 122.44/3110MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.8	17.84	18.52	0.1582	0.03377
								4500	15.0	18.62	19.60	0.1706	0.03374
								4750	15.2	19.37	20.68	0.1830	0.03371
								5000	15.4	20.10	21.77	0.1955	0.03367
								5250	15.6	20.81	22.86	0.2081	0.03364
								5500	15.9	21.50	23.96	0.2207	0.03360
								6000	16.3	22.81	26.17	0.2460	0.03354
								6500	16.8	24.05	28.39	0.2715	0.03347
								7000	17.2	25.22	30.62	0.2972	0.03340
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.14	25.72	0.1707	0.03529
								4500	16.6	16.83	26.99	0.1833	0.03526
								4750	16.8	17.51	28.26	0.1958	0.03524
								5000	17.1	18.16	29.52	0.2082	0.03522
								5250	17.3	18.81	30.77	0.2206	0.03519
								5500	17.5	19.43	32.01	0.2329	0.03517
								6000	18.0	20.63	34.49	0.2573	0.03513
								6500	18.5	21.77	36.94	0.2816	0.03508

USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	7000	19.0	22.86	39.37	0.3056	0.03504
								4250	15.3	17.27	18.80	0.1554	0.03519
								4500	15.5	18.03	19.90	0.1673	0.03516
								4750	15.7	18.77	21.00	0.1792	0.03513
								5000	15.9	19.48	22.11	0.1913	0.03510
								5250	16.1	20.17	23.22	0.2033	0.03507
								5500	16.4	20.85	24.34	0.2154	0.03504
								6000	16.8	22.14	26.58	0.2398	0.03498
								6500	17.2	23.36	28.84	0.2643	0.03492
								7000	17.7	24.52	31.11	0.2889	0.03486
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.68	26.15	0.1630	0.03672
								4500	17.1	16.36	27.45	0.1750	0.03670
								4750	17.3	17.02	28.74	0.1869	0.03669
								5000	17.6	17.66	30.02	0.1987	0.03667
								5250	17.8	18.29	31.29	0.2105	0.03665
								5500	18.0	18.90	32.56	0.2222	0.03663
								6000	18.5	20.09	35.08	0.2454	0.03659
								6500	19.0	21.21	37.57	0.2685	0.03656
								7000	19.5	22.29	40.05	0.2913	0.03652
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.05	19.84	0.2476	0.03351
								4500	15.7	17.78	21.05	0.2598	0.03347
								4750	15.9	18.49	22.26	0.2721	0.03344
								5000	16.2	19.19	23.47	0.2844	0.03340
								5250	16.4	19.86	24.69	0.2967	0.03337
								5500	16.6	20.51	25.91	0.3091	0.03333
								6000	17.1	21.75	28.37	0.3339	0.03326
								6500	17.6	22.93	30.83	0.3588	0.03319
								7000	18.0	24.04	33.31	0.3839	0.03312
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.44	17.79	0.2280	0.03369
								4500	15.4	18.17	18.98	0.2411	0.03369
								4750	15.6	18.87	20.18	0.2543	0.03369
								5000	15.9	19.55	21.38	0.2675	0.03369
								5250	16.1	20.20	22.60	0.2809	0.03370
								5500	16.4	20.83	23.83	0.2944	0.03370
								6000	16.9	22.03	26.31	0.3217	0.03370
								6500	17.4	23.15	28.82	0.3493	0.03370
								7000	17.9	24.18	31.37	0.3773	0.03371
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.03	25.80	0.2847	0.03331
								4500	16.7	16.69	27.17	0.2997	0.03328
								4750	17.0	17.33	28.54	0.3147	0.03326
								5000	17.3	17.95	29.90	0.3296	0.03323
								5250	17.5	18.56	31.25	0.3444	0.03320
								5500	17.8	19.15	32.60	0.3592	0.03317
								6000	18.3	20.27	35.29	0.3887	0.03312
								6500	18.9	21.33	37.96	0.4180	0.03306
								7000	19.4	22.34	40.61	0.4471	0.03301
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.88	19.56	0.2447	0.03414
								4500	15.8	17.62	20.72	0.2568	0.03411
								4750	16.1	18.33	21.89	0.2689	0.03408
								5000	16.3	19.03	23.05	0.2810	0.03405
								5250	16.5	19.70	24.22	0.2932	0.03402
								5500	16.8	20.36	25.39	0.3053	0.03399
								6000	17.2	21.62	27.73	0.3297	0.03393
								6500	17.7	22.81	30.08	0.3542	0.03386
								7000	18.1	23.94	32.43	0.3787	0.03380
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.83	20.49	0.2586	0.03362
								4500	15.9	17.53	21.78	0.2735	0.03357
								4750	16.2	18.22	23.08	0.2886	0.03351
								5000	16.4	18.87	24.38	0.3037	0.03346
								5250	16.7	19.51	25.69	0.3189	0.03340
								5500	16.9	20.12	27.01	0.3341	0.03335
								6000	17.5	21.29	29.65	0.3649	0.03324
								6500	18.0	22.38	32.32	0.3959	0.03313
								7000	18.5	23.41	35.01	0.4271	0.03302
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.52	24.13	0.2781	0.03265
								4500	16.2	17.22	25.37	0.2914	0.03263
								4750	16.4	17.90	26.60	0.3046	0.03261
								5000	16.7	18.57	27.83	0.3177	0.03258
								5250	16.9	19.22	29.05	0.3308	0.03256
								5500	17.2	19.84	30.26	0.3438	0.03254
								6000	17.7	21.06	32.67	0.3696	0.03250
								6500	18.1	22.21	35.05	0.3952	0.03246
								7000	18.6	23.31	37.42	0.4206	0.03241
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.32	21.01	0.2700	0.03186
								4500	15.5	18.03	22.29	0.2849	0.03181
								4750	15.7	18.73	23.58	0.2998	0.03175
								5000	16.0	19.40	24.87	0.3148	0.03170
								5250	16.2	20.04	26.16	0.3298	0.03165
								5500	16.5	20.67	27.46	0.3448	0.03159
								6000	17.0	21.86	30.06	0.3751	0.03149
								6500	17.5	22.98	32.68	0.4055	0.03138

USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	7000	18.0	24.03	35.31	0.4360	0.03127
								4250	15.6	16.94	19.92	0.2462	0.03380
								4500	15.8	17.67	21.13	0.2583	0.03377
								4750	16.0	18.38	22.34	0.2704	0.03374
								5000	16.3	19.07	23.56	0.2826	0.03370
								5250	16.5	19.74	24.78	0.2948	0.03367
								5500	16.7	20.39	26.01	0.3070	0.03363
								6000	17.2	21.63	28.47	0.3316	0.03357
								6500	17.7	22.80	30.95	0.3562	0.03350
								7000	18.1	23.91	33.43	0.3810	0.03343
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.33	17.86	0.2267	0.03398
								4500	15.5	18.05	19.05	0.2396	0.03399
								4750	15.7	18.75	20.26	0.2526	0.03399
								5000	16.0	19.43	21.47	0.2658	0.03399
								5250	16.2	20.08	22.69	0.2790	0.03399
								5500	16.5	20.71	23.92	0.2924	0.03400
								6000	17.0	21.90	26.41	0.3194	0.03400
								6500	17.5	23.01	28.93	0.3467	0.03401
								7000	18.0	24.05	31.49	0.3745	0.03401
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.81	26.05	0.2787	0.03401
								4500	16.9	16.46	27.43	0.2934	0.03399
								4750	17.2	17.10	28.81	0.3080	0.03396
								5000	17.5	17.72	30.18	0.3225	0.03394
								5250	17.8	18.32	31.55	0.3370	0.03391
								5500	18.0	18.90	32.91	0.3515	0.03389
								6000	18.6	20.02	35.62	0.3802	0.03384
								6500	19.1	21.08	38.32	0.4088	0.03379
								7000	19.6	22.08	41.00	0.4372	0.03374
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.67	19.71	0.2421	0.03474
								4500	16.0	17.40	20.88	0.2540	0.03471
								4750	16.3	18.11	22.05	0.2658	0.03468
								5000	16.5	18.80	23.22	0.2777	0.03465
								5250	16.7	19.47	24.40	0.2896	0.03462
								5500	16.9	20.12	25.57	0.3015	0.03459
								6000	17.4	21.37	27.93	0.3254	0.03453
								6500	17.9	22.56	30.30	0.3494	0.03447
								7000	18.3	23.68	32.67	0.3734	0.03442
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.63	20.65	0.2553	0.03421
								4500	16.1	17.32	21.95	0.2699	0.03416
								4750	16.4	18.00	23.26	0.2847	0.03411
								5000	16.6	18.65	24.57	0.2995	0.03406
								5250	16.9	19.28	25.89	0.3144	0.03401
								5500	17.1	19.89	27.22	0.3294	0.03395
								6000	17.7	21.05	29.88	0.3596	0.03385
								6500	18.2	22.14	32.58	0.3900	0.03374
								7000	18.7	23.16	35.29	0.4206	0.03364
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.32	24.33	0.2735	0.03325
								4500	16.4	17.01	25.58	0.2865	0.03323
								4750	16.6	17.69	26.82	0.2994	0.03321
								5000	16.9	18.35	28.05	0.3123	0.03319
								5250	17.1	19.00	29.28	0.3250	0.03317
								5500	17.4	19.62	30.50	0.3378	0.03315
								6000	17.8	20.83	32.93	0.3630	0.03311
								6500	18.3	21.97	35.34	0.3881	0.03307
								7000	18.8	23.07	37.73	0.4129	0.03303
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.10	21.18	0.2662	0.03246
								4500	15.7	17.81	22.47	0.2808	0.03240
								4750	15.9	18.50	23.77	0.2954	0.03235
								5000	16.2	19.16	25.07	0.3100	0.03230
								5250	16.4	19.80	26.37	0.3248	0.03225
								5500	16.7	20.43	27.68	0.3395	0.03220
								6000	17.2	21.61	30.31	0.3692	0.03210
								6500	17.7	22.73	32.95	0.3990	0.03199
								7000	18.2	23.77	35.60	0.4289	0.03189
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.80	18.24	0.2194	0.03542
								4500	15.9	17.51	19.46	0.2316	0.03543
								4750	16.2	18.19	20.69	0.2439	0.03544
								5000	16.4	18.86	21.92	0.2563	0.03545
								5250	16.7	19.50	23.17	0.2688	0.03546
								5500	17.0	20.12	24.43	0.2814	0.03546
								6000	17.5	21.30	26.97	0.3068	0.03548
								6500	18.0	22.39	29.55	0.3326	0.03550
								7000	18.5	23.43	32.16	0.3587	0.03551
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.40	26.58	0.2658	0.03540
								4500	17.4	16.04	28.00	0.2796	0.03538
								4750	17.7	16.67	29.40	0.2933	0.03536
								5000	17.9	17.28	30.80	0.3070	0.03534
								5250	18.2	17.87	32.20	0.3207	0.03532
								5500	18.5	18.45	33.59	0.3343	0.03530
								6000	19.0	19.55	36.35	0.3614	0.03527
								6500	19.5	20.60	39.10	0.3883	0.03523

							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	7000	20.1	21.59	41.84	0.4151	0.03519
								4250	16.3	16.16	20.10	0.2352	0.03620
								4500	16.5	16.88	21.29	0.2463	0.03617
								4750	16.8	17.58	22.49	0.2575	0.03615
								5000	17.0	18.25	23.68	0.2687	0.03612
								5250	17.2	18.91	24.88	0.2799	0.03610
								5500	17.4	19.55	26.08	0.2911	0.03608
								6000	17.9	20.78	28.49	0.3136	0.03603
								6500	18.4	21.95	30.91	0.3362	0.03598
								7000	18.8	23.06	33.33	0.3588	0.03593
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.13	21.09	0.2464	0.03567
								4500	16.6	16.82	22.41	0.2603	0.03562
								4750	16.9	17.48	23.75	0.2742	0.03558
								5000	17.1	18.12	25.09	0.2883	0.03553
								5250	17.4	18.74	26.43	0.3023	0.03549
								5500	17.6	19.34	27.79	0.3165	0.03544
								6000	18.2	20.49	30.51	0.3450	0.03535
								6500	18.7	21.57	33.26	0.3737	0.03525
								7000	19.2	22.57	36.03	0.4027	0.03516
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.85	24.86	0.2610	0.03473
								4500	16.9	16.53	26.14	0.2732	0.03471
								4750	17.1	17.20	27.40	0.2853	0.03470
								5000	17.4	17.85	28.67	0.2973	0.03468
								5250	17.6	18.48	29.92	0.3093	0.03467
								5500	17.9	19.09	31.17	0.3212	0.03466
								6000	18.3	20.28	33.65	0.3449	0.03463
								6500	18.8	21.41	36.11	0.3684	0.03460
								7000	19.3	22.49	38.55	0.3917	0.03458
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.58	21.64	0.2558	0.03392
								4500	16.2	17.28	22.96	0.2696	0.03388
								4750	16.4	17.95	24.28	0.2833	0.03384
								5000	16.7	18.61	25.61	0.2972	0.03379
								5250	16.9	19.24	26.94	0.3111	0.03375
								5500	17.2	19.85	28.28	0.3250	0.03370
								6000	17.7	21.02	30.96	0.3529	0.03361
								6500	18.2	22.12	33.66	0.3810	0.03352
								7000	18.7	23.16	36.37	0.4093	0.03343
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.25	26.08	0.2680	0.03604
								4500	17.5	15.92	27.36	0.2799	0.03602
								4750	17.8	16.58	28.64	0.2917	0.03600
								5000	18.0	17.21	29.91	0.3035	0.03599
								5250	18.2	17.83	31.18	0.3152	0.03597
								5500	18.5	18.44	32.44	0.3269	0.03595
								6000	19.0	19.60	34.94	0.3501	0.03592
								6500	19.4	20.71	37.41	0.3730	0.03589
								7000	19.9	21.78	39.87	0.3958	0.03586
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	22.85	0.2626	0.03527
								4500	16.8	16.60	24.18	0.2761	0.03523
								4750	17.1	17.26	25.52	0.2896	0.03518
								5000	17.3	17.91	26.85	0.3031	0.03513
								5250	17.6	18.52	28.20	0.3167	0.03509
								5500	17.8	19.13	29.54	0.3303	0.03504
								6000	18.3	20.28	32.25	0.3576	0.03494
								6500	18.8	21.37	34.97	0.3851	0.03485
								7000	19.4	22.39	37.70	0.4128	0.03475
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.71	20.33	0.2973	0.03324
								4500	16.0	17.44	21.51	0.3102	0.03319
								4750	16.2	18.15	22.70	0.3232	0.03315
								5000	16.5	18.83	23.89	0.3362	0.03310
								5250	16.7	19.50	25.09	0.3492	0.03305
								5500	16.9	20.15	26.29	0.3623	0.03300
								6000	17.4	21.39	28.70	0.3886	0.03291
								6500	17.9	22.56	31.12	0.4151	0.03281
								7000	18.3	23.66	33.55	0.4416	0.03272
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.10	18.23	0.2788	0.03339
								4500	15.7	17.82	19.40	0.2927	0.03338
								4750	15.9	18.52	20.57	0.3067	0.03337
								5000	16.2	19.19	21.75	0.3208	0.03335
								5250	16.4	19.84	22.95	0.3350	0.03334
								5500	16.7	20.47	24.15	0.3493	0.03333
								6000	17.2	21.67	26.58	0.3783	0.03330
								6500	17.7	22.78	29.04	0.4076	0.03327
								7000	18.2	23.82	31.54	0.4374	0.03325
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.77	26.05	0.3387	0.03294
								4500	17.0	16.43	27.39	0.3546	0.03289
								4750	17.2	17.06	28.73	0.3704	0.03285
								5000	17.5	17.68	30.06	0.3862	0.03281
								5250	17.8	18.29	31.39	0.4020	0.03276
								5500	18.1	18.87	32.71	0.4177	0.03272
								6000	18.6	19.99	35.35	0.4489	0.03264
								6500	19.1	21.06	37.96	0.4799	0.03255

							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	7000	19.6	22.07	40.57	0.5108	0.03247
								4250	15.9	16.57	20.07	0.2911	0.03388
								4500	16.1	17.30	21.21	0.3038	0.03383
								4750	16.4	18.01	22.35	0.3166	0.03379
								5000	16.6	18.70	23.50	0.3294	0.03375
								5250	16.8	19.37	24.64	0.3422	0.03371
								5500	17.0	20.03	25.79	0.3551	0.03366
								6000	17.5	21.28	28.09	0.3808	0.03358
								6500	17.9	22.47	30.40	0.4067	0.03349
								7000	18.4	23.59	32.71	0.4326	0.03341
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.54	20.92	0.3065	0.03332
								4500	16.2	17.23	22.18	0.3223	0.03326
								4750	16.4	17.91	23.45	0.3381	0.03319
								5000	16.7	18.57	24.73	0.3540	0.03312
								5250	17.0	19.20	26.02	0.3700	0.03305
								5500	17.2	19.81	27.31	0.3860	0.03299
								6000	17.7	20.97	29.91	0.4184	0.03285
								6500	18.2	22.07	32.53	0.4510	0.03271
								7000	18.8	23.09	35.17	0.4838	0.03258
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.22	24.40	0.3349	0.03229
								4500	16.5	16.91	25.62	0.3491	0.03225
								4750	16.7	17.59	26.82	0.3631	0.03222
								5000	17.0	18.25	28.02	0.3771	0.03218
								5250	17.2	18.90	29.22	0.3910	0.03214
								5500	17.5	19.52	30.40	0.4048	0.03211
								6000	17.9	20.73	32.76	0.4323	0.03204
								6500	18.4	21.88	35.10	0.4595	0.03196
								7000	18.9	22.98	37.42	0.4865	0.03189
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	16.97	21.37	0.3232	0.03157
								4500	15.8	17.69	22.63	0.3389	0.03150
								4750	16.0	18.37	23.89	0.3547	0.03144
								5000	16.3	19.04	25.15	0.3705	0.03137
								5250	16.5	19.68	26.42	0.3864	0.03130
								5500	16.8	20.31	27.69	0.4023	0.03123
								6000	17.3	21.50	30.24	0.4342	0.03110
								6500	17.8	22.61	32.81	0.4663	0.03096
								7000	18.3	23.67	35.39	0.4986	0.03082
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.61	20.40	0.2962	0.03353
								4500	16.1	17.34	21.59	0.3090	0.03348
								4750	16.3	18.04	22.79	0.3218	0.03344
								5000	16.6	18.72	23.98	0.3347	0.03339
								5250	16.8	19.39	25.18	0.3476	0.03334
								5500	17.0	20.03	26.39	0.3606	0.03330
								6000	17.5	21.27	28.80	0.3866	0.03320
								6500	18.0	22.43	31.23	0.4128	0.03311
								7000	18.4	23.54	33.67	0.4391	0.03301
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	16.99	18.31	0.2778	0.03368
								4500	15.8	17.72	19.47	0.2915	0.03366
								4750	16.0	18.41	20.65	0.3054	0.03365
								5000	16.3	19.08	21.84	0.3193	0.03364
								5250	16.5	19.73	23.04	0.3334	0.03363
								5500	16.8	20.35	24.24	0.3476	0.03362
								6000	17.3	21.55	26.68	0.3763	0.03359
								6500	17.8	22.66	29.16	0.4054	0.03357
								7000	18.3	23.70	31.66	0.4348	0.03354
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.56	26.30	0.3333	0.03362
								4500	17.2	16.21	27.65	0.3489	0.03358
								4750	17.5	16.84	29.00	0.3644	0.03354
								5000	17.7	17.46	30.35	0.3798	0.03350
								5250	18.0	18.06	31.69	0.3952	0.03346
								5500	18.3	18.64	33.03	0.4105	0.03342
								6000	18.8	19.76	35.68	0.4410	0.03334
								6500	19.3	20.81	38.33	0.4714	0.03326
								7000	19.9	21.82	40.95	0.5015	0.03318
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.37	20.22	0.2890	0.03445
								4500	16.3	17.10	21.36	0.3015	0.03441
								4750	16.6	17.80	22.52	0.3140	0.03437
								5000	16.8	18.48	23.67	0.3266	0.03433
								5250	17.0	19.15	24.82	0.3392	0.03429
								5500	17.2	19.79	25.98	0.3518	0.03425
								6000	17.7	21.04	28.30	0.3770	0.03417
								6500	18.1	22.22	30.62	0.4024	0.03409
								7000	18.6	23.34	32.95	0.4278	0.03400
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.34	21.08	0.3038	0.03390
								4500	16.4	17.03	22.35	0.3192	0.03383
								4750	16.6	17.70	23.64	0.3347	0.03377
								5000	16.9	18.35	24.92	0.3504	0.03370
								5250	17.2	18.98	26.22	0.3661	0.03364
								5500	17.4	19.59	27.52	0.3818	0.03357
								6000	17.9	20.74	30.14	0.4136	0.03344
								6500	18.4	21.83	32.78	0.4456	0.03331
								7000	19.0	22.85	35.44	0.4778	0.03318

							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.03	24.60	0.3309	0.03287
								4500	16.7	16.72	25.82	0.3448	0.03283
								4750	16.9	17.39	27.04	0.3585	0.03280
								5000	17.2	18.05	28.25	0.3722	0.03277
								5250	17.4	18.69	29.45	0.3858	0.03273
								5500	17.6	19.31	30.65	0.3994	0.03270
								6000	18.1	20.51	33.03	0.4263	0.03263
								6500	18.6	21.65	35.39	0.4530	0.03256
								7000	19.1	22.74	37.72	0.4794	0.03250
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.76	21.54	0.3200	0.03215
								4500	16.0	17.47	22.81	0.3354	0.03208
								4750	16.2	18.15	24.08	0.3509	0.03202
								5000	16.5	18.82	25.35	0.3664	0.03195
								5250	16.7	19.45	26.63	0.3820	0.03189
								5500	17.0	20.07	27.91	0.3976	0.03182
								6000	17.5	21.26	30.49	0.4289	0.03169
								6500	18.0	22.37	33.08	0.4604	0.03155
								7000	18.5	23.42	35.68	0.4921	0.03142
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.16	23.87	0.3784	0.03179
								4500	16.5	16.88	24.95	0.3941	0.03172
								4750	16.8	17.57	26.04	0.4099	0.03165
								5000	17.0	18.25	27.14	0.4258	0.03157
								5250	17.2	18.90	28.23	0.4417	0.03150
								5500	17.4	19.55	29.33	0.4576	0.03142
								6000	17.9	20.77	31.54	0.4896	0.03128
								6500	18.4	21.93	33.75	0.5217	0.03113
								7000	18.8	23.04	35.98	0.5540	0.03098
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.54	21.57	0.3632	0.03192
								4500	16.2	17.25	22.63	0.3800	0.03188
								4750	16.4	17.93	23.70	0.3969	0.03184
								5000	16.7	18.60	24.78	0.4139	0.03180
								5250	16.9	19.25	25.87	0.4311	0.03175
								5500	17.2	19.87	26.96	0.4484	0.03171
								6000	17.7	21.05	29.18	0.4835	0.03163
								6500	18.2	22.17	31.43	0.5189	0.03154
								7000	18.7	23.21	33.70	0.5549	0.03146
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.32	28.38	0.4477	0.03126
								4500	17.5	15.97	29.60	0.4670	0.03119
								4750	17.7	16.60	30.82	0.4863	0.03111
								5000	18.0	17.22	32.03	0.5055	0.03104
								5250	18.2	17.82	33.24	0.5247	0.03096
								5500	18.5	18.40	34.44	0.5437	0.03089
								6000	19.0	19.52	36.84	0.5817	0.03074
								6500	19.6	20.58	39.22	0.6194	0.03059
								7000	20.1	21.58	41.59	0.6569	0.03045
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.04	23.59	0.3682	0.03248
								4500	16.6	16.76	24.64	0.3835	0.03241
								4750	16.9	17.46	25.69	0.3989	0.03235
								5000	17.1	18.14	26.74	0.4143	0.03228
								5250	17.3	18.80	27.79	0.4298	0.03221
								5500	17.5	19.44	28.85	0.4452	0.03214
								6000	18.0	20.68	30.96	0.4762	0.03201
								6500	18.4	21.86	33.08	0.5074	0.03187
								7000	18.9	22.98	35.21	0.5385	0.03174
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.03	24.03	0.3930	0.03185
								4500	16.7	16.71	25.19	0.4118	0.03176
								4750	16.9	17.38	26.35	0.4306	0.03166
								5000	17.2	18.02	27.52	0.4496	0.03157
								5250	17.4	18.65	28.70	0.4687	0.03147
								5500	17.7	19.26	29.88	0.4878	0.03137
								6000	18.2	20.42	32.26	0.5264	0.03118
								6500	18.7	21.51	34.65	0.5653	0.03098
								7000	19.2	22.53	37.07	0.6045	0.03079
USA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.07	23.96	0.3766	0.03208
								4500	16.6	16.78	25.05	0.3922	0.03201
								4750	16.9	17.47	26.15	0.4079	0.03194
								5000	17.1	18.14	27.24	0.4236	0.03187
								5250	17.3	18.80	28.34	0.4393	0.03179
								5500	17.5	19.44	29.45	0.4551	0.03172
								6000	18.0	20.66	31.66	0.4869	0.03157
								6500	18.5	21.82	33.89	0.5188	0.03142
								7000	18.9	22.92	36.13	0.5508	0.03128
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.44	21.66	0.3615	0.03220
								4500	16.3	17.15	22.73	0.3781	0.03216
								4750	16.5	17.83	23.80	0.3948	0.03212
								5000	16.8	18.50	24.89	0.4118	0.03208
								5250	17.0	19.14	25.98	0.4288	0.03204
								5500	17.3	19.76	27.08	0.4460	0.03200
								6000	17.8	20.94	29.31	0.4808	0.03192
								6500	18.3	22.05	31.56	0.5160	0.03184
								7000	18.8	23.09	33.85	0.5516	0.03175

							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.13	28.67	0.4408	0.03195
								4500	17.7	15.77	29.91	0.4598	0.03188
								4750	17.9	16.40	31.14	0.4787	0.03180
								5000	18.2	17.01	32.36	0.4975	0.03173
								5250	18.5	17.60	33.59	0.5163	0.03166
								5500	18.7	18.18	34.80	0.5350	0.03159
								6000	19.3	19.29	37.23	0.5722	0.03145
								6500	19.8	20.35	39.63	0.6092	0.03130
								7000	20.3	21.35	42.03	0.6460	0.03116
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.85	23.78	0.3647	0.03306
								4500	16.8	16.57	24.84	0.3798	0.03299
								4750	17.1	17.26	25.89	0.3950	0.03293
								5000	17.3	17.93	26.95	0.4102	0.03286
								5250	17.5	18.59	28.01	0.4254	0.03280
								5500	17.7	19.23	29.08	0.4406	0.03273
								6000	18.2	20.46	31.21	0.4711	0.03260
								6500	18.6	21.63	33.35	0.5017	0.03247
								7000	19.1	22.74	35.49	0.5324	0.03234
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.84	24.23	0.3889	0.03243
								4500	16.9	16.52	25.40	0.4074	0.03234
								4750	17.1	17.18	26.57	0.4259	0.03225
								5000	17.4	17.83	27.75	0.4446	0.03215
								5250	17.6	18.45	28.94	0.4634	0.03206
								5500	17.9	19.05	30.13	0.4823	0.03196
								6000	18.4	20.20	32.53	0.5203	0.03177
								6500	18.9	21.29	34.95	0.5586	0.03158
								7000	19.4	22.31	37.38	0.5971	0.03139
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT GENERAL (GRABBER) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.5	15.04	25.38	0.2305	0.03782
								4500	17.8	15.68	26.79	0.2451	0.03778
								4750	18.1	16.30	28.19	0.2598	0.03774
								5000	18.3	16.90	29.59	0.2744	0.03770
								5250	18.6	17.48	30.99	0.2891	0.03766
								5500	18.9	18.06	32.39	0.3037	0.03761
								6000	19.4	19.14	35.20	0.3330	0.03753
								6500	20.0	20.17	38.00	0.3624	0.03744
								7000	20.5	21.14	40.81	0.3917	0.03736
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.49	18.69	0.2719	0.03507
								4500	16.2	17.19	19.88	0.2849	0.03507
								4750	16.5	17.87	21.09	0.2980	0.03506
								5000	16.7	18.54	22.30	0.3112	0.03505
								5250	17.0	19.17	23.52	0.3246	0.03505
								5500	17.2	19.79	24.76	0.3380	0.03504
								6000	17.7	20.96	27.25	0.3651	0.03503
								6500	18.3	22.06	29.78	0.3926	0.03501
								7000	18.8	23.09	32.34	0.4205	0.03500
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.16	26.84	0.3216	0.03496
								4500	17.6	15.81	28.22	0.3363	0.03493
								4750	17.9	16.43	29.60	0.3509	0.03489
								5000	18.2	17.04	30.97	0.3655	0.03486
								5250	18.5	17.63	32.34	0.3801	0.03483
								5500	18.7	18.20	33.71	0.3946	0.03479
								6000	19.3	19.30	36.42	0.4234	0.03473
								6500	19.8	20.35	39.12	0.4521	0.03466
								7000	20.3	21.34	41.80	0.4806	0.03459
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.89	20.62	0.2833	0.03587
								4500	16.8	16.60	21.79	0.2951	0.03583
								4750	17.0	17.29	22.96	0.3069	0.03580
								5000	17.3	17.96	24.14	0.3188	0.03576
								5250	17.5	18.61	25.31	0.3307	0.03573
								5500	17.7	19.25	26.49	0.3426	0.03569
								6000	18.2	20.47	28.86	0.3665	0.03562
								6500	18.6	21.64	31.23	0.3904	0.03555
								7000	19.1	22.74	33.61	0.4144	0.03548
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.87	21.52	0.2962	0.03531
								4500	16.9	16.55	22.82	0.3108	0.03526
								4750	17.1	17.21	24.13	0.3255	0.03520
								5000	17.4	17.84	25.45	0.3403	0.03514
								5250	17.6	18.46	26.77	0.3552	0.03508
								5500	17.9	19.06	28.10	0.3702	0.03502
								6000	18.4	20.20	30.77	0.4003	0.03490
								6500	18.9	21.28	33.47	0.4306	0.03478
								7000	19.5	22.29	36.19	0.4611	0.03466
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.58	25.14	0.3199	0.03430
								4500	17.2	16.26	26.39	0.3329	0.03427
								4750	17.4	16.92	27.63	0.3459	0.03424
								5000	17.6	17.56	28.87	0.3588	0.03421
								5250	17.9	18.19	30.10	0.3716	0.03418
								5500	18.1	18.80	31.32	0.3844	0.03416
								6000	18.6	19.99	33.75	0.4097	0.03410
								6500	19.1	21.12	36.16	0.4348	0.03404

							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	7000	19.5	22.19	38.55	0.4597	0.03399
								4250	16.2	16.27	22.01	0.3111	0.03357
								4500	16.4	16.97	23.30	0.3257	0.03351
								4750	16.7	17.64	24.60	0.3404	0.03345
								5000	17.0	18.29	25.90	0.3550	0.03339
								5250	17.2	18.92	27.21	0.3698	0.03333
								5500	17.5	19.53	28.52	0.3845	0.03327
								6000	18.0	20.69	31.15	0.4142	0.03315
								6500	18.5	21.79	33.79	0.4440	0.03303
								7000	19.0	22.83	36.45	0.4740	0.03291
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.41	24.29	0.3552	0.03449
								4500	17.3	16.11	25.37	0.3696	0.03443
								4750	17.5	16.78	26.45	0.3841	0.03437
								5000	17.8	17.45	27.53	0.3986	0.03431
								5250	18.0	18.09	28.62	0.4131	0.03425
								5500	18.2	18.72	29.70	0.4276	0.03419
								6000	18.6	19.93	31.88	0.4567	0.03406
								6500	19.1	21.09	34.07	0.4859	0.03394
								7000	19.5	22.19	36.26	0.5152	0.03382
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.13	27.86	0.4224	0.03263
								4500	17.6	15.80	28.99	0.4387	0.03257
								4750	17.9	16.45	30.13	0.4548	0.03251
								5000	18.1	17.09	31.25	0.4709	0.03245
								5250	18.4	17.71	32.37	0.4868	0.03240
								5500	18.6	18.32	33.49	0.5027	0.03234
								6000	19.1	19.49	35.70	0.5343	0.03223
								6500	19.5	20.61	37.89	0.5655	0.03211
								7000	20.0	21.68	40.07	0.5966	0.03200
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.77	25.11	0.4038	0.03200
								4500	17.0	16.45	26.29	0.4216	0.03191
								4750	17.2	17.11	27.47	0.4395	0.03182
								5000	17.4	17.76	28.66	0.4575	0.03173
								5250	17.7	18.38	29.85	0.4755	0.03164
								5500	17.9	18.99	31.04	0.4936	0.03155
								6000	18.4	20.14	33.44	0.5299	0.03137
								6500	19.0	21.24	35.85	0.5664	0.03119
								7000	19.5	22.27	38.27	0.6030	0.03101
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 122.44/3110MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.60	25.27	0.3155	0.03425
								4500	17.1	16.28	26.52	0.3283	0.03423
								4750	17.4	16.95	27.77	0.3409	0.03420
								5000	17.6	17.59	29.02	0.3535	0.03417
								5250	17.9	18.22	30.25	0.3661	0.03415
								5500	18.1	18.83	31.48	0.3786	0.03412
								6000	18.6	20.02	33.93	0.4033	0.03407
								6500	19.0	21.15	36.35	0.4279	0.03402
								7000	19.5	22.22	38.75	0.4523	0.03397
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.30	22.12	0.3075	0.03352
								4500	16.4	16.99	23.42	0.3217	0.03347
								4750	16.7	17.66	24.73	0.3361	0.03341
								5000	16.9	18.31	26.04	0.3504	0.03335
								5250	17.2	18.94	27.35	0.3649	0.03330
								5500	17.4	19.55	28.67	0.3793	0.03324
								6000	17.9	20.73	31.31	0.4084	0.03312
								6500	18.4	21.82	33.97	0.4376	0.03301
								7000	19.0	22.86	36.64	0.4669	0.03289
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.15	25.79	0.3062	0.03576
								4500	17.6	15.81	27.07	0.3182	0.03574
								4750	17.9	16.46	28.35	0.3301	0.03572
								5000	18.1	17.09	29.62	0.3420	0.03570
								5250	18.4	17.71	30.88	0.3537	0.03568
								5500	18.6	18.32	32.14	0.3655	0.03566
								6000	19.1	19.48	34.63	0.3888	0.03562
								6500	19.6	20.59	37.10	0.4119	0.03558
								7000	20.0	21.66	39.56	0.4348	0.03554
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.80	22.57	0.3002	0.03503
								4500	16.9	16.48	23.90	0.3137	0.03498
								4750	17.2	17.14	25.23	0.3272	0.03492
								5000	17.4	17.78	26.57	0.3408	0.03487
								5250	17.7	18.40	27.91	0.3545	0.03482
								5500	17.9	19.00	29.26	0.3681	0.03477
								6000	18.5	20.15	31.96	0.3956	0.03467
								6500	19.0	21.23	34.67	0.4232	0.03456
								7000	19.5	22.26	37.40	0.4510	0.03446
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD880 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.57	18.39	0.4716	0.03093
								4500	16.1	17.28	19.52	0.4856	0.03092
								4750	16.4	17.97	20.66	0.4998	0.03091
								5000	16.6	18.64	21.81	0.5140	0.03089
								5250	16.9	19.28	22.97	0.5284	0.03088
								5500	17.1	19.90	24.13	0.5428	0.03087

							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	6000	17.6	21.09	26.49	0.5721	0.03084
								6500	18.1	22.21	28.88	0.6017	0.03081
								7000	18.6	23.25	31.31	0.6317	0.03078
								4250	16.4	16.07	20.29	0.4785	0.03150
								4500	16.6	16.79	21.40	0.4914	0.03146
								4750	16.8	17.49	22.51	0.5043	0.03142
								5000	17.1	18.17	23.63	0.5172	0.03137
								5250	17.3	18.83	24.74	0.5302	0.03133
								5500	17.5	19.48	25.86	0.5432	0.03129
								6000	17.9	20.72	28.10	0.5692	0.03120
								6500	18.4	21.90	30.34	0.5953	0.03111
								7000	18.8	23.02	32.59	0.6215	0.03103
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.06	21.01	0.4925	0.03098
								4500	16.7	16.75	22.24	0.5084	0.03091
								4750	16.9	17.41	23.48	0.5244	0.03084
								5000	17.2	18.06	24.72	0.5405	0.03078
								5250	17.4	18.69	25.97	0.5566	0.03071
								5500	17.7	19.30	27.22	0.5728	0.03064
								6000	18.2	20.46	29.75	0.6055	0.03050
								6500	18.7	21.55	32.29	0.6385	0.03036
								7000	19.2	22.58	34.86	0.6717	0.03022
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD880 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.47	18.47	0.4703	0.03122
								4500	16.2	17.18	19.61	0.4841	0.03120
								4750	16.5	17.87	20.75	0.4981	0.03119
								5000	16.7	18.53	21.90	0.5122	0.03118
								5250	17.0	19.17	23.07	0.5264	0.03117
								5500	17.2	19.80	24.24	0.5408	0.03115
								6000	17.7	20.98	26.61	0.5698	0.03113
								6500	18.2	22.09	29.01	0.5991	0.03110
								7000	18.7	23.14	31.44	0.6289	0.03107
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.88	20.46	0.4758	0.03208
								4500	16.8	16.59	21.58	0.4885	0.03204
								4750	17.0	17.29	22.69	0.5011	0.03200
								5000	17.3	17.97	23.82	0.5138	0.03195
								5250	17.5	18.62	24.94	0.5266	0.03191
								5500	17.7	19.26	26.07	0.5393	0.03187
								6000	18.1	20.50	28.32	0.5649	0.03179
								6500	18.6	21.67	30.58	0.5905	0.03171
								7000	19.0	22.79	32.85	0.6162	0.03162
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.87	21.19	0.4891	0.03155
								4500	16.9	16.55	22.43	0.5047	0.03149
								4750	17.1	17.22	23.68	0.5205	0.03142
								5000	17.4	17.86	24.93	0.5363	0.03136
								5250	17.6	18.48	26.19	0.5521	0.03129
								5500	17.9	19.09	27.45	0.5681	0.03122
								6000	18.4	20.24	30.00	0.6002	0.03109
								6500	18.9	21.32	32.57	0.6325	0.03096
								7000	19.4	22.35	35.15	0.6652	0.03082
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.14	21.47	0.5009	0.03037
								4500	16.6	16.84	22.50	0.5181	0.03032
								4750	16.8	17.53	23.54	0.5354	0.03027
								5000	17.0	18.19	24.60	0.5529	0.03022
								5250	17.3	18.83	25.65	0.5705	0.03017
								5500	17.5	19.45	26.72	0.5883	0.03012
								6000	18.0	20.63	28.88	0.6242	0.03002
								6500	18.5	21.74	31.07	0.6606	0.02992
								7000	19.0	22.78	33.28	0.6974	0.02982
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.67	23.58	0.5002	0.03100
								4500	17.0	16.38	24.60	0.5159	0.03092
								4750	17.2	17.07	25.62	0.5317	0.03085
								5000	17.5	17.74	26.65	0.5475	0.03078
								5250	17.7	18.40	27.68	0.5633	0.03071
								5500	17.9	19.04	28.71	0.5791	0.03063
								6000	18.3	20.27	30.77	0.6108	0.03049
								6500	18.8	21.44	32.84	0.6427	0.03034
								7000	19.2	22.56	34.92	0.6746	0.03019
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.67	23.91	0.5248	0.03037
								4500	17.1	16.35	25.04	0.5440	0.03027
								4750	17.3	17.01	26.18	0.5633	0.03017
								5000	17.6	17.65	27.32	0.5827	0.03007
								5250	17.8	18.28	28.46	0.6022	0.02996
								5500	18.0	18.88	29.62	0.6218	0.02986
								6000	18.5	20.03	31.93	0.6612	0.02965
								6500	19.1	21.12	34.27	0.7009	0.02944
								7000	19.6	22.15	36.63	0.7409	0.02923
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.05	21.57	0.4992	0.03065
								4500	16.7	16.75	22.60	0.5162	0.03060
								4750	16.9	17.43	23.65	0.5334	0.03055
								5000	17.1	18.09	24.71	0.5508	0.03050
								5250	17.4	18.72	25.77	0.5683	0.03046

							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5500	17.6	19.34	26.84	0.5859	0.03041
								6000	18.1	20.52	29.01	0.6215	0.03031
								6500	18.6	21.63	31.21	0.6576	0.03021
								7000	19.1	22.67	33.43	0.6942	0.03011
								4250	17.0	15.49	23.77	0.4968	0.03157
								4500	17.2	16.20	24.80	0.5123	0.03149
								4750	17.4	16.88	25.84	0.5278	0.03142
								5000	17.7	17.55	26.87	0.5433	0.03135
								5250	17.9	18.20	27.91	0.5589	0.03128
								5500	18.1	18.83	28.95	0.5745	0.03121
								6000	18.5	20.06	31.03	0.6057	0.03107
								6500	19.0	21.22	33.11	0.6371	0.03092
								7000	19.4	22.33	35.21	0.6685	0.03078
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.0	15.49	24.12	0.5207	0.03094
								4500	17.2	16.17	25.26	0.5396	0.03084
								4750	17.5	16.83	26.41	0.5586	0.03074
								5000	17.7	17.46	27.56	0.5778	0.03064
								5250	18.0	18.08	28.72	0.5969	0.03054
								5500	18.2	18.68	29.88	0.6162	0.03044
								6000	18.7	19.83	32.22	0.6551	0.03024
								6500	19.2	20.91	34.58	0.6942	0.03003
								7000	19.8	21.93	36.95	0.7337	0.02982
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.80	22.03	0.6108	0.02898
								4500	16.9	16.50	23.02	0.6290	0.02892
								4750	17.1	17.18	24.01	0.6474	0.02886
								5000	17.4	17.83	25.02	0.6659	0.02880
								5250	17.6	18.47	26.03	0.6846	0.02874
								5500	17.9	19.08	27.05	0.7034	0.02868
								6000	18.3	20.26	29.12	0.7414	0.02855
								6500	18.8	21.37	31.21	0.7800	0.02843
								7000	19.3	22.41	33.33	0.8190	0.02830
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.2	15.35	24.25	0.6046	0.02967
								4500	17.4	16.05	25.23	0.6212	0.02959
								4750	17.6	16.74	26.22	0.6379	0.02951
								5000	17.8	17.40	27.20	0.6546	0.02943
								5250	18.0	18.05	28.19	0.6713	0.02934
								5500	18.2	18.69	29.18	0.6881	0.02926
								6000	18.7	19.91	31.16	0.7216	0.02909
								6500	19.1	21.07	33.15	0.7553	0.02893
								7000	19.5	22.19	35.15	0.7891	0.02876
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.36	24.42	0.6316	0.02903
								4500	17.4	16.04	25.50	0.6519	0.02892
								4750	17.6	16.69	26.59	0.6722	0.02881
								5000	17.9	17.33	27.68	0.6927	0.02869
								5250	18.1	17.95	28.78	0.7133	0.02858
								5500	18.4	18.55	29.88	0.7339	0.02846
								6000	18.9	19.70	32.11	0.7755	0.02823
								6500	19.4	20.78	34.35	0.8174	0.02800
								7000	19.9	21.81	36.61	0.8597	0.02776
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.3	15.18	24.46	0.6009	0.03024
								4500	17.6	15.88	25.45	0.6173	0.03016
								4750	17.8	16.55	26.45	0.6337	0.03008
								5000	18.0	17.22	27.44	0.6501	0.03000
								5250	18.2	17.86	28.44	0.6666	0.02991
								5500	18.4	18.49	29.44	0.6831	0.02983
								6000	18.9	19.71	31.44	0.7162	0.02967
								6500	19.3	20.86	33.44	0.7494	0.02951
								7000	19.7	21.97	35.46	0.7826	0.02934
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.3	15.20	24.64	0.6272	0.02959
								4500	17.6	15.87	25.74	0.6471	0.02948
								4750	17.8	16.52	26.84	0.6672	0.02937
								5000	18.1	17.15	27.94	0.6874	0.02926
								5250	18.3	17.76	29.05	0.7077	0.02915
								5500	18.6	18.36	30.16	0.7280	0.02904
								6000	19.1	19.50	32.41	0.7690	0.02881
								6500	19.6	20.58	34.67	0.8104	0.02858
								7000	20.1	21.60	36.95	0.8521	0.02835
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | Street	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.7	14.92	24.39	0.4385	0.03446
								4500	17.9	15.60	25.48	0.4540	0.03438
								4750	18.1	16.26	26.58	0.4695	0.03430
								5000	18.3	16.91	27.68	0.4851	0.03422
								5250	18.6	17.53	28.79	0.5007	0.03414
								5500	18.8	18.14	29.91	0.5164	0.03406
								6000	19.2	19.32	32.14	0.5480	0.03391
								6500	19.7	20.44	34.40	0.5798	0.03374
								7000	20.2	21.50	36.67	0.6119	0.03358
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT GENERAL (GRABBER) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	18.3	14.41	27.43	0.4649	0.03458
								4500	18.5	15.04	28.68	0.4836	0.03450

								4750	18.8	15.65	29.92	0.5023	0.03441
								5000	19.1	16.24	31.17	0.5210	0.03433
								5250	19.3	16.82	32.41	0.5397	0.03424
								5500	19.6	17.39	33.66	0.5584	0.03416
								6000	20.1	18.47	36.15	0.5959	0.03399
								6500	20.7	19.49	38.64	0.6333	0.03383
								7000	21.2	20.47	41.13	0.6707	0.03366
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.40	25.51	0.2458	0.03624
								4500	17.4	16.07	26.81	0.2570	0.03623
								4750	17.6	16.72	28.12	0.2680	0.03623
								5000	17.9	17.36	29.41	0.2790	0.03622
								5250	18.1	17.98	30.70	0.2900	0.03621
								5500	18.3	18.59	31.98	0.3009	0.03621
								6000	18.8	19.75	34.52	0.3225	0.03620
								6500	19.3	20.87	37.04	0.3440	0.03619
								7000	19.8	21.94	39.55	0.3653	0.03617
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.08	22.20	0.2434	0.03543
								4500	16.6	16.77	23.55	0.2561	0.03540
								4750	16.9	17.43	24.91	0.2688	0.03536
								5000	17.2	18.07	26.27	0.2815	0.03532
								5250	17.4	18.69	27.64	0.2943	0.03529
								5500	17.7	19.30	29.01	0.3071	0.03525
								6000	18.2	20.46	31.76	0.3329	0.03517
								6500	18.7	21.54	34.53	0.3588	0.03510
								7000	19.2	22.56	37.31	0.3848	0.03503
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.3	18.40	19.82	0.1708	0.03164
								4500	14.6	19.18	20.93	0.1852	0.03158
								4750	14.8	19.93	22.04	0.1997	0.03153
								5000	15.0	20.66	23.15	0.2142	0.03147
								5250	15.2	21.37	24.26	0.2287	0.03142
								5500	15.5	22.05	25.37	0.2432	0.03137
								6000	15.9	23.36	27.60	0.2724	0.03126
								6500	16.4	24.60	29.84	0.3016	0.03115
								7000	16.8	25.77	32.08	0.3309	0.03104
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.5	18.19	18.68	0.1245	0.03355
								4500	14.7	18.93	19.84	0.1384	0.03354
								4750	15.0	19.65	21.02	0.1523	0.03353
								5000	15.2	20.34	22.21	0.1664	0.03353
								5250	15.5	21.01	23.40	0.1807	0.03352
								5500	15.8	21.65	24.61	0.1950	0.03351
								6000	16.3	22.87	27.05	0.2240	0.03350
								6500	16.8	24.00	29.52	0.2533	0.03348
								7000	17.3	25.05	32.02	0.2830	0.03347
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.55	26.61	0.1895	0.03334
								4500	16.2	17.22	27.96	0.2053	0.03331
								4750	16.5	17.87	29.31	0.2210	0.03327
								5000	16.7	18.50	30.65	0.2367	0.03324
								5250	17.0	19.12	31.98	0.2523	0.03320
								5500	17.3	19.72	33.32	0.2679	0.03316
								6000	17.8	20.86	35.97	0.2989	0.03309
								6500	18.4	21.93	38.60	0.3297	0.03302
								7000	18.9	22.95	41.22	0.3603	0.03295
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.99	19.51	0.1219	0.03373
								4500	14.9	18.76	20.66	0.1341	0.03370
								4750	15.1	19.51	21.81	0.1464	0.03366
								5000	15.3	20.23	22.97	0.1587	0.03363
								5250	15.6	20.93	24.14	0.1711	0.03360
								5500	15.8	21.60	25.31	0.1836	0.03357
								6000	16.2	22.90	27.66	0.2086	0.03350
								6500	16.7	24.11	30.03	0.2339	0.03343
								7000	17.2	25.25	32.42	0.2593	0.03337
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	13.8	19.06	18.13	0.1531	0.03119
								4500	14.1	19.86	19.17	0.1667	0.03116
								4750	14.3	20.65	20.21	0.1803	0.03112
								5000	14.5	21.41	21.26	0.1939	0.03108
								5250	14.7	22.14	22.31	0.2076	0.03104
								5500	14.9	22.85	23.37	0.2214	0.03100
								6000	15.4	24.20	25.49	0.2490	0.03093
								6500	15.8	25.47	27.63	0.2768	0.03085
								7000	16.3	26.67	29.78	0.3048	0.03077
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.4	17.07	24.99	0.1771	0.03278
								4500	15.7	17.79	26.21	0.1911	0.03275
								4750	15.9	18.48	27.43	0.2050	0.03272
								5000	16.2	19.16	28.64	0.2189	0.03269
								5250	16.4	19.82	29.84	0.2326	0.03266
								5500	16.7	20.46	31.03	0.2464	0.03263
								6000	17.1	21.69	33.41	0.2736	0.03257
								6500	17.6	22.86	35.77	0.3006	0.03251
								7000	18.1	23.97	38.10	0.3274	0.03246
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.6	18.05	20.11	0.1644	0.03249

								4500	14.8	18.82	21.23	0.1783	0.03244
								4750	15.1	19.56	22.36	0.1922	0.03239
								5000	15.3	20.28	23.48	0.2062	0.03234
								5250	15.5	20.98	24.61	0.2201	0.03229
								5500	15.7	21.66	25.74	0.2341	0.03224
								6000	16.2	22.96	28.01	0.2622	0.03214
								6500	16.7	24.19	30.28	0.2903	0.03204
								7000	17.1	25.34	32.56	0.3185	0.03194
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.27	27.01	0.1788	0.03421
								4500	16.5	16.94	28.39	0.1939	0.03418
								4750	16.7	17.58	29.76	0.2089	0.03415
								5000	17.0	18.21	31.12	0.2239	0.03411
								5250	17.3	18.82	32.47	0.2389	0.03408
								5500	17.6	19.41	33.83	0.2538	0.03405
								6000	18.1	20.55	36.52	0.2834	0.03399
								6500	18.6	21.62	39.20	0.3128	0.03393
								7000	19.2	22.63	41.86	0.3421	0.03387
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.9	17.66	19.78	0.1163	0.03457
								4500	15.2	18.42	20.94	0.1280	0.03454
								4750	15.4	19.15	22.12	0.1397	0.03451
								5000	15.6	19.87	23.29	0.1515	0.03448
								5250	15.8	20.56	24.47	0.1634	0.03445
								5500	16.1	21.23	25.66	0.1753	0.03442
								6000	16.5	22.51	28.05	0.1992	0.03437
								6500	17.0	23.72	30.46	0.2233	0.03431
								7000	17.5	24.85	32.88	0.2476	0.03425
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.1	18.67	18.38	0.1477	0.03206
								4500	14.3	19.47	19.44	0.1607	0.03202
								4750	14.6	20.24	20.50	0.1738	0.03199
								5000	14.8	21.00	21.56	0.1869	0.03195
								5250	15.0	21.72	22.63	0.2001	0.03192
								5500	15.2	22.42	23.70	0.2134	0.03188
								6000	15.7	23.76	25.86	0.2400	0.03181
								6500	16.1	25.03	28.03	0.2668	0.03174
								7000	16.5	26.22	30.21	0.2938	0.03167
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.7	16.77	25.37	0.1674	0.03364
								4500	16.0	17.48	26.61	0.1808	0.03362
								4750	16.2	18.17	27.84	0.1941	0.03359
								5000	16.4	18.85	29.07	0.2073	0.03356
								5250	16.7	19.50	30.29	0.2205	0.03354
								5500	16.9	20.13	31.51	0.2336	0.03351
								6000	17.4	21.35	33.92	0.2596	0.03346
								6500	17.9	22.52	36.31	0.2854	0.03341
								7000	18.4	23.62	38.69	0.3110	0.03337
USA | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.3	17.25	19.17	0.1349	0.03551
								4500	15.5	18.01	20.27	0.1466	0.03548
								4750	15.7	18.74	21.38	0.1584	0.03546
								5000	15.9	19.46	22.49	0.1701	0.03543
								5250	16.2	20.15	23.61	0.1820	0.03541
								5500	16.4	20.82	24.73	0.1938	0.03539
								6000	16.8	22.10	26.99	0.2177	0.03534
								6500	17.3	23.32	29.26	0.2417	0.03529
								7000	17.7	24.48	31.54	0.2659	0.03524
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.64	26.54	0.1420	0.03711
								4500	17.1	16.32	27.84	0.1537	0.03710
								4750	17.3	16.98	29.13	0.1653	0.03709
								5000	17.6	17.62	30.42	0.1768	0.03708
								5250	17.8	18.25	31.70	0.1883	0.03706
								5500	18.1	18.86	32.97	0.1998	0.03705
								6000	18.6	20.04	35.50	0.2225	0.03702
								6500	19.0	21.16	38.01	0.2450	0.03700
								7000	19.5	22.23	40.50	0.2674	0.03697
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.4	18.32	19.69	0.1790	0.03171
								4500	14.6	19.10	20.80	0.1935	0.03165
								4750	14.8	19.85	21.91	0.2080	0.03160
								5000	15.1	20.58	23.01	0.2225	0.03154
								5250	15.3	21.29	24.13	0.2370	0.03148
								5500	15.5	21.97	25.24	0.2516	0.03142
								6000	16.0	23.28	27.47	0.2808	0.03131
								6500	16.4	24.51	29.71	0.3101	0.03120
								7000	16.9	25.68	31.96	0.3395	0.03108
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.6	18.12	18.56	0.1318	0.03360
								4500	14.8	18.87	19.73	0.1457	0.03359
								4750	15.0	19.59	20.90	0.1597	0.03358
								5000	15.3	20.28	22.09	0.1739	0.03357
								5250	15.5	20.94	23.29	0.1882	0.03356
								5500	15.8	21.59	24.49	0.2026	0.03355
								6000	16.3	22.80	26.93	0.2316	0.03353
								6500	16.8	23.94	29.40	0.2611	0.03351
								7000	17.4	24.99	31.90	0.2909	0.03349
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.50	26.50	0.1963	0.03338

									4500	16.2	17.18	27.85	0.2122	0.03334
									4750	16.5	17.83	29.20	0.2279	0.03330
									5000	16.8	18.46	30.54	0.2437	0.03326
									5250	17.1	19.08	31.88	0.2593	0.03322
									5500	17.3	19.67	33.21	0.2749	0.03319
									6000	17.9	20.81	35.86	0.3060	0.03311
									6500	18.4	21.89	38.50	0.3369	0.03303
									7000	18.9	22.91	41.12	0.3676	0.03296
								P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.94	19.40	0.1283	0.03378
									4500	14.9	18.70	20.55	0.1406	0.03375
									4750	15.1	19.45	21.70	0.1529	0.03371
									5000	15.4	20.17	22.86	0.1653	0.03368
									5250	15.6	20.87	24.03	0.1777	0.03364
									5500	15.8	21.54	25.20	0.1902	0.03361
									6000	16.3	22.83	27.55	0.2153	0.03354
									6500	16.8	24.05	29.93	0.2406	0.03347
									7000	17.2	25.19	32.32	0.2661	0.03340
								P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.43	20.42	0.1469	0.03429
									4500	15.4	18.18	21.56	0.1596	0.03425
									4750	15.6	18.91	22.71	0.1723	0.03421
									5000	15.8	19.62	23.86	0.1851	0.03417
									5250	16.0	20.31	25.01	0.1978	0.03413
									5500	16.3	20.98	26.17	0.2106	0.03409
									6000	16.7	22.25	28.48	0.2363	0.03402
									6500	17.2	23.47	30.80	0.2620	0.03394
									7000	17.6	24.61	33.13	0.2878	0.03386
								P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.37	21.29	0.1647	0.03373
									4500	15.4	18.09	22.57	0.1804	0.03366
									4750	15.7	18.78	23.85	0.1961	0.03360
									5000	15.9	19.44	25.13	0.2120	0.03354
									5250	16.2	20.09	26.43	0.2279	0.03347
									5500	16.5	20.71	27.73	0.2439	0.03341
									6000	17.0	21.90	30.34	0.2761	0.03328
									6500	17.5	23.01	32.98	0.3086	0.03315
									7000	18.0	24.04	35.63	0.3414	0.03302
								P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	13.9	18.97	18.00	0.1609	0.03128
									4500	14.1	19.78	19.04	0.1745	0.03124
									4750	14.3	20.56	20.08	0.1881	0.03120
									5000	14.5	21.31	21.13	0.2018	0.03116
									5250	14.8	22.05	22.18	0.2156	0.03112
									5500	15.0	22.75	23.24	0.2294	0.03108
									6000	15.4	24.11	25.36	0.2571	0.03100
									6500	15.9	25.38	27.50	0.2850	0.03091
									7000	16.3	26.58	29.65	0.3131	0.03083
								LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.5	17.02	24.87	0.1847	0.03282
									4500	15.7	17.73	26.10	0.1988	0.03279
									4750	16.0	18.43	27.31	0.2127	0.03276
									5000	16.2	19.10	28.52	0.2266	0.03273
									5250	16.5	19.76	29.72	0.2405	0.03269
									5500	16.7	20.40	30.92	0.2542	0.03266
									6000	17.2	21.63	33.29	0.2816	0.03260
									6500	17.7	22.80	35.65	0.3086	0.03253
									7000	18.1	23.92	37.99	0.3355	0.03247
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.7	17.98	19.97	0.1731	0.03255
									4500	14.9	18.74	21.10	0.1871	0.03250
									4750	15.1	19.48	22.22	0.2010	0.03245
									5000	15.3	20.21	23.35	0.2150	0.03239
									5250	15.6	20.91	24.47	0.2290	0.03234
									5500	15.8	21.58	25.61	0.2430	0.03229
									6000	16.3	22.88	27.87	0.2712	0.03218
									6500	16.7	24.11	30.14	0.2994	0.03208
									7000	17.2	25.27	32.42	0.3277	0.03197
								LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.23	26.90	0.1860	0.03423
									4500	16.5	16.89	28.28	0.2012	0.03420
									4750	16.8	17.54	29.65	0.2163	0.03417
									5000	17.1	18.17	31.01	0.2313	0.03413
									5250	17.3	18.78	32.37	0.2463	0.03410
									5500	17.6	19.37	33.72	0.2612	0.03407
									6000	18.1	20.50	36.41	0.2909	0.03400
									6500	18.7	21.57	39.09	0.3205	0.03393
									7000	19.2	22.59	41.75	0.3498	0.03387
								P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.0	17.61	19.67	0.1232	0.03461
									4500	15.2	18.37	20.83	0.1349	0.03458
									4750	15.4	19.10	22.00	0.1466	0.03455
									5000	15.7	19.81	23.18	0.1584	0.03452
									5250	15.9	20.50	24.36	0.1703	0.03449
									5500	16.1	21.17	25.55	0.1822	0.03446
									6000	16.6	22.45	27.94	0.2062	0.03440
									6500	17.0	23.66	30.35	0.2304	0.03434
									7000	17.5	24.80	32.77	0.2548	0.03427
								P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.2	18.60	18.25	0.1559	0.03213
									4500	14.4	19.39	19.30	0.1690	0.03210

								4750	14.6	20.16	20.36	0.1822	0.03206
								5000	14.8	20.91	21.43	0.1954	0.03202
								5250	15.1	21.63	22.50	0.2086	0.03199
								5500	15.3	22.33	23.57	0.2219	0.03195
								6000	15.7	23.67	25.73	0.2486	0.03187
								6500	16.2	24.93	27.90	0.2755	0.03180
								7000	16.6	26.13	30.08	0.3026	0.03172
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.8	16.72	25.25	0.1755	0.03367
								4500	16.0	17.43	26.49	0.1889	0.03365
								4750	16.3	18.12	27.72	0.2023	0.03362
								5000	16.5	18.79	28.95	0.2155	0.03359
								5250	16.7	19.44	30.17	0.2288	0.03356
								5500	17.0	20.08	31.39	0.2419	0.03353
								6000	17.5	21.30	33.80	0.2680	0.03348
								6500	17.9	22.46	36.19	0.2939	0.03342
								7000	18.4	23.56	38.57	0.3196	0.03337
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.72	23.26	0.2494	0.03032
								4500	15.1	18.48	24.27	0.2666	0.03024
								4750	15.3	19.22	25.28	0.2837	0.03016
								5000	15.5	19.94	26.30	0.3009	0.03008
								5250	15.8	20.64	27.31	0.3182	0.03000
								5500	16.0	21.32	28.33	0.3354	0.02992
								6000	16.4	22.61	30.37	0.3701	0.02976
								6500	16.9	23.84	32.42	0.4048	0.02960
								7000	17.3	25.00	34.47	0.4396	0.02944
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.0	17.56	21.94	0.1991	0.03228
								4500	15.3	18.30	23.01	0.2157	0.03224
								4750	15.5	19.00	24.09	0.2325	0.03221
								5000	15.7	19.69	25.17	0.2494	0.03218
								5250	16.0	20.35	26.27	0.2665	0.03214
								5500	16.2	20.98	27.38	0.2836	0.03211
								6000	16.7	22.20	29.61	0.3184	0.03203
								6500	17.3	23.33	31.88	0.3536	0.03196
								7000	17.8	24.38	34.17	0.3893	0.03189
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.06	28.93	0.2870	0.03188
								4500	16.7	16.73	30.17	0.3061	0.03181
								4750	16.9	17.38	31.40	0.3251	0.03174
								5000	17.2	18.00	32.63	0.3440	0.03168
								5250	17.5	18.61	33.86	0.3629	0.03161
								5500	17.7	19.21	35.08	0.3817	0.03154
								6000	18.3	20.34	37.51	0.4191	0.03141
								6500	18.8	21.42	39.92	0.4563	0.03128
								7000	19.3	22.43	42.32	0.4932	0.03115
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.38	22.93	0.1897	0.03253
								4500	15.4	18.14	23.99	0.2045	0.03247
								4750	15.6	18.87	25.05	0.2193	0.03242
								5000	15.8	19.58	26.12	0.2342	0.03236
								5250	16.1	20.27	27.20	0.2492	0.03230
								5500	16.3	20.94	28.28	0.2642	0.03225
								6000	16.7	22.22	30.45	0.2944	0.03213
								6500	17.2	23.43	32.64	0.3249	0.03201
								7000	17.7	24.56	34.85	0.3556	0.03190
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.90	23.97	0.2073	0.03304
								4500	15.8	17.64	25.03	0.2225	0.03298
								4750	16.0	18.36	26.09	0.2377	0.03292
								5000	16.3	19.06	27.16	0.2529	0.03286
								5250	16.5	19.74	28.22	0.2681	0.03280
								5500	16.7	20.40	29.29	0.2834	0.03274
								6000	17.2	21.67	31.42	0.3140	0.03261
								6500	17.6	22.87	33.57	0.3447	0.03249
								7000	18.1	24.01	35.72	0.3755	0.03237
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.86	24.46	0.2342	0.03241
								4500	15.9	17.57	25.63	0.2527	0.03232
								4750	16.1	18.25	26.81	0.2714	0.03224
								5000	16.4	18.91	28.00	0.2901	0.03215
								5250	16.6	19.55	29.19	0.3090	0.03206
								5500	16.9	20.17	30.38	0.3279	0.03197
								6000	17.4	21.35	32.79	0.3660	0.03179
								6500	17.9	22.46	35.21	0.4044	0.03160
								7000	18.4	23.49	37.66	0.4431	0.03142
USA | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.3	17.19	19.01	0.1451	0.03554
								4500	15.6	17.94	20.12	0.1568	0.03552
								4750	15.8	18.67	21.23	0.1686	0.03549
								5000	16.0	19.38	22.34	0.1805	0.03546
								5250	16.2	20.07	23.46	0.1923	0.03544
								5500	16.4	20.75	24.58	0.2042	0.03541
								6000	16.9	22.03	26.84	0.2282	0.03536
								6500	17.3	23.25	29.11	0.2523	0.03530
								7000	17.8	24.40	31.39	0.2766	0.03525
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.59	26.40	0.1518	0.03711
								4500	17.2	16.27	27.70	0.1635	0.03710

								4750	17.4	16.93	29.00	0.1752	0.03708
								5000	17.6	17.57	30.28	0.1868	0.03707
								5250	17.9	18.20	31.56	0.1983	0.03705
								5500	18.1	18.81	32.84	0.2098	0.03704
								6000	18.6	19.99	35.37	0.2326	0.03701
								6500	19.1	21.11	37.87	0.2552	0.03698
								7000	19.5	22.18	40.36	0.2776	0.03695
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.12	20.40	0.2660	0.03273
								4500	15.6	17.85	21.57	0.2792	0.03269
								4750	15.9	18.57	22.75	0.2924	0.03264
								5000	16.1	19.26	23.94	0.3057	0.03260
								5250	16.3	19.94	25.12	0.3190	0.03255
								5500	16.6	20.59	26.31	0.3323	0.03250
								6000	17.0	21.84	28.70	0.3591	0.03241
								6500	17.5	23.02	31.11	0.3861	0.03232
								7000	18.0	24.14	33.52	0.4131	0.03222
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.51	18.32	0.2475	0.03291
								4500	15.3	18.24	19.47	0.2615	0.03290
								4750	15.6	18.94	20.64	0.2757	0.03289
								5000	15.8	19.62	21.81	0.2901	0.03288
								5250	16.0	20.29	22.99	0.3045	0.03286
								5500	16.3	20.92	24.19	0.3191	0.03285
								6000	16.8	22.12	26.60	0.3485	0.03283
								6500	17.3	23.24	29.05	0.3783	0.03281
								7000	17.9	24.29	31.52	0.4085	0.03279
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.00	26.15	0.3094	0.03274
								4500	16.7	16.67	27.49	0.3255	0.03270
								4750	17.0	17.31	28.83	0.3415	0.03266
								5000	17.3	17.93	30.15	0.3574	0.03262
								5250	17.5	18.54	31.48	0.3733	0.03258
								5500	17.8	19.13	32.79	0.3891	0.03254
								6000	18.3	20.26	35.42	0.4206	0.03246
								6500	18.9	21.32	38.02	0.4519	0.03238
								7000	19.4	22.34	40.62	0.4831	0.03230
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.85	20.20	0.2604	0.03366
								4500	15.9	17.59	21.33	0.2733	0.03362
								4750	16.1	18.30	22.47	0.2862	0.03358
								5000	16.3	19.00	23.61	0.2991	0.03354
								5250	16.5	19.67	24.75	0.3121	0.03350
								5500	16.8	20.33	25.90	0.3250	0.03346
								6000	17.2	21.59	28.19	0.3510	0.03338
								6500	17.7	22.79	30.49	0.3771	0.03329
								7000	18.1	23.92	32.80	0.4032	0.03321
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.80	21.04	0.2768	0.03311
								4500	15.9	17.51	22.30	0.2927	0.03305
								4750	16.2	18.19	23.57	0.3086	0.03298
								5000	16.4	18.84	24.84	0.3247	0.03292
								5250	16.7	19.48	26.12	0.3408	0.03285
								5500	17.0	20.09	27.41	0.3570	0.03279
								6000	17.5	21.27	29.99	0.3896	0.03266
								6500	18.0	22.36	32.61	0.4225	0.03252
								7000	18.5	23.40	35.23	0.4556	0.03239
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.48	24.54	0.3027	0.03210
								4500	16.2	17.18	25.75	0.3170	0.03207
								4750	16.5	17.87	26.95	0.3311	0.03203
								5000	16.7	18.53	28.14	0.3452	0.03200
								5250	17.0	19.18	29.33	0.3592	0.03197
								5500	17.2	19.81	30.52	0.3732	0.03193
								6000	17.7	21.02	32.87	0.4009	0.03187
								6500	18.1	22.18	35.20	0.4283	0.03180
								7000	18.6	23.28	37.51	0.4555	0.03174
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.27	21.51	0.2912	0.03136
								4500	15.5	17.99	22.76	0.3070	0.03129
								4750	15.8	18.68	24.02	0.3229	0.03123
								5000	16.0	19.35	25.28	0.3388	0.03116
								5250	16.3	20.00	26.54	0.3548	0.03110
								5500	16.5	20.63	27.81	0.3709	0.03103
								6000	17.0	21.82	30.35	0.4031	0.03090
								6500	17.5	22.94	32.91	0.4355	0.03077
								7000	18.1	24.00	35.48	0.4680	0.03064
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.83	20.60	0.2624	0.03352
								4500	15.9	17.56	21.79	0.2752	0.03347
								4750	16.1	18.26	22.98	0.2881	0.03343
								5000	16.4	18.95	24.18	0.3010	0.03339
								5250	16.6	19.62	25.38	0.3140	0.03334
								5500	16.8	20.27	26.58	0.3270	0.03330
								6000	17.3	21.51	28.99	0.3531	0.03321
								6500	17.8	22.68	31.42	0.3793	0.03313
								7000	18.2	23.78	33.86	0.4057	0.03304
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.21	18.51	0.2439	0.03368
								4500	15.6	17.94	19.68	0.2576	0.03367

								4750	15.8	18.64	20.85	0.2715	0.03366
								5000	16.1	19.31	22.04	0.2855	0.03366
								5250	16.3	19.96	23.24	0.2995	0.03365
								5500	16.6	20.59	24.44	0.3137	0.03364
								6000	17.1	21.78	26.88	0.3424	0.03362
								6500	17.6	22.90	29.35	0.3715	0.03360
								7000	18.1	23.94	31.86	0.4010	0.03359
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.76	26.44	0.3027	0.03353
								4500	17.0	16.41	27.80	0.3183	0.03350
								4750	17.3	17.05	29.14	0.3339	0.03346
								5000	17.5	17.67	30.48	0.3494	0.03342
								5250	17.8	18.27	31.82	0.3649	0.03338
								5500	18.1	18.85	33.15	0.3803	0.03335
								6000	18.6	19.98	35.81	0.4110	0.03327
								6500	19.1	21.04	38.44	0.4415	0.03320
								7000	19.7	22.04	41.07	0.4718	0.03313
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.57	20.40	0.2570	0.03444
								4500	16.1	17.29	21.55	0.2696	0.03441
								4750	16.4	18.00	22.70	0.2821	0.03437
								5000	16.6	18.69	23.85	0.2947	0.03433
								5250	16.8	19.36	25.00	0.3074	0.03429
								5500	17.0	20.01	26.16	0.3200	0.03425
								6000	17.5	21.26	28.47	0.3453	0.03418
								6500	17.9	22.45	30.79	0.3707	0.03410
								7000	18.4	23.57	33.12	0.3962	0.03402
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.53	21.26	0.2724	0.03389
								4500	16.2	17.23	22.53	0.2879	0.03383
								4750	16.5	17.90	23.81	0.3035	0.03377
								5000	16.7	18.55	25.10	0.3192	0.03371
								5250	17.0	19.18	26.39	0.3349	0.03365
								5500	17.2	19.79	27.69	0.3508	0.03358
								6000	17.7	20.95	30.31	0.3826	0.03346
								6500	18.3	22.04	32.95	0.4147	0.03333
								7000	18.8	23.07	35.61	0.4470	0.03320
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.22	24.80	0.2967	0.03289
								4500	16.5	16.91	26.03	0.3105	0.03286
								4750	16.7	17.59	27.24	0.3243	0.03283
								5000	17.0	18.25	28.45	0.3380	0.03280
								5250	17.2	18.89	29.65	0.3517	0.03277
								5500	17.5	19.52	30.85	0.3652	0.03273
								6000	17.9	20.72	33.23	0.3922	0.03267
								6500	18.4	21.87	35.58	0.4189	0.03261
								7000	18.9	22.97	37.92	0.4454	0.03255
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	16.98	21.75	0.2861	0.03214
								4500	15.8	17.69	23.01	0.3016	0.03208
								4750	16.0	18.38	24.28	0.3171	0.03202
								5000	16.3	19.04	25.55	0.3326	0.03196
								5250	16.5	19.69	26.83	0.3483	0.03189
								5500	16.8	20.31	28.11	0.3639	0.03183
								6000	17.3	21.49	30.68	0.3953	0.03171
								6500	17.8	22.61	33.27	0.4269	0.03158
								7000	18.3	23.66	35.87	0.4587	0.03145
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.73	18.88	0.2372	0.03501
								4500	16.0	17.43	20.07	0.2502	0.03501
								4750	16.3	18.12	21.27	0.2634	0.03500
								5000	16.5	18.79	22.48	0.2767	0.03500
								5250	16.8	19.43	23.70	0.2900	0.03500
								5500	17.0	20.05	24.93	0.3035	0.03499
								6000	17.5	21.23	27.42	0.3307	0.03499
								6500	18.0	22.33	29.94	0.3584	0.03498
								7000	18.6	23.36	32.50	0.3863	0.03497
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.35	26.99	0.2898	0.03490
								4500	17.4	16.00	28.37	0.3046	0.03487
								4750	17.7	16.62	29.75	0.3193	0.03484
								5000	18.0	17.23	31.12	0.3340	0.03481
								5250	18.2	17.83	32.48	0.3486	0.03478
								5500	18.5	18.40	33.84	0.3632	0.03475
								6000	19.1	19.51	36.55	0.3922	0.03469
								6500	19.6	20.56	39.24	0.4211	0.03463
								7000	20.1	21.55	41.92	0.4497	0.03457
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.98	21.76	0.2627	0.03553
								4500	16.7	16.67	23.06	0.2773	0.03547
								4750	17.0	17.32	24.38	0.2920	0.03542
								5000	17.3	17.97	25.69	0.3068	0.03536
								5250	17.5	18.58	27.02	0.3216	0.03531
								5500	17.8	19.18	28.35	0.3365	0.03525
								6000	18.3	20.33	31.03	0.3665	0.03514
								6500	18.8	21.40	33.73	0.3967	0.03503
								7000	19.3	22.41	36.45	0.4272	0.03491
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.79	25.32	0.2850	0.03425
								4500	16.9	16.47	26.56	0.2981	0.03422
								4750	17.2	17.14	27.80	0.3112	0.03420

								5000	17.4	17.79	29.04	0.3241	0.03417
								5250	17.7	18.42	30.27	0.3370	0.03415
								5500	17.9	19.03	31.49	0.3499	0.03412
								6000	18.4	20.22	33.91	0.3753	0.03407
								6500	18.9	21.35	36.32	0.4006	0.03403
								7000	19.3	22.43	38.70	0.4256	0.03398
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.51	22.19	0.2765	0.03350
								4500	16.2	17.21	23.48	0.2912	0.03344
								4750	16.5	17.88	24.78	0.3059	0.03338
								5000	16.7	18.53	26.07	0.3207	0.03333
								5250	17.0	19.17	27.38	0.3355	0.03327
								5500	17.2	19.78	28.68	0.3504	0.03322
								6000	17.7	20.95	31.31	0.3802	0.03310
								6500	18.3	22.05	33.95	0.4102	0.03299
								7000	18.8	23.09	36.60	0.4404	0.03287
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.34	25.98	0.2699	0.03575
								4500	17.4	16.01	27.26	0.2820	0.03573
								4750	17.7	16.67	28.53	0.2939	0.03571
								5000	17.9	17.30	29.80	0.3059	0.03570
								5250	18.2	17.92	31.06	0.3177	0.03568
								5500	18.4	18.53	32.31	0.3295	0.03566
								6000	18.9	19.70	34.80	0.3530	0.03563
								6500	19.3	20.82	37.27	0.3762	0.03559
								7000	19.8	21.88	39.72	0.3993	0.03556
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	16.01	22.77	0.2642	0.03499
								4500	16.7	16.70	24.09	0.2778	0.03494
								4750	17.0	17.36	25.42	0.2914	0.03489
								5000	17.2	18.01	26.75	0.3051	0.03484
								5250	17.5	18.63	28.09	0.3188	0.03480
								5500	17.7	19.23	29.43	0.3326	0.03475
								6000	18.2	20.39	32.13	0.3602	0.03465
								6500	18.7	21.48	34.83	0.3880	0.03455
								7000	19.3	22.51	37.56	0.4159	0.03445
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.03	20.27	0.2845	0.03264
								4500	15.7	17.77	21.44	0.2977	0.03260
								4750	15.9	18.48	22.62	0.3110	0.03255
								5000	16.2	19.17	23.80	0.3243	0.03250
								5250	16.4	19.85	24.99	0.3376	0.03245
								5500	16.6	20.50	26.18	0.3510	0.03240
								6000	17.1	21.75	28.57	0.3778	0.03231
								6500	17.6	22.93	30.97	0.4048	0.03221
								7000	18.0	24.04	33.38	0.4319	0.03211
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.42	18.18	0.2660	0.03281
								4500	15.4	18.15	19.34	0.2801	0.03280
								4750	15.6	18.86	20.50	0.2943	0.03279
								5000	15.9	19.54	21.67	0.3087	0.03277
								5250	16.1	20.19	22.86	0.3232	0.03276
								5500	16.4	20.83	24.05	0.3378	0.03274
								6000	16.9	22.03	26.46	0.3673	0.03272
								6500	17.4	23.15	28.90	0.3972	0.03269
								7000	17.9	24.20	31.37	0.4275	0.03266
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.94	26.02	0.3271	0.03264
								4500	16.8	16.60	27.36	0.3432	0.03259
								4750	17.1	17.24	28.69	0.3592	0.03255
								5000	17.3	17.87	30.01	0.3752	0.03251
								5250	17.6	18.48	31.34	0.3911	0.03246
								5500	17.9	19.06	32.65	0.4070	0.03242
								6000	18.4	20.19	35.27	0.4385	0.03234
								6500	18.9	21.26	37.88	0.4699	0.03225
								7000	19.5	22.27	40.47	0.5011	0.03217
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.77	20.08	0.2779	0.03357
								4500	15.9	17.51	21.21	0.2908	0.03353
								4750	16.2	18.22	22.35	0.3038	0.03348
								5000	16.4	18.92	23.49	0.3167	0.03344
								5250	16.6	19.59	24.63	0.3297	0.03340
								5500	16.8	20.25	25.77	0.3427	0.03336
								6000	17.3	21.51	28.06	0.3687	0.03327
								6500	17.7	22.70	30.36	0.3948	0.03319
								7000	18.2	23.83	32.66	0.4210	0.03310
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.73	20.91	0.2941	0.03302
								4500	16.0	17.44	22.17	0.3100	0.03295
								4750	16.3	18.12	23.44	0.3260	0.03288
								5000	16.5	18.77	24.71	0.3420	0.03282
								5250	16.8	19.41	25.99	0.3582	0.03275
								5500	17.0	20.02	27.28	0.3744	0.03268
								6000	17.5	21.19	29.86	0.4071	0.03255
								6500	18.1	22.29	32.47	0.4400	0.03241
								7000	18.6	23.32	35.10	0.4732	0.03227
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.41	24.39	0.3218	0.03199
								4500	16.3	17.11	25.60	0.3361	0.03196
								4750	16.5	17.79	26.80	0.3503	0.03192

								5000	16.8	18.45	28.00	0.3644	0.03189
								5250	17.0	19.10	29.18	0.3784	0.03185
								5500	17.3	19.73	30.37	0.3924	0.03181
								6000	17.7	20.95	32.71	0.4202	0.03174
								6500	18.2	22.10	35.04	0.4477	0.03167
								7000	18.7	23.20	37.35	0.4750	0.03160
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.18	21.37	0.3099	0.03127
								4500	15.6	17.90	22.62	0.3257	0.03120
								4750	15.8	18.59	23.88	0.3416	0.03113
								5000	16.1	19.26	25.14	0.3576	0.03106
								5250	16.3	19.91	26.40	0.3737	0.03100
								5500	16.6	20.54	27.66	0.3897	0.03093
								6000	17.1	21.73	30.21	0.4220	0.03079
								6500	17.6	22.85	32.76	0.4545	0.03066
								7000	18.1	23.91	35.33	0.4871	0.03052
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.75	20.47	0.2812	0.03342
								4500	16.0	17.48	21.65	0.2941	0.03337
								4750	16.2	18.18	22.85	0.3070	0.03333
								5000	16.4	18.87	24.04	0.3199	0.03328
								5250	16.7	19.53	25.24	0.3329	0.03324
								5500	16.9	20.18	26.44	0.3459	0.03319
								6000	17.4	21.42	28.85	0.3721	0.03310
								6500	17.8	22.59	31.28	0.3984	0.03301
								7000	18.3	23.70	33.71	0.4248	0.03292
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.13	18.37	0.2628	0.03358
								4500	15.6	17.85	19.54	0.2765	0.03357
								4750	15.9	18.55	20.71	0.2904	0.03356
								5000	16.1	19.23	21.90	0.3044	0.03354
								5250	16.4	19.87	23.10	0.3186	0.03353
								5500	16.6	20.50	24.30	0.3328	0.03352
								6000	17.1	21.70	26.74	0.3616	0.03350
								6500	17.7	22.81	29.21	0.3908	0.03348
								7000	18.2	23.85	31.71	0.4203	0.03346
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.70	26.31	0.3206	0.03342
								4500	17.1	16.35	27.66	0.3363	0.03338
								4750	17.3	16.99	29.00	0.3519	0.03334
								5000	17.6	17.61	30.34	0.3675	0.03330
								5250	17.9	18.21	31.68	0.3830	0.03326
								5500	18.1	18.79	33.01	0.3985	0.03322
								6000	18.7	19.91	35.66	0.4292	0.03315
								6500	19.2	20.97	38.30	0.4598	0.03307
								7000	19.7	21.98	40.91	0.4902	0.03299
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.49	20.27	0.2748	0.03435
								4500	16.2	17.22	21.42	0.2874	0.03431
								4750	16.4	17.93	22.57	0.3000	0.03427
								5000	16.7	18.61	23.72	0.3126	0.03423
								5250	16.9	19.28	24.87	0.3253	0.03419
								5500	17.1	19.93	26.03	0.3379	0.03415
								6000	17.6	21.18	28.34	0.3633	0.03407
								6500	18.0	22.36	30.66	0.3888	0.03399
								7000	18.5	23.49	32.99	0.4143	0.03390
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.46	21.13	0.2900	0.03379
								4500	16.3	17.16	22.40	0.3056	0.03373
								4750	16.5	17.83	23.68	0.3212	0.03367
								5000	16.8	18.48	24.97	0.3369	0.03360
								5250	17.0	19.11	26.26	0.3526	0.03354
								5500	17.3	19.72	27.56	0.3685	0.03347
								6000	17.8	20.88	30.18	0.4004	0.03334
								6500	18.3	21.97	32.81	0.4325	0.03321
								7000	18.9	22.99	35.47	0.4649	0.03308
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.15	24.66	0.3161	0.03277
								4500	16.6	16.84	25.88	0.3300	0.03274
								4750	16.8	17.52	27.09	0.3438	0.03271
								5000	17.0	18.18	28.30	0.3575	0.03267
								5250	17.3	18.82	29.50	0.3712	0.03264
								5500	17.5	19.44	30.70	0.3848	0.03261
								6000	18.0	20.65	33.07	0.4119	0.03254
								6500	18.5	21.79	35.42	0.4387	0.03248
								7000	18.9	22.89	37.76	0.4652	0.03241
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.90	21.60	0.3052	0.03204
								4500	15.8	17.61	22.87	0.3207	0.03198
								4750	16.1	18.29	24.14	0.3362	0.03191
								5000	16.4	18.96	25.41	0.3518	0.03185
								5250	16.6	19.60	26.68	0.3674	0.03179
								5500	16.9	20.22	27.96	0.3831	0.03172
								6000	17.4	21.41	30.53	0.4146	0.03159
								6500	17.9	22.52	33.12	0.4462	0.03146
								7000	18.4	23.57	35.71	0.4781	0.03133
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.47	23.61	0.3643	0.03126
								4500	16.2	17.19	24.69	0.3802	0.03119
								4750	16.4	17.90	25.77	0.3961	0.03112

								5000	16.7	18.58	26.86	0.4121	0.03104
								5250	16.9	19.24	27.95	0.4281	0.03097
								5500	17.1	19.89	29.04	0.4442	0.03090
								6000	17.6	21.13	31.24	0.4765	0.03075
								6500	18.1	22.30	33.44	0.5089	0.03060
								7000	18.5	23.41	35.66	0.5415	0.03045
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.86	21.33	0.3488	0.03140
								4500	15.9	17.58	22.38	0.3657	0.03136
								4750	16.1	18.27	23.45	0.3828	0.03132
								5000	16.4	18.94	24.52	0.3999	0.03128
								5250	16.6	19.59	25.61	0.4172	0.03124
								5500	16.9	20.22	26.70	0.4347	0.03120
								6000	17.4	21.41	28.90	0.4700	0.03112
								6500	17.9	22.53	31.14	0.5057	0.03104
								7000	18.4	23.58	33.40	0.5420	0.03095
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.50	28.23	0.4326	0.03104
								4500	17.3	16.15	29.45	0.4520	0.03097
								4750	17.5	16.79	30.67	0.4713	0.03089
								5000	17.8	17.41	31.88	0.4905	0.03082
								5250	18.1	18.00	33.09	0.5097	0.03075
								5500	18.3	18.59	34.29	0.5287	0.03067
								6000	18.8	19.71	36.69	0.5667	0.03053
								6500	19.4	20.78	39.07	0.6045	0.03039
								7000	19.9	21.79	41.44	0.6420	0.03024
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.24	23.42	0.3531	0.03224
								4500	16.4	16.97	24.47	0.3685	0.03217
								4750	16.7	17.67	25.51	0.3839	0.03210
								5000	16.9	18.35	26.57	0.3993	0.03204
								5250	17.1	19.02	27.62	0.4148	0.03197
								5500	17.3	19.67	28.67	0.4303	0.03191
								6000	17.8	20.92	30.78	0.4613	0.03178
								6500	18.2	22.10	32.90	0.4925	0.03164
								7000	18.7	23.23	35.03	0.5237	0.03151
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.22	23.87	0.3781	0.03161
								4500	16.5	16.92	25.02	0.3969	0.03152
								4750	16.7	17.59	26.19	0.4158	0.03143
								5000	17.0	18.24	27.36	0.4348	0.03133
								5250	17.2	18.87	28.53	0.4539	0.03124
								5500	17.5	19.48	29.71	0.4731	0.03114
								6000	18.0	20.64	32.09	0.5117	0.03095
								6500	18.5	21.73	34.48	0.5506	0.03076
								7000	19.0	22.76	36.90	0.5898	0.03057
USA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.21	23.86	0.3592	0.03204
								4500	16.5	16.92	24.95	0.3748	0.03197
								4750	16.7	17.62	26.05	0.3903	0.03190
								5000	16.9	18.30	27.15	0.4060	0.03183
								5250	17.2	18.95	28.25	0.4217	0.03176
								5500	17.4	19.59	29.36	0.4374	0.03169
								6000	17.9	20.82	31.58	0.4690	0.03155
								6500	18.3	21.98	33.81	0.5007	0.03140
								7000	18.8	23.09	36.05	0.5326	0.03126
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.58	21.57	0.3439	0.03217
								4500	16.1	17.30	22.64	0.3604	0.03213
								4750	16.4	17.98	23.72	0.3771	0.03210
								5000	16.6	18.65	24.80	0.3939	0.03206
								5250	16.9	19.29	25.90	0.4109	0.03202
								5500	17.1	19.92	27.00	0.4280	0.03198
								6000	17.6	21.10	29.24	0.4625	0.03191
								6500	18.1	22.21	31.50	0.4975	0.03183
								7000	18.6	23.26	33.79	0.5330	0.03175
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.27	28.56	0.4245	0.03183
								4500	17.5	15.92	29.80	0.4434	0.03176
								4750	17.8	16.55	31.03	0.4623	0.03169
								5000	18.0	17.16	32.26	0.4811	0.03162
								5250	18.3	17.76	33.48	0.4998	0.03155
								5500	18.6	18.34	34.70	0.5185	0.03148
								6000	19.1	19.45	37.13	0.5557	0.03134
								6500	19.6	20.51	39.54	0.5926	0.03120
								7000	20.1	21.51	41.93	0.6293	0.03107
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.99	23.67	0.3483	0.03302
								4500	16.7	16.70	24.73	0.3634	0.03295
								4750	16.9	17.40	25.79	0.3784	0.03289
								5000	17.1	18.07	26.85	0.3936	0.03283
								5250	17.4	18.74	27.91	0.4087	0.03276
								5500	17.6	19.38	28.98	0.4238	0.03270
								6000	18.0	20.61	31.11	0.4542	0.03257
								6500	18.5	21.79	33.26	0.4847	0.03244
								7000	18.9	22.90	35.40	0.5153	0.03232
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.97	24.14	0.3724	0.03239
								4500	16.7	16.66	25.31	0.3908	0.03230
								4750	17.0	17.32	26.48	0.4093	0.03221
								5000	17.2	17.96	27.67	0.4280	0.03212

								5250	17.5	18.59	28.85	0.4467	0.03203
								5500	17.8	19.19	30.05	0.4655	0.03194
								6000	18.3	20.35	32.45	0.5033	0.03175
								6500	18.8	21.44	34.88	0.5414	0.03156
								7000	19.3	22.46	37.32	0.5798	0.03138
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.65	18.74	0.2566	0.03489
								4500	16.1	17.36	19.93	0.2697	0.03489
								4750	16.3	18.04	21.13	0.2829	0.03488
								5000	16.6	18.71	22.34	0.2962	0.03487
								5250	16.8	19.35	23.56	0.3096	0.03487
								5500	17.1	19.97	24.79	0.3232	0.03486
								6000	17.6	21.15	27.27	0.3505	0.03485
								6500	18.1	22.25	29.79	0.3782	0.03484
								7000	18.6	23.28	32.34	0.4063	0.03483
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.29	26.85	0.3083	0.03478
								4500	17.5	15.94	28.23	0.3231	0.03474
								4750	17.8	16.57	29.60	0.3379	0.03471
								5000	18.0	17.18	30.97	0.3526	0.03468
								5250	18.3	17.77	32.34	0.3673	0.03465
								5500	18.6	18.34	33.70	0.3819	0.03461
								6000	19.1	19.45	36.40	0.4110	0.03455
								6500	19.6	20.50	39.09	0.4399	0.03448
								7000	20.2	21.49	41.76	0.4687	0.03442
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	21.63	0.2810	0.03541
								4500	16.8	16.60	22.93	0.2956	0.03536
								4750	17.1	17.26	24.24	0.3103	0.03530
								5000	17.3	17.90	25.56	0.3251	0.03524
								5250	17.6	18.52	26.88	0.3399	0.03518
								5500	17.8	19.11	28.21	0.3549	0.03513
								6000	18.4	20.26	30.89	0.3849	0.03501
								6500	18.9	21.33	33.59	0.4152	0.03489
								7000	19.4	22.34	36.31	0.4457	0.03478
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.72	25.16	0.3050	0.03412
								4500	17.0	16.40	26.41	0.3182	0.03409
								4750	17.3	17.07	27.65	0.3313	0.03407
								5000	17.5	17.72	28.88	0.3443	0.03404
								5250	17.7	18.35	30.11	0.3572	0.03401
								5500	18.0	18.96	31.33	0.3701	0.03398
								6000	18.4	20.15	33.75	0.3956	0.03393
								6500	18.9	21.28	36.15	0.4209	0.03388
								7000	19.4	22.36	38.54	0.4461	0.03382
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.43	22.04	0.2962	0.03338
								4500	16.3	17.13	23.33	0.3109	0.03332
								4750	16.5	17.80	24.63	0.3257	0.03327
								5000	16.8	18.45	25.93	0.3405	0.03321
								5250	17.0	19.09	27.23	0.3553	0.03315
								5500	17.3	19.70	28.53	0.3702	0.03309
								6000	17.8	20.87	31.16	0.4001	0.03297
								6500	18.3	21.97	33.79	0.4302	0.03285
								7000	18.8	23.01	36.44	0.4604	0.03273
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.28	25.82	0.2906	0.03560
								4500	17.5	15.95	27.10	0.3027	0.03558
								4750	17.7	16.60	28.37	0.3147	0.03556
								5000	18.0	17.24	29.64	0.3267	0.03554
								5250	18.2	17.86	30.90	0.3386	0.03552
								5500	18.5	18.47	32.15	0.3504	0.03550
								6000	18.9	19.64	34.64	0.3739	0.03546
								6500	19.4	20.75	37.10	0.3972	0.03543
								7000	19.9	21.82	39.55	0.4204	0.03539
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.94	22.62	0.2845	0.03486
								4500	16.8	16.63	23.94	0.2981	0.03481
								4750	17.0	17.29	25.27	0.3118	0.03476
								5000	17.3	17.93	26.60	0.3255	0.03471
								5250	17.5	18.55	27.94	0.3393	0.03466
								5500	17.8	19.16	29.28	0.3531	0.03461
								6000	18.3	20.31	31.97	0.3808	0.03450
								6500	18.8	21.40	34.67	0.4086	0.03440
								7000	19.3	22.43	37.39	0.4366	0.03430
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.28	27.75	0.4044	0.03253
								4500	17.5	15.95	28.89	0.4206	0.03247
								4750	17.7	16.61	30.02	0.4367	0.03242
								5000	18.0	17.25	31.15	0.4527	0.03236
								5250	18.2	17.87	32.27	0.4686	0.03231
								5500	18.4	18.48	33.39	0.4844	0.03225
								6000	18.9	19.66	35.60	0.5159	0.03214
								6500	19.4	20.79	37.80	0.5471	0.03203
								7000	19.8	21.86	39.98	0.5780	0.03192
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.93	24.99	0.3861	0.03189
								4500	16.8	16.62	26.17	0.4039	0.03180
								4750	17.0	17.29	27.36	0.4218	0.03171

USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT GENERAL (GRABBER) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	17.3	17.93	28.54	0.4397	0.03162
								5250	17.5	18.56	29.74	0.4577	0.03154
								5500	17.8	19.17	30.93	0.4757	0.03145
								6000	18.3	20.33	33.33	0.5119	0.03127
								6500	18.8	21.43	35.75	0.5483	0.03109
								7000	19.3	22.47	38.17	0.5849	0.03091
								4250	17.5	15.04	25.38	0.2305	0.03782
								4500	17.8	15.68	26.79	0.2451	0.03778
								4750	18.1	16.30	28.19	0.2598	0.03774
								5000	18.3	16.90	29.59	0.2744	0.03770
								5250	18.6	17.48	30.99	0.2891	0.03766
								5500	18.9	18.06	32.39	0.3037	0.03761
								6000	19.4	19.14	35.20	0.3330	0.03753
								6500	20.0	20.17	38.00	0.3624	0.03744
								7000	20.5	21.14	40.81	0.3917	0.03736
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | POLICE PACKAGE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	9.75" AXLE SIZE	FAJAL F150 Police	LT265/70R 18 AT GOODYEAR (WRANGLER) / D3HGD AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	17.9	14.75	28.47	0.5502	0.03116
								4500	18.1	15.38	29.72	0.5731	0.03104
								4750	18.4	15.98	30.96	0.5960	0.03093
								5000	18.7	16.57	32.20	0.6188	0.03081
								5250	19.0	17.14	33.43	0.6415	0.03070
								5500	19.2	17.70	34.67	0.6642	0.03059
								6000	19.8	18.76	37.12	0.7094	0.03036
								6500	20.3	19.78	39.56	0.7543	0.03013
								7000	20.9	20.73	42.00	0.7990	0.02991
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.63	21.17	0.4292	0.03049
								4500	16.1	17.34	22.21	0.4461	0.03045
								4750	16.3	18.04	23.27	0.4632	0.03040
								5000	16.6	18.71	24.33	0.4805	0.03036
								5250	16.8	19.35	25.40	0.4979	0.03032
								5500	17.1	19.98	26.48	0.5154	0.03028
								6000	17.6	21.17	28.66	0.5508	0.03019
								6500	18.1	22.29	30.87	0.5868	0.03010
								7000	18.6	23.34	33.10	0.6231	0.03001
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.04	23.30	0.4306	0.03135
								4500	16.6	16.75	24.34	0.4461	0.03129
								4750	16.9	17.46	25.37	0.4615	0.03122
								5000	17.1	18.14	26.41	0.4770	0.03115
								5250	17.3	18.80	27.45	0.4926	0.03108
								5500	17.5	19.44	28.50	0.5081	0.03102
								6000	18.0	20.69	30.59	0.5393	0.03088
								6500	18.4	21.87	32.69	0.5705	0.03075
								7000	18.9	22.99	34.79	0.6019	0.03061
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.02	23.71	0.4550	0.03074
								4500	16.7	16.71	24.85	0.4739	0.03065
								4750	16.9	17.38	26.00	0.4928	0.03055
								5000	17.2	18.03	27.16	0.5119	0.03045
								5250	17.4	18.65	28.32	0.5311	0.03036
								5500	17.7	19.26	29.49	0.5503	0.03026
								6000	18.2	20.42	31.84	0.5891	0.03007
								6500	18.7	21.52	34.20	0.6281	0.02987
								7000	19.2	22.55	36.59	0.6675	0.02967
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.37	21.42	0.4241	0.03125
								4500	16.3	17.08	22.48	0.4407	0.03121
								4750	16.6	17.76	23.54	0.4575	0.03117
								5000	16.8	18.42	24.62	0.4744	0.03113
								5250	17.1	19.07	25.70	0.4914	0.03109
								5500	17.3	19.69	26.79	0.5086	0.03105
								6000	17.8	20.87	29.00	0.5433	0.03097
								6500	18.3	21.98	31.23	0.5785	0.03089
								7000	18.8	23.03	33.50	0.6141	0.03080
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.79	23.56	0.4258	0.03213
								4500	16.9	16.50	24.60	0.4409	0.03206
								4750	17.1	17.19	25.65	0.4561	0.03200
								5000	17.3	17.87	26.70	0.4712	0.03193
								5250	17.6	18.52	27.76	0.4864	0.03187
								5500	17.8	19.16	28.81	0.5016	0.03180
								6000	18.2	20.39	30.92	0.5322	0.03167
								6500	18.7	21.56	33.04	0.5628	0.03154
								7000	19.1	22.68	35.17	0.5934	0.03141
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.78	23.98	0.4492	0.03151
								4500	16.9	16.46	25.14	0.4677	0.03142
								4750	17.2	17.12	26.30	0.4863	0.03133
								5000	17.4	17.77	27.47	0.5050	0.03123
								5250	17.7	18.39	28.65	0.5238	0.03114
								5500	17.9	18.99	29.83	0.5426	0.03105
								6000	18.5	20.14	32.21	0.5806	0.03086
								6500	19.0	21.23	34.60	0.6189	0.03067
								7000	19.5	22.25	37.02	0.6575	0.03048

USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.48	21.22	0.4715	0.03006
								4500	16.2	17.19	22.26	0.4888	0.03001
								4750	16.5	17.88	23.30	0.5062	0.02996
								5000	16.7	18.54	24.34	0.5237	0.02992
								5250	17.0	19.19	25.40	0.5414	0.02987
								5500	17.2	19.82	26.47	0.5593	0.02982
								6000	17.7	21.01	28.62	0.5953	0.02972
								6500	18.2	22.12	30.81	0.6319	0.02963
								7000	18.7	23.17	33.02	0.6689	0.02953
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.90	23.39	0.4707	0.03094
								4500	16.8	16.61	24.42	0.4864	0.03087
								4750	17.0	17.31	25.44	0.5021	0.03080
								5000	17.2	17.99	26.47	0.5179	0.03073
								5250	17.4	18.65	27.50	0.5337	0.03066
								5500	17.7	19.29	28.54	0.5495	0.03059
								6000	18.1	20.53	30.60	0.5811	0.03044
								6500	18.5	21.71	32.68	0.6129	0.03030
								7000	19.0	22.83	34.76	0.6448	0.03016
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.89	23.75	0.4955	0.03032
								4500	16.8	16.58	24.89	0.5147	0.03022
								4750	17.1	17.24	26.02	0.5339	0.03012
								5000	17.3	17.89	27.17	0.5533	0.03002
								5250	17.6	18.51	28.32	0.5727	0.02992
								5500	17.8	19.12	29.47	0.5923	0.02982
								6000	18.3	20.28	31.79	0.6316	0.02962
								6500	18.8	21.37	34.14	0.6713	0.02941
								7000	19.3	22.40	36.50	0.7113	0.02921
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.22	21.48	0.4666	0.03081
								4500	16.5	16.92	22.52	0.4835	0.03077
								4750	16.7	17.61	23.57	0.5006	0.03072
								5000	17.0	18.27	24.64	0.5178	0.03068
								5250	17.2	18.91	25.71	0.5351	0.03063
								5500	17.5	19.53	26.79	0.5526	0.03059
								6000	17.9	20.71	28.97	0.5879	0.03050
								6500	18.4	21.82	31.18	0.6238	0.03040
								7000	19.0	22.87	33.41	0.6600	0.03031
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.65	23.65	0.4660	0.03171
								4500	17.0	16.36	24.69	0.4814	0.03164
								4750	17.3	17.05	25.73	0.4968	0.03157
								5000	17.5	17.72	26.77	0.5122	0.03150
								5250	17.7	18.38	27.81	0.5277	0.03143
								5500	17.9	19.02	28.85	0.5431	0.03136
								6000	18.4	20.24	30.95	0.5742	0.03123
								6500	18.8	21.41	33.04	0.6053	0.03109
								7000	19.2	22.52	35.15	0.6365	0.03095
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.65	24.03	0.4899	0.03109
								4500	17.1	16.33	25.18	0.5086	0.03099
								4750	17.3	16.99	26.33	0.5275	0.03089
								5000	17.6	17.63	27.49	0.5465	0.03080
								5250	17.8	18.25	28.65	0.5656	0.03070
								5500	18.1	18.85	29.82	0.5847	0.03060
								6000	18.6	20.00	32.17	0.6233	0.03040
								6500	19.1	21.09	34.54	0.6622	0.03020
								7000	19.6	22.11	36.93	0.7014	0.03000
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.14	21.78	0.5741	0.02878
								4500	16.6	16.84	22.77	0.5923	0.02872
								4750	16.8	17.53	23.76	0.6107	0.02866
								5000	17.0	18.19	24.77	0.6293	0.02861
								5250	17.3	18.83	25.79	0.6480	0.02855
								5500	17.5	19.45	26.81	0.6668	0.02849
								6000	18.0	20.64	28.87	0.7050	0.02837
								6500	18.5	21.75	30.97	0.7436	0.02825
								7000	19.0	22.81	33.09	0.7827	0.02812
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.58	24.06	0.5679	0.02972
								4500	17.1	16.29	25.05	0.5845	0.02964
								4750	17.3	16.98	26.04	0.6011	0.02956
								5000	17.5	17.65	27.03	0.6177	0.02948
								5250	17.8	18.31	28.02	0.6344	0.02940
								5500	18.0	18.95	29.02	0.6510	0.02932
								6000	18.4	20.18	31.01	0.6845	0.02916
								6500	18.9	21.35	33.01	0.7180	0.02900
								7000	19.3	22.47	35.01	0.7516	0.02883
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.59	24.26	0.5950	0.02909
								4500	17.1	16.27	25.35	0.6152	0.02898
								4750	17.4	16.93	26.44	0.6355	0.02887
								5000	17.6	17.57	27.54	0.6559	0.02875
								5250	17.9	18.19	28.65	0.6763	0.02864
								5500	18.1	18.80	29.76	0.6969	0.02853
								6000	18.6	19.95	31.99	0.7384	0.02830
								6500	19.1	21.04	34.24	0.7802	0.02808

USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	7000	19.6	22.07	36.51	0.8222	0.02785
								4250	17.2	15.35	24.34	0.5628	0.03048
								4500	17.4	16.05	25.34	0.5790	0.03040
								4750	17.6	16.73	26.34	0.5953	0.03033
								5000	17.8	17.40	27.34	0.6116	0.03025
								5250	18.0	18.05	28.35	0.6279	0.03017
								5500	18.2	18.68	29.35	0.6443	0.03009
								6000	18.7	19.90	31.37	0.6770	0.02993
								6500	19.1	21.06	33.39	0.7099	0.02978
								7000	19.5	22.17	35.42	0.7429	0.02962
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.36	24.56	0.5889	0.02984
								4500	17.4	16.03	25.66	0.6087	0.02974
								4750	17.6	16.69	26.77	0.6286	0.02963
								5000	17.9	17.32	27.88	0.6486	0.02952
								5250	18.1	17.94	29.00	0.6687	0.02941
								5500	18.4	18.54	30.13	0.6889	0.02930
								6000	18.9	19.68	32.39	0.7296	0.02908
								6500	19.4	20.77	34.67	0.7706	0.02886
								7000	19.9	21.79	36.96	0.8119	0.02863
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT GENERAL (GRABBER) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	18.3	14.41	27.43	0.4649	0.03458
								4500	18.5	15.04	28.68	0.4836	0.03450
								4750	18.8	15.65	29.92	0.5023	0.03441
								5000	19.1	16.24	31.17	0.5210	0.03433
								5250	19.3	16.82	32.41	0.5397	0.03424
								5500	19.6	17.39	33.66	0.5584	0.03416
								6000	20.1	18.47	36.15	0.5959	0.03399
								6500	20.7	19.49	38.64	0.6333	0.03383
								7000	21.2	20.47	41.13	0.6707	0.03366
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.72	20.40	0.3031	0.03040
								4500	15.1	18.48	21.47	0.3199	0.03032
								4750	15.3	19.21	22.54	0.3368	0.03024
								5000	15.6	19.92	23.61	0.3536	0.03016
								5250	15.8	20.61	24.68	0.3705	0.03009
								5500	16.0	21.28	25.75	0.3875	0.03001
								6000	16.5	22.56	27.91	0.4214	0.02985
								6500	16.9	23.76	30.07	0.4555	0.02970
								7000	17.4	24.90	32.23	0.4896	0.02954
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.97	26.73	0.3358	0.03207
								4500	16.8	16.63	28.04	0.3545	0.03200
								4750	17.0	17.27	29.34	0.3732	0.03194
								5000	17.3	17.89	30.63	0.3918	0.03187
								5250	17.6	18.48	31.93	0.4103	0.03181
								5500	17.9	19.07	33.21	0.4288	0.03174
								6000	18.4	20.18	35.77	0.4656	0.03161
								6500	19.0	21.24	38.32	0.5021	0.03148
								7000	19.5	22.24	40.85	0.5385	0.03135
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.33	20.04	0.2489	0.03265
								4500	15.4	18.08	21.15	0.2635	0.03259
								4750	15.7	18.80	22.27	0.2781	0.03254
								5000	15.9	19.50	23.39	0.2928	0.03248
								5250	16.1	20.18	24.52	0.3076	0.03242
								5500	16.4	20.84	25.65	0.3224	0.03237
								6000	16.8	22.10	27.93	0.3522	0.03225
								6500	17.3	23.29	30.23	0.3823	0.03214
								7000	17.8	24.41	32.55	0.4126	0.03202
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	15.6	16.90	20.83	0.2659	0.03316
								4500	15.8	17.63	21.92	0.2807	0.03310
								4750	16.1	18.35	23.02	0.2955	0.03304
								5000	16.3	19.04	24.12	0.3104	0.03298
								5250	16.5	19.72	25.22	0.3253	0.03292
								5500	16.7	20.38	26.33	0.3402	0.03286
								6000	17.2	21.64	28.54	0.3701	0.03274
								6500	17.6	22.83	30.76	0.4001	0.03261
								7000	18.1	23.96	32.99	0.4302	0.03249
							P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.02	20.62	0.2755	0.03270
								4500	15.7	17.75	21.76	0.2916	0.03262
								4750	16.0	18.46	22.90	0.3077	0.03255
								5000	16.2	19.15	24.04	0.3240	0.03247
								5250	16.4	19.81	25.20	0.3403	0.03239
								5500	16.7	20.46	26.35	0.3567	0.03231
								6000	17.1	21.69	28.68	0.3896	0.03216
								6500	17.6	22.85	31.02	0.4228	0.03200
								7000	18.1	23.95	33.37	0.4561	0.03184
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.79	21.79	0.2910	0.03255
								4500	16.0	17.49	23.02	0.3093	0.03246
								4750	16.2	18.16	24.26	0.3278	0.03238
								5000	16.5	18.82	25.51	0.3463	0.03229
								5250	16.7	19.44	26.76	0.3650	0.03220
								5500	17.0	20.05	28.01	0.3837	0.03211

								6000	17.5	21.22	30.54	0.4214	0.03192
								6500	18.1	22.30	33.09	0.4594	0.03174
								7000	18.6	23.32	35.66	0.4977	0.03156
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.34	18.81	0.2814	0.02998
								4500	14.6	19.12	19.81	0.2971	0.02992
								4750	14.8	19.88	20.82	0.3130	0.02986
								5000	15.0	20.62	21.83	0.3288	0.02980
								5250	15.3	21.33	22.85	0.3448	0.02974
								5500	15.5	22.02	23.87	0.3608	0.02968
								6000	15.9	23.34	25.92	0.3930	0.02956
								6500	16.4	24.59	27.98	0.4253	0.02944
								7000	16.8	25.76	30.06	0.4579	0.02932
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.47	25.22	0.3207	0.03149
								4500	16.2	17.16	26.40	0.3374	0.03144
								4750	16.5	17.84	27.58	0.3540	0.03138
								5000	16.7	18.51	28.74	0.3704	0.03132
								5250	17.0	19.15	29.90	0.3869	0.03127
								5500	17.2	19.77	31.06	0.4032	0.03121
								6000	17.7	20.98	33.35	0.4356	0.03110
								6500	18.2	22.12	35.62	0.4677	0.03099
								7000	18.7	23.21	37.88	0.4996	0.03088
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975-3/4 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	15.3	17.19	23.17	0.3817	0.02907
								4500	15.5	17.94	24.16	0.4008	0.02897
								4750	15.8	18.66	25.14	0.4199	0.02887
								5000	16.0	19.36	26.13	0.4391	0.02877
								5250	16.2	20.04	27.12	0.4583	0.02868
								5500	16.5	20.70	28.11	0.4775	0.02858
								6000	16.9	21.97	30.10	0.5161	0.02838
								6500	17.4	23.17	32.09	0.5548	0.02818
								7000	17.8	24.31	34.09	0.5936	0.02798
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.85	22.81	0.3174	0.03145
								4500	15.9	17.59	23.85	0.3341	0.03137
								4750	16.1	18.30	24.89	0.3509	0.03130
								5000	16.3	18.99	25.94	0.3677	0.03122
								5250	16.5	19.67	26.99	0.3847	0.03114
								5500	16.8	20.32	28.04	0.4017	0.03107
								6000	17.2	21.57	30.17	0.4360	0.03091
								6500	17.7	22.75	32.31	0.4705	0.03075
								7000	18.2	23.87	34.47	0.5053	0.03060
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	16.0	16.44	23.65	0.3332	0.03196
								4500	16.2	17.17	24.67	0.3501	0.03188
								4750	16.5	17.87	25.69	0.3670	0.03180
								5000	16.7	18.56	26.72	0.3839	0.03172
								5250	16.9	19.23	27.75	0.4009	0.03164
								5500	17.1	19.88	28.78	0.4179	0.03156
								6000	17.6	21.13	30.84	0.4520	0.03140
								6500	18.0	22.31	32.91	0.4863	0.03124
								7000	18.5	23.44	34.98	0.5206	0.03108
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.36	24.27	0.3664	0.03129
								4500	16.4	17.05	25.41	0.3872	0.03118
								4750	16.6	17.71	26.56	0.4081	0.03107
								5000	16.9	18.36	27.71	0.4292	0.03096
								5250	17.1	18.98	28.88	0.4503	0.03085
								5500	17.4	19.59	30.04	0.4715	0.03073
								6000	17.9	20.74	32.39	0.5143	0.03051
								6500	18.4	21.82	34.76	0.5574	0.03028
								7000	19.0	22.84	37.14	0.6008	0.03005
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.0	17.61	19.24	0.2733	0.03175
								4500	15.2	18.38	20.27	0.2884	0.03169
								4750	15.4	19.11	21.30	0.3036	0.03164
								5000	15.6	19.84	22.34	0.3188	0.03158
								5250	15.9	20.53	23.38	0.3340	0.03153
								5500	16.1	21.21	24.42	0.3493	0.03147
								6000	16.5	22.51	26.52	0.3801	0.03136
								6500	17.0	23.73	28.64	0.4111	0.03125
								7000	17.4	24.88	30.76	0.4422	0.03114
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.89	25.85	0.3066	0.03327
								4500	16.8	16.58	27.05	0.3224	0.03321
								4750	17.1	17.24	28.26	0.3382	0.03316
								5000	17.3	17.89	29.45	0.3538	0.03311
								5250	17.6	18.51	30.64	0.3694	0.03307
								5500	17.8	19.13	31.83	0.3849	0.03302
								6000	18.3	20.31	34.18	0.4156	0.03292
								6500	18.8	21.43	36.51	0.4461	0.03282
								7000	19.3	22.51	38.82	0.4764	0.03272
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.35	20.89	0.4087	0.03183
								4500	16.4	17.07	22.03	0.4244	0.03175
								4750	16.6	17.76	23.17	0.4401	0.03168
								5000	16.8	18.43	24.32	0.4559	0.03161
								5250	17.1	19.08	25.47	0.4717	0.03153

							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5500	17.3	19.72	26.62	0.4875	0.03146
								6000	17.8	20.94	28.93	0.5194	0.03131
								6500	18.2	22.09	31.26	0.5514	0.03116
								7000	18.7	23.18	33.59	0.5836	0.03101
								4250	15.8	16.72	18.74	0.3891	0.03201
								4500	16.0	17.43	19.86	0.4058	0.03197
								4750	16.3	18.12	20.98	0.4227	0.03193
								5000	16.5	18.78	22.12	0.4396	0.03189
								5250	16.8	19.42	23.26	0.4568	0.03185
								5500	17.0	20.03	24.42	0.4740	0.03181
								6000	17.5	21.20	26.75	0.5089	0.03173
								6500	18.1	22.30	29.11	0.5442	0.03164
								7000	18.6	23.33	31.50	0.5800	0.03156
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.34	26.23	0.4681	0.03166
								4500	17.4	15.98	27.52	0.4872	0.03159
								4750	17.7	16.61	28.81	0.5063	0.03151
								5000	18.0	17.22	30.09	0.5252	0.03144
								5250	18.3	17.80	31.37	0.5441	0.03137
								5500	18.5	18.38	32.64	0.5629	0.03129
								6000	19.1	19.48	35.18	0.6004	0.03115
								6500	19.6	20.52	37.70	0.6376	0.03100
								7000	20.1	21.51	40.20	0.6746	0.03086
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	16.3	16.15	20.46	0.3979	0.03281
								4500	16.5	16.87	21.54	0.4129	0.03274
								4750	16.8	17.57	22.63	0.4280	0.03267
								5000	17.0	18.25	23.72	0.4432	0.03261
								5250	17.2	18.91	24.82	0.4583	0.03254
								5500	17.4	19.55	25.91	0.4735	0.03247
								6000	17.9	20.79	28.10	0.5039	0.03234
								6500	18.3	21.96	30.30	0.5344	0.03220
								7000	18.8	23.07	32.51	0.5650	0.03207
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.08	21.38	0.4215	0.03220
								4500	16.6	16.76	22.60	0.4401	0.03210
								4750	16.9	17.42	23.83	0.4589	0.03200
								5000	17.2	18.06	25.06	0.4777	0.03191
								5250	17.4	18.68	26.30	0.4966	0.03181
								5500	17.7	19.28	27.54	0.5157	0.03171
								6000	18.2	20.42	30.05	0.5540	0.03152
								6500	18.7	21.49	32.58	0.5926	0.03132
								7000	19.3	22.50	35.12	0.6315	0.03112
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.77	24.70	0.4599	0.03103
								4500	16.9	16.45	25.87	0.4769	0.03096
								4750	17.2	17.12	27.03	0.4938	0.03090
								5000	17.4	17.77	28.18	0.5106	0.03083
								5250	17.7	18.39	29.33	0.5273	0.03077
								5500	17.9	19.01	30.47	0.5439	0.03071
								6000	18.4	20.19	32.74	0.5770	0.03058
								6500	18.9	21.32	34.99	0.6097	0.03046
								7000	19.4	22.39	37.22	0.6422	0.03033
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.50	21.82	0.4406	0.03037
								4500	16.2	17.19	23.03	0.4593	0.03027
								4750	16.5	17.87	24.24	0.4780	0.03018
								5000	16.7	18.52	25.46	0.4968	0.03008
								5250	17.0	19.15	26.68	0.5156	0.02998
								5500	17.2	19.76	27.90	0.5345	0.02989
								6000	17.8	20.93	30.35	0.5725	0.02969
								6500	18.3	22.02	32.82	0.6106	0.02949
								7000	18.8	23.05	35.31	0.6490	0.02930
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.77	21.37	0.4017	0.03357
								4500	17.0	16.46	22.54	0.4166	0.03351
								4750	17.2	17.14	23.71	0.4316	0.03344
								5000	17.4	17.80	24.88	0.4466	0.03337
								5250	17.7	18.44	26.05	0.4616	0.03330
								5500	17.9	19.06	27.23	0.4767	0.03323
								6000	18.4	20.25	29.60	0.5070	0.03310
								6500	18.8	21.38	31.98	0.5375	0.03296
								7000	19.3	22.45	34.38	0.5681	0.03282
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.12	19.20	0.3824	0.03373
								4500	16.6	16.81	20.34	0.3983	0.03370
								4750	16.8	17.48	21.50	0.4144	0.03366
								5000	17.1	18.13	22.66	0.4305	0.03363
								5250	17.4	18.76	23.83	0.4469	0.03359
								5500	17.6	19.36	25.01	0.4633	0.03356
								6000	18.1	20.51	27.40	0.4965	0.03349
								6500	18.6	21.60	29.82	0.5302	0.03341
								7000	19.2	22.61	32.28	0.5644	0.03334
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.8	14.83	26.90	0.4543	0.03343
								4500	18.0	15.47	28.22	0.4725	0.03336
								4750	18.3	16.08	29.54	0.4905	0.03330
								5000	18.6	16.67	30.86	0.5086	0.03323
								5250	18.9	17.25	32.17	0.5265	0.03316
								5500	19.1	17.81	33.48	0.5444	0.03310

								6000	19.7	18.90	36.08	0.5800	0.03296
								6500	20.2	19.93	38.66	0.6153	0.03283
								7000	20.7	20.90	41.23	0.6505	0.03270
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	16.9	15.58	20.92	0.3917	0.03455
								4500	17.1	16.28	22.03	0.4061	0.03449
								4750	17.4	16.96	23.15	0.4204	0.03443
								5000	17.6	17.63	24.26	0.4348	0.03436
								5250	17.8	18.27	25.38	0.4493	0.03430
								5500	18.0	18.90	26.50	0.4637	0.03424
								6000	18.5	20.11	28.75	0.4927	0.03412
								6500	18.9	21.26	31.00	0.5217	0.03399
								7000	19.4	22.36	33.26	0.5508	0.03387
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.0	15.52	21.90	0.4131	0.03394
								4500	17.2	16.18	23.15	0.4309	0.03385
								4750	17.5	16.83	24.41	0.4488	0.03376
								5000	17.8	17.45	25.67	0.4667	0.03367
								5250	18.0	18.06	26.94	0.4848	0.03358
								5500	18.3	18.65	28.21	0.5030	0.03349
								6000	18.8	19.77	30.78	0.5395	0.03330
								6500	19.3	20.83	33.37	0.5763	0.03312
								7000	19.9	21.83	35.97	0.6135	0.03293
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.24	25.33	0.4475	0.03278
								4500	17.5	15.91	26.53	0.4636	0.03272
								4750	17.8	16.56	27.72	0.4797	0.03266
								5000	18.0	17.19	28.90	0.4956	0.03261
								5250	18.3	17.80	30.08	0.5115	0.03255
								5500	18.5	18.41	31.25	0.5273	0.03249
								6000	19.0	19.57	33.57	0.5587	0.03238
								6500	19.5	20.67	35.88	0.5898	0.03227
								7000	19.9	21.73	38.17	0.6206	0.03216
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.91	22.37	0.4305	0.03212
								4500	16.8	16.59	23.61	0.4483	0.03203
								4750	17.1	17.25	24.85	0.4661	0.03194
								5000	17.3	17.89	26.10	0.4840	0.03185
								5250	17.6	18.51	27.35	0.5020	0.03176
								5500	17.8	19.11	28.60	0.5200	0.03166
								6000	18.4	20.25	31.12	0.5562	0.03148
								6500	18.9	21.33	33.65	0.5926	0.03130
								7000	19.4	22.35	36.20	0.6291	0.03112
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	23.74	0.4829	0.03050
								4500	16.8	16.62	24.79	0.5009	0.03041
								4750	17.0	17.30	25.85	0.5191	0.03031
								5000	17.2	17.97	26.91	0.5372	0.03022
								5250	17.5	18.62	27.97	0.5555	0.03012
								5500	17.7	19.24	29.04	0.5737	0.03003
								6000	18.2	20.45	31.18	0.6104	0.02983
								6500	18.6	21.60	33.33	0.6473	0.02964
								7000	19.1	22.68	35.50	0.6844	0.02945
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.28	21.42	0.4661	0.03067
								4500	16.4	16.98	22.44	0.4852	0.03061
								4750	16.7	17.66	23.48	0.5045	0.03054
								5000	16.9	18.31	24.53	0.5240	0.03048
								5250	17.2	18.94	25.58	0.5436	0.03042
								5500	17.4	19.56	26.64	0.5634	0.03035
								6000	17.9	20.73	28.79	0.6034	0.03022
								6500	18.5	21.82	30.97	0.6440	0.03009
								7000	19.0	22.84	33.17	0.6851	0.02996
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.6	14.99	28.06	0.5656	0.03016
								4500	17.8	15.63	29.25	0.5877	0.03006
								4750	18.1	16.25	30.44	0.6096	0.02996
								5000	18.4	16.85	31.62	0.6314	0.02986
								5250	18.6	17.44	32.79	0.6532	0.02976
								5500	18.9	18.01	33.97	0.6749	0.02966
								6000	19.4	19.10	36.30	0.7181	0.02946
								6500	20.0	20.14	38.62	0.7610	0.02926
								7000	20.5	21.13	40.92	0.8036	0.02907
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	16.7	15.74	23.33	0.4675	0.03154
								4500	17.0	16.45	24.34	0.4847	0.03145
								4750	17.2	17.14	25.35	0.5020	0.03136
								5000	17.4	17.80	26.36	0.5193	0.03128
								5250	17.6	18.46	27.38	0.5367	0.03119
								5500	17.8	19.10	28.39	0.5541	0.03110
								6000	18.3	20.32	30.43	0.5889	0.03093
								6500	18.7	21.48	32.47	0.6238	0.03076
								7000	19.2	22.59	34.52	0.6589	0.03058
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.68	23.89	0.4997	0.03086
								4500	17.1	16.35	25.02	0.5209	0.03074
								4750	17.3	17.01	26.15	0.5422	0.03062
								5000	17.6	17.64	27.29	0.5637	0.03050
								5250	17.8	18.25	28.44	0.5852	0.03038
								5500	18.1	18.85	29.59	0.6069	0.03026
								6000	18.6	19.98	31.91	0.6505	0.03002

USA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	6500	19.1	21.05	34.24	0.6945	0.02977
								7000	19.6	22.06	36.59	0.7387	0.02953
								4250	17.1	15.36	24.33	0.4719	0.03227
								4500	17.4	16.05	25.41	0.4892	0.03218
								4750	17.6	16.72	26.49	0.5066	0.03209
								5000	17.8	17.37	27.58	0.5240	0.03200
								5250	18.1	18.00	28.67	0.5414	0.03191
								5500	18.3	18.62	29.77	0.5589	0.03182
								6000	18.8	19.80	31.96	0.5941	0.03164
								6500	19.2	20.92	34.17	0.6294	0.03146
								7000	19.7	21.99	36.39	0.6649	0.03127
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.72	21.98	0.4553	0.03240
								4500	17.0	16.40	23.04	0.4737	0.03235
								4750	17.3	17.06	24.10	0.4922	0.03229
								5000	17.5	17.70	25.18	0.5109	0.03223
								5250	17.8	18.32	26.26	0.5297	0.03217
								5500	18.0	18.92	27.35	0.5487	0.03212
								6000	18.5	20.07	29.56	0.5871	0.03200
								6500	19.0	21.15	31.79	0.6260	0.03188
								7000	19.6	22.16	34.06	0.6654	0.03176
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	18.1	14.51	28.84	0.5479	0.03194
								4500	18.4	15.14	30.06	0.5690	0.03185
								4750	18.7	15.75	31.28	0.5900	0.03175
								5000	19.0	16.34	32.49	0.6109	0.03166
								5250	19.2	16.91	33.70	0.6317	0.03157
								5500	19.5	17.47	34.91	0.6525	0.03148
								6000	20.0	18.55	37.31	0.6938	0.03129
								6500	20.6	19.57	39.69	0.7348	0.03111
								7000	21.1	20.55	42.06	0.7757	0.03093
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.3	15.20	23.90	0.4575	0.03329
								4500	17.6	15.89	24.94	0.4740	0.03321
								4750	17.8	16.56	25.97	0.4906	0.03313
								5000	18.0	17.22	27.01	0.5072	0.03305
								5250	18.2	17.85	28.05	0.5238	0.03297
								5500	18.4	18.48	29.09	0.5405	0.03289
								6000	18.9	19.68	31.18	0.5738	0.03272
								6500	19.3	20.82	33.27	0.6073	0.03256
								7000	19.8	21.91	35.37	0.6409	0.03240
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.86	20.88	0.5749	0.02999
								4500	16.8	16.57	21.92	0.5911	0.02991
								4750	17.1	17.26	22.96	0.6074	0.02983
								5000	17.3	17.94	24.01	0.6238	0.02975
								5250	17.5	18.59	25.06	0.6403	0.02967
								5500	17.7	19.23	26.12	0.6568	0.02959
								6000	18.2	20.45	28.25	0.6901	0.02943
								6500	18.6	21.61	30.40	0.7236	0.02926
								7000	19.1	22.71	32.56	0.7574	0.02910
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.0	15.49	21.70	0.5923	0.03049
								4500	17.2	16.20	22.73	0.6087	0.03040
								4750	17.4	16.88	23.75	0.6252	0.03032
								5000	17.7	17.54	24.78	0.6417	0.03024
								5250	17.9	18.19	25.81	0.6582	0.03015
								5500	18.1	18.83	26.84	0.6747	0.03007
								6000	18.5	20.05	28.91	0.7079	0.02990
								6500	19.0	21.20	30.99	0.7412	0.02974
								7000	19.4	22.31	33.07	0.7745	0.02957
							P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.60	21.47	0.6040	0.03001
								4500	17.1	16.29	22.53	0.6217	0.02991
								4750	17.3	16.97	23.60	0.6396	0.02981
								5000	17.6	17.63	24.67	0.6575	0.02971
								5250	17.8	18.27	25.74	0.6755	0.02961
								5500	18.0	18.89	26.82	0.6936	0.02951
								6000	18.5	20.09	28.99	0.7300	0.02930
								6500	19.0	21.22	31.18	0.7666	0.02910
								7000	19.4	22.30	33.37	0.8034	0.02889
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.44	22.35	0.6192	0.02985
								4500	17.3	16.11	23.50	0.6395	0.02973
								4750	17.6	16.76	24.65	0.6598	0.02962
								5000	17.8	17.39	25.81	0.6803	0.02950
								5250	18.1	18.00	26.97	0.7008	0.02939
								5500	18.3	18.60	28.14	0.7215	0.02927
								6000	18.8	19.73	30.50	0.7631	0.02904
								6500	19.3	20.80	32.87	0.8050	0.02880
								7000	19.9	21.81	35.26	0.8472	0.02856
USA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.2	15.32	21.40	0.5678	0.03168
								4500	17.4	16.01	22.47	0.5833	0.03161
								4750	17.6	16.69	23.54	0.5989	0.03153
								5000	17.9	17.35	24.61	0.6145	0.03146
								5250	18.1	17.99	25.69	0.6302	0.03138
								5500	18.3	18.61	26.78	0.6460	0.03131

							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	6000	18.8	19.81	28.96	0.6778	0.03116
								6500	19.2	20.95	31.16	0.7098	0.03100
								7000	19.7	22.03	33.38	0.7420	0.03085
								4250	17.6	14.98	22.24	0.5852	0.03218
								4500	17.8	15.66	23.29	0.6009	0.03211
								4750	18.0	16.33	24.34	0.6166	0.03203
								5000	18.3	16.98	25.40	0.6324	0.03195
								5250	18.5	17.61	26.45	0.6482	0.03187
								5500	18.7	18.23	27.51	0.6640	0.03180
								6000	19.1	19.43	29.63	0.6957	0.03164
								6500	19.6	20.56	31.76	0.7275	0.03148
								7000	20.0	21.65	33.89	0.7594	0.03133
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.6	14.94	22.94	0.6099	0.03154
								4500	17.9	15.59	24.12	0.6293	0.03144
								4750	18.1	16.23	25.30	0.6488	0.03133
								5000	18.4	16.84	26.49	0.6684	0.03122
								5250	18.6	17.44	27.68	0.6880	0.03111
								5500	18.9	18.03	28.88	0.7078	0.03100
								6000	19.4	19.14	31.30	0.7477	0.03078
								6500	19.9	20.19	33.74	0.7878	0.03055
								7000	20.5	21.19	36.19	0.8283	0.03033
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.0	15.48	23.20	0.6575	0.02861
								4500	17.2	16.18	24.15	0.6760	0.02851
								4750	17.4	16.86	25.12	0.6946	0.02841
								5000	17.7	17.53	26.08	0.7133	0.02831
								5250	17.9	18.18	27.06	0.7320	0.02821
								5500	18.1	18.81	28.03	0.7509	0.02810
								6000	18.6	20.02	30.00	0.7888	0.02790
								6500	19.0	21.18	31.98	0.8270	0.02769
								7000	19.5	22.27	33.97	0.8655	0.02749
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.4	15.13	24.06	0.6737	0.02911
								4500	17.6	15.82	25.01	0.6923	0.02901
								4750	17.8	16.50	25.96	0.7110	0.02890
								5000	18.1	17.16	26.91	0.7297	0.02880
								5250	18.3	17.80	27.86	0.7484	0.02870
								5500	18.5	18.43	28.81	0.7671	0.02860
								6000	18.9	19.63	30.73	0.8047	0.02839
								6500	19.4	20.79	32.64	0.8424	0.02818
								7000	19.8	21.89	34.56	0.8802	0.02797
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.4	15.10	24.35	0.7092	0.02841
								4500	17.7	15.76	25.40	0.7320	0.02827
								4750	17.9	16.40	26.46	0.7550	0.02813
								5000	18.2	17.03	27.53	0.7781	0.02799
								5250	18.4	17.64	28.60	0.8012	0.02785
								5500	18.7	18.22	29.67	0.8245	0.02771
								6000	19.2	19.35	31.84	0.8714	0.02743
								6500	19.7	20.42	34.02	0.9187	0.02714
								7000	20.2	21.42	36.22	0.9663	0.02686
USA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.6	14.97	23.83	0.6466	0.03031
								4500	17.8	15.66	24.81	0.6644	0.03022
								4750	18.0	16.33	25.80	0.6822	0.03012
								5000	18.3	16.97	26.80	0.7001	0.03003
								5250	18.5	17.61	27.79	0.7182	0.02993
								5500	18.7	18.22	28.80	0.7362	0.02984
								6000	19.1	19.42	30.82	0.7726	0.02964
								6500	19.6	20.54	32.85	0.8093	0.02945
								7000	20.0	21.62	34.90	0.8463	0.02925
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	18.0	14.64	24.71	0.6628	0.03082
								4500	18.2	15.32	25.68	0.6806	0.03072
								4750	18.4	15.98	26.66	0.6986	0.03063
								5000	18.6	16.62	27.63	0.7165	0.03053
								5250	18.9	17.25	28.61	0.7345	0.03043
								5500	19.1	17.86	29.59	0.7525	0.03033
								6000	19.5	19.05	31.55	0.7887	0.03014
								6500	19.9	20.18	33.52	0.8249	0.02994
								7000	20.4	21.26	35.49	0.8612	0.02974
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.65	21.66	0.2101	0.03193
								4500	15.2	18.41	22.75	0.2246	0.03188
								4750	15.4	19.15	23.85	0.2391	0.03182
								5000	15.6	19.86	24.95	0.2536	0.03177
								5250	15.8	20.55	26.05	0.2682	0.03172
								5500	16.1	21.23	27.15	0.2828	0.03166
								6000	16.5	22.51	29.37	0.3120	0.03156
								6500	17.0	23.73	31.58	0.3414	0.03145
								7000	17.4	24.88	33.81	0.3708	0.03134
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.01	28.17	0.2276	0.03354
								4500	16.7	16.68	29.51	0.2435	0.03350
								4750	17.0	17.32	30.84	0.2594	0.03346
								5000	17.3	17.94	32.17	0.2753	0.03343
								5250	17.5	18.55	33.49	0.2911	0.03339

							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5500	17.8	19.13	34.81	0.3068	0.03336
								6000	18.3	20.26	37.43	0.3381	0.03328
								6500	18.9	21.33	40.04	0.3692	0.03321
								7000	19.4	22.34	42.63	0.4002	0.03314
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.2	17.35	21.25	0.1582	0.03393
								4500	15.4	18.10	22.39	0.1705	0.03390
								4750	15.6	18.83	23.53	0.1829	0.03387
								5000	15.9	19.53	24.68	0.1954	0.03384
								5250	16.1	20.22	25.83	0.2079	0.03381
								5500	16.3	20.89	26.99	0.2205	0.03377
								6000	16.8	22.16	29.32	0.2458	0.03371
								6500	17.2	23.35	31.68	0.2713	0.03364
								7000	17.7	24.49	34.04	0.2970	0.03357
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	14.4	18.25	20.00	0.1930	0.03148
								4500	14.7	19.04	21.03	0.2066	0.03144
								4750	14.9	19.80	22.06	0.2202	0.03140
								5000	15.1	20.54	23.10	0.2339	0.03137
								5250	15.3	21.25	24.15	0.2477	0.03133
								5500	15.5	21.95	25.19	0.2615	0.03129
								6000	16.0	23.28	27.30	0.2892	0.03122
								6500	16.4	24.53	29.42	0.3171	0.03114
								7000	16.9	25.71	31.55	0.3452	0.03107
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.71	21.70	0.2085	0.03181
								4500	15.1	18.47	22.80	0.2228	0.03176
								4750	15.3	19.20	23.90	0.2372	0.03171
								5000	15.6	19.92	25.00	0.2516	0.03166
								5250	15.8	20.61	26.10	0.2661	0.03161
								5500	16.0	21.29	27.21	0.2805	0.03155
								6000	16.5	22.57	29.42	0.3095	0.03145
								6500	16.9	23.79	31.65	0.3386	0.03134
								7000	17.4	24.94	33.88	0.3677	0.03124
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.00	28.30	0.2234	0.03362
								4500	16.7	16.66	29.65	0.2391	0.03358
								4750	17.0	17.30	30.98	0.2547	0.03355
								5000	17.3	17.93	32.32	0.2703	0.03351
								5250	17.6	18.53	33.65	0.2858	0.03348
								5500	17.8	19.12	34.97	0.3013	0.03344
								6000	18.4	20.24	37.61	0.3321	0.03338
								6500	18.9	21.31	40.23	0.3627	0.03331
								7000	19.4	22.33	42.83	0.3931	0.03324
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.33	21.34	0.1558	0.03400
								4500	15.4	18.08	22.48	0.1679	0.03397
								4750	15.7	18.81	23.63	0.1801	0.03394
								5000	15.9	19.51	24.79	0.1923	0.03391
								5250	16.1	20.20	25.94	0.2046	0.03388
								5500	16.3	20.86	27.11	0.2170	0.03385
								6000	16.8	22.14	29.45	0.2419	0.03378
								6500	17.3	23.33	31.81	0.2669	0.03372
								7000	17.7	24.46	34.19	0.2922	0.03366
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.30	20.04	0.1916	0.03137
								4500	14.6	19.09	21.07	0.2050	0.03133
								4750	14.8	19.85	22.11	0.2186	0.03130
								5000	15.1	20.59	23.15	0.2321	0.03126
								5250	15.3	21.31	24.19	0.2458	0.03122
								5500	15.5	22.01	25.24	0.2594	0.03119
								6000	15.9	23.34	27.35	0.2869	0.03111
								6500	16.4	24.60	29.48	0.3146	0.03104
								7000	16.8	25.78	31.61	0.3424	0.03097
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.48	26.72	0.2127	0.03301
								4500	16.2	17.19	27.94	0.2267	0.03298
								4750	16.5	17.87	29.15	0.2405	0.03295
								5000	16.7	18.53	30.35	0.2543	0.03293
								5250	17.0	19.18	31.54	0.2680	0.03290
								5500	17.2	19.81	32.73	0.2816	0.03287
								6000	17.7	21.03	35.09	0.3087	0.03282
								6500	18.1	22.18	37.43	0.3356	0.03276
								7000	18.6	23.28	39.75	0.3622	0.03271
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.6	16.94	20.91	0.1744	0.03486
								4500	15.8	17.68	21.99	0.1865	0.03484
								4750	16.0	18.41	23.08	0.1986	0.03481
								5000	16.2	19.11	24.17	0.2108	0.03479

								5250	16.4	19.80	25.26	0.2231	0.03476
								5500	16.7	20.47	26.36	0.2354	0.03473
								6000	17.1	21.75	28.57	0.2601	0.03468
								6500	17.5	22.96	30.79	0.2850	0.03463
								7000	18.0	24.10	33.03	0.3100	0.03458
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.39	27.98	0.1833	0.03652
								4500	17.4	16.06	29.25	0.1955	0.03651
								4750	17.6	16.71	30.52	0.2077	0.03649
								5000	17.9	17.35	31.78	0.2198	0.03648
								5250	18.1	17.97	33.03	0.2318	0.03646
								5500	18.3	18.58	34.28	0.2438	0.03644
								6000	18.8	19.75	36.76	0.2675	0.03641
								6500	19.3	20.87	39.21	0.2911	0.03638
								7000	19.8	21.93	41.65	0.3145	0.03635
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	15.0	17.61	21.64	0.2169	0.03191
								4500	15.2	18.37	22.73	0.2314	0.03185
								4750	15.4	19.10	23.83	0.2460	0.03180
								5000	15.6	19.82	24.92	0.2606	0.03175
								5250	15.9	20.51	26.03	0.2752	0.03169
								5500	16.1	21.18	27.13	0.2898	0.03164
								6000	16.5	22.47	29.34	0.3191	0.03153
								6500	17.0	23.68	31.55	0.3486	0.03142
								7000	17.5	24.83	33.78	0.3781	0.03131
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.99	28.14	0.2337	0.03351
								4500	16.8	16.65	29.48	0.2497	0.03347
								4750	17.0	17.29	30.81	0.2657	0.03343
								5000	17.3	17.92	32.14	0.2816	0.03339
								5250	17.6	18.52	33.46	0.2974	0.03336
								5500	17.8	19.11	34.78	0.3132	0.03332
								6000	18.4	20.24	37.40	0.3446	0.03324
								6500	18.9	21.30	40.00	0.3758	0.03317
								7000	19.4	22.31	42.59	0.4069	0.03310
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.31	21.24	0.1639	0.03391
								4500	15.5	18.07	22.37	0.1763	0.03388
								4750	15.7	18.79	23.52	0.1887	0.03385
								5000	15.9	19.50	24.66	0.2012	0.03381
								5250	16.1	20.18	25.82	0.2138	0.03378
								5500	16.4	20.85	26.98	0.2264	0.03375
								6000	16.8	22.12	29.31	0.2518	0.03368
								6500	17.3	23.32	31.65	0.2773	0.03361
								7000	17.7	24.45	34.02	0.3031	0.03354
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.5	18.20	19.98	0.1997	0.03146
								4500	14.7	18.99	21.01	0.2133	0.03143
								4750	14.9	19.75	22.05	0.2270	0.03139
								5000	15.1	20.49	23.08	0.2407	0.03135
								5250	15.4	21.20	24.13	0.2545	0.03131
								5500	15.6	21.90	25.17	0.2683	0.03127
								6000	16.0	23.22	27.28	0.2961	0.03120
								6500	16.5	24.48	29.39	0.3241	0.03112
								7000	16.9	25.66	31.52	0.3523	0.03104
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.47	26.57	0.2232	0.03290
								4500	16.2	17.17	27.78	0.2374	0.03287
								4750	16.5	17.85	28.98	0.2516	0.03284
								5000	16.7	18.52	30.18	0.2656	0.03281
								5250	17.0	19.17	31.36	0.2796	0.03278
								5500	17.2	19.80	32.55	0.2935	0.03274
								6000	17.7	21.01	34.89	0.3212	0.03268
								6500	18.2	22.17	37.22	0.3486	0.03262
								7000	18.6	23.27	39.53	0.3757	0.03256
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.66	21.68	0.2153	0.03179
								4500	15.1	18.42	22.78	0.2297	0.03174
								4750	15.4	19.16	23.87	0.2441	0.03169
								5000	15.6	19.87	24.97	0.2585	0.03164
								5250	15.8	20.57	26.08	0.2730	0.03158
								5500	16.1	21.24	27.18	0.2875	0.03153
								6000	16.5	22.53	29.40	0.3166	0.03142
								6500	17.0	23.75	31.62	0.3457	0.03131
								7000	17.4	24.90	33.84	0.3750	0.03121
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.97	28.28	0.2296	0.03358
								4500	16.8	16.63	29.62	0.2453	0.03355
								4750	17.0	17.28	30.96	0.2610	0.03351
								5000	17.3	17.90	32.29	0.2766	0.03348
								5250	17.6	18.50	33.62	0.2922	0.03344
								5500	17.8	19.09	34.94	0.3077	0.03341
								6000	18.4	20.22	37.57	0.3386	0.03334
								6500	18.9	21.28	40.19	0.3693	0.03327
								7000	19.4	22.30	42.79	0.3998	0.03320
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.29	21.33	0.1615	0.03398
								4500	15.5	18.04	22.47	0.1737	0.03395
								4750	15.7	18.77	23.62	0.1859	0.03392

								5000	15.9	19.48	24.77	0.1982	0.03388
								5250	16.1	20.16	25.93	0.2105	0.03385
								5500	16.4	20.83	27.09	0.2229	0.03382
								6000	16.8	22.10	29.43	0.2478	0.03375
								6500	17.3	23.30	31.79	0.2730	0.03369
								7000	17.8	24.43	34.17	0.2983	0.03362
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.26	20.02	0.1982	0.03135
								4500	14.7	19.04	21.05	0.2117	0.03132
								4750	14.9	19.80	22.09	0.2253	0.03128
								5000	15.1	20.55	23.13	0.2389	0.03124
								5250	15.3	21.26	24.17	0.2525	0.03121
								5500	15.5	21.96	25.22	0.2663	0.03117
								6000	16.0	23.29	27.33	0.2938	0.03109
								6500	16.4	24.54	29.45	0.3216	0.03102
								7000	16.9	25.73	31.59	0.3495	0.03094
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.45	26.70	0.2193	0.03298
								4500	16.3	17.15	27.91	0.2333	0.03295
								4750	16.5	17.84	29.12	0.2472	0.03292
								5000	16.7	18.50	30.32	0.2610	0.03289
								5250	17.0	19.15	31.51	0.2748	0.03286
								5500	17.2	19.78	32.70	0.2885	0.03283
								6000	17.7	20.99	35.06	0.3156	0.03278
								6500	18.2	22.15	37.39	0.3426	0.03272
								7000	18.6	23.25	39.71	0.3693	0.03266
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.6	16.90	20.89	0.1816	0.03483
								4500	15.8	17.64	21.97	0.1938	0.03481
								4750	16.0	18.37	23.06	0.2060	0.03478
								5000	16.3	19.07	24.14	0.2182	0.03475
								5250	16.5	19.76	25.24	0.2305	0.03473
								5500	16.7	20.42	26.34	0.2429	0.03470
								6000	17.1	21.70	28.54	0.2677	0.03464
								6500	17.6	22.91	30.76	0.2926	0.03459
								7000	18.0	24.06	33.00	0.3177	0.03453
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.36	27.95	0.1904	0.03648
								4500	17.4	16.03	29.22	0.2027	0.03646
								4750	17.6	16.69	30.49	0.2149	0.03644
								5000	17.9	17.32	31.75	0.2271	0.03643
								5250	18.1	17.95	33.00	0.2391	0.03641
								5500	18.4	18.55	34.24	0.2511	0.03639
								6000	18.8	19.72	36.72	0.2750	0.03636
								6500	19.3	20.84	39.17	0.2987	0.03633
								7000	19.8	21.90	41.61	0.3221	0.03630
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.84	20.40	0.2612	0.03358
								4500	15.9	17.57	21.61	0.2734	0.03354
								4750	16.1	18.28	22.82	0.2856	0.03351
								5000	16.3	18.97	24.03	0.2978	0.03347
								5250	16.6	19.63	25.25	0.3101	0.03343
								5500	16.8	20.28	26.47	0.3224	0.03340
								6000	17.3	21.52	28.93	0.3472	0.03333
								6500	17.8	22.69	31.39	0.3720	0.03326
								7000	18.2	23.80	33.87	0.3970	0.03318
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.23	18.35	0.2415	0.03376
								4500	15.6	17.95	19.54	0.2545	0.03376
								4750	15.8	18.65	20.74	0.2676	0.03376
								5000	16.1	19.32	21.94	0.2809	0.03376
								5250	16.3	19.97	23.16	0.2942	0.03376
								5500	16.6	20.60	24.39	0.3077	0.03376
								6000	17.1	21.79	26.87	0.3349	0.03376
								6500	17.6	22.90	29.38	0.3625	0.03376
								7000	18.1	23.94	31.93	0.3904	0.03376
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.85	26.37	0.2969	0.03338
								4500	16.9	16.51	27.74	0.3119	0.03335
								4750	17.2	17.15	29.11	0.3268	0.03332
								5000	17.4	17.77	30.47	0.3417	0.03330
								5250	17.7	18.37	31.82	0.3565	0.03327
								5500	18.0	18.95	33.17	0.3713	0.03324
								6000	18.5	20.07	35.86	0.4007	0.03318
								6500	19.0	21.13	38.53	0.4299	0.03313
								7000	19.6	22.14	41.19	0.4590	0.03307
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.68	20.13	0.2575	0.03422
								4500	16.0	17.41	21.29	0.2695	0.03419
								4750	16.3	18.13	22.45	0.2816	0.03415
								5000	16.5	18.81	23.62	0.2937	0.03412
								5250	16.7	19.49	24.78	0.3058	0.03409
								5500	16.9	20.14	25.95	0.3179	0.03406
								6000	17.4	21.39	28.30	0.3422	0.03400
								6500	17.8	22.58	30.65	0.3666	0.03393
								7000	18.3	23.70	33.00	0.3911	0.03387
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.64	21.06	0.2709	0.03369
								4500	16.1	17.34	22.35	0.2858	0.03364
								4750	16.4	18.01	23.65	0.3009	0.03358

USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	5000	16.6	18.66	24.95	0.3159	0.03353
								5250	16.9	19.29	26.26	0.3311	0.03348
								5500	17.1	19.91	27.58	0.3463	0.03342
								6000	17.6	21.07	30.22	0.3770	0.03331
								6500	18.2	22.16	32.90	0.4079	0.03320
								7000	18.7	23.18	35.59	0.4390	0.03309
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.11	21.57	0.2834	0.03193
								4500	15.7	17.82	22.85	0.2982	0.03188
								4750	15.9	18.50	24.14	0.3131	0.03183
								5000	16.2	19.17	25.43	0.3280	0.03177
								5250	16.4	19.81	26.72	0.3430	0.03172
								5500	16.7	20.44	28.02	0.3580	0.03166
								6000	17.2	21.63	30.63	0.3881	0.03155
								6500	17.7	22.74	33.25	0.4185	0.03145
								7000	18.2	23.79	35.88	0.4489	0.03134
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.60	18.80	0.2334	0.03548
								4500	16.1	17.31	20.01	0.2455	0.03549
								4750	16.4	17.99	21.24	0.2578	0.03549
								5000	16.6	18.65	22.48	0.2701	0.03550
								5250	16.9	19.28	23.73	0.2826	0.03551
								5500	17.1	19.90	24.99	0.2952	0.03552
								6000	17.7	21.07	27.53	0.3206	0.03553
								6500	18.2	22.17	30.11	0.3463	0.03555
								7000	18.7	23.20	32.72	0.3724	0.03556
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.23	27.15	0.2786	0.03546
								4500	17.6	15.88	28.56	0.2923	0.03544
								4750	17.8	16.50	29.97	0.3061	0.03542
								5000	18.1	17.11	31.37	0.3197	0.03540
								5250	18.4	17.70	32.76	0.3333	0.03538
								5500	18.7	18.27	34.15	0.3469	0.03536
								6000	19.2	19.37	36.92	0.3739	0.03532
								6500	19.7	20.41	39.67	0.4008	0.03528
								7000	20.3	21.40	42.41	0.4275	0.03524
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.98	20.66	0.2484	0.03626
								4500	16.7	16.70	21.85	0.2595	0.03623
								4750	16.9	17.38	23.05	0.2707	0.03621
								5000	17.2	18.06	24.25	0.2818	0.03618
								5250	17.4	18.71	25.45	0.2930	0.03616
								5500	17.6	19.35	26.65	0.3042	0.03613
								6000	18.1	20.57	29.05	0.3266	0.03608
								6500	18.5	21.74	31.47	0.3491	0.03603
								7000	19.0	22.84	33.89	0.3717	0.03598
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.95	21.65	0.2593	0.03573
								4500	16.8	16.64	22.98	0.2732	0.03568
								4750	17.0	17.29	24.31	0.2871	0.03564
								5000	17.3	17.93	25.65	0.3010	0.03559
								5250	17.6	18.55	27.00	0.3151	0.03555
								5500	17.8	19.15	28.35	0.3292	0.03550
								6000	18.3	20.28	31.08	0.3576	0.03541
								6500	18.9	21.36	33.83	0.3863	0.03531
								7000	19.4	22.37	36.60	0.4151	0.03521
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.67	25.42	0.2749	0.03478
								4500	17.1	16.35	26.69	0.2871	0.03476
								4750	17.3	17.01	27.96	0.2992	0.03475
								5000	17.5	17.66	29.22	0.3112	0.03473
								5250	17.8	18.29	30.48	0.3231	0.03472
								5500	18.0	18.90	31.73	0.3350	0.03471
								6000	18.5	20.08	34.21	0.3587	0.03468
								6500	19.0	21.21	36.67	0.3821	0.03465
								7000	19.5	22.28	39.11	0.4053	0.03462
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.39	22.20	0.2698	0.03398
								4500	16.3	17.08	23.52	0.2835	0.03394
								4750	16.6	17.75	24.84	0.2972	0.03389
								5000	16.8	18.40	26.17	0.3110	0.03385
								5250	17.1	19.03	27.50	0.3248	0.03380
								5500	17.4	19.64	28.84	0.3387	0.03376
								6000	17.9	20.80	31.52	0.3666	0.03367
								6500	18.4	21.90	34.22	0.3946	0.03357
								7000	18.9	22.94	36.93	0.4228	0.03348
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.18	26.12	0.2590	0.03647
								4500	17.6	15.84	27.43	0.2700	0.03647
								4750	17.9	16.49	28.74	0.2809	0.03646

								5000	18.1	17.12	30.04	0.2918	0.03646
								5250	18.3	17.74	31.33	0.3026	0.03645
								5500	18.6	18.34	32.61	0.3134	0.03644
								6000	19.1	19.50	35.16	0.3348	0.03643
								6500	19.5	20.61	37.69	0.3560	0.03642
								7000	20.0	21.67	40.20	0.3771	0.03641
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.84	22.81	0.2568	0.03567
								4500	16.9	16.52	24.16	0.2693	0.03564
								4750	17.1	17.18	25.52	0.2819	0.03560
								5000	17.4	17.81	26.89	0.2945	0.03556
								5250	17.7	18.43	28.26	0.3072	0.03553
								5500	17.9	19.03	29.64	0.3198	0.03549
								6000	18.4	20.18	32.40	0.3453	0.03542
								6500	18.9	21.26	35.17	0.3709	0.03534
								7000	19.5	22.28	37.96	0.3967	0.03527
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.80	20.28	0.2737	0.03350
								4500	15.9	17.53	21.49	0.2858	0.03346
								4750	16.2	18.23	22.70	0.2980	0.03343
								5000	16.4	18.92	23.91	0.3103	0.03339
								5250	16.6	19.59	25.13	0.3225	0.03335
								5500	16.9	20.23	26.35	0.3348	0.03332
								6000	17.3	21.47	28.81	0.3595	0.03325
								6500	17.8	22.64	31.27	0.3843	0.03317
								7000	18.3	23.75	33.75	0.4093	0.03310
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.18	18.23	0.2539	0.03368
								4500	15.6	17.90	19.42	0.2669	0.03368
								4750	15.8	18.60	20.62	0.2800	0.03368
								5000	16.1	19.27	21.83	0.2932	0.03368
								5250	16.3	19.92	23.04	0.3066	0.03368
								5500	16.6	20.55	24.27	0.3200	0.03368
								6000	17.1	21.74	26.75	0.3472	0.03368
								6500	17.6	22.86	29.27	0.3748	0.03367
								7000	18.1	23.90	31.81	0.4027	0.03367
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.82	26.26	0.3084	0.03330
								4500	16.9	16.48	27.63	0.3234	0.03327
								4750	17.2	17.11	29.00	0.3383	0.03324
								5000	17.5	17.73	30.36	0.3531	0.03322
								5250	17.7	18.33	31.71	0.3679	0.03319
								5500	18.0	18.92	33.06	0.3826	0.03316
								6000	18.5	20.04	35.75	0.4120	0.03310
								6500	19.1	21.10	38.42	0.4411	0.03304
								7000	19.6	22.11	41.08	0.4701	0.03298
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.64	20.01	0.2693	0.03414
								4500	16.1	17.37	21.17	0.2813	0.03411
								4750	16.3	18.08	22.34	0.2934	0.03408
								5000	16.5	18.77	23.50	0.3054	0.03405
								5250	16.7	19.44	24.67	0.3175	0.03401
								5500	17.0	20.09	25.84	0.3296	0.03398
								6000	17.4	21.34	28.18	0.3539	0.03392
								6500	17.9	22.53	30.53	0.3783	0.03385
								7000	18.3	23.66	32.89	0.4027	0.03379
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.60	20.95	0.2825	0.03362
								4500	16.1	17.30	22.24	0.2974	0.03356
								4750	16.4	17.97	23.54	0.3123	0.03351
								5000	16.6	18.62	24.84	0.3274	0.03345
								5250	16.9	19.25	26.15	0.3425	0.03340
								5500	17.2	19.87	27.47	0.3577	0.03334
								6000	17.7	21.03	30.11	0.3883	0.03323
								6500	18.2	22.12	32.79	0.4192	0.03312
								7000	18.7	23.15	35.48	0.4503	0.03300
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.28	24.58	0.3039	0.03264
								4500	16.4	16.98	25.81	0.3171	0.03261
								4750	16.7	17.66	27.05	0.3303	0.03259
								5000	16.9	18.32	28.27	0.3433	0.03256
								5250	17.2	18.97	29.49	0.3563	0.03254
								5500	17.4	19.59	30.70	0.3693	0.03252
								6000	17.9	20.80	33.11	0.3950	0.03247
								6500	18.3	21.94	35.50	0.4204	0.03243
								7000	18.8	23.04	37.87	0.4457	0.03238
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.06	21.45	0.2958	0.03186
								4500	15.7	17.77	22.73	0.3106	0.03180
								4750	16.0	18.46	24.02	0.3254	0.03175
								5000	16.2	19.12	25.31	0.3403	0.03169
								5250	16.5	19.77	26.60	0.3552	0.03164
								5500	16.7	20.39	27.90	0.3702	0.03158
								6000	17.2	21.58	30.51	0.4003	0.03147
								6500	17.7	22.69	33.13	0.4306	0.03136
								7000	18.3	23.74	35.76	0.4610	0.03125
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.56	18.68	0.2462	0.03539
								4500	16.2	17.26	19.89	0.2583	0.03540
								4750	16.4	17.95	21.12	0.2706	0.03540

								5000	16.7	18.60	22.36	0.2829	0.03541
								5250	16.9	19.24	23.61	0.2953	0.03542
								5500	17.2	19.86	24.86	0.3079	0.03542
								6000	17.7	21.03	27.41	0.3333	0.03544
								6500	18.2	22.13	29.98	0.3590	0.03545
								7000	18.7	23.15	32.60	0.3850	0.03546
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.20	27.04	0.2905	0.03537
								4500	17.6	15.85	28.45	0.3042	0.03535
								4750	17.9	16.47	29.85	0.3179	0.03533
								5000	18.1	17.08	31.25	0.3316	0.03531
								5250	18.4	17.66	32.65	0.3452	0.03529
								5500	18.7	18.24	34.04	0.3587	0.03527
								6000	19.2	19.33	36.81	0.3857	0.03523
								6500	19.8	20.38	39.56	0.4125	0.03519
								7000	20.3	21.37	42.30	0.4391	0.03515
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.95	20.54	0.2607	0.03617
								4500	16.8	16.66	21.74	0.2718	0.03615
								4750	17.0	17.35	22.93	0.2829	0.03612
								5000	17.2	18.02	24.13	0.2940	0.03610
								5250	17.4	18.67	25.33	0.3052	0.03607
								5500	17.7	19.31	26.53	0.3164	0.03605
								6000	18.1	20.53	28.94	0.3388	0.03599
								6500	18.6	21.70	31.35	0.3612	0.03594
								7000	19.0	22.80	33.78	0.3837	0.03589
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	21.53	0.2713	0.03565
								4500	16.8	16.60	22.86	0.2851	0.03560
								4750	17.1	17.26	24.20	0.2990	0.03555
								5000	17.3	17.89	25.54	0.3130	0.03551
								5250	17.6	18.51	26.89	0.3270	0.03546
								5500	17.8	19.11	28.24	0.3411	0.03541
								6000	18.4	20.25	30.97	0.3694	0.03532
								6500	18.9	21.32	33.71	0.3980	0.03522
								7000	19.4	22.33	36.48	0.4268	0.03512
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.64	25.29	0.2878	0.03469
								4500	17.1	16.32	26.57	0.2999	0.03467
								4750	17.3	16.98	27.84	0.3120	0.03465
								5000	17.6	17.62	29.10	0.3240	0.03464
								5250	17.8	18.25	30.36	0.3359	0.03462
								5500	18.1	18.86	31.61	0.3478	0.03461
								6000	18.5	20.04	34.09	0.3714	0.03458
								6500	19.0	21.17	36.55	0.3947	0.03455
								7000	19.5	22.24	38.99	0.4179	0.03452
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.35	22.07	0.2826	0.03390
								4500	16.4	17.04	23.39	0.2963	0.03385
								4750	16.6	17.71	24.72	0.3100	0.03381
								5000	16.9	18.36	26.05	0.3238	0.03376
								5250	17.1	18.99	27.38	0.3376	0.03371
								5500	17.4	19.60	28.72	0.3514	0.03367
								6000	17.9	20.76	31.40	0.3792	0.03357
								6500	18.4	21.86	34.10	0.4072	0.03348
								7000	18.9	22.89	36.81	0.4353	0.03339
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.14	26.00	0.2722	0.03637
								4500	17.7	15.81	27.31	0.2832	0.03637
								4750	17.9	16.45	28.61	0.2942	0.03636
								5000	18.1	17.09	29.91	0.3050	0.03635
								5250	18.4	17.70	31.20	0.3158	0.03634
								5500	18.6	18.30	32.49	0.3266	0.03634
								6000	19.1	19.47	35.04	0.3479	0.03632
								6500	19.6	20.57	37.57	0.3691	0.03631
								7000	20.0	21.63	40.08	0.3901	0.03630
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.80	22.68	0.2701	0.03558
								4500	16.9	16.48	24.04	0.2826	0.03554
								4750	17.2	17.14	25.40	0.2951	0.03550
								5000	17.4	17.77	26.77	0.3077	0.03547
								5250	17.7	18.39	28.14	0.3203	0.03543
								5500	18.0	18.99	29.51	0.3330	0.03539
								6000	18.5	20.14	32.27	0.3584	0.03531
								6500	19.0	21.22	35.05	0.3839	0.03524
								7000	19.5	22.24	37.83	0.4096	0.03516
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	15.1	17.42	23.52	0.2536	0.03089
								4500	15.3	18.18	24.54	0.2706	0.03081
								4750	15.6	18.91	25.55	0.2877	0.03073
								5000	15.8	19.62	26.57	0.3049	0.03065
								5250	16.0	20.31	27.59	0.3220	0.03057
								5500	16.2	20.99	28.61	0.3392	0.03049
								6000	16.7	22.28	30.66	0.3737	0.03032
								6500	17.1	23.49	32.72	0.4083	0.03016
								7000	17.6	24.65	34.78	0.4429	0.02999
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.42	22.07	0.2054	0.03245
								4500	15.4	18.16	23.14	0.2221	0.03241
								4750	15.6	18.86	24.22	0.2390	0.03237

							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	15.9	19.54	25.30	0.2560	0.03234
								5250	16.1	20.20	26.40	0.2731	0.03230
								5500	16.4	20.84	27.50	0.2904	0.03226
								6000	16.9	22.05	29.74	0.3254	0.03218
								6500	17.4	23.18	32.00	0.3608	0.03211
								7000	17.9	24.23	34.29	0.3967	0.03203
								4250	15.3	17.25	23.07	0.1952	0.03270
								4500	15.5	18.00	24.13	0.2100	0.03265
								4750	15.7	18.73	25.20	0.2249	0.03259
								5000	15.9	19.44	26.27	0.2399	0.03253
								5250	16.2	20.13	27.34	0.2549	0.03247
								5500	16.4	20.79	28.42	0.2700	0.03241
								6000	16.8	22.07	30.59	0.3004	0.03229
								6500	17.3	23.27	32.78	0.3310	0.03217
								7000	17.8	24.41	34.98	0.3619	0.03205
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.42	20.32	0.2387	0.03527
								4500	16.3	17.14	21.55	0.2500	0.03524
								4750	16.5	17.84	22.79	0.2614	0.03521
								5000	16.8	18.51	24.04	0.2729	0.03518
								5250	17.0	19.17	25.28	0.2843	0.03516
								5500	17.2	19.80	26.53	0.2958	0.03513
								6000	17.7	21.02	29.05	0.3189	0.03507
								6500	18.2	22.18	31.57	0.3421	0.03501
								7000	18.6	23.27	34.11	0.3654	0.03496
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.40	26.58	0.2658	0.03540
								4500	17.4	16.04	28.00	0.2796	0.03538
								4750	17.7	16.67	29.40	0.2933	0.03536
								5000	17.9	17.28	30.80	0.3070	0.03534
								5250	18.2	17.87	32.20	0.3207	0.03532
								5500	18.5	18.45	33.59	0.3343	0.03530
								6000	19.0	19.55	36.35	0.3614	0.03527
								6500	19.5	20.60	39.10	0.3883	0.03523
								7000	20.1	21.59	41.84	0.4151	0.03519
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.16	20.10	0.2352	0.03620
								4500	16.5	16.88	21.29	0.2463	0.03617
								4750	16.8	17.58	22.49	0.2575	0.03615
								5000	17.0	18.25	23.68	0.2687	0.03612
								5250	17.2	18.91	24.88	0.2799	0.03610
								5500	17.4	19.55	26.08	0.2911	0.03608
								6000	17.9	20.78	28.49	0.3136	0.03603
								6500	18.4	21.95	30.91	0.3362	0.03598
								7000	18.8	23.06	33.33	0.3588	0.03593
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.13	21.09	0.2464	0.03567
								4500	16.6	16.82	22.41	0.2603	0.03562
								4750	16.9	17.48	23.75	0.2742	0.03558
								5000	17.1	18.12	25.09	0.2883	0.03553
								5250	17.4	18.74	26.43	0.3023	0.03549
								5500	17.6	19.34	27.79	0.3165	0.03544
								6000	18.2	20.49	30.51	0.3450	0.03535
								6500	18.7	21.57	33.26	0.3737	0.03525
								7000	19.2	22.57	36.03	0.4027	0.03516
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.85	24.86	0.2610	0.03473
								4500	16.9	16.53	26.14	0.2732	0.03471
								4750	17.1	17.20	27.40	0.2853	0.03470
								5000	17.4	17.85	28.67	0.2973	0.03468
								5250	17.6	18.48	29.92	0.3093	0.03467
								5500	17.9	19.09	31.17	0.3212	0.03466
								6000	18.3	20.28	33.65	0.3449	0.03463
								6500	18.8	21.41	36.11	0.3684	0.03460
								7000	19.3	22.49	38.55	0.3917	0.03458
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.58	21.64	0.2558	0.03392
								4500	16.2	17.28	22.96	0.2696	0.03388
								4750	16.4	17.95	24.28	0.2833	0.03384
								5000	16.7	18.61	25.61	0.2972	0.03379
								5250	16.9	19.24	26.94	0.3111	0.03375
								5500	17.2	19.85	28.28	0.3250	0.03370
								6000	17.7	21.02	30.96	0.3529	0.03361
								6500	18.2	22.12	33.66	0.3810	0.03352
								7000	18.7	23.16	36.37	0.4093	0.03343
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.12	20.81	0.2900	0.03495
								4500	16.6	16.83	22.02	0.3021	0.03491
								4750	16.8	17.52	23.24	0.3142	0.03487
								5000	17.0	18.19	24.46	0.3264	0.03483
								5250	17.3	18.84	25.69	0.3386	0.03478
								5500	17.5	19.47	26.92	0.3508	0.03474
								6000	18.0	20.69	29.38	0.3754	0.03466
								6500	18.4	21.84	31.86	0.4000	0.03458
								7000	18.9	22.93	34.35	0.4248	0.03449
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.16	26.84	0.3216	0.03496
								4500	17.6	15.81	28.22	0.3363	0.03493
								4750	17.9	16.43	29.60	0.3509	0.03489

								5000	18.2	17.04	30.97	0.3655	0.03486
								5250	18.5	17.63	32.34	0.3801	0.03483
								5500	18.7	18.20	33.71	0.3946	0.03479
								6000	19.3	19.30	36.42	0.4234	0.03473
								6500	19.8	20.35	39.12	0.4521	0.03466
								7000	20.3	21.34	41.80	0.4806	0.03459
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.89	20.62	0.2833	0.03587
								4500	16.8	16.60	21.79	0.2951	0.03583
								4750	17.0	17.29	22.96	0.3069	0.03580
								5000	17.3	17.96	24.14	0.3188	0.03576
								5250	17.5	18.61	25.31	0.3307	0.03573
								5500	17.7	19.25	26.49	0.3426	0.03569
								6000	18.2	20.47	28.86	0.3665	0.03562
								6500	18.6	21.64	31.23	0.3904	0.03555
								7000	19.1	22.74	33.61	0.4144	0.03548
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.87	21.52	0.2962	0.03531
								4500	16.9	16.55	22.82	0.3108	0.03526
								4750	17.1	17.21	24.13	0.3255	0.03520
								5000	17.4	17.84	25.45	0.3403	0.03514
								5250	17.6	18.46	26.77	0.3552	0.03508
								5500	17.9	19.06	28.10	0.3702	0.03502
								6000	18.4	20.20	30.77	0.4003	0.03490
								6500	18.9	21.28	33.47	0.4306	0.03478
								7000	19.5	22.29	36.19	0.4611	0.03466
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.58	25.14	0.3199	0.03430
								4500	17.2	16.26	26.39	0.3329	0.03427
								4750	17.4	16.92	27.63	0.3459	0.03424
								5000	17.6	17.56	28.87	0.3588	0.03421
								5250	17.9	18.19	30.10	0.3716	0.03418
								5500	18.1	18.80	31.32	0.3844	0.03416
								6000	18.6	19.99	33.75	0.4097	0.03410
								6500	19.1	21.12	36.16	0.4348	0.03404
								7000	19.5	22.19	38.55	0.4597	0.03399
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.27	22.01	0.3111	0.03357
								4500	16.4	16.97	23.30	0.3257	0.03351
								4750	16.7	17.64	24.60	0.3404	0.03345
								5000	17.0	18.29	25.90	0.3550	0.03339
								5250	17.2	18.92	27.21	0.3698	0.03333
								5500	17.5	19.53	28.52	0.3845	0.03327
								6000	18.0	20.69	31.15	0.4142	0.03315
								6500	18.5	21.79	33.79	0.4440	0.03303
								7000	19.0	22.83	36.45	0.4740	0.03291
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.54	21.57	0.3632	0.03192
								4500	16.2	17.25	22.63	0.3800	0.03188
								4750	16.4	17.93	23.70	0.3969	0.03184
								5000	16.7	18.60	24.78	0.4139	0.03180
								5250	16.9	19.25	25.87	0.4311	0.03175
								5500	17.2	19.87	26.96	0.4484	0.03171
								6000	17.7	21.05	29.18	0.4835	0.03163
								6500	18.2	22.17	31.43	0.5189	0.03154
								7000	18.7	23.21	33.70	0.5549	0.03146
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.32	28.38	0.4477	0.03126
								4500	17.5	15.97	29.60	0.4670	0.03119
								4750	17.7	16.60	30.82	0.4863	0.03111
								5000	18.0	17.22	32.03	0.5055	0.03104
								5250	18.2	17.82	33.24	0.5247	0.03096
								5500	18.5	18.40	34.44	0.5437	0.03089
								6000	19.0	19.52	36.84	0.5817	0.03074
								6500	19.6	20.58	39.22	0.6194	0.03059
								7000	20.1	21.58	41.59	0.6569	0.03045
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.04	23.59	0.3682	0.03248
								4500	16.6	16.76	24.64	0.3835	0.03241
								4750	16.9	17.46	25.69	0.3989	0.03235
								5000	17.1	18.14	26.74	0.4143	0.03228
								5250	17.3	18.80	27.79	0.4298	0.03221
								5500	17.5	19.44	28.85	0.4452	0.03214
								6000	18.0	20.68	30.96	0.4762	0.03201
								6500	18.4	21.86	33.08	0.5074	0.03187
								7000	18.9	22.98	35.21	0.5385	0.03174
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.03	24.03	0.3930	0.03185
								4500	16.7	16.71	25.19	0.4118	0.03176
								4750	16.9	17.38	26.35	0.4306	0.03166
								5000	17.2	18.02	27.52	0.4496	0.03157
								5250	17.4	18.65	28.70	0.4687	0.03147
								5500	17.7	19.26	29.88	0.4878	0.03137
								6000	18.2	20.42	32.26	0.5264	0.03118
								6500	18.7	21.51	34.65	0.5653	0.03098
								7000	19.2	22.53	37.07	0.6045	0.03079
CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.44	21.66	0.3615	0.03220
								4500	16.3	17.15	22.73	0.3781	0.03216
								4750	16.5	17.83	23.80	0.3948	0.03212

								5000	16.8	18.50	24.89	0.4118	0.03208
								5250	17.0	19.14	25.98	0.4288	0.03204
								5500	17.3	19.76	27.08	0.4460	0.03200
								6000	17.8	20.94	29.31	0.4808	0.03192
								6500	18.3	22.05	31.56	0.5160	0.03184
								7000	18.8	23.09	33.85	0.5516	0.03175
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.13	28.67	0.4408	0.03195
								4500	17.7	15.77	29.91	0.4598	0.03188
								4750	17.9	16.40	31.14	0.4787	0.03180
								5000	18.2	17.01	32.36	0.4975	0.03173
								5250	18.5	17.60	33.59	0.5163	0.03166
								5500	18.7	18.18	34.80	0.5350	0.03159
								6000	19.3	19.29	37.23	0.5722	0.03145
								6500	19.8	20.35	39.63	0.6092	0.03130
								7000	20.3	21.35	42.03	0.6460	0.03116
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.85	23.78	0.3647	0.03306
								4500	16.8	16.57	24.84	0.3798	0.03299
								4750	17.1	17.26	25.89	0.3950	0.03293
								5000	17.3	17.93	26.95	0.4102	0.03286
								5250	17.5	18.59	28.01	0.4254	0.03280
								5500	17.7	19.23	29.08	0.4406	0.03273
								6000	18.2	20.46	31.21	0.4711	0.03260
								6500	18.6	21.63	33.35	0.5017	0.03247
								7000	19.1	22.74	35.49	0.5324	0.03234
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.84	24.23	0.3889	0.03243
								4500	16.9	16.52	25.40	0.4074	0.03234
								4750	17.1	17.18	26.57	0.4259	0.03225
								5000	17.4	17.83	27.75	0.4446	0.03215
								5250	17.6	18.45	28.94	0.4634	0.03206
								5500	17.9	19.05	30.13	0.4823	0.03196
								6000	18.4	20.20	32.53	0.5203	0.03177
								6500	18.9	21.29	34.95	0.5586	0.03158
								7000	19.4	22.31	37.38	0.5971	0.03139
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.35	20.99	0.2554	0.03487
								4500	16.4	17.07	22.20	0.2675	0.03483
								4750	16.6	17.76	23.42	0.2797	0.03479
								5000	16.8	18.44	24.64	0.2920	0.03475
								5250	17.0	19.09	25.86	0.3042	0.03472
								5500	17.3	19.73	27.08	0.3165	0.03468
								6000	17.7	20.95	29.54	0.3413	0.03460
								6500	18.2	22.11	32.02	0.3661	0.03452
								7000	18.7	23.21	34.50	0.3910	0.03444
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.35	26.99	0.2898	0.03490
								4500	17.4	16.00	28.37	0.3046	0.03487
								4750	17.7	16.62	29.75	0.3193	0.03484
								5000	18.0	17.23	31.12	0.3340	0.03481
								5250	18.2	17.83	32.48	0.3486	0.03478
								5500	18.5	18.40	33.84	0.3632	0.03475
								6000	19.1	19.51	36.55	0.3922	0.03469
								6500	19.6	20.56	39.24	0.4211	0.03463
								7000	20.1	21.55	41.92	0.4497	0.03457
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.98	21.76	0.2627	0.03553
								4500	16.7	16.67	23.06	0.2773	0.03547
								4750	17.0	17.32	24.38	0.2920	0.03542
								5000	17.3	17.97	25.69	0.3068	0.03536
								5250	17.5	18.58	27.02	0.3216	0.03531
								5500	17.8	19.18	28.35	0.3365	0.03525
								6000	18.3	20.33	31.03	0.3665	0.03514
								6500	18.8	21.40	33.73	0.3967	0.03503
								7000	19.3	22.41	36.45	0.4272	0.03491
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.79	25.32	0.2850	0.03425
								4500	16.9	16.47	26.56	0.2981	0.03422
								4750	17.2	17.14	27.80	0.3112	0.03420
								5000	17.4	17.79	29.04	0.3241	0.03417
								5250	17.7	18.42	30.27	0.3370	0.03415
								5500	17.9	19.03	31.49	0.3499	0.03412
								6000	18.4	20.22	33.91	0.3753	0.03407
								6500	18.9	21.35	36.32	0.4006	0.03403
								7000	19.3	22.43	38.70	0.4256	0.03398
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.51	22.19	0.2765	0.03350
								4500	16.2	17.21	23.48	0.2912	0.03344
								4750	16.5	17.88	24.78	0.3059	0.03338
								5000	16.7	18.53	26.07	0.3207	0.03333
								5250	17.0	19.17	27.38	0.3355	0.03327
								5500	17.2	19.78	28.68	0.3504	0.03322
								6000	17.7	20.95	31.31	0.3802	0.03310
								6500	18.3	22.05	33.95	0.4102	0.03299
								7000	18.8	23.09	36.60	0.4404	0.03287
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.28	20.85	0.2748	0.03476
								4500	16.4	16.99	22.06	0.2870	0.03472
								4750	16.7	17.68	23.28	0.2992	0.03468

								5000	16.9	18.36	24.49	0.3115	0.03464
								5250	17.1	19.01	25.72	0.3238	0.03460
								5500	17.4	19.65	26.94	0.3361	0.03456
								6000	17.8	20.87	29.40	0.3609	0.03448
								6500	18.3	22.03	31.87	0.3858	0.03439
								7000	18.8	23.12	34.35	0.4108	0.03431
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.29	26.85	0.3083	0.03478
								4500	17.5	15.94	28.23	0.3231	0.03474
								4750	17.8	16.57	29.60	0.3379	0.03471
								5000	18.0	17.18	30.97	0.3526	0.03468
								5250	18.3	17.77	32.34	0.3673	0.03465
								5500	18.6	18.34	33.70	0.3819	0.03461
								6000	19.1	19.45	36.40	0.4110	0.03455
								6500	19.6	20.50	39.09	0.4399	0.03448
								7000	20.2	21.49	41.76	0.4687	0.03442
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	21.63	0.2810	0.03541
								4500	16.8	16.60	22.93	0.2956	0.03536
								4750	17.1	17.26	24.24	0.3103	0.03530
								5000	17.3	17.90	25.56	0.3251	0.03524
								5250	17.6	18.52	26.88	0.3399	0.03518
								5500	17.8	19.11	28.21	0.3549	0.03513
								6000	18.4	20.26	30.89	0.3849	0.03501
								6500	18.9	21.33	33.59	0.4152	0.03489
								7000	19.4	22.34	36.31	0.4457	0.03478
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.72	25.16	0.3050	0.03412
								4500	17.0	16.40	26.41	0.3182	0.03409
								4750	17.3	17.07	27.65	0.3313	0.03407
								5000	17.5	17.72	28.88	0.3443	0.03404
								5250	17.7	18.35	30.11	0.3572	0.03401
								5500	18.0	18.96	31.33	0.3701	0.03398
								6000	18.4	20.15	33.75	0.3956	0.03393
								6500	18.9	21.28	36.15	0.4209	0.03388
								7000	19.4	22.36	38.54	0.4461	0.03382
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.43	22.04	0.2962	0.03338
								4500	16.3	17.13	23.33	0.3109	0.03332
								4750	16.5	17.80	24.63	0.3257	0.03327
								5000	16.8	18.45	25.93	0.3405	0.03321
								5250	17.0	19.09	27.23	0.3553	0.03315
								5500	17.3	19.70	28.53	0.3702	0.03309
								6000	17.8	20.87	31.16	0.4001	0.03297
								6500	18.3	21.97	33.79	0.4302	0.03285
								7000	18.8	23.01	36.44	0.4604	0.03273
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.86	21.33	0.3488	0.03140
								4500	15.9	17.58	22.38	0.3657	0.03136
								4750	16.1	18.27	23.45	0.3828	0.03132
								5000	16.4	18.94	24.52	0.3999	0.03128
								5250	16.6	19.59	25.61	0.4172	0.03124
								5500	16.9	20.22	26.70	0.4347	0.03120
								6000	17.4	21.41	28.90	0.4700	0.03112
								6500	17.9	22.53	31.14	0.5057	0.03104
								7000	18.4	23.58	33.40	0.5420	0.03095
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.50	28.23	0.4326	0.03104
								4500	17.3	16.15	29.45	0.4520	0.03097
								4750	17.5	16.79	30.67	0.4713	0.03089
								5000	17.8	17.41	31.88	0.4905	0.03082
								5250	18.1	18.00	33.09	0.5097	0.03075
								5500	18.3	18.59	34.29	0.5287	0.03067
								6000	18.8	19.71	36.69	0.5667	0.03053
								6500	19.4	20.78	39.07	0.6045	0.03039
								7000	19.9	21.79	41.44	0.6420	0.03024
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.24	23.42	0.3531	0.03224
								4500	16.4	16.97	24.47	0.3685	0.03217
								4750	16.7	17.67	25.51	0.3839	0.03210
								5000	16.9	18.35	26.57	0.3993	0.03204
								5250	17.1	19.02	27.62	0.4148	0.03197
								5500	17.3	19.67	28.67	0.4303	0.03191
								6000	17.8	20.92	30.78	0.4613	0.03178
								6500	18.2	22.10	32.90	0.4925	0.03164
								7000	18.7	23.23	35.03	0.5237	0.03151
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.22	23.87	0.3781	0.03161
								4500	16.5	16.92	25.02	0.3969	0.03152
								4750	16.7	17.59	26.19	0.4158	0.03143
								5000	17.0	18.24	27.36	0.4348	0.03133
								5250	17.2	18.87	28.53	0.4539	0.03124
								5500	17.5	19.48	29.71	0.4731	0.03114
								6000	18.0	20.64	32.09	0.5117	0.03095
								6500	18.5	21.73	34.48	0.5506	0.03076
								7000	19.0	22.76	36.90	0.5898	0.03057
CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.58	21.57	0.3439	0.03217
								4500	16.1	17.30	22.64	0.3604	0.03213
								4750	16.4	17.98	23.72	0.3771	0.03210

								5000	16.6	18.65	24.80	0.3939	0.03206
								5250	16.9	19.29	25.90	0.4109	0.03202
								5500	17.1	19.92	27.00	0.4280	0.03198
								6000	17.6	21.10	29.24	0.4625	0.03191
								6500	18.1	22.21	31.50	0.4975	0.03183
								7000	18.6	23.26	33.79	0.5330	0.03175
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.27	28.56	0.4245	0.03183
								4500	17.5	15.92	29.80	0.4434	0.03176
								4750	17.8	16.55	31.03	0.4623	0.03169
								5000	18.0	17.16	32.26	0.4811	0.03162
								5250	18.3	17.76	33.48	0.4998	0.03155
								5500	18.6	18.34	34.70	0.5185	0.03148
								6000	19.1	19.45	37.13	0.5557	0.03134
								6500	19.6	20.51	39.54	0.5926	0.03120
								7000	20.1	21.51	41.93	0.6293	0.03107
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.99	23.67	0.3483	0.03302
								4500	16.7	16.70	24.73	0.3634	0.03295
								4750	16.9	17.40	25.79	0.3784	0.03289
								5000	17.1	18.07	26.85	0.3936	0.03283
								5250	17.4	18.74	27.91	0.4087	0.03276
								5500	17.6	19.38	28.98	0.4238	0.03270
								6000	18.0	20.61	31.11	0.4542	0.03257
								6500	18.5	21.79	33.26	0.4847	0.03244
								7000	18.9	22.90	35.40	0.5153	0.03232
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.97	24.14	0.3724	0.03239
								4500	16.7	16.66	25.31	0.3908	0.03230
								4750	17.0	17.32	26.48	0.4093	0.03221
								5000	17.2	17.96	27.67	0.4280	0.03212
								5250	17.5	18.59	28.85	0.4467	0.03203
								5500	17.8	19.19	30.05	0.4655	0.03194
								6000	18.3	20.35	32.45	0.5033	0.03175
								6500	18.8	21.44	34.88	0.5414	0.03156
								7000	19.3	22.46	37.32	0.5798	0.03138
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.3	18.40	19.82	0.1708	0.03164
								4500	14.6	19.18	20.93	0.1852	0.03158
								4750	14.8	19.93	22.04	0.1997	0.03153
								5000	15.0	20.66	23.15	0.2142	0.03147
								5250	15.2	21.37	24.26	0.2287	0.03142
								5500	15.5	22.05	25.37	0.2432	0.03137
								6000	15.9	23.36	27.60	0.2724	0.03126
								6500	16.4	24.60	29.84	0.3016	0.03115
								7000	16.8	25.77	32.08	0.3309	0.03104
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.5	18.19	18.68	0.1245	0.03355
								4500	14.7	18.93	19.84	0.1384	0.03354
								4750	15.0	19.65	21.02	0.1523	0.03353
								5000	15.2	20.34	22.21	0.1664	0.03353
								5250	15.5	21.01	23.40	0.1807	0.03352
								5500	15.8	21.65	24.61	0.1950	0.03351
								6000	16.3	22.87	27.05	0.2240	0.03350
								6500	16.8	24.00	29.52	0.2533	0.03348
								7000	17.3	25.05	32.02	0.2830	0.03347
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.55	26.61	0.1895	0.03334
								4500	16.2	17.22	27.96	0.2053	0.03331
								4750	16.5	17.87	29.31	0.2210	0.03327
								5000	16.7	18.50	30.65	0.2367	0.03324
								5250	17.0	19.12	31.98	0.2523	0.03320
								5500	17.3	19.72	33.32	0.2679	0.03316
								6000	17.8	20.86	35.97	0.2989	0.03309
								6500	18.4	21.93	38.60	0.3297	0.03302
								7000	18.9	22.95	41.22	0.3603	0.03295
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.99	19.51	0.1219	0.03373
								4500	14.9	18.76	20.66	0.1341	0.03370
								4750	15.1	19.51	21.81	0.1464	0.03366
								5000	15.3	20.23	22.97	0.1587	0.03363
								5250	15.6	20.93	24.14	0.1711	0.03360
								5500	15.8	21.60	25.31	0.1836	0.03357
								6000	16.2	22.90	27.66	0.2086	0.03350
								6500	16.7	24.11	30.03	0.2339	0.03343
								7000	17.2	25.25	32.42	0.2593	0.03337
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	13.8	19.06	18.13	0.1531	0.03119
								4500	14.1	19.86	19.17	0.1667	0.03116
								4750	14.3	20.65	20.21	0.1803	0.03112
								5000	14.5	21.41	21.26	0.1939	0.03108
								5250	14.7	22.14	22.31	0.2076	0.03104
								5500	14.9	22.85	23.37	0.2214	0.03100
								6000	15.4	24.20	25.49	0.2490	0.03093
								6500	15.8	25.47	27.63	0.2768	0.03085
								7000	16.3	26.67	29.78	0.3048	0.03077
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.4	17.07	24.99	0.1771	0.03278
								4500	15.7	17.79	26.21	0.1911	0.03275
								4750	15.9	18.48	27.43	0.2050	0.03272
								5000	16.2	19.16	28.64	0.2189	0.03269

CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5250	16.4	19.82	29.84	0.2326	0.03266
								5500	16.7	20.46	31.03	0.2464	0.03263
								6000	17.1	21.69	33.41	0.2736	0.03257
								6500	17.6	22.86	35.77	0.3006	0.03251
								7000	18.1	23.97	38.10	0.3274	0.03246
								4250	14.6	18.05	20.11	0.1644	0.03249
								4500	14.8	18.82	21.23	0.1783	0.03244
								4750	15.1	19.56	22.36	0.1922	0.03239
								5000	15.3	20.28	23.48	0.2062	0.03234
								5250	15.5	20.98	24.61	0.2201	0.03229
								5500	15.7	21.66	25.74	0.2341	0.03224
								6000	16.2	22.96	28.01	0.2622	0.03214
								6500	16.7	24.19	30.28	0.2903	0.03204
								7000	17.1	25.34	32.56	0.3185	0.03194
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.27	27.01	0.1788	0.03421
								4500	16.5	16.94	28.39	0.1939	0.03418
								4750	16.7	17.58	29.76	0.2089	0.03415
								5000	17.0	18.21	31.12	0.2239	0.03411
								5250	17.3	18.82	32.47	0.2389	0.03408
								5500	17.6	19.41	33.83	0.2538	0.03405
								6000	18.1	20.55	36.52	0.2834	0.03399
								6500	18.6	21.62	39.20	0.3128	0.03393
								7000	19.2	22.63	41.86	0.3421	0.03387
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.9	17.66	19.78	0.1163	0.03457
								4500	15.2	18.42	20.94	0.1280	0.03454
								4750	15.4	19.15	22.12	0.1397	0.03451
								5000	15.6	19.87	23.29	0.1515	0.03448
								5250	15.8	20.56	24.47	0.1634	0.03445
								5500	16.1	21.23	25.66	0.1753	0.03442
								6000	16.5	22.51	28.05	0.1992	0.03437
								6500	17.0	23.72	30.46	0.2233	0.03431
								7000	17.5	24.85	32.88	0.2476	0.03425
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.1	18.67	18.38	0.1477	0.03206
								4500	14.3	19.47	19.44	0.1607	0.03202
								4750	14.6	20.24	20.50	0.1738	0.03199
								5000	14.8	21.00	21.56	0.1869	0.03195
								5250	15.0	21.72	22.63	0.2001	0.03192
								5500	15.2	22.42	23.70	0.2134	0.03188
								6000	15.7	23.76	25.86	0.2400	0.03181
								6500	16.1	25.03	28.03	0.2668	0.03174
								7000	16.5	26.22	30.21	0.2938	0.03167
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.7	16.77	25.37	0.1674	0.03364
								4500	16.0	17.48	26.61	0.1808	0.03362
								4750	16.2	18.17	27.84	0.1941	0.03359
								5000	16.4	18.85	29.07	0.2073	0.03356
								5250	16.7	19.50	30.29	0.2205	0.03354
								5500	16.9	20.13	31.51	0.2336	0.03351
								6000	17.4	21.35	33.92	0.2596	0.03346
								6500	17.9	22.52	36.31	0.2854	0.03341
								7000	18.4	23.62	38.69	0.3110	0.03337
CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.3	17.25	19.17	0.1349	0.03551
								4500	15.5	18.01	20.27	0.1466	0.03548
								4750	15.7	18.74	21.38	0.1584	0.03546
								5000	15.9	19.46	22.49	0.1701	0.03543
								5250	16.2	20.15	23.61	0.1820	0.03541
								5500	16.4	20.82	24.73	0.1938	0.03539
								6000	16.8	22.10	26.99	0.2177	0.03534
								6500	17.3	23.32	29.26	0.2417	0.03529
								7000	17.7	24.48	31.54	0.2659	0.03524
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.64	26.54	0.1420	0.03711
								4500	17.1	16.32	27.84	0.1537	0.03710
								4750	17.3	16.98	29.13	0.1653	0.03709
								5000	17.6	17.62	30.42	0.1768	0.03708
								5250	17.8	18.25	31.70	0.1883	0.03706
								5500	18.1	18.86	32.97	0.1998	0.03705
								6000	18.6	20.04	35.50	0.2225	0.03702
								6500	19.0	21.16	38.01	0.2450	0.03700
								7000	19.5	22.23	40.50	0.2674	0.03697
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.4	18.32	19.69	0.1790	0.03171
								4500	14.6	19.10	20.80	0.1935	0.03165
								4750	14.8	19.85	21.91	0.2080	0.03160
								5000	15.1	20.58	23.01	0.2225	0.03154
								5250	15.3	21.29	24.13	0.2370	0.03148
								5500	15.5	21.97	25.24	0.2516	0.03142
								6000	16.0	23.28	27.47	0.2808	0.03131
								6500	16.4	24.51	29.71	0.3101	0.03120
								7000	16.9	25.68	31.96	0.3395	0.03108
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.6	18.12	18.56	0.1318	0.03360
								4500	14.8	18.87	19.73	0.1457	0.03359
								4750	15.0	19.59	20.90	0.1597	0.03358

								5000	15.3	20.28	22.09	0.1739	0.03357
								5250	15.5	20.94	23.29	0.1882	0.03356
								5500	15.8	21.59	24.49	0.2026	0.03355
								6000	16.3	22.80	26.93	0.2316	0.03353
								6500	16.8	23.94	29.40	0.2611	0.03351
								7000	17.4	24.99	31.90	0.2909	0.03349
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.50	26.50	0.1963	0.03338
								4500	16.2	17.18	27.85	0.2122	0.03334
								4750	16.5	17.83	29.20	0.2279	0.03330
								5000	16.8	18.46	30.54	0.2437	0.03326
								5250	17.1	19.08	31.88	0.2593	0.03322
								5500	17.3	19.67	33.21	0.2749	0.03319
								6000	17.9	20.81	35.86	0.3060	0.03311
								6500	18.4	21.89	38.50	0.3369	0.03303
								7000	18.9	22.91	41.12	0.3676	0.03296
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.94	19.40	0.1283	0.03378
								4500	14.9	18.70	20.55	0.1406	0.03375
								4750	15.1	19.45	21.70	0.1529	0.03371
								5000	15.4	20.17	22.86	0.1653	0.03368
								5250	15.6	20.87	24.03	0.1777	0.03364
								5500	15.8	21.54	25.20	0.1902	0.03361
								6000	16.3	22.83	27.55	0.2153	0.03354
								6500	16.8	24.05	29.93	0.2406	0.03347
								7000	17.2	25.19	32.32	0.2661	0.03340
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.43	20.42	0.1469	0.03429
								4500	15.4	18.18	21.56	0.1596	0.03425
								4750	15.6	18.91	22.71	0.1723	0.03421
								5000	15.8	19.62	23.86	0.1851	0.03417
								5250	16.0	20.31	25.01	0.1978	0.03413
								5500	16.3	20.98	26.17	0.2106	0.03409
								6000	16.7	22.25	28.48	0.2363	0.03402
								6500	17.2	23.47	30.80	0.2620	0.03394
								7000	17.6	24.61	33.13	0.2878	0.03386
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.37	21.29	0.1647	0.03373
								4500	15.4	18.09	22.57	0.1804	0.03366
								4750	15.7	18.78	23.85	0.1961	0.03360
								5000	15.9	19.44	25.13	0.2120	0.03354
								5250	16.2	20.09	26.43	0.2279	0.03347
								5500	16.5	20.71	27.73	0.2439	0.03341
								6000	17.0	21.90	30.34	0.2761	0.03328
								6500	17.5	23.01	32.98	0.3086	0.03315
								7000	18.0	24.04	35.63	0.3414	0.03302
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	13.9	18.97	18.00	0.1609	0.03128
								4500	14.1	19.78	19.04	0.1745	0.03124
								4750	14.3	20.56	20.08	0.1881	0.03120
								5000	14.5	21.31	21.13	0.2018	0.03116
								5250	14.8	22.05	22.18	0.2156	0.03112
								5500	15.0	22.75	23.24	0.2294	0.03108
								6000	15.4	24.11	25.36	0.2571	0.03100
								6500	15.9	25.38	27.50	0.2850	0.03091
								7000	16.3	26.58	29.65	0.3131	0.03083
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.5	17.02	24.87	0.1847	0.03282
								4500	15.7	17.73	26.10	0.1988	0.03279
								4750	16.0	18.43	27.31	0.2127	0.03276
								5000	16.2	19.10	28.52	0.2266	0.03273
								5250	16.5	19.76	29.72	0.2405	0.03269
								5500	16.7	20.40	30.92	0.2542	0.03266
								6000	17.2	21.63	33.29	0.2816	0.03260
								6500	17.7	22.80	35.65	0.3086	0.03253
								7000	18.1	23.92	37.99	0.3355	0.03247
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.7	17.98	19.97	0.1731	0.03255
								4500	14.9	18.74	21.10	0.1871	0.03250
								4750	15.1	19.48	22.22	0.2010	0.03245
								5000	15.3	20.21	23.35	0.2150	0.03239
								5250	15.6	20.91	24.47	0.2290	0.03234
								5500	15.8	21.58	25.61	0.2430	0.03229
								6000	16.3	22.88	27.87	0.2712	0.03218
								6500	16.7	24.11	30.14	0.2994	0.03208
								7000	17.2	25.27	32.42	0.3277	0.03197
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.23	26.90	0.1860	0.03423
								4500	16.5	16.89	28.28	0.2012	0.03420
								4750	16.8	17.54	29.65	0.2163	0.03417
								5000	17.1	18.17	31.01	0.2313	0.03413
								5250	17.3	18.78	32.37	0.2463	0.03410
								5500	17.6	19.37	33.72	0.2612	0.03407
								6000	18.1	20.50	36.41	0.2909	0.03400
								6500	18.7	21.57	39.09	0.3205	0.03393
								7000	19.2	22.59	41.75	0.3498	0.03387
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.0	17.61	19.67	0.1232	0.03461
								4500	15.2	18.37	20.83	0.1349	0.03458
								4750	15.4	19.10	22.00	0.1466	0.03455
								5000	15.7	19.81	23.18	0.1584	0.03452

								5250	15.9	20.50	24.36	0.1703	0.03449
								5500	16.1	21.17	25.55	0.1822	0.03446
								6000	16.6	22.45	27.94	0.2062	0.03440
								6500	17.0	23.66	30.35	0.2304	0.03434
								7000	17.5	24.80	32.77	0.2548	0.03427
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.2	18.60	18.25	0.1559	0.03213
								4500	14.4	19.39	19.30	0.1690	0.03210
								4750	14.6	20.16	20.36	0.1822	0.03206
								5000	14.8	20.91	21.43	0.1954	0.03202
								5250	15.1	21.63	22.50	0.2086	0.03199
								5500	15.3	22.33	23.57	0.2219	0.03195
								6000	15.7	23.67	25.73	0.2486	0.03187
								6500	16.2	24.93	27.90	0.2755	0.03180
								7000	16.6	26.13	30.08	0.3026	0.03172
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.8	16.72	25.25	0.1755	0.03367
								4500	16.0	17.43	26.49	0.1889	0.03365
								4750	16.3	18.12	27.72	0.2023	0.03362
								5000	16.5	18.79	28.95	0.2155	0.03359
								5250	16.7	19.44	30.17	0.2288	0.03356
								5500	17.0	20.08	31.39	0.2419	0.03353
								6000	17.5	21.30	33.80	0.2680	0.03348
								6500	17.9	22.46	36.19	0.2939	0.03342
								7000	18.4	23.56	38.57	0.3196	0.03337
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.9	17.72	23.26	0.2494	0.03032
								4500	15.1	18.48	24.27	0.2666	0.03024
								4750	15.3	19.22	25.28	0.2837	0.03016
								5000	15.5	19.94	26.30	0.3009	0.03008
								5250	15.8	20.64	27.31	0.3182	0.03000
								5500	16.0	21.32	28.33	0.3354	0.02992
								6000	16.4	22.61	30.37	0.3701	0.02976
								6500	16.9	23.84	32.42	0.4048	0.02960
								7000	17.3	25.00	34.47	0.4396	0.02944
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.0	17.56	21.94	0.1991	0.03228
								4500	15.3	18.30	23.01	0.2157	0.03224
								4750	15.5	19.00	24.09	0.2325	0.03221
								5000	15.7	19.69	25.17	0.2494	0.03218
								5250	16.0	20.35	26.27	0.2665	0.03214
								5500	16.2	20.98	27.38	0.2836	0.03211
								6000	16.7	22.20	29.61	0.3184	0.03203
								6500	17.3	23.33	31.88	0.3536	0.03196
								7000	17.8	24.38	34.17	0.3893	0.03189
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.38	22.93	0.1897	0.03253
								4500	15.4	18.14	23.99	0.2045	0.03247
								4750	15.6	18.87	25.05	0.2193	0.03242
								5000	15.8	19.58	26.12	0.2342	0.03236
								5250	16.1	20.27	27.20	0.2492	0.03230
								5500	16.3	20.94	28.28	0.2642	0.03225
								6000	16.7	22.22	30.45	0.2944	0.03213
								6500	17.2	23.43	32.64	0.3249	0.03201
								7000	17.7	24.56	34.85	0.3556	0.03190
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.90	23.97	0.2073	0.03304
								4500	15.8	17.64	25.03	0.2225	0.03298
								4750	16.0	18.36	26.09	0.2377	0.03292
								5000	16.3	19.06	27.16	0.2529	0.03286
								5250	16.5	19.74	28.22	0.2681	0.03280
								5500	16.7	20.40	29.29	0.2834	0.03274
								6000	17.2	21.67	31.42	0.3140	0.03261
								6500	17.6	22.87	33.57	0.3447	0.03249
								7000	18.1	24.01	35.72	0.3755	0.03237
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.86	24.46	0.2342	0.03241
								4500	15.9	17.57	25.63	0.2527	0.03232
								4750	16.1	18.25	26.81	0.2714	0.03224
								5000	16.4	18.91	28.00	0.2901	0.03215
								5250	16.6	19.55	29.19	0.3090	0.03206
								5500	16.9	20.17	30.38	0.3279	0.03197
								6000	17.4	21.35	32.79	0.3660	0.03179
								6500	17.9	22.46	35.21	0.4044	0.03160
								7000	18.4	23.49	37.66	0.4431	0.03142
CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	15.3	17.19	19.01	0.1451	0.03554
								4500	15.6	17.94	20.12	0.1568	0.03552
								4750	15.8	18.67	21.23	0.1686	0.03549
								5000	16.0	19.38	22.34	0.1805	0.03546
								5250	16.2	20.07	23.46	0.1923	0.03544
								5500	16.4	20.75	24.58	0.2042	0.03541
								6000	16.9	22.03	26.84	0.2282	0.03536
								6500	17.3	23.25	29.11	0.2523	0.03530
								7000	17.8	24.40	31.39	0.2766	0.03525
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.59	26.40	0.1518	0.03711
								4500	17.2	16.27	27.70	0.1635	0.03710
								4750	17.4	16.93	29.00	0.1752	0.03708
								5000	17.6	17.57	30.28	0.1868	0.03707

								5250	17.9	18.20	31.56	0.1983	0.03705
								5500	18.1	18.81	32.84	0.2098	0.03704
								6000	18.6	19.99	35.37	0.2326	0.03701
								6500	19.1	21.11	37.87	0.2552	0.03698
								7000	19.5	22.18	40.36	0.2776	0.03695
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.28	21.42	0.4661	0.03067
								4500	16.4	16.98	22.44	0.4852	0.03061
								4750	16.7	17.66	23.48	0.5045	0.03054
								5000	16.9	18.31	24.53	0.5240	0.03048
								5250	17.2	18.94	25.58	0.5436	0.03042
								5500	17.4	19.56	26.64	0.5634	0.03035
								6000	17.9	20.73	28.79	0.6034	0.03022
								6500	18.5	21.82	30.97	0.6440	0.03009
								7000	19.0	22.84	33.17	0.6851	0.02996
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.6	14.99	28.06	0.5656	0.03016
								4500	17.8	15.63	29.25	0.5877	0.03006
								4750	18.1	16.25	30.44	0.6096	0.02996
								5000	18.4	16.85	31.62	0.6314	0.02986
								5250	18.6	17.44	32.79	0.6532	0.02976
								5500	18.9	18.01	33.97	0.6749	0.02966
								6000	19.4	19.10	36.30	0.7181	0.02946
								6500	20.0	20.14	38.62	0.7610	0.02926
								7000	20.5	21.13	40.92	0.8036	0.02907
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	16.7	15.74	23.33	0.4675	0.03154
								4500	17.0	16.45	24.34	0.4847	0.03145
								4750	17.2	17.14	25.35	0.5020	0.03136
								5000	17.4	17.80	26.36	0.5193	0.03128
								5250	17.6	18.46	27.38	0.5367	0.03119
								5500	17.8	19.10	28.39	0.5541	0.03110
								6000	18.3	20.32	30.43	0.5889	0.03093
								6500	18.7	21.48	32.47	0.6238	0.03076
								7000	19.2	22.59	34.52	0.6589	0.03058
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.68	23.89	0.4997	0.03086
								4500	17.1	16.35	25.02	0.5209	0.03074
								4750	17.3	17.01	26.15	0.5422	0.03062
								5000	17.6	17.64	27.29	0.5637	0.03050
								5250	17.8	18.25	28.44	0.5852	0.03038
								5500	18.1	18.85	29.59	0.6069	0.03026
								6000	18.6	19.98	31.91	0.6505	0.03002
								6500	19.1	21.05	34.24	0.6945	0.02977
								7000	19.6	22.06	36.59	0.7387	0.02953
CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.72	21.98	0.4553	0.03240
								4500	17.0	16.40	23.04	0.4737	0.03235
								4750	17.3	17.06	24.10	0.4922	0.03229
								5000	17.5	17.70	25.18	0.5109	0.03223
								5250	17.8	18.32	26.26	0.5297	0.03217
								5500	18.0	18.92	27.35	0.5487	0.03212
								6000	18.5	20.07	29.56	0.5871	0.03200
								6500	19.0	21.15	31.79	0.6260	0.03188
								7000	19.6	22.16	34.06	0.6654	0.03176
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	18.1	14.51	28.84	0.5479	0.03194
								4500	18.4	15.14	30.06	0.5690	0.03185
								4750	18.7	15.75	31.28	0.5900	0.03175
								5000	19.0	16.34	32.49	0.6109	0.03166
								5250	19.2	16.91	33.70	0.6317	0.03157
								5500	19.5	17.47	34.91	0.6525	0.03148
								6000	20.0	18.55	37.31	0.6938	0.03129
								6500	20.6	19.57	39.69	0.7348	0.03111
								7000	21.1	20.55	42.06	0.7757	0.03093
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.3	15.20	23.90	0.4575	0.03329
								4500	17.6	15.89	24.94	0.4740	0.03321
								4750	17.8	16.56	25.97	0.4906	0.03313
								5000	18.0	17.22	27.01	0.5072	0.03305
								5250	18.2	17.85	28.05	0.5238	0.03297
								5500	18.4	18.48	29.09	0.5405	0.03289
								6000	18.9	19.68	31.18	0.5738	0.03272
								6500	19.3	20.82	33.27	0.6073	0.03256
								7000	19.8	21.91	35.37	0.6409	0.03240
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	16.00	19.80	0.5939	0.02959
								4500	16.7	16.70	20.84	0.6121	0.02953
								4750	16.9	17.37	21.90	0.6305	0.02947
								5000	17.2	18.03	22.96	0.6491	0.02940
								5250	17.4	18.66	24.03	0.6678	0.02934
								5500	17.7	19.27	25.11	0.6867	0.02928
								6000	18.2	20.43	27.30	0.7248	0.02916
								6500	18.7	21.53	29.51	0.7635	0.02903
								7000	19.2	22.56	31.75	0.8027	0.02890
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.0	15.49	21.70	0.5923	0.03049
								4500	17.2	16.20	22.73	0.6087	0.03040
								4750	17.4	16.88	23.75	0.6252	0.03032

							P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	17.7	17.54	24.78	0.6417	0.03024
								5250	17.9	18.19	25.81	0.6582	0.03015
								5500	18.1	18.83	26.84	0.6747	0.03007
								6000	18.5	20.05	28.91	0.7079	0.02990
								6500	19.0	21.20	30.99	0.7412	0.02974
								7000	19.4	22.31	33.07	0.7745	0.02957
								4250	16.9	15.60	21.47	0.6040	0.03001
								4500	17.1	16.29	22.53	0.6217	0.02991
								4750	17.3	16.97	23.60	0.6396	0.02981
								5000	17.6	17.63	24.67	0.6575	0.02971
								5250	17.8	18.27	25.74	0.6755	0.02961
								5500	18.0	18.89	26.82	0.6936	0.02951
								6000	18.5	20.09	28.99	0.7300	0.02930
								6500	19.0	21.22	31.18	0.7666	0.02910
								7000	19.4	22.30	33.37	0.8034	0.02889
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.44	22.35	0.6192	0.02985
								4500	17.3	16.11	23.50	0.6395	0.02973
								4750	17.6	16.76	24.65	0.6598	0.02962
								5000	17.8	17.39	25.81	0.6803	0.02950
								5250	18.1	18.00	26.97	0.7008	0.02939
								5500	18.3	18.60	28.14	0.7215	0.02927
								6000	18.8	19.73	30.50	0.7631	0.02904
								6500	19.3	20.80	32.87	0.8050	0.02880
								7000	19.9	21.81	35.26	0.8472	0.02856
CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.63	21.93	0.6832	0.02813
								4500	17.1	16.31	22.88	0.7039	0.02805
								4750	17.3	16.98	23.85	0.7248	0.02797
								5000	17.6	17.63	24.82	0.7459	0.02788
								5250	17.8	18.25	25.81	0.7672	0.02780
								5500	18.1	18.86	26.80	0.7886	0.02771
								6000	18.6	20.01	28.80	0.8319	0.02754
								6500	19.1	21.10	30.83	0.8757	0.02737
								7000	19.6	22.13	32.88	0.9202	0.02719
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.4	15.13	24.06	0.6737	0.02911
								4500	17.6	15.82	25.01	0.6923	0.02901
								4750	17.8	16.50	25.96	0.7110	0.02890
								5000	18.1	17.16	26.91	0.7297	0.02880
								5250	18.3	17.80	27.86	0.7484	0.02870
								5500	18.5	18.43	28.81	0.7671	0.02860
								6000	18.9	19.63	30.73	0.8047	0.02839
								6500	19.4	20.79	32.64	0.8424	0.02818
								7000	19.8	21.89	34.56	0.8802	0.02797
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.4	15.10	24.35	0.7092	0.02841
								4500	17.7	15.76	25.40	0.7320	0.02827
								4750	17.9	16.40	26.46	0.7550	0.02813
								5000	18.2	17.03	27.53	0.7781	0.02799
								5250	18.4	17.64	28.60	0.8012	0.02785
								5500	18.7	18.22	29.67	0.8245	0.02771
								6000	19.2	19.35	31.84	0.8714	0.02743
								6500	19.7	20.42	34.02	0.9187	0.02714
								7000	20.2	21.42	36.22	0.9663	0.02686
CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	17.6	14.98	22.24	0.5852	0.03218
								4500	17.8	15.66	23.29	0.6009	0.03211
								4750	18.0	16.33	24.34	0.6166	0.03203
								5000	18.3	16.98	25.40	0.6324	0.03195
								5250	18.5	17.61	26.45	0.6482	0.03187
								5500	18.7	18.23	27.51	0.6640	0.03180
								6000	19.1	19.43	29.63	0.6957	0.03164
								6500	19.6	20.56	31.76	0.7275	0.03148
								7000	20.0	21.65	33.89	0.7594	0.03133
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.6	14.94	22.94	0.6099	0.03154
								4500	17.9	15.59	24.12	0.6293	0.03144
								4750	18.1	16.23	25.30	0.6488	0.03133
								5000	18.4	16.84	26.49	0.6684	0.03122
								5250	18.6	17.44	27.68	0.6880	0.03111
								5500	18.9	18.03	28.88	0.7078	0.03100
								6000	19.4	19.14	31.30	0.7477	0.03078
								6500	19.9	20.19	33.74	0.7878	0.03055
								7000	20.5	21.19	36.19	0.8283	0.03033
CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	18.0	14.64	24.71	0.6628	0.03082
								4500	18.2	15.32	25.68	0.6806	0.03072
								4750	18.4	15.98	26.66	0.6986	0.03063
								5000	18.6	16.62	27.63	0.7165	0.03053
								5250	18.9	17.25	28.61	0.7345	0.03043
								5500	19.1	17.86	29.59	0.7525	0.03033
								6000	19.5	19.05	31.55	0.7887	0.03014
								6500	19.9	20.18	33.52	0.8249	0.02994
								7000	20.4	21.26	35.49	0.8612	0.02974
CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.23	20.87	0.2527	0.03533

								4500	16.5	16.94	22.11	0.2640	0.03530
								4750	16.7	17.63	23.35	0.2754	0.03527
								5000	16.9	18.31	24.59	0.2868	0.03524
								5250	17.2	18.96	25.84	0.2982	0.03521
								5500	17.4	19.59	27.09	0.3097	0.03518
								6000	17.9	20.81	29.60	0.3327	0.03512
								6500	18.3	21.95	32.13	0.3558	0.03507
								7000	18.8	23.05	34.66	0.3791	0.03501
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.60	18.80	0.2334	0.03548
								4500	16.1	17.31	20.01	0.2455	0.03549
								4750	16.4	17.99	21.24	0.2578	0.03549
								5000	16.6	18.65	22.48	0.2701	0.03550
								5250	16.9	19.28	23.73	0.2826	0.03551
								5500	17.1	19.90	24.99	0.2952	0.03552
								6000	17.7	21.07	27.53	0.3206	0.03553
								6500	18.2	22.17	30.11	0.3463	0.03555
								7000	18.7	23.20	32.72	0.3724	0.03556
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.23	27.15	0.2786	0.03546
								4500	17.6	15.88	28.56	0.2923	0.03544
								4750	17.8	16.50	29.97	0.3061	0.03542
								5000	18.1	17.11	31.37	0.3197	0.03540
								5250	18.4	17.70	32.76	0.3333	0.03538
								5500	18.7	18.27	34.15	0.3469	0.03536
								6000	19.2	19.37	36.92	0.3739	0.03532
								6500	19.7	20.41	39.67	0.4008	0.03528
								7000	20.3	21.40	42.41	0.4275	0.03524
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.98	20.66	0.2484	0.03626
								4500	16.7	16.70	21.85	0.2595	0.03623
								4750	16.9	17.38	23.05	0.2707	0.03621
								5000	17.2	18.06	24.25	0.2818	0.03618
								5250	17.4	18.71	25.45	0.2930	0.03616
								5500	17.6	19.35	26.65	0.3042	0.03613
								6000	18.1	20.57	29.05	0.3266	0.03608
								6500	18.5	21.74	31.47	0.3491	0.03603
								7000	19.0	22.84	33.89	0.3717	0.03598
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.95	21.65	0.2593	0.03573
								4500	16.8	16.64	22.98	0.2732	0.03568
								4750	17.0	17.29	24.31	0.2871	0.03564
								5000	17.3	17.93	25.65	0.3010	0.03559
								5250	17.6	18.55	27.00	0.3151	0.03555
								5500	17.8	19.15	28.35	0.3292	0.03550
								6000	18.3	20.28	31.08	0.3576	0.03541
								6500	18.9	21.36	33.83	0.3863	0.03531
								7000	19.4	22.37	36.60	0.4151	0.03521
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.67	25.42	0.2749	0.03478
								4500	17.1	16.35	26.69	0.2871	0.03476
								4750	17.3	17.01	27.96	0.2992	0.03475
								5000	17.5	17.66	29.22	0.3112	0.03473
								5250	17.8	18.29	30.48	0.3231	0.03472
								5500	18.0	18.90	31.73	0.3350	0.03471
								6000	18.5	20.08	34.21	0.3587	0.03468
								6500	19.0	21.21	36.67	0.3821	0.03465
								7000	19.5	22.28	39.11	0.4053	0.03462
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.39	22.20	0.2698	0.03398
								4500	16.3	17.08	23.52	0.2835	0.03394
								4750	16.6	17.75	24.84	0.2972	0.03389
								5000	16.8	18.40	26.17	0.3110	0.03385
								5250	17.1	19.03	27.50	0.3248	0.03380
								5500	17.4	19.64	28.84	0.3387	0.03376
								6000	17.9	20.80	31.52	0.3666	0.03367
								6500	18.4	21.90	34.22	0.3946	0.03357
								7000	18.9	22.94	36.93	0.4228	0.03348
CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.19	20.75	0.2656	0.03524
								4500	16.5	16.90	21.98	0.2769	0.03521
								4750	16.7	17.59	23.22	0.2883	0.03518
								5000	17.0	18.26	24.47	0.2996	0.03515
								5250	17.2	18.92	25.72	0.3110	0.03512
								5500	17.4	19.55	26.97	0.3225	0.03509
								6000	17.9	20.76	29.48	0.3454	0.03503
								6500	18.4	21.91	32.01	0.3685	0.03497
								7000	18.9	23.00	34.54	0.3917	0.03491
							P275/65R 18 AT GOODYEAR (WRANGLER) / D3HGQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.56	18.68	0.2462	0.03539
								4500	16.2	17.26	19.89	0.2583	0.03540
								4750	16.4	17.95	21.12	0.2706	0.03540
								5000	16.7	18.60	22.36	0.2829	0.03541
								5250	16.9	19.24	23.61	0.2953	0.03542
								5500	17.2	19.86	24.86	0.3079	0.03542
								6000	17.7	21.03	27.41	0.3333	0.03544
								6500	18.2	22.13	29.98	0.3590	0.03545
								7000	18.7	23.15	32.60	0.3850	0.03546
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.20	27.04	0.2905	0.03537
								4500	17.6	15.85	28.45	0.3042	0.03535

								4750	17.9	16.47	29.85	0.3179	0.03533
								5000	18.1	17.08	31.25	0.3316	0.03531
								5250	18.4	17.66	32.65	0.3452	0.03529
								5500	18.7	18.24	34.04	0.3587	0.03527
								6000	19.2	19.33	36.81	0.3857	0.03523
								6500	19.8	20.38	39.56	0.4125	0.03519
								7000	20.3	21.37	42.30	0.4391	0.03515
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.95	20.54	0.2607	0.03617
								4500	16.8	16.66	21.74	0.2718	0.03615
								4750	17.0	17.35	22.93	0.2829	0.03612
								5000	17.2	18.02	24.13	0.2940	0.03610
								5250	17.4	18.67	25.33	0.3052	0.03607
								5500	17.7	19.31	26.53	0.3164	0.03605
								6000	18.1	20.53	28.94	0.3388	0.03599
								6500	18.6	21.70	31.35	0.3612	0.03594
								7000	19.0	22.80	33.78	0.3837	0.03589
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	21.53	0.2713	0.03565
								4500	16.8	16.60	22.86	0.2851	0.03560
								4750	17.1	17.26	24.20	0.2990	0.03555
								5000	17.3	17.89	25.54	0.3130	0.03551
								5250	17.6	18.51	26.89	0.3270	0.03546
								5500	17.8	19.11	28.24	0.3411	0.03541
								6000	18.4	20.25	30.97	0.3694	0.03532
								6500	18.9	21.32	33.71	0.3980	0.03522
								7000	19.4	22.33	36.48	0.4268	0.03512
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.64	25.29	0.2878	0.03469
								4500	17.1	16.32	26.57	0.2999	0.03467
								4750	17.3	16.98	27.84	0.3120	0.03465
								5000	17.6	17.62	29.10	0.3240	0.03464
								5250	17.8	18.25	30.36	0.3359	0.03462
								5500	18.1	18.86	31.61	0.3478	0.03461
								6000	18.5	20.04	34.09	0.3714	0.03458
								6500	19.0	21.17	36.55	0.3947	0.03455
								7000	19.5	22.24	38.99	0.4179	0.03452
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.35	22.07	0.2826	0.03390
								4500	16.4	17.04	23.39	0.2963	0.03385
								4750	16.6	17.71	24.72	0.3100	0.03381
								5000	16.9	18.36	26.05	0.3238	0.03376
								5250	17.1	18.99	27.38	0.3376	0.03371
								5500	17.4	19.60	28.72	0.3514	0.03367
								6000	17.9	20.76	31.40	0.3792	0.03357
								6500	18.4	21.86	34.10	0.4072	0.03348
								7000	18.9	22.89	36.81	0.4353	0.03339
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.15	8.8" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.6	18.06	20.86	0.2014	0.03141
								4500	14.8	18.83	21.96	0.2159	0.03136
								4750	15.0	19.58	23.05	0.2305	0.03130
								5000	15.3	20.30	24.15	0.2451	0.03125
								5250	15.5	21.00	25.24	0.2598	0.03120
								5500	15.7	21.68	26.34	0.2745	0.03115
								6000	16.2	22.98	28.55	0.3039	0.03104
								6500	16.6	24.20	30.76	0.3334	0.03094
								7000	17.1	25.36	32.98	0.3630	0.03083
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.40	27.27	0.2234	0.03283
								4500	16.3	17.06	28.60	0.2396	0.03280
								4750	16.6	17.72	29.93	0.2557	0.03276
								5000	16.9	18.35	31.24	0.2718	0.03273
								5250	17.2	18.96	32.56	0.2878	0.03269
								5500	17.4	19.55	33.87	0.3037	0.03265
								6000	18.0	20.69	36.48	0.3354	0.03258
								6500	18.5	21.76	39.07	0.3670	0.03251
								7000	19.0	22.78	41.64	0.3984	0.03244
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.8	17.81	20.40	0.1523	0.03322
								4500	15.0	18.57	21.53	0.1648	0.03319
								4750	15.3	19.31	22.66	0.1774	0.03316
								5000	15.5	20.02	23.81	0.1901	0.03313
								5250	15.7	20.72	24.95	0.2027	0.03309
								5500	15.9	21.39	26.11	0.2155	0.03306
								6000	16.4	22.68	28.43	0.2411	0.03300
								6500	16.9	23.89	30.76	0.2670	0.03293
								7000	17.3	25.03	33.12	0.2930	0.03286
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.0	18.87	19.11	0.1867	0.03054
								4500	14.2	19.67	20.13	0.2005	0.03051
								4750	14.4	20.45	21.16	0.2143	0.03047
								5000	14.6	21.20	22.19	0.2283	0.03043
								5250	14.8	21.93	23.22	0.2422	0.03040
								5500	15.1	22.64	24.26	0.2562	0.03036
								6000	15.5	23.98	26.35	0.2844	0.03029
								6500	15.9	25.25	28.45	0.3128	0.03021
								7000	16.4	26.45	30.57	0.3413	0.03014
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.91	25.72	0.2112	0.03223
								4500	15.8	17.62	26.92	0.2256	0.03220
								4750	16.1	18.32	28.12	0.2399	0.03217

MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	16.3	18.99	29.30	0.2541	0.03214
								5250	16.6	19.65	30.49	0.2682	0.03211
								5500	16.8	20.29	31.66	0.2823	0.03208
								6000	17.3	21.51	34.00	0.3102	0.03202
								6500	17.7	22.68	36.31	0.3379	0.03196
								7000	18.2	23.79	38.61	0.3653	0.03191
								4250	14.6	18.03	20.86	0.2062	0.03139
								4500	14.8	18.80	21.95	0.2208	0.03134
								4750	15.1	19.54	23.04	0.2354	0.03129
								5000	15.3	20.27	24.14	0.2501	0.03123
								5250	15.5	20.97	25.23	0.2648	0.03118
								5500	15.8	21.64	26.33	0.2795	0.03113
								6000	16.2	22.94	28.54	0.3090	0.03102
								6500	16.7	24.17	30.75	0.3385	0.03092
								7000	17.1	25.33	32.96	0.3682	0.03081
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.37	27.26	0.2278	0.03281
								4500	16.4	17.05	28.59	0.2440	0.03277
								4750	16.6	17.69	29.91	0.2602	0.03274
								5000	16.9	18.33	31.23	0.2763	0.03270
								5250	17.2	18.94	32.54	0.2923	0.03266
								5500	17.4	19.53	33.85	0.3083	0.03263
								6000	18.0	20.67	36.46	0.3401	0.03255
								6500	18.5	21.74	39.04	0.3718	0.03248
								7000	19.0	22.76	41.62	0.4032	0.03241
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.8	17.78	20.39	0.1564	0.03321
								4500	15.1	18.54	21.52	0.1690	0.03318
								4750	15.3	19.28	22.66	0.1816	0.03314
								5000	15.5	20.00	23.80	0.1942	0.03311
								5250	15.7	20.69	24.95	0.2069	0.03308
								5500	16.0	21.37	26.10	0.2197	0.03304
								6000	16.4	22.65	28.42	0.2454	0.03298
								6500	16.9	23.86	30.75	0.2713	0.03291
								7000	17.3	25.00	33.11	0.2974	0.03284
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.0	18.83	19.10	0.1913	0.03054
								4500	14.2	19.63	20.13	0.2052	0.03050
								4750	14.4	20.41	21.15	0.2191	0.03046
								5000	14.7	21.16	22.18	0.2330	0.03042
								5250	14.9	21.89	23.22	0.2470	0.03039
								5500	15.1	22.59	24.25	0.2611	0.03035
								6000	15.5	23.94	26.34	0.2893	0.03027
								6500	16.0	25.21	28.44	0.3177	0.03019
								7000	16.4	26.41	30.55	0.3463	0.03012
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.89	25.71	0.2159	0.03221
								4500	15.8	17.60	26.91	0.2303	0.03217
								4750	16.1	18.30	28.10	0.2446	0.03214
								5000	16.3	18.97	29.29	0.2589	0.03211
								5250	16.6	19.63	30.47	0.2730	0.03208
								5500	16.8	20.26	31.64	0.2871	0.03205
								6000	17.3	21.49	33.98	0.3151	0.03199
								6500	17.8	22.66	36.29	0.3429	0.03193
								7000	18.2	23.76	38.58	0.3704	0.03188
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.6	18.02	19.72	0.1843	0.03233
								4500	14.9	18.79	20.83	0.1985	0.03227
								4750	15.1	19.53	21.95	0.2128	0.03222
								5000	15.3	20.25	23.07	0.2271	0.03216
								5250	15.5	20.95	24.19	0.2415	0.03210
								5500	15.8	21.64	25.31	0.2558	0.03204
								6000	16.2	22.93	27.56	0.2846	0.03193
								6500	16.7	24.16	29.82	0.3135	0.03181
								7000	17.1	25.32	32.08	0.3425	0.03170
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.40	26.48	0.2011	0.03359
								4500	16.3	17.07	27.83	0.2169	0.03355
								4750	16.6	17.72	29.18	0.2326	0.03351
								5000	16.9	18.35	30.53	0.2483	0.03347
								5250	17.2	18.97	31.87	0.2639	0.03343
								5500	17.4	19.56	33.21	0.2794	0.03339
								6000	18.0	20.70	35.86	0.3103	0.03331
								6500	18.5	21.77	38.51	0.3411	0.03324
								7000	19.0	22.79	41.13	0.3717	0.03316
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.8	17.81	19.35	0.1336	0.03401
								4500	15.0	18.58	20.50	0.1458	0.03397
								4750	15.3	19.32	21.66	0.1580	0.03394
								5000	15.5	20.04	22.82	0.1704	0.03390
								5250	15.7	20.73	23.99	0.1827	0.03387
								5500	15.9	21.40	25.17	0.1952	0.03383
								6000	16.4	22.69	27.53	0.2202	0.03376
								6500	16.9	23.90	29.91	0.2454	0.03369
								7000	17.3	25.05	32.30	0.2707	0.03361
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.0	18.81	17.93	0.1676	0.03154
								4500	14.2	19.62	18.97	0.1811	0.03149
								4750	14.5	20.39	20.02	0.1947	0.03145

							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	5000	14.7	21.14	21.07	0.2084	0.03141
								5250	14.9	21.87	22.12	0.2221	0.03137
								5500	15.1	22.57	23.18	0.2359	0.03133
								6000	15.5	23.93	25.31	0.2635	0.03124
								6500	16.0	25.20	27.46	0.2914	0.03115
								7000	16.4	26.39	29.61	0.3194	0.03107
								4250	15.6	16.90	24.83	0.1905	0.03304
								4500	15.8	17.61	26.06	0.2045	0.03301
								4750	16.1	18.31	27.28	0.2184	0.03297
								5000	16.3	18.98	28.49	0.2322	0.03294
								5250	16.6	19.64	29.70	0.2460	0.03291
								5500	16.8	20.28	30.90	0.2597	0.03287
								6000	17.3	21.50	33.28	0.2869	0.03281
								6500	17.8	22.67	35.64	0.3139	0.03274
								7000	18.2	23.79	37.98	0.3407	0.03267
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.25	23.07	0.1952	0.03270
								4500	15.5	18.00	24.13	0.2100	0.03265
								4750	15.7	18.73	25.20	0.2249	0.03259
								5000	15.9	19.44	26.27	0.2399	0.03253
								5250	16.2	20.13	27.34	0.2549	0.03247
								5500	16.4	20.79	28.42	0.2700	0.03241
								6000	16.8	22.07	30.59	0.3004	0.03229
								6500	17.3	23.27	32.78	0.3310	0.03217
								7000	17.8	24.41	34.98	0.3619	0.03205
MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.81	23.53	0.1849	0.03393
								4500	15.9	17.55	24.62	0.1990	0.03387
								4750	16.1	18.27	25.70	0.2132	0.03382
								5000	16.3	18.97	26.79	0.2274	0.03377
								5250	16.6	19.64	27.89	0.2417	0.03371
								5500	16.8	20.30	28.99	0.2561	0.03366
								6000	17.2	21.56	31.21	0.2850	0.03355
								6500	17.7	22.75	33.45	0.3142	0.03344
								7000	18.2	23.88	35.70	0.3436	0.03333
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.05	19.84	0.2476	0.03351
								4500	15.7	17.78	21.05	0.2598	0.03347
								4750	15.9	18.49	22.26	0.2721	0.03344
								5000	16.2	19.19	23.47	0.2844	0.03340
								5250	16.4	19.86	24.69	0.2967	0.03337
								5500	16.6	20.51	25.91	0.3091	0.03333
								6000	17.1	21.75	28.37	0.3339	0.03326
								6500	17.6	22.93	30.83	0.3588	0.03319
								7000	18.0	24.04	33.31	0.3839	0.03312
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.03	25.80	0.2847	0.03331
								4500	16.7	16.69	27.17	0.2997	0.03328
								4750	17.0	17.33	28.54	0.3147	0.03326
								5000	17.3	17.95	29.90	0.3296	0.03323
								5250	17.5	18.56	31.25	0.3444	0.03320
								5500	17.8	19.15	32.60	0.3592	0.03317
								6000	18.3	20.27	35.29	0.3887	0.03312
								6500	18.9	21.33	37.96	0.4180	0.03306
								7000	19.4	22.34	40.61	0.4471	0.03301
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.88	19.56	0.2447	0.03414
								4500	15.8	17.62	20.72	0.2568	0.03411
								4750	16.1	18.33	21.89	0.2689	0.03408
								5000	16.3	19.03	23.05	0.2810	0.03405
								5250	16.5	19.70	24.22	0.2932	0.03402
								5500	16.8	20.36	25.39	0.3053	0.03399
								6000	17.2	21.62	27.73	0.3297	0.03393
								6500	17.7	22.81	30.08	0.3542	0.03386
								7000	18.1	23.94	32.43	0.3787	0.03380
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.83	20.49	0.2586	0.03362
								4500	15.9	17.53	21.78	0.2735	0.03357
								4750	16.2	18.22	23.08	0.2886	0.03351
								5000	16.4	18.87	24.38	0.3037	0.03346
								5250	16.7	19.51	25.69	0.3189	0.03340
								5500	16.9	20.12	27.01	0.3341	0.03335
								6000	17.5	21.29	29.65	0.3649	0.03324
								6500	18.0	22.38	32.32	0.3959	0.03313
								7000	18.5	23.41	35.01	0.4271	0.03302
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.52	24.13	0.2781	0.03265
								4500	16.2	17.22	25.37	0.2914	0.03263
								4750	16.4	17.90	26.60	0.3046	0.03261
								5000	16.7	18.57	27.83	0.3177	0.03258
								5250	16.9	19.22	29.05	0.3308	0.03256
								5500	17.2	19.84	30.26	0.3438	0.03254
								6000	17.7	21.06	32.67	0.3696	0.03250
								6500	18.1	22.21	35.05	0.3952	0.03246
								7000	18.6	23.31	37.42	0.4206	0.03241
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.32	21.01	0.2700	0.03186
								4500	15.5	18.03	22.29	0.2849	0.03181

								4750	15.7	18.73	23.58	0.2998	0.03175
								5000	16.0	19.40	24.87	0.3148	0.03170
								5250	16.2	20.04	26.16	0.3298	0.03165
								5500	16.5	20.67	27.46	0.3448	0.03159
								6000	17.0	21.86	30.06	0.3751	0.03149
								6500	17.5	22.98	32.68	0.4055	0.03138
								7000	18.0	24.03	35.31	0.4360	0.03127
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.94	19.92	0.2462	0.03380
								4500	15.8	17.67	21.13	0.2583	0.03377
								4750	16.0	18.38	22.34	0.2704	0.03374
								5000	16.3	19.07	23.56	0.2826	0.03370
								5250	16.5	19.74	24.78	0.2948	0.03367
								5500	16.7	20.39	26.01	0.3070	0.03363
								6000	17.2	21.63	28.47	0.3316	0.03357
								6500	17.7	22.80	30.95	0.3562	0.03350
								7000	18.1	23.91	33.43	0.3810	0.03343
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.81	26.05	0.2787	0.03401
								4500	16.9	16.46	27.43	0.2934	0.03399
								4750	17.2	17.10	28.81	0.3080	0.03396
								5000	17.5	17.72	30.18	0.3225	0.03394
								5250	17.8	18.32	31.55	0.3370	0.03391
								5500	18.0	18.90	32.91	0.3515	0.03389
								6000	18.6	20.02	35.62	0.3802	0.03384
								6500	19.1	21.08	38.32	0.4088	0.03379
								7000	19.6	22.08	41.00	0.4372	0.03374
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.63	20.65	0.2553	0.03421
								4500	16.1	17.32	21.95	0.2699	0.03416
								4750	16.4	18.00	23.26	0.2847	0.03411
								5000	16.6	18.65	24.57	0.2995	0.03406
								5250	16.9	19.28	25.89	0.3144	0.03401
								5500	17.1	19.89	27.22	0.3294	0.03395
								6000	17.7	21.05	29.88	0.3596	0.03385
								6500	18.2	22.14	32.58	0.3900	0.03374
								7000	18.7	23.16	35.29	0.4206	0.03364
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.32	24.33	0.2735	0.03325
								4500	16.4	17.01	25.58	0.2865	0.03323
								4750	16.6	17.69	26.82	0.2994	0.03321
								5000	16.9	18.35	28.05	0.3123	0.03319
								5250	17.1	19.00	29.28	0.3250	0.03317
								5500	17.4	19.62	30.50	0.3378	0.03315
								6000	17.8	20.83	32.93	0.3630	0.03311
								6500	18.3	21.97	35.34	0.3881	0.03307
								7000	18.8	23.07	37.73	0.4129	0.03303
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.10	21.18	0.2662	0.03246
								4500	15.7	17.81	22.47	0.2808	0.03240
								4750	15.9	18.50	23.77	0.2954	0.03235
								5000	16.2	19.16	25.07	0.3100	0.03230
								5250	16.4	19.80	26.37	0.3248	0.03225
								5500	16.7	20.43	27.68	0.3395	0.03220
								6000	17.2	21.61	30.31	0.3692	0.03210
								6500	17.7	22.73	32.95	0.3990	0.03199
								7000	18.2	23.77	35.60	0.4289	0.03189
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.71	20.33	0.2973	0.03324
								4500	16.0	17.44	21.51	0.3102	0.03319
								4750	16.2	18.15	22.70	0.3232	0.03315
								5000	16.5	18.83	23.89	0.3362	0.03310
								5250	16.7	19.50	25.09	0.3492	0.03305
								5500	16.9	20.15	26.29	0.3623	0.03300
								6000	17.4	21.39	28.70	0.3886	0.03291
								6500	17.9	22.56	31.12	0.4151	0.03281
								7000	18.3	23.66	33.55	0.4416	0.03272
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.77	26.05	0.3387	0.03294
								4500	17.0	16.43	27.39	0.3546	0.03289
								4750	17.2	17.06	28.73	0.3704	0.03285
								5000	17.5	17.68	30.06	0.3862	0.03281
								5250	17.8	18.29	31.39	0.4020	0.03276
								5500	18.1	18.87	32.71	0.4177	0.03272
								6000	18.6	19.99	35.35	0.4489	0.03264
								6500	19.1	21.06	37.96	0.4799	0.03255
								7000	19.6	22.07	40.57	0.5108	0.03247
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.57	20.07	0.2911	0.03388
								4500	16.1	17.30	21.21	0.3038	0.03383
								4750	16.4	18.01	22.35	0.3166	0.03379
								5000	16.6	18.70	23.50	0.3294	0.03375
								5250	16.8	19.37	24.64	0.3422	0.03371
								5500	17.0	20.03	25.79	0.3551	0.03366
								6000	17.5	21.28	28.09	0.3808	0.03358
								6500	17.9	22.47	30.40	0.4067	0.03349
								7000	18.4	23.59	32.71	0.4326	0.03341
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.54	20.92	0.3065	0.03332
								4500	16.2	17.23	22.18	0.3223	0.03326

								4750	16.4	17.91	23.45	0.3381	0.03319
								5000	16.7	18.57	24.73	0.3540	0.03312
								5250	17.0	19.20	26.02	0.3700	0.03305
								5500	17.2	19.81	27.31	0.3860	0.03299
								6000	17.7	20.97	29.91	0.4184	0.03285
								6500	18.2	22.07	32.53	0.4510	0.03271
								7000	18.8	23.09	35.17	0.4838	0.03258
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.22	24.40	0.3349	0.03229
								4500	16.5	16.91	25.62	0.3491	0.03225
								4750	16.7	17.59	26.82	0.3631	0.03222
								5000	17.0	18.25	28.02	0.3771	0.03218
								5250	17.2	18.90	29.22	0.3910	0.03214
								5500	17.5	19.52	30.40	0.4048	0.03211
								6000	17.9	20.73	32.76	0.4323	0.03204
								6500	18.4	21.88	35.10	0.4595	0.03196
								7000	18.9	22.98	37.42	0.4865	0.03189
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	16.97	21.37	0.3232	0.03157
								4500	15.8	17.69	22.63	0.3389	0.03150
								4750	16.0	18.37	23.89	0.3547	0.03144
								5000	16.3	19.04	25.15	0.3705	0.03137
								5250	16.5	19.68	26.42	0.3864	0.03130
								5500	16.8	20.31	27.69	0.4023	0.03123
								6000	17.3	21.50	30.24	0.4342	0.03110
								6500	17.8	22.61	32.81	0.4663	0.03096
								7000	18.3	23.67	35.39	0.4986	0.03082
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.61	20.40	0.2962	0.03353
								4500	16.1	17.34	21.59	0.3090	0.03348
								4750	16.3	18.04	22.79	0.3218	0.03344
								5000	16.6	18.72	23.98	0.3347	0.03339
								5250	16.8	19.39	25.18	0.3476	0.03334
								5500	17.0	20.03	26.39	0.3606	0.03330
								6000	17.5	21.27	28.80	0.3866	0.03320
								6500	18.0	22.43	31.23	0.4128	0.03311
								7000	18.4	23.54	33.67	0.4391	0.03301
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.56	26.30	0.3333	0.03362
								4500	17.2	16.21	27.65	0.3489	0.03358
								4750	17.5	16.84	29.00	0.3644	0.03354
								5000	17.7	17.46	30.35	0.3798	0.03350
								5250	18.0	18.06	31.69	0.3952	0.03346
								5500	18.3	18.64	33.03	0.4105	0.03342
								6000	18.8	19.76	35.68	0.4410	0.03334
								6500	19.3	20.81	38.33	0.4714	0.03326
								7000	19.9	21.82	40.95	0.5015	0.03318
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.34	21.08	0.3038	0.03390
								4500	16.4	17.03	22.35	0.3192	0.03383
								4750	16.6	17.70	23.64	0.3347	0.03377
								5000	16.9	18.35	24.92	0.3504	0.03370
								5250	17.2	18.98	26.22	0.3661	0.03364
								5500	17.4	19.59	27.52	0.3818	0.03357
								6000	17.9	20.74	30.14	0.4136	0.03344
								6500	18.4	21.83	32.78	0.4456	0.03331
								7000	19.0	22.85	35.44	0.4778	0.03318
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.03	24.60	0.3309	0.03287
								4500	16.7	16.72	25.82	0.3448	0.03283
								4750	16.9	17.39	27.04	0.3585	0.03280
								5000	17.2	18.05	28.25	0.3722	0.03277
								5250	17.4	18.69	29.45	0.3858	0.03273
								5500	17.6	19.31	30.65	0.3994	0.03270
								6000	18.1	20.51	33.03	0.4263	0.03263
								6500	18.6	21.65	35.39	0.4530	0.03256
								7000	19.1	22.74	37.72	0.4794	0.03250
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.76	21.54	0.3200	0.03215
								4500	16.0	17.47	22.81	0.3354	0.03208
								4750	16.2	18.15	24.08	0.3509	0.03202
								5000	16.5	18.82	25.35	0.3664	0.03195
								5250	16.7	19.45	26.63	0.3820	0.03189
								5500	17.0	20.07	27.91	0.3976	0.03182
								6000	17.5	21.26	30.49	0.4289	0.03169
								6500	18.0	22.37	33.08	0.4604	0.03155
								7000	18.5	23.42	35.68	0.4921	0.03142
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.32	28.38	0.4477	0.03126
								4500	17.5	15.97	29.60	0.4670	0.03119
								4750	17.7	16.60	30.82	0.4863	0.03111
								5000	18.0	17.22	32.03	0.5055	0.03104
								5250	18.2	17.82	33.24	0.5247	0.03096
								5500	18.5	18.40	34.44	0.5437	0.03089
								6000	19.0	19.52	36.84	0.5817	0.03074
								6500	19.6	20.58	39.22	0.6194	0.03059
								7000	20.1	21.58	41.59	0.6569	0.03045
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.04	23.59	0.3682	0.03248
								4500	16.6	16.76	24.64	0.3835	0.03241

								4750	16.9	17.46	25.69	0.3989	0.03235
								5000	17.1	18.14	26.74	0.4143	0.03228
								5250	17.3	18.80	27.79	0.4298	0.03221
								5500	17.5	19.44	28.85	0.4452	0.03214
								6000	18.0	20.68	30.96	0.4762	0.03201
								6500	18.4	21.86	33.08	0.5074	0.03187
								7000	18.9	22.98	35.21	0.5385	0.03174
MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.41	24.29	0.3552	0.03449
								4500	17.3	16.11	25.37	0.3696	0.03443
								4750	17.5	16.78	26.45	0.3841	0.03437
								5000	17.8	17.45	27.53	0.3986	0.03431
								5250	18.0	18.09	28.62	0.4131	0.03425
								5500	18.2	18.72	29.70	0.4276	0.03419
								6000	18.6	19.93	31.88	0.4567	0.03406
								6500	19.1	21.09	34.07	0.4859	0.03394
								7000	19.5	22.19	36.26	0.5152	0.03382
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD880 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.07	20.29	0.4785	0.03150
								4500	16.6	16.79	21.40	0.4914	0.03146
								4750	16.8	17.49	22.51	0.5043	0.03142
								5000	17.1	18.17	23.63	0.5172	0.03137
								5250	17.3	18.83	24.74	0.5302	0.03133
								5500	17.5	19.48	25.86	0.5432	0.03129
								6000	17.9	20.72	28.10	0.5692	0.03120
								6500	18.4	21.90	30.34	0.5953	0.03111
								7000	18.8	23.02	32.59	0.6215	0.03103
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.06	21.01	0.4925	0.03098
								4500	16.7	16.75	22.24	0.5084	0.03091
								4750	16.9	17.41	23.48	0.5244	0.03084
								5000	17.2	18.06	24.72	0.5405	0.03078
								5250	17.4	18.69	25.97	0.5566	0.03071
								5500	17.7	19.30	27.22	0.5728	0.03064
								6000	18.2	20.46	29.75	0.6055	0.03050
								6500	18.7	21.55	32.29	0.6385	0.03036
								7000	19.2	22.58	34.86	0.6717	0.03022
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD880 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.88	20.46	0.4758	0.03208
								4500	16.8	16.59	21.58	0.4885	0.03204
								4750	17.0	17.29	22.69	0.5011	0.03200
								5000	17.3	17.97	23.82	0.5138	0.03195
								5250	17.5	18.62	24.94	0.5266	0.03191
								5500	17.7	19.26	26.07	0.5393	0.03187
								6000	18.1	20.50	28.32	0.5649	0.03179
								6500	18.6	21.67	30.58	0.5905	0.03171
								7000	19.0	22.79	32.85	0.6162	0.03162
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.87	21.19	0.4891	0.03155
								4500	16.9	16.55	22.43	0.5047	0.03149
								4750	17.1	17.22	23.68	0.5205	0.03142
								5000	17.4	17.86	24.93	0.5363	0.03136
								5250	17.6	18.48	26.19	0.5521	0.03129
								5500	17.9	19.09	27.45	0.5681	0.03122
								6000	18.4	20.24	30.00	0.6002	0.03109
								6500	18.9	21.32	32.57	0.6325	0.03096
								7000	19.4	22.35	35.15	0.6652	0.03082
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.67	23.58	0.5002	0.03100
								4500	17.0	16.38	24.60	0.5159	0.03092
								4750	17.2	17.07	25.62	0.5317	0.03085
								5000	17.5	17.74	26.65	0.5475	0.03078
								5250	17.7	18.40	27.68	0.5633	0.03071
								5500	17.9	19.04	28.71	0.5791	0.03063
								6000	18.3	20.27	30.77	0.6108	0.03049
								6500	18.8	21.44	32.84	0.6427	0.03034
								7000	19.2	22.56	34.92	0.6746	0.03019
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.67	23.91	0.5248	0.03037
								4500	17.1	16.35	25.04	0.5440	0.03027
								4750	17.3	17.01	26.18	0.5633	0.03017
								5000	17.6	17.65	27.32	0.5827	0.03007
								5250	17.8	18.28	28.46	0.6022	0.02996
								5500	18.0	18.88	29.62	0.6218	0.02986
								6000	18.5	20.03	31.93	0.6612	0.02965
								6500	19.1	21.12	34.27	0.7009	0.02944
								7000	19.6	22.15	36.63	0.7409	0.02923
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.0	15.49	23.77	0.4968	0.03157
								4500	17.2	16.20	24.80	0.5123	0.03149
								4750	17.4	16.88	25.84	0.5278	0.03142
								5000	17.7	17.55	26.87	0.5433	0.03135
								5250	17.9	18.20	27.91	0.5589	0.03128
								5500	18.1	18.83	28.95	0.5745	0.03121
								6000	18.5	20.06	31.03	0.6057	0.03107
								6500	19.0	21.22	33.11	0.6371	0.03092
								7000	19.4	22.33	35.21	0.6685	0.03078

							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.0	15.49	24.12	0.5207	0.03094
								4500	17.2	16.17	25.26	0.5396	0.03084
								4750	17.5	16.83	26.41	0.5586	0.03074
								5000	17.7	17.46	27.56	0.5778	0.03064
								5250	18.0	18.08	28.72	0.5969	0.03054
								5500	18.2	18.68	29.88	0.6162	0.03044
								6000	18.7	19.83	32.22	0.6551	0.03024
								6500	19.2	20.91	34.58	0.6942	0.03003
								7000	19.8	21.93	36.95	0.7337	0.02982
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.2	15.35	24.25	0.6046	0.02967
								4500	17.4	16.05	25.23	0.6212	0.02959
								4750	17.6	16.74	26.22	0.6379	0.02951
								5000	17.8	17.40	27.20	0.6546	0.02943
								5250	18.0	18.05	28.19	0.6713	0.02934
								5500	18.2	18.69	29.18	0.6881	0.02926
								6000	18.7	19.91	31.16	0.7216	0.02909
								6500	19.1	21.07	33.15	0.7553	0.02893
								7000	19.5	22.19	35.15	0.7891	0.02876
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.36	24.42	0.6316	0.02903
								4500	17.4	16.04	25.50	0.6519	0.02892
								4750	17.6	16.69	26.59	0.6722	0.02881
								5000	17.9	17.33	27.68	0.6927	0.02869
								5250	18.1	17.95	28.78	0.7133	0.02858
								5500	18.4	18.55	29.88	0.7339	0.02846
								6000	18.9	19.70	32.11	0.7755	0.02823
								6500	19.4	20.78	34.35	0.8174	0.02800
								7000	19.9	21.81	36.61	0.8597	0.02776
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.12	20.40	0.2660	0.03273
								4500	15.6	17.85	21.57	0.2792	0.03269
								4750	15.9	18.57	22.75	0.2924	0.03264
								5000	16.1	19.26	23.94	0.3057	0.03260
								5250	16.3	19.94	25.12	0.3190	0.03255
								5500	16.6	20.59	26.31	0.3323	0.03250
								6000	17.0	21.84	28.70	0.3591	0.03241
								6500	17.5	23.02	31.11	0.3861	0.03232
								7000	18.0	24.14	33.52	0.4131	0.03222
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.00	26.15	0.3094	0.03274
								4500	16.7	16.67	27.49	0.3255	0.03270
								4750	17.0	17.31	28.83	0.3415	0.03266
								5000	17.3	17.93	30.15	0.3574	0.03262
								5250	17.5	18.54	31.48	0.3733	0.03258
								5500	17.8	19.13	32.79	0.3891	0.03254
								6000	18.3	20.26	35.42	0.4206	0.03246
								6500	18.9	21.32	38.02	0.4519	0.03238
								7000	19.4	22.34	40.62	0.4831	0.03230
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.80	21.04	0.2768	0.03311
								4500	15.9	17.51	22.30	0.2927	0.03305
								4750	16.2	18.19	23.57	0.3086	0.03298
								5000	16.4	18.84	24.84	0.3247	0.03292
								5250	16.7	19.48	26.12	0.3408	0.03285
								5500	17.0	20.09	27.41	0.3570	0.03279
								6000	17.5	21.27	29.99	0.3896	0.03266
								6500	18.0	22.36	32.61	0.4225	0.03252
								7000	18.5	23.40	35.23	0.4556	0.03239
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.48	24.54	0.3027	0.03210
								4500	16.2	17.18	25.75	0.3170	0.03207
								4750	16.5	17.87	26.95	0.3311	0.03203
								5000	16.7	18.53	28.14	0.3452	0.03200
								5250	17.0	19.18	29.33	0.3592	0.03197
								5500	17.2	19.81	30.52	0.3732	0.03193
								6000	17.7	21.02	32.87	0.4009	0.03187
								6500	18.1	22.18	35.20	0.4283	0.03180
								7000	18.6	23.28	37.51	0.4555	0.03174
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.27	21.51	0.2912	0.03136
								4500	15.5	17.99	22.76	0.3070	0.03129
								4750	15.8	18.68	24.02	0.3229	0.03123
								5000	16.0	19.35	25.28	0.3388	0.03116
								5250	16.3	20.00	26.54	0.3548	0.03110
								5500	16.5	20.63	27.81	0.3709	0.03103
								6000	17.0	21.82	30.35	0.4031	0.03090
								6500	17.5	22.94	32.91	0.4355	0.03077
								7000	18.1	24.00	35.48	0.4680	0.03064
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.83	20.60	0.2624	0.03352
								4500	15.9	17.56	21.79	0.2752	0.03347
								4750	16.1	18.26	22.98	0.2881	0.03343
								5000	16.4	18.95	24.18	0.3010	0.03339
								5250	16.6	19.62	25.38	0.3140	0.03334
								5500	16.8	20.27	26.58	0.3270	0.03330
								6000	17.3	21.51	28.99	0.3531	0.03321
								6500	17.8	22.68	31.42	0.3793	0.03313

							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	7000	18.2	23.78	33.86	0.4057	0.03304
								4250	16.7	15.76	26.44	0.3027	0.03353
								4500	17.0	16.41	27.80	0.3183	0.03350
								4750	17.3	17.05	29.14	0.3339	0.03346
								5000	17.5	17.67	30.48	0.3494	0.03342
								5250	17.8	18.27	31.82	0.3649	0.03338
								5500	18.1	18.85	33.15	0.3803	0.03335
								6000	18.6	19.98	35.81	0.4110	0.03327
								6500	19.1	21.04	38.44	0.4415	0.03320
								7000	19.7	22.04	41.07	0.4718	0.03313
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.53	21.26	0.2724	0.03389
								4500	16.2	17.23	22.53	0.2879	0.03383
								4750	16.5	17.90	23.81	0.3035	0.03377
								5000	16.7	18.55	25.10	0.3192	0.03371
								5250	17.0	19.18	26.39	0.3349	0.03365
								5500	17.2	19.79	27.69	0.3508	0.03358
								6000	17.7	20.95	30.31	0.3826	0.03346
								6500	18.3	22.04	32.95	0.4147	0.03333
								7000	18.8	23.07	35.61	0.4470	0.03320
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.22	24.80	0.2967	0.03289
								4500	16.5	16.91	26.03	0.3105	0.03286
								4750	16.7	17.59	27.24	0.3243	0.03283
								5000	17.0	18.25	28.45	0.3380	0.03280
								5250	17.2	18.89	29.65	0.3517	0.03277
								5500	17.5	19.52	30.85	0.3652	0.03273
								6000	17.9	20.72	33.23	0.3922	0.03267
								6500	18.4	21.87	35.58	0.4189	0.03261
								7000	18.9	22.97	37.92	0.4454	0.03255
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	16.98	21.75	0.2861	0.03214
								4500	15.8	17.69	23.01	0.3016	0.03208
								4750	16.0	18.38	24.28	0.3171	0.03202
								5000	16.3	19.04	25.55	0.3326	0.03196
								5250	16.5	19.69	26.83	0.3483	0.03189
								5500	16.8	20.31	28.11	0.3639	0.03183
								6000	17.3	21.49	30.68	0.3953	0.03171
								6500	17.8	22.61	33.27	0.4269	0.03158
								7000	18.3	23.66	35.87	0.4587	0.03145
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.03	20.27	0.2845	0.03264
								4500	15.7	17.77	21.44	0.2977	0.03260
								4750	15.9	18.48	22.62	0.3110	0.03255
								5000	16.2	19.17	23.80	0.3243	0.03250
								5250	16.4	19.85	24.99	0.3376	0.03245
								5500	16.6	20.50	26.18	0.3510	0.03240
								6000	17.1	21.75	28.57	0.3778	0.03231
								6500	17.6	22.93	30.97	0.4048	0.03221
								7000	18.0	24.04	33.38	0.4319	0.03211
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.94	26.02	0.3271	0.03264
								4500	16.8	16.60	27.36	0.3432	0.03259
								4750	17.1	17.24	28.69	0.3592	0.03255
								5000	17.3	17.87	30.01	0.3752	0.03251
								5250	17.6	18.48	31.34	0.3911	0.03246
								5500	17.9	19.06	32.65	0.4070	0.03242
								6000	18.4	20.19	35.27	0.4385	0.03234
								6500	18.9	21.26	37.88	0.4699	0.03225
								7000	19.5	22.27	40.47	0.5011	0.03217
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.73	20.91	0.2941	0.03302
								4500	16.0	17.44	22.17	0.3100	0.03295
								4750	16.3	18.12	23.44	0.3260	0.03288
								5000	16.5	18.77	24.71	0.3420	0.03282
								5250	16.8	19.41	25.99	0.3582	0.03275
								5500	17.0	20.02	27.28	0.3744	0.03268
								6000	17.5	21.19	29.86	0.4071	0.03255
								6500	18.1	22.29	32.47	0.4400	0.03241
								7000	18.6	23.32	35.10	0.4732	0.03227
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.41	24.39	0.3218	0.03199
								4500	16.3	17.11	25.60	0.3361	0.03196
								4750	16.5	17.79	26.80	0.3503	0.03192
								5000	16.8	18.45	28.00	0.3644	0.03189
								5250	17.0	19.10	29.18	0.3784	0.03185
								5500	17.3	19.73	30.37	0.3924	0.03181
								6000	17.7	20.95	32.71	0.4202	0.03174
								6500	18.2	22.10	35.04	0.4477	0.03167
								7000	18.7	23.20	37.35	0.4750	0.03160
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.3	17.18	21.37	0.3099	0.03127
								4500	15.6	17.90	22.62	0.3257	0.03120
								4750	15.8	18.59	23.88	0.3416	0.03113
								5000	16.1	19.26	25.14	0.3576	0.03106
								5250	16.3	19.91	26.40	0.3737	0.03100
								5500	16.6	20.54	27.66	0.3897	0.03093
								6000	17.1	21.73	30.21	0.4220	0.03079
								6500	17.6	22.85	32.76	0.4545	0.03066
								7000	18.1	23.91	35.33	0.4871	0.03052

MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.75	20.47	0.2812	0.03342
								4500	16.0	17.48	21.65	0.2941	0.03337
								4750	16.2	18.18	22.85	0.3070	0.03333
								5000	16.4	18.87	24.04	0.3199	0.03328
								5250	16.7	19.53	25.24	0.3329	0.03324
								5500	16.9	20.18	26.44	0.3459	0.03319
								6000	17.4	21.42	28.85	0.3721	0.03310
								6500	17.8	22.59	31.28	0.3984	0.03301
								7000	18.3	23.70	33.71	0.4248	0.03292
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.70	26.31	0.3206	0.03342
								4500	17.1	16.35	27.66	0.3363	0.03338
								4750	17.3	16.99	29.00	0.3519	0.03334
								5000	17.6	17.61	30.34	0.3675	0.03330
								5250	17.9	18.21	31.68	0.3830	0.03326
								5500	18.1	18.79	33.01	0.3985	0.03322
								6000	18.7	19.91	35.66	0.4292	0.03315
								6500	19.2	20.97	38.30	0.4598	0.03307
								7000	19.7	21.98	40.91	0.4902	0.03299
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.46	21.13	0.2900	0.03379
								4500	16.3	17.16	22.40	0.3056	0.03373
								4750	16.5	17.83	23.68	0.3212	0.03367
								5000	16.8	18.48	24.97	0.3369	0.03360
								5250	17.0	19.11	26.26	0.3526	0.03354
								5500	17.3	19.72	27.56	0.3685	0.03347
								6000	17.8	20.88	30.18	0.4004	0.03334
								6500	18.3	21.97	32.81	0.4325	0.03321
								7000	18.9	22.99	35.47	0.4649	0.03308
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.15	24.66	0.3161	0.03277
								4500	16.6	16.84	25.88	0.3300	0.03274
								4750	16.8	17.52	27.09	0.3438	0.03271
								5000	17.0	18.18	28.30	0.3575	0.03267
								5250	17.3	18.82	29.50	0.3712	0.03264
								5500	17.5	19.44	30.70	0.3848	0.03261
								6000	18.0	20.65	33.07	0.4119	0.03254
								6500	18.5	21.79	35.42	0.4387	0.03248
								7000	18.9	22.89	37.76	0.4652	0.03241
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.90	21.60	0.3052	0.03204
								4500	15.8	17.61	22.87	0.3207	0.03198
								4750	16.1	18.29	24.14	0.3362	0.03191
								5000	16.4	18.96	25.41	0.3518	0.03185
								5250	16.6	19.60	26.68	0.3674	0.03179
								5500	16.9	20.22	27.96	0.3831	0.03172
								6000	17.4	21.41	30.53	0.4146	0.03159
								6500	17.9	22.52	33.12	0.4462	0.03146
								7000	18.4	23.57	35.71	0.4781	0.03133
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.50	28.23	0.4326	0.03104
								4500	17.3	16.15	29.45	0.4520	0.03097
								4750	17.5	16.79	30.67	0.4713	0.03089
								5000	17.8	17.41	31.88	0.4905	0.03082
								5250	18.1	18.00	33.09	0.5097	0.03075
								5500	18.3	18.59	34.29	0.5287	0.03067
								6000	18.8	19.71	36.69	0.5667	0.03053
								6500	19.4	20.78	39.07	0.6045	0.03039
								7000	19.9	21.79	41.44	0.6420	0.03024
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.04	23.30	0.4306	0.03135
								4500	16.6	16.75	24.34	0.4461	0.03129
								4750	16.9	17.46	25.37	0.4615	0.03122
								5000	17.1	18.14	26.41	0.4770	0.03115
								5250	17.3	18.80	27.45	0.4926	0.03108
								5500	17.5	19.44	28.50	0.5081	0.03102
								6000	18.0	20.69	30.59	0.5393	0.03088
								6500	18.4	21.87	32.69	0.5705	0.03075
								7000	18.9	22.99	34.79	0.6019	0.03061
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.4	16.02	23.71	0.4550	0.03074
								4500	16.7	16.71	24.85	0.4739	0.03065
								4750	16.9	17.38	26.00	0.4928	0.03055
								5000	17.2	18.03	27.16	0.5119	0.03045
								5250	17.4	18.65	28.32	0.5311	0.03036
								5500	17.7	19.26	29.49	0.5503	0.03026
								6000	18.2	20.42	31.84	0.5891	0.03007
								6500	18.7	21.52	34.20	0.6281	0.02987
								7000	19.2	22.55	36.59	0.6675	0.02967
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.7	15.79	23.56	0.4258	0.03213
								4500	16.9	16.50	24.60	0.4409	0.03206
								4750	17.1	17.19	25.65	0.4561	0.03200
								5000	17.3	17.87	26.70	0.4712	0.03193
								5250	17.6	18.52	27.76	0.4864	0.03187
								5500	17.8	19.16	28.81	0.5016	0.03180
								6000	18.2	20.39	30.92	0.5322	0.03167

							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	6500	18.7	21.56	33.04	0.5628	0.03154
								7000	19.1	22.68	35.17	0.5934	0.03141
								4250	16.7	15.78	23.98	0.4492	0.03151
								4500	16.9	16.46	25.14	0.4677	0.03142
								4750	17.2	17.12	26.30	0.4863	0.03133
								5000	17.4	17.77	27.47	0.5050	0.03123
								5250	17.7	18.39	28.65	0.5238	0.03114
								5500	17.9	18.99	29.83	0.5426	0.03105
								6000	18.5	20.14	32.21	0.5806	0.03086
								6500	19.0	21.23	34.60	0.6189	0.03067
								7000	19.5	22.25	37.02	0.6575	0.03048
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.90	23.39	0.4707	0.03094
								4500	16.8	16.61	24.42	0.4864	0.03087
								4750	17.0	17.31	25.44	0.5021	0.03080
								5000	17.2	17.99	26.47	0.5179	0.03073
								5250	17.4	18.65	27.50	0.5337	0.03066
								5500	17.7	19.29	28.54	0.5495	0.03059
								6000	18.1	20.53	30.60	0.5811	0.03044
								6500	18.5	21.71	32.68	0.6129	0.03030
								7000	19.0	22.83	34.76	0.6448	0.03016
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.89	23.75	0.4955	0.03032
								4500	16.8	16.58	24.89	0.5147	0.03022
								4750	17.1	17.24	26.02	0.5339	0.03012
								5000	17.3	17.89	27.17	0.5533	0.03002
								5250	17.6	18.51	28.32	0.5727	0.02992
								5500	17.8	19.12	29.47	0.5923	0.02982
								6000	18.3	20.28	31.79	0.6316	0.02962
								6500	18.8	21.37	34.14	0.6713	0.02941
								7000	19.3	22.40	36.50	0.7113	0.02921
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.65	23.65	0.4660	0.03171
								4500	17.0	16.36	24.69	0.4814	0.03164
								4750	17.3	17.05	25.73	0.4968	0.03157
								5000	17.5	17.72	26.77	0.5122	0.03150
								5250	17.7	18.38	27.81	0.5277	0.03143
								5500	17.9	19.02	28.85	0.5431	0.03136
								6000	18.4	20.24	30.95	0.5742	0.03123
								6500	18.8	21.41	33.04	0.6053	0.03109
								7000	19.2	22.52	35.15	0.6365	0.03095
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.8	15.65	24.03	0.4899	0.03109
								4500	17.1	16.33	25.18	0.5086	0.03099
								4750	17.3	16.99	26.33	0.5275	0.03089
								5000	17.6	17.63	27.49	0.5465	0.03080
								5250	17.8	18.25	28.65	0.5656	0.03070
								5500	18.1	18.85	29.82	0.5847	0.03060
								6000	18.6	20.00	32.17	0.6233	0.03040
								6500	19.1	21.09	34.54	0.6622	0.03020
								7000	19.6	22.11	36.93	0.7014	0.03000
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.58	24.06	0.5679	0.02972
								4500	17.1	16.29	25.05	0.5845	0.02964
								4750	17.3	16.98	26.04	0.6011	0.02956
								5000	17.5	17.65	27.03	0.6177	0.02948
								5250	17.8	18.31	28.02	0.6344	0.02940
								5500	18.0	18.95	29.02	0.6510	0.02932
								6000	18.4	20.18	31.01	0.6845	0.02916
								6500	18.9	21.35	33.01	0.7180	0.02900
								7000	19.3	22.47	35.01	0.7516	0.02883
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.59	24.26	0.5950	0.02909
								4500	17.1	16.27	25.35	0.6152	0.02898
								4750	17.4	16.93	26.44	0.6355	0.02887
								5000	17.6	17.57	27.54	0.6559	0.02875
								5250	17.9	18.19	28.65	0.6763	0.02864
								5500	18.1	18.80	29.76	0.6969	0.02853
								6000	18.6	19.95	31.99	0.7384	0.02830
								6500	19.1	21.04	34.24	0.7802	0.02808
								7000	19.6	22.07	36.51	0.8222	0.02785
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.3	18.40	19.82	0.1708	0.03164
								4500	14.6	19.18	20.93	0.1852	0.03158
								4750	14.8	19.93	22.04	0.1997	0.03153
								5000	15.0	20.66	23.15	0.2142	0.03147
								5250	15.2	21.37	24.26	0.2287	0.03142
								5500	15.5	22.05	25.37	0.2432	0.03137
								6000	15.9	23.36	27.60	0.2724	0.03126
								6500	16.4	24.60	29.84	0.3016	0.03115
								7000	16.8	25.77	32.08	0.3309	0.03104
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.55	26.61	0.1895	0.03334
								4500	16.2	17.22	27.96	0.2053	0.03331
								4750	16.5	17.87	29.31	0.2210	0.03327
								5000	16.7	18.50	30.65	0.2367	0.03324
								5250	17.0	19.12	31.98	0.2523	0.03320

								5500	17.3	19.72	33.32	0.2679	0.03316
								6000	17.8	20.86	35.97	0.2989	0.03309
								6500	18.4	21.93	38.60	0.3297	0.03302
								7000	18.9	22.95	41.22	0.3603	0.03295
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.99	19.51	0.1219	0.03373
								4500	14.9	18.76	20.66	0.1341	0.03370
								4750	15.1	19.51	21.81	0.1464	0.03366
								5000	15.3	20.23	22.97	0.1587	0.03363
								5250	15.6	20.93	24.14	0.1711	0.03360
								5500	15.8	21.60	25.31	0.1836	0.03357
								6000	16.2	22.90	27.66	0.2086	0.03350
								6500	16.7	24.11	30.03	0.2339	0.03343
								7000	17.2	25.25	32.42	0.2593	0.03337
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	13.8	19.06	18.13	0.1531	0.03119
								4500	14.1	19.86	19.17	0.1667	0.03116
								4750	14.3	20.65	20.21	0.1803	0.03112
								5000	14.5	21.41	21.26	0.1939	0.03108
								5250	14.7	22.14	22.31	0.2076	0.03104
								5500	14.9	22.85	23.37	0.2214	0.03100
								6000	15.4	24.20	25.49	0.2490	0.03093
								6500	15.8	25.47	27.63	0.2768	0.03085
								7000	16.3	26.67	29.78	0.3048	0.03077
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.4	17.07	24.99	0.1771	0.03278
								4500	15.7	17.79	26.21	0.1911	0.03275
								4750	15.9	18.48	27.43	0.2050	0.03272
								5000	16.2	19.16	28.64	0.2189	0.03269
								5250	16.4	19.82	29.84	0.2326	0.03266
								5500	16.7	20.46	31.03	0.2464	0.03263
								6000	17.1	21.69	33.41	0.2736	0.03257
								6500	17.6	22.86	35.77	0.3006	0.03251
								7000	18.1	23.97	38.10	0.3274	0.03246
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P265/60R 18 ALS HANKOOK (DYNAPRO) / D3HD9 AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	14.4	18.32	19.69	0.1790	0.03171
								4500	14.6	19.10	20.80	0.1935	0.03165
								4750	14.8	19.85	21.91	0.2080	0.03160
								5000	15.1	20.58	23.01	0.2225	0.03154
								5250	15.3	21.29	24.13	0.2370	0.03148
								5500	15.5	21.97	25.24	0.2516	0.03142
								6000	16.0	23.28	27.47	0.2808	0.03131
								6500	16.4	24.51	29.71	0.3101	0.03120
								7000	16.9	25.68	31.96	0.3395	0.03108
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.50	26.50	0.1963	0.03338
								4500	16.2	17.18	27.85	0.2122	0.03334
								4750	16.5	17.83	29.20	0.2279	0.03330
								5000	16.8	18.46	30.54	0.2437	0.03326
								5250	17.1	19.08	31.88	0.2593	0.03322
								5500	17.3	19.67	33.21	0.2749	0.03319
								6000	17.9	20.81	35.86	0.3060	0.03311
								6500	18.4	21.89	38.50	0.3369	0.03303
								7000	18.9	22.91	41.12	0.3676	0.03296
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	14.7	17.94	19.40	0.1283	0.03378
								4500	14.9	18.70	20.55	0.1406	0.03375
								4750	15.1	19.45	21.70	0.1529	0.03371
								5000	15.4	20.17	22.86	0.1653	0.03368
								5250	15.6	20.87	24.03	0.1777	0.03364
								5500	15.8	21.54	25.20	0.1902	0.03361
								6000	16.3	22.83	27.55	0.2153	0.03354
								6500	16.8	24.05	29.93	0.2406	0.03347
								7000	17.2	25.19	32.32	0.2661	0.03340
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.1	17.43	20.42	0.1469	0.03429
								4500	15.4	18.18	21.56	0.1596	0.03425
								4750	15.6	18.91	22.71	0.1723	0.03421
								5000	15.8	19.62	23.86	0.1851	0.03417
								5250	16.0	20.31	25.01	0.1978	0.03413
								5500	16.3	20.98	26.17	0.2106	0.03409
								6000	16.7	22.25	28.48	0.2363	0.03402
								6500	17.2	23.47	30.80	0.2620	0.03394
								7000	17.6	24.61	33.13	0.2878	0.03386
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.37	21.29	0.1647	0.03373
								4500	15.4	18.09	22.57	0.1804	0.03366
								4750	15.7	18.78	23.85	0.1961	0.03360
								5000	15.9	19.44	25.13	0.2120	0.03354
								5250	16.2	20.09	26.43	0.2279	0.03347
								5500	16.5	20.71	27.73	0.2439	0.03341
								6000	17.0	21.90	30.34	0.2761	0.03328
								6500	17.5	23.01	32.98	0.3086	0.03315
								7000	18.0	24.04	35.63	0.3414	0.03302
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	13.9	18.97	18.00	0.1609	0.03128
								4500	14.1	19.78	19.04	0.1745	0.03124
								4750	14.3	20.56	20.08	0.1881	0.03120
								5000	14.5	21.31	21.13	0.2018	0.03116
								5250	14.8	22.05	22.18	0.2156	0.03112
								5500	15.0	22.75	23.24	0.2294	0.03108

MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	6000	15.4	24.11	25.36	0.2571	0.03100
								6500	15.9	25.38	27.50	0.2850	0.03091
								7000	16.3	26.58	29.65	0.3131	0.03083
								4250	15.5	17.02	24.87	0.1847	0.03282
								4500	15.7	17.73	26.10	0.1988	0.03279
								4750	16.0	18.43	27.31	0.2127	0.03276
								5000	16.2	19.10	28.52	0.2266	0.03273
								5250	16.5	19.76	29.72	0.2405	0.03269
								5500	16.7	20.40	30.92	0.2542	0.03266
								6000	17.2	21.63	33.29	0.2816	0.03260
								6500	17.7	22.80	35.65	0.3086	0.03253
								7000	18.1	23.92	37.99	0.3355	0.03247
							P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.38	22.93	0.1897	0.03253
								4500	15.4	18.14	23.99	0.2045	0.03247
								4750	15.6	18.87	25.05	0.2193	0.03242
								5000	15.8	19.58	26.12	0.2342	0.03236
								5250	16.1	20.27	27.20	0.2492	0.03230
								5500	16.3	20.94	28.28	0.2642	0.03225
								6000	16.7	22.22	30.45	0.2944	0.03213
								6500	17.2	23.43	32.64	0.3249	0.03201
								7000	17.7	24.56	34.85	0.3556	0.03190
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.90	23.97	0.2073	0.03304
								4500	15.8	17.64	25.03	0.2225	0.03298
								4750	16.0	18.36	26.09	0.2377	0.03292
								5000	16.3	19.06	27.16	0.2529	0.03286
								5250	16.5	19.74	28.22	0.2681	0.03280
								5500	16.7	20.40	29.29	0.2834	0.03274
								6000	17.2	21.67	31.42	0.3140	0.03261
								6500	17.6	22.87	33.57	0.3447	0.03249
								7000	18.1	24.01	35.72	0.3755	0.03237
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.6	16.86	24.46	0.2342	0.03241
								4500	15.9	17.57	25.63	0.2527	0.03232
								4750	16.1	18.25	26.81	0.2714	0.03224
								5000	16.4	18.91	28.00	0.2901	0.03215
								5250	16.6	19.55	29.19	0.3090	0.03206
								5500	16.9	20.17	30.38	0.3279	0.03197
								6000	17.4	21.35	32.79	0.3660	0.03179
								6500	17.9	22.46	35.21	0.4044	0.03160
								7000	18.4	23.49	37.66	0.4431	0.03142
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.2	17.33	20.04	0.2489	0.03265
								4500	15.4	18.08	21.15	0.2635	0.03259
								4750	15.7	18.80	22.27	0.2781	0.03254
								5000	15.9	19.50	23.39	0.2928	0.03248
								5250	16.1	20.18	24.52	0.3076	0.03242
								5500	16.4	20.84	25.65	0.3224	0.03237
								6000	16.8	22.10	27.93	0.3522	0.03225
								6500	17.3	23.29	30.23	0.3823	0.03214
								7000	17.8	24.41	32.55	0.4126	0.03202
							P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.02	20.62	0.2755	0.03270
								4500	15.7	17.75	21.76	0.2916	0.03262
								4750	16.0	18.46	22.90	0.3077	0.03255
								5000	16.2	19.15	24.04	0.3240	0.03247
								5250	16.4	19.81	25.20	0.3403	0.03239
								5500	16.7	20.46	26.35	0.3567	0.03231
								6000	17.1	21.69	28.68	0.3896	0.03216
								6500	17.6	22.85	31.02	0.4228	0.03200
								7000	18.1	23.95	33.37	0.4561	0.03184
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.79	21.79	0.2910	0.03255
								4500	16.0	17.49	23.02	0.3093	0.03246
								4750	16.2	18.16	24.26	0.3278	0.03238
								5000	16.5	18.82	25.51	0.3463	0.03229
								5250	16.7	19.44	26.76	0.3650	0.03220
								5500	17.0	20.05	28.01	0.3837	0.03211
								6000	17.5	21.22	30.54	0.4214	0.03192
								6500	18.1	22.30	33.09	0.4594	0.03174
								7000	18.6	23.32	35.66	0.4977	0.03156
							P245/70R 17 ALS MICHELIN (PRIMACY) / D3KDQ AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	14.4	18.34	18.81	0.2814	0.02998
								4500	14.6	19.12	19.81	0.2971	0.02992
								4750	14.8	19.88	20.82	0.3130	0.02986
								5000	15.0	20.62	21.83	0.3288	0.02980
								5250	15.3	21.33	22.85	0.3448	0.02974
								5500	15.5	22.02	23.87	0.3608	0.02968
								6000	15.9	23.34	25.92	0.3930	0.02956
								6500	16.4	24.59	27.98	0.4253	0.02944
								7000	16.8	25.76	30.06	0.4579	0.02932
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.47	25.22	0.3207	0.03149
								4500	16.2	17.16	26.40	0.3374	0.03144
								4750	16.5	17.84	27.58	0.3540	0.03138
								5000	16.7	18.51	28.74	0.3704	0.03132
								5250	17.0	19.15	29.90	0.3869	0.03127
								5500	17.2	19.77	31.06	0.4032	0.03121

MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975-3/4 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 ALS GOODYEAR (WRANGLER) / D3IGB AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	6000	17.7	20.98	33.35	0.4356	0.03110
								6500	18.2	22.12	35.62	0.4677	0.03099
								7000	18.7	23.21	37.88	0.4996	0.03088
								4250	15.6	16.85	22.81	0.3174	0.03145
								4500	15.9	17.59	23.85	0.3341	0.03137
								4750	16.1	18.30	24.89	0.3509	0.03130
								5000	16.3	18.99	25.94	0.3677	0.03122
								5250	16.5	19.67	26.99	0.3847	0.03114
								5500	16.8	20.32	28.04	0.4017	0.03107
								6000	17.2	21.57	30.17	0.4360	0.03091
								6500	17.7	22.75	32.31	0.4705	0.03075
								7000	18.2	23.87	34.47	0.5053	0.03060
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.36	24.27	0.3664	0.03129
								4500	16.4	17.05	25.41	0.3872	0.03118
								4750	16.6	17.71	26.56	0.4081	0.03107
								5000	16.9	18.36	27.71	0.4292	0.03096
								5250	17.1	18.98	28.88	0.4503	0.03085
								5500	17.4	19.59	30.04	0.4715	0.03073
								6000	17.9	20.74	32.39	0.5143	0.03051
								6500	18.4	21.82	34.76	0.5574	0.03028
								7000	19.0	22.84	37.14	0.6008	0.03005
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.77	24.70	0.4599	0.03103
								4500	16.9	16.45	25.87	0.4769	0.03096
								4750	17.2	17.12	27.03	0.4938	0.03090
								5000	17.4	17.77	28.18	0.5106	0.03083
								5250	17.7	18.39	29.33	0.5273	0.03077
								5500	17.9	19.01	30.47	0.5439	0.03071
								6000	18.4	20.19	32.74	0.5770	0.03058
								6500	18.9	21.32	34.99	0.6097	0.03046
								7000	19.4	22.39	37.22	0.6422	0.03033
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.0	16.50	21.82	0.4406	0.03037
								4500	16.2	17.19	23.03	0.4593	0.03027
								4750	16.5	17.87	24.24	0.4780	0.03018
								5000	16.7	18.52	25.46	0.4968	0.03008
								5250	17.0	19.15	26.68	0.5156	0.02998
								5500	17.2	19.76	27.90	0.5345	0.02989
								6000	17.8	20.93	30.35	0.5725	0.02969
								6500	18.3	22.02	32.82	0.6106	0.02949
								7000	18.8	23.05	35.31	0.6490	0.02930
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.24	25.33	0.4475	0.03278
								4500	17.5	15.91	26.53	0.4636	0.03272
								4750	17.8	16.56	27.72	0.4797	0.03266
								5000	18.0	17.19	28.90	0.4956	0.03261
								5250	18.3	17.80	30.08	0.5115	0.03255
								5500	18.5	18.41	31.25	0.5273	0.03249
								6000	19.0	19.57	33.57	0.5587	0.03238
								6500	19.5	20.67	35.88	0.5898	0.03227
								7000	19.9	21.73	38.17	0.6206	0.03216
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.91	22.37	0.4305	0.03212
								4500	16.8	16.59	23.61	0.4483	0.03203
								4750	17.1	17.25	24.85	0.4661	0.03194
								5000	17.3	17.89	26.10	0.4840	0.03185
								5250	17.6	18.51	27.35	0.5020	0.03176
								5500	17.8	19.11	28.60	0.5200	0.03166
								6000	18.4	20.25	31.12	0.5562	0.03148
								6500	18.9	21.33	33.65	0.5926	0.03130
								7000	19.4	22.35	36.20	0.6291	0.03112
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	4250	18.0	14.64	24.71	0.6628	0.03082
								4500	18.2	15.32	25.68	0.6806	0.03072
								4750	18.4	15.98	26.66	0.6986	0.03063
								5000	18.6	16.62	27.63	0.7165	0.03053
								5250	18.9	17.25	28.61	0.7345	0.03043
								5500	19.1	17.86	29.59	0.7525	0.03033
								6000	19.5	19.05	31.55	0.7887	0.03014
								6500	19.9	20.18	33.52	0.8249	0.02994
								7000	20.4	21.26	35.49	0.8612	0.02974
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/50R 22 ALS BRIDGESTONE (ALENZA) / D3IGW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.9	15.60	21.47	0.6040	0.03001
								4500	17.1	16.29	22.53	0.6217	0.02991
								4750	17.3	16.97	23.60	0.6396	0.02981
								5000	17.6	17.63	24.67	0.6575	0.02971
								5250	17.8	18.27	25.74	0.6755	0.02961
								5500	18.0	18.89	26.82	0.6936	0.02951
								6000	18.5	20.09	28.99	0.7300	0.02930
								6500	19.0	21.22	31.18	0.7666	0.02910
								7000	19.4	22.30	33.37	0.8034	0.02889
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.44	22.35	0.6192	0.02985
								4500	17.3	16.11	23.50	0.6395	0.02973
								4750	17.6	16.76	24.65	0.6598	0.02962

MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD975 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	17.8	17.39	25.81	0.6803	0.02950
								5250	18.1	18.00	26.97	0.7008	0.02939
								5500	18.3	18.60	28.14	0.7215	0.02927
								6000	18.8	19.73	30.50	0.7631	0.02904
								6500	19.3	20.80	32.87	0.8050	0.02880
								7000	19.9	21.81	35.26	0.8472	0.02856
								4250	17.6	14.94	22.94	0.6099	0.03154
								4500	17.9	15.59	24.12	0.6293	0.03144
								4750	18.1	16.23	25.30	0.6488	0.03133
								5000	18.4	16.84	26.49	0.6684	0.03122
								5250	18.6	17.44	27.68	0.6880	0.03111
								5500	18.9	18.03	28.88	0.7078	0.03100
								6000	19.4	19.14	31.30	0.7477	0.03078
								6500	19.9	20.19	33.74	0.7878	0.03055
								7000	20.5	21.19	36.19	0.8283	0.03033
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDTOD-3/4 | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.4	15.10	24.35	0.7092	0.02841
								4500	17.7	15.76	25.40	0.7320	0.02827
								4750	17.9	16.40	26.46	0.7550	0.02813
								5000	18.2	17.03	27.53	0.7781	0.02799
								5250	18.4	17.64	28.60	0.8012	0.02785
								5500	18.7	18.22	29.67	0.8245	0.02771
								6000	19.2	19.35	31.84	0.8714	0.02743
								6500	19.7	20.42	34.02	0.9187	0.02714
								7000	20.2	21.42	36.22	0.9663	0.02686
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.84	20.40	0.2612	0.03358
								4500	15.9	17.57	21.61	0.2734	0.03354
								4750	16.1	18.28	22.82	0.2856	0.03351
								5000	16.3	18.97	24.03	0.2978	0.03347
								5250	16.6	19.63	25.25	0.3101	0.03343
								5500	16.8	20.28	26.47	0.3224	0.03340
								6000	17.3	21.52	28.93	0.3472	0.03333
								6500	17.8	22.69	31.39	0.3720	0.03326
								7000	18.2	23.80	33.87	0.3970	0.03318
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.85	26.37	0.2969	0.03338
								4500	16.9	16.51	27.74	0.3119	0.03335
								4750	17.2	17.15	29.11	0.3268	0.03332
								5000	17.4	17.77	30.47	0.3417	0.03330
								5250	17.7	18.37	31.82	0.3565	0.03327
								5500	18.0	18.95	33.17	0.3713	0.03324
								6000	18.5	20.07	35.86	0.4007	0.03318
								6500	19.0	21.13	38.53	0.4299	0.03313
								7000	19.6	22.14	41.19	0.4590	0.03307
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.68	20.13	0.2575	0.03422
								4500	16.0	17.41	21.29	0.2695	0.03419
								4750	16.3	18.13	22.45	0.2816	0.03415
								5000	16.5	18.81	23.62	0.2937	0.03412
								5250	16.7	19.49	24.78	0.3058	0.03409
								5500	16.9	20.14	25.95	0.3179	0.03406
								6000	17.4	21.39	28.30	0.3422	0.03400
								6500	17.8	22.58	30.65	0.3666	0.03393
								7000	18.3	23.70	33.00	0.3911	0.03387
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.64	21.06	0.2709	0.03369
								4500	16.1	17.34	22.35	0.2858	0.03364
								4750	16.4	18.01	23.65	0.3009	0.03358
								5000	16.6	18.66	24.95	0.3159	0.03353
								5250	16.9	19.29	26.26	0.3311	0.03348
								5500	17.1	19.91	27.58	0.3463	0.03342
								6000	17.6	21.07	30.22	0.3770	0.03331
								6500	18.2	22.16	32.90	0.4079	0.03320
								7000	18.7	23.18	35.59	0.4390	0.03309
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.32	24.69	0.2915	0.03272
								4500	16.4	17.02	25.93	0.3047	0.03269
								4750	16.6	17.70	27.17	0.3179	0.03267
								5000	16.9	18.36	28.39	0.3310	0.03265
								5250	17.1	19.01	29.61	0.3440	0.03263
								5500	17.4	19.64	30.82	0.3570	0.03260
								6000	17.8	20.84	33.23	0.3827	0.03256
								6500	18.3	21.99	35.62	0.4083	0.03251
								7000	18.8	23.08	37.99	0.4336	0.03247
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.4	17.11	21.57	0.2834	0.03193
								4500	15.7	17.82	22.85	0.2982	0.03188
								4750	15.9	18.50	24.14	0.3131	0.03183
								5000	16.2	19.17	25.43	0.3280	0.03177
								5250	16.4	19.81	26.72	0.3430	0.03172
								5500	16.7	20.44	28.02	0.3580	0.03166
								6000	17.2	21.63	30.63	0.3881	0.03155
								6500	17.7	22.74	33.25	0.4185	0.03145
								7000	18.2	23.79	35.88	0.4489	0.03134
MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.23	20.87	0.2527	0.03533

								4500	16.5	16.94	22.11	0.2640	0.03530
								4750	16.7	17.63	23.35	0.2754	0.03527
								5000	16.9	18.31	24.59	0.2868	0.03524
								5250	17.2	18.96	25.84	0.2982	0.03521
								5500	17.4	19.59	27.09	0.3097	0.03518
								6000	17.9	20.81	29.60	0.3327	0.03512
								6500	18.3	21.95	32.13	0.3558	0.03507
								7000	18.8	23.05	34.66	0.3791	0.03501
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.23	27.15	0.2786	0.03546
								4500	17.6	15.88	28.56	0.2923	0.03544
								4750	17.8	16.50	29.97	0.3061	0.03542
								5000	18.1	17.11	31.37	0.3197	0.03540
								5250	18.4	17.70	32.76	0.3333	0.03538
								5500	18.7	18.27	34.15	0.3469	0.03536
								6000	19.2	19.37	36.92	0.3739	0.03532
								6500	19.7	20.41	39.67	0.4008	0.03528
								7000	20.3	21.40	42.41	0.4275	0.03524
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.98	20.66	0.2484	0.03626
								4500	16.7	16.70	21.85	0.2595	0.03623
								4750	16.9	17.38	23.05	0.2707	0.03621
								5000	17.2	18.06	24.25	0.2818	0.03618
								5250	17.4	18.71	25.45	0.2930	0.03616
								5500	17.6	19.35	26.65	0.3042	0.03613
								6000	18.1	20.57	29.05	0.3266	0.03608
								6500	18.5	21.74	31.47	0.3491	0.03603
								7000	19.0	22.84	33.89	0.3717	0.03598
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.95	21.65	0.2593	0.03573
								4500	16.8	16.64	22.98	0.2732	0.03568
								4750	17.0	17.29	24.31	0.2871	0.03564
								5000	17.3	17.93	25.65	0.3010	0.03559
								5250	17.6	18.55	27.00	0.3151	0.03555
								5500	17.8	19.15	28.35	0.3292	0.03550
								6000	18.3	20.28	31.08	0.3576	0.03541
								6500	18.9	21.36	33.83	0.3863	0.03531
								7000	19.4	22.37	36.60	0.4151	0.03521
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.67	25.42	0.2749	0.03478
								4500	17.1	16.35	26.69	0.2871	0.03476
								4750	17.3	17.01	27.96	0.2992	0.03475
								5000	17.5	17.66	29.22	0.3112	0.03473
								5250	17.8	18.29	30.48	0.3231	0.03472
								5500	18.0	18.90	31.73	0.3350	0.03471
								6000	18.5	20.08	34.21	0.3587	0.03468
								6500	19.0	21.21	36.67	0.3821	0.03465
								7000	19.5	22.28	39.11	0.4053	0.03462
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.39	22.20	0.2698	0.03398
								4500	16.3	17.08	23.52	0.2835	0.03394
								4750	16.6	17.75	24.84	0.2972	0.03389
								5000	16.8	18.40	26.17	0.3110	0.03385
								5250	17.1	19.03	27.50	0.3248	0.03380
								5500	17.4	19.64	28.84	0.3387	0.03376
								6000	17.9	20.80	31.52	0.3666	0.03367
								6500	18.4	21.90	34.22	0.3946	0.03357
								7000	18.9	22.94	36.93	0.4228	0.03348
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.7	16.80	20.28	0.2737	0.03350
								4500	15.9	17.53	21.49	0.2858	0.03346
								4750	16.2	18.23	22.70	0.2980	0.03343
								5000	16.4	18.92	23.91	0.3103	0.03339
								5250	16.6	19.59	25.13	0.3225	0.03335
								5500	16.9	20.23	26.35	0.3348	0.03332
								6000	17.3	21.47	28.81	0.3595	0.03325
								6500	17.8	22.64	31.27	0.3843	0.03317
								7000	18.3	23.75	33.75	0.4093	0.03310
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.82	26.26	0.3084	0.03330
								4500	16.9	16.48	27.63	0.3234	0.03327
								4750	17.2	17.11	29.00	0.3383	0.03324
								5000	17.5	17.73	30.36	0.3531	0.03322
								5250	17.7	18.33	31.71	0.3679	0.03319
								5500	18.0	18.92	33.06	0.3826	0.03316
								6000	18.5	20.04	35.75	0.4120	0.03310
								6500	19.1	21.10	38.42	0.4411	0.03304
								7000	19.6	22.11	41.08	0.4701	0.03298
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.8	16.64	20.01	0.2693	0.03414
								4500	16.1	17.37	21.17	0.2813	0.03411
								4750	16.3	18.08	22.34	0.2934	0.03408
								5000	16.5	18.77	23.50	0.3054	0.03405
								5250	16.7	19.44	24.67	0.3175	0.03401
								5500	17.0	20.09	25.84	0.3296	0.03398
								6000	17.4	21.34	28.18	0.3539	0.03392
								6500	17.9	22.53	30.53	0.3783	0.03385
								7000	18.3	23.66	32.89	0.4027	0.03379
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.60	20.95	0.2825	0.03362
								4500	16.1	17.30	22.24	0.2974	0.03356

								4750	16.4	17.97	23.54	0.3123	0.03351
								5000	16.6	18.62	24.84	0.3274	0.03345
								5250	16.9	19.25	26.15	0.3425	0.03340
								5500	17.2	19.87	27.47	0.3577	0.03334
								6000	17.7	21.03	30.11	0.3883	0.03323
								6500	18.2	22.12	32.79	0.4192	0.03312
								7000	18.7	23.15	35.48	0.4503	0.03300
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.28	24.58	0.3039	0.03264
								4500	16.4	16.98	25.81	0.3171	0.03261
								4750	16.7	17.66	27.05	0.3303	0.03259
								5000	16.9	18.32	28.27	0.3433	0.03256
								5250	17.2	18.97	29.49	0.3563	0.03254
								5500	17.4	19.59	30.70	0.3693	0.03252
								6000	17.9	20.80	33.11	0.3950	0.03247
								6500	18.3	21.94	35.50	0.4204	0.03243
								7000	18.8	23.04	37.87	0.4457	0.03238
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.5	17.06	21.45	0.2958	0.03186
								4500	15.7	17.77	22.73	0.3106	0.03180
								4750	16.0	18.46	24.02	0.3254	0.03175
								5000	16.2	19.12	25.31	0.3403	0.03169
								5250	16.5	19.77	26.60	0.3552	0.03164
								5500	16.7	20.39	27.90	0.3702	0.03158
								6000	17.2	21.58	30.51	0.4003	0.03147
								6500	17.7	22.69	33.13	0.4306	0.03136
								7000	18.3	23.74	35.76	0.4610	0.03125
MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	P275/65R 18 AT MICHELIN (PRIMACY) / D3HGE AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.3	16.19	20.75	0.2656	0.03524
								4500	16.5	16.90	21.98	0.2769	0.03521
								4750	16.7	17.59	23.22	0.2883	0.03518
								5000	17.0	18.26	24.47	0.2996	0.03515
								5250	17.2	18.92	25.72	0.3110	0.03512
								5500	17.4	19.55	26.97	0.3225	0.03509
								6000	17.9	20.76	29.48	0.3454	0.03503
								6500	18.4	21.91	32.01	0.3685	0.03497
								7000	18.9	23.00	34.54	0.3917	0.03491
							LT265/70R 18 AT GENERAL (GRABBER) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.20	27.04	0.2905	0.03537
								4500	17.6	15.85	28.45	0.3042	0.03535
								4750	17.9	16.47	29.85	0.3179	0.03533
								5000	18.1	17.08	31.25	0.3316	0.03531
								5250	18.4	17.66	32.65	0.3452	0.03529
								5500	18.7	18.24	34.04	0.3587	0.03527
								6000	19.2	19.33	36.81	0.3857	0.03523
								6500	19.8	20.38	39.56	0.4125	0.03519
								7000	20.3	21.37	42.30	0.4391	0.03515
							P275/60R 20 AT HANKOOK (DYNAPRO) / D3IGD AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.5	15.95	20.54	0.2607	0.03617
								4500	16.8	16.66	21.74	0.2718	0.03615
								4750	17.0	17.35	22.93	0.2829	0.03612
								5000	17.2	18.02	24.13	0.2940	0.03610
								5250	17.4	18.67	25.33	0.3052	0.03607
								5500	17.7	19.31	26.53	0.3164	0.03605
								6000	18.1	20.53	28.94	0.3388	0.03599
								6500	18.6	21.70	31.35	0.3612	0.03594
								7000	19.0	22.80	33.78	0.3837	0.03589
							P275/60R 20 AT PIRELLI (SCORPION) / D3IHW AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.6	15.92	21.53	0.2713	0.03565
								4500	16.8	16.60	22.86	0.2851	0.03560
								4750	17.1	17.26	24.20	0.2990	0.03555
								5000	17.3	17.89	25.54	0.3130	0.03551
								5250	17.6	18.51	26.89	0.3270	0.03546
								5500	17.8	19.11	28.24	0.3411	0.03541
								6000	18.4	20.25	30.97	0.3694	0.03532
								6500	18.9	21.32	33.71	0.3980	0.03522
								7000	19.4	22.33	36.48	0.4268	0.03512
							LT265/70R 17 AT GENERAL (GRABBER) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.64	25.29	0.2878	0.03469
								4500	17.1	16.32	26.57	0.2999	0.03467
								4750	17.3	16.98	27.84	0.3120	0.03465
								5000	17.6	17.62	29.10	0.3240	0.03464
								5250	17.8	18.25	30.36	0.3359	0.03462
								5500	18.1	18.86	31.61	0.3478	0.03461
								6000	18.5	20.04	34.09	0.3714	0.03458
								6500	19.0	21.17	36.55	0.3947	0.03455
								7000	19.5	22.24	38.99	0.4179	0.03452
							P265/70R 17 AT PIRELLI (SCORPION) / D3KHV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.1	16.35	22.07	0.2826	0.03390
								4500	16.4	17.04	23.39	0.2963	0.03385
								4750	16.6	17.71	24.72	0.3100	0.03381
								5000	16.9	18.36	26.05	0.3238	0.03376
								5250	17.1	18.99	27.38	0.3376	0.03371
								5500	17.4	19.60	28.72	0.3514	0.03367
								6000	17.9	20.76	31.40	0.3792	0.03357
								6500	18.4	21.86	34.10	0.4072	0.03348
								7000	18.9	22.89	36.81	0.4353	0.03339
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT PIRELLI (PIRELLI) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	18.1	14.58	25.23	0.2568	0.03902

								4500	18.4	15.20	26.58	0.2725	0.03900
								4750	18.6	15.80	27.92	0.2882	0.03899
								5000	18.9	16.39	29.27	0.3039	0.03897
								5250	19.2	16.95	30.62	0.3197	0.03895
								5500	19.5	17.50	31.98	0.3354	0.03893
								6000	20.0	18.56	34.68	0.3670	0.03890
								6500	20.6	19.55	37.40	0.3986	0.03887
								7000	21.2	20.49	40.11	0.4302	0.03883
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT PIRELLI (PIRELLI) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	18.9	13.96	28.03	0.4757	0.03589
								4500	19.1	14.57	29.23	0.4949	0.03584
								4750	19.4	15.16	30.44	0.5143	0.03578
								5000	19.7	15.74	31.64	0.5336	0.03573
								5250	20.0	16.30	32.85	0.5530	0.03567
								5500	20.2	16.84	34.06	0.5723	0.03562
								6000	20.8	17.89	36.48	0.6111	0.03551
								6500	21.3	18.88	38.91	0.6500	0.03540
								7000	21.9	19.82	41.33	0.6889	0.03529
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT PIRELLI (PIRELLI) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	18.1	14.58	25.23	0.2568	0.03902
								4500	18.4	15.20	26.58	0.2725	0.03900
								4750	18.6	15.80	27.92	0.2882	0.03899
								5000	18.9	16.39	29.27	0.3039	0.03897
								5250	19.2	16.95	30.62	0.3197	0.03895
								5500	19.5	17.50	31.98	0.3354	0.03893
								6000	20.0	18.56	34.68	0.3670	0.03890
								6500	20.6	19.55	37.40	0.3986	0.03887
								7000	21.2	20.49	40.11	0.4302	0.03883
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE | TREMOR SERIES |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDTOD975 | 2 SPD TOD W/4HI-LOC	4X4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	P275/70R 18 AT PIRELLI (PIRELLI) / D3HGF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	18.9	13.96	28.03	0.4757	0.03589
								4500	19.1	14.57	29.23	0.4949	0.03584
								4750	19.4	15.16	30.44	0.5143	0.03578
								5000	19.7	15.74	31.64	0.5336	0.03573
								5250	20.0	16.30	32.85	0.5530	0.03567
								5500	20.2	16.84	34.06	0.5723	0.03562
								6000	20.8	17.89	36.48	0.6111	0.03551
								6500	21.3	18.88	38.91	0.6500	0.03540
								7000	21.9	19.82	41.33	0.6889	0.03529
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.15	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.59	24.79	0.2075	0.03360
								4500	16.1	17.30	25.95	0.2216	0.03358
								4750	16.4	17.99	27.10	0.2357	0.03355
								5000	16.6	18.67	28.24	0.2497	0.03352
								5250	16.8	19.32	29.38	0.2637	0.03350
								5500	17.1	19.96	30.52	0.2776	0.03347
								6000	17.5	21.18	32.80	0.3054	0.03342
								6500	18.0	22.35	35.06	0.3331	0.03337
								7000	18.5	23.45	37.31	0.3607	0.03332
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.7	16.79	24.63	0.2098	0.03304
								4500	15.9	17.51	25.77	0.2238	0.03302
								4750	16.2	18.21	26.91	0.2377	0.03299
								5000	16.4	18.89	28.05	0.2515	0.03297
								5250	16.6	19.55	29.18	0.2654	0.03295
								5500	16.9	20.19	30.31	0.2792	0.03293
								6000	17.3	21.43	32.57	0.3067	0.03288
								6500	17.8	22.60	34.81	0.3340	0.03284
								7000	18.3	23.71	37.05	0.3613	0.03280
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.15	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.17	25.25	0.1965	0.03487
								4500	16.5	16.87	26.43	0.2099	0.03485
								4750	16.8	17.55	27.60	0.2233	0.03483
								5000	17.0	18.21	28.77	0.2366	0.03481
								5250	17.3	18.86	29.94	0.2499	0.03479
								5500	17.5	19.49	31.10	0.2632	0.03477
								6000	18.0	20.70	33.42	0.2896	0.03473
								6500	18.4	21.85	35.72	0.3159	0.03469
								7000	18.9	22.94	38.02	0.3421	0.03465
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.36	25.08	0.1989	0.03431
								4500	16.3	17.07	26.25	0.2121	0.03429
								4750	16.6	17.76	27.41	0.2253	0.03428
								5000	16.8	18.43	28.57	0.2385	0.03426
								5250	17.1	19.08	29.73	0.2516	0.03424
								5500	17.3	19.72	30.88	0.2647	0.03422
								6000	17.8	20.93	33.18	0.2908	0.03419
								6500	18.2	22.09	35.47	0.3168	0.03416
								7000	18.7	23.20	37.75	0.3427	0.03412
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.56	24.79	0.2118	0.03358
								4500	16.2	17.27	25.94	0.2259	0.03356
								4750	16.4	17.97	27.09	0.2400	0.03353
								5000	16.6	18.64	28.23	0.2541	0.03350

								5250	16.9	19.29	29.38	0.2681	0.03348
								5500	17.1	19.93	30.52	0.2821	0.03345
								6000	17.6	21.16	32.79	0.3099	0.03340
								6500	18.0	22.32	35.05	0.3377	0.03335
								7000	18.5	23.42	37.30	0.3653	0.03330
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.7	16.77	24.62	0.2144	0.03302
								4500	16.0	17.48	25.76	0.2284	0.03300
								4750	16.2	18.19	26.90	0.2423	0.03297
								5000	16.4	18.86	28.04	0.2562	0.03295
								5250	16.7	19.52	29.17	0.2701	0.03293
								5500	16.9	20.16	30.30	0.2839	0.03291
								6000	17.4	21.40	32.55	0.3115	0.03286
								6500	17.8	22.57	34.80	0.3389	0.03281
								7000	18.3	23.69	37.03	0.3663	0.03277
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.15	25.25	0.2009	0.03485
								4500	16.6	16.85	26.43	0.2144	0.03482
								4750	16.8	17.53	27.60	0.2278	0.03480
								5000	17.0	18.19	28.76	0.2411	0.03478
								5250	17.3	18.84	29.93	0.2544	0.03476
								5500	17.5	19.47	31.09	0.2677	0.03474
								6000	18.0	20.67	33.41	0.2942	0.03470
								6500	18.5	21.82	35.71	0.3205	0.03466
								7000	18.9	22.92	38.01	0.3468	0.03462
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.34	25.08	0.2036	0.03429
								4500	16.4	17.05	26.24	0.2169	0.03427
								4750	16.6	17.74	27.40	0.2301	0.03425
								5000	16.8	18.40	28.56	0.2433	0.03424
								5250	17.1	19.05	29.72	0.2565	0.03422
								5500	17.3	19.69	30.87	0.2696	0.03420
								6000	17.8	20.91	33.17	0.2958	0.03416
								6500	18.3	22.06	35.46	0.3219	0.03413
								7000	18.7	23.17	37.74	0.3478	0.03409
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.59	23.76	0.1892	0.03439
								4500	16.1	17.30	24.93	0.2031	0.03436
								4750	16.4	17.99	26.10	0.2168	0.03433
								5000	16.6	18.67	27.27	0.2306	0.03430
								5250	16.8	19.32	28.43	0.2443	0.03427
								5500	17.1	19.96	29.59	0.2580	0.03424
								6000	17.5	21.19	31.91	0.2852	0.03418
								6500	18.0	22.35	34.21	0.3124	0.03412
								7000	18.5	23.46	36.50	0.3394	0.03406
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.7	16.77	23.52	0.1926	0.03388
								4500	16.0	17.49	24.69	0.2063	0.03385
								4750	16.2	18.20	25.85	0.2199	0.03382
								5000	16.4	18.87	27.01	0.2335	0.03380
								5250	16.7	19.54	28.16	0.2471	0.03377
								5500	16.9	20.18	29.31	0.2606	0.03374
								6000	17.4	21.41	31.61	0.2876	0.03369
								6500	17.8	22.59	33.90	0.3144	0.03364
								7000	18.3	23.70	36.18	0.3412	0.03358
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.17	24.17	0.1813	0.03561
								4500	16.5	16.87	25.37	0.1944	0.03558
								4750	16.8	17.55	26.56	0.2075	0.03556
								5000	17.0	18.22	27.75	0.2205	0.03553
								5250	17.3	18.86	28.94	0.2335	0.03551
								5500	17.5	19.50	30.12	0.2465	0.03548
								6000	18.0	20.70	32.48	0.2724	0.03544
								6500	18.4	21.85	34.83	0.2981	0.03539
								7000	18.9	22.95	37.17	0.3237	0.03534
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.35	23.93	0.1850	0.03510
								4500	16.4	17.06	25.12	0.1979	0.03508
								4750	16.6	17.74	26.30	0.2109	0.03506
								5000	16.8	18.41	27.49	0.2238	0.03503
								5250	17.1	19.07	28.66	0.2366	0.03501
								5500	17.3	19.70	29.84	0.2495	0.03499
								6000	17.8	20.92	32.18	0.2750	0.03495
								6500	18.2	22.08	34.51	0.3005	0.03491
								7000	18.7	23.18	36.83	0.3259	0.03486
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.10	27.36	0.2555	0.03303
								4500	16.6	16.81	28.44	0.2720	0.03297
								4750	16.8	17.49	29.52	0.2885	0.03292
								5000	17.1	18.15	30.59	0.3048	0.03287
								5250	17.3	18.80	31.66	0.3212	0.03282
								5500	17.5	19.43	32.72	0.3375	0.03276
								6000	18.0	20.65	34.85	0.3700	0.03266
								6500	18.5	21.80	36.97	0.4023	0.03256
								7000	18.9	22.91	39.07	0.4345	0.03245

USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.20	22.97	0.2816	0.03400
								4500	16.5	16.90	24.16	0.2948	0.03398
								4750	16.8	17.58	25.34	0.3080	0.03396
								5000	17.0	18.24	26.52	0.3211	0.03394
								5250	17.2	18.89	27.69	0.3342	0.03392
								5500	17.5	19.52	28.86	0.3472	0.03390
								6000	17.9	20.73	31.20	0.3733	0.03387
								6500	18.4	21.88	33.53	0.3992	0.03383
								7000	18.9	22.97	35.84	0.4250	0.03379
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.39	22.73	0.2884	0.03339
								4500	16.3	17.10	23.91	0.3014	0.03337
								4750	16.6	17.78	25.08	0.3144	0.03336
								5000	16.8	18.45	26.25	0.3273	0.03334
								5250	17.0	19.11	27.41	0.3402	0.03333
								5500	17.3	19.74	28.58	0.3531	0.03331
								6000	17.7	20.96	30.90	0.3787	0.03328
								6500	18.2	22.12	33.21	0.4043	0.03325
								7000	18.7	23.22	35.51	0.4297	0.03322
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.97	23.16	0.2779	0.03470
								4500	16.7	16.66	24.36	0.2908	0.03468
								4750	17.0	17.34	25.55	0.3037	0.03467
								5000	17.2	18.00	26.74	0.3165	0.03465
								5250	17.5	18.64	27.92	0.3293	0.03463
								5500	17.7	19.26	29.11	0.3421	0.03461
								6000	18.2	20.46	31.46	0.3675	0.03458
								6500	18.6	21.60	33.81	0.3929	0.03455
								7000	19.1	22.69	36.14	0.4181	0.03451
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.19	22.89	0.2852	0.03399
								4500	16.5	16.89	24.08	0.2980	0.03398
								4750	16.8	17.57	25.26	0.3107	0.03396
								5000	17.0	18.24	26.44	0.3234	0.03395
								5250	17.2	18.88	27.61	0.3361	0.03394
								5500	17.5	19.51	28.78	0.3487	0.03392
								6000	17.9	20.73	31.12	0.3739	0.03389
								6500	18.4	21.87	33.45	0.3989	0.03387
								7000	18.9	22.97	35.76	0.4239	0.03384
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.53	23.58	0.2698	0.03608
								4500	17.2	16.22	24.80	0.2820	0.03606
								4750	17.4	16.88	26.01	0.2942	0.03605
								5000	17.7	17.53	27.22	0.3064	0.03604
								5250	17.9	18.16	28.43	0.3186	0.03603
								5500	18.2	18.77	29.63	0.3307	0.03602
								6000	18.6	19.95	32.04	0.3548	0.03599
								6500	19.1	21.08	34.43	0.3789	0.03597
								7000	19.6	22.15	36.81	0.4028	0.03594
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.71	23.33	0.2767	0.03547
								4500	17.0	16.40	24.54	0.2887	0.03546
								4750	17.3	17.07	25.74	0.3008	0.03546
								5000	17.5	17.72	26.95	0.3128	0.03545
								5250	17.7	18.36	28.14	0.3247	0.03544
								5500	18.0	18.97	29.34	0.3367	0.03543
								6000	18.4	20.17	31.72	0.3605	0.03541
								6500	18.9	21.30	34.10	0.3842	0.03539
								7000	19.4	22.38	36.46	0.4078	0.03538
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.91	23.44	0.3304	0.03371
								4500	16.8	16.61	24.60	0.3443	0.03368
								4750	17.0	17.28	25.76	0.3582	0.03365
								5000	17.3	17.94	26.92	0.3720	0.03362
								5250	17.5	18.58	28.07	0.3859	0.03358
								5500	17.7	19.21	29.22	0.3996	0.03355
								6000	18.2	20.41	31.51	0.4271	0.03349
								6500	18.7	21.56	33.80	0.4544	0.03343
								7000	19.1	22.65	36.07	0.4817	0.03337
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.07	23.19	0.3408	0.03311
								4500	16.6	16.77	24.34	0.3545	0.03308
								4750	16.9	17.45	25.49	0.3683	0.03305
								5000	17.1	18.12	26.64	0.3820	0.03302
								5250	17.3	18.77	27.79	0.3956	0.03299
								5500	17.6	19.40	28.93	0.4092	0.03296
								6000	18.0	20.61	31.20	0.4364	0.03291
								6500	18.5	21.76	33.47	0.4634	0.03285
								7000	19.0	22.86	35.73	0.4904	0.03279
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.8	15.69	23.63	0.3273	0.03439
								4500	17.0	16.38	24.80	0.3409	0.03436
								4750	17.3	17.05	25.97	0.3545	0.03433
								5000	17.5	17.71	27.14	0.3681	0.03430
								5250	17.7	18.34	28.30	0.3816	0.03427
								5500	18.0	18.96	29.46	0.3951	0.03424

							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	6000	18.4	20.15	31.78	0.4220	0.03419
								6500	18.9	21.29	34.08	0.4488	0.03413
								7000	19.4	22.38	36.37	0.4755	0.03407
								4250	16.6	15.88	23.35	0.3382	0.03369
								4500	16.8	16.57	24.52	0.3518	0.03366
								4750	17.1	17.25	25.67	0.3652	0.03364
								5000	17.3	17.91	26.83	0.3787	0.03361
								5250	17.5	18.55	27.98	0.3921	0.03358
								5500	17.8	19.18	29.13	0.4055	0.03355
								6000	18.2	20.38	31.43	0.4322	0.03350
								6500	18.7	21.53	33.71	0.4587	0.03345
								7000	19.2	22.63	35.98	0.4852	0.03339
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.28	24.05	0.3204	0.03573
								4500	17.5	15.95	25.25	0.3334	0.03570
								4750	17.7	16.61	26.44	0.3463	0.03568
								5000	18.0	17.26	27.63	0.3592	0.03565
								5250	18.2	17.88	28.81	0.3721	0.03563
								5500	18.4	18.49	30.00	0.3849	0.03561
								6000	18.9	19.67	32.36	0.4105	0.03556
								6500	19.4	20.79	34.70	0.4360	0.03551
								7000	19.8	21.86	37.04	0.4614	0.03546
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.42	23.80	0.3312	0.03512
								4500	17.3	16.11	24.98	0.3440	0.03510
								4750	17.6	16.77	26.17	0.3568	0.03508
								5000	17.8	17.42	27.34	0.3696	0.03506
								5250	18.0	18.05	28.52	0.3823	0.03504
								5500	18.3	18.66	29.70	0.3950	0.03501
								6000	18.7	19.85	32.04	0.4203	0.03497
								6500	19.2	20.98	34.36	0.4455	0.03492
								7000	19.7	22.06	36.69	0.4705	0.03488
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.42	26.80	0.4137	0.03225
								4500	17.3	16.11	27.87	0.4303	0.03219
								4750	17.6	16.77	28.93	0.4469	0.03214
								5000	17.8	17.42	29.99	0.4634	0.03208
								5250	18.0	18.06	31.05	0.4799	0.03202
								5500	18.2	18.67	32.11	0.4963	0.03197
								6000	18.7	19.87	34.21	0.5291	0.03185
								6500	19.2	21.00	36.30	0.5617	0.03174
								7000	19.6	22.09	38.39	0.5941	0.03163
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.22	27.04	0.4090	0.03294
								4500	17.5	15.90	28.12	0.4253	0.03288
								4750	17.8	16.56	29.19	0.4416	0.03283
								5000	18.0	17.20	30.26	0.4578	0.03277
								5250	18.2	17.83	31.33	0.4740	0.03272
								5500	18.5	18.44	32.40	0.4902	0.03266
								6000	18.9	19.63	34.52	0.5224	0.03255
								6500	19.4	20.75	36.64	0.5544	0.03244
								7000	19.9	21.83	38.74	0.5863	0.03234
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.7	16.75	23.92	0.1768	0.03411
								4500	16.0	17.46	25.09	0.1906	0.03409
								4750	16.2	18.16	26.25	0.2044	0.03406
								5000	16.5	18.84	27.42	0.2182	0.03403
								5250	16.7	19.49	28.58	0.2319	0.03401
								5500	16.9	20.14	29.73	0.2456	0.03398
								6000	17.4	21.37	32.04	0.2728	0.03393
								6500	17.9	22.53	34.34	0.3000	0.03388
								7000	18.3	23.64	36.62	0.3270	0.03383
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.5	16.95	23.70	0.1785	0.03360
								4500	15.8	17.68	24.87	0.1922	0.03357
								4750	16.0	18.38	26.02	0.2058	0.03355
								5000	16.3	19.06	27.18	0.2194	0.03353
								5250	16.5	19.73	28.33	0.2330	0.03350
								5500	16.7	20.37	29.48	0.2465	0.03348
								6000	17.2	21.61	31.77	0.2734	0.03343
								6500	17.7	22.79	34.05	0.3003	0.03339
								7000	18.1	23.91	36.32	0.3270	0.03334
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.45	24.23	0.1698	0.03497
								4500	16.3	17.17	25.42	0.1831	0.03494
								4750	16.5	17.85	26.61	0.1963	0.03492
								5000	16.7	18.52	27.79	0.2095	0.03490
								5250	17.0	19.17	28.96	0.2227	0.03488
								5500	17.2	19.81	30.14	0.2358	0.03486
								6000	17.7	21.03	32.48	0.2620	0.03481
								6500	18.2	22.19	34.81	0.2881	0.03477
								7000	18.6	23.29	37.13	0.3141	0.03473
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.8	16.65	24.02	0.1716	0.03445
								4500	16.1	17.37	25.20	0.1848	0.03443
								4750	16.3	18.06	26.37	0.1979	0.03442

USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	5000	16.5	18.74	27.54	0.2109	0.03440
								5250	16.8	19.39	28.71	0.2239	0.03438
								5500	17.0	20.03	29.88	0.2369	0.03436
								6000	17.5	21.26	32.20	0.2628	0.03432
								6500	18.0	22.43	34.51	0.2886	0.03428
								7000	18.4	23.54	36.82	0.3143	0.03424
								4250	15.8	16.70	23.80	0.1837	0.03416
								4500	16.0	17.42	24.97	0.1976	0.03413
								4750	16.3	18.11	26.14	0.2114	0.03410
								5000	16.5	18.78	27.30	0.2252	0.03408
								5250	16.7	19.44	28.46	0.2390	0.03405
								5500	17.0	20.08	29.62	0.2527	0.03402
								6000	17.4	21.31	31.93	0.2800	0.03396
								6500	17.9	22.48	34.23	0.3073	0.03391
								7000	18.4	23.59	36.51	0.3344	0.03385
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.89	23.58	0.1863	0.03365
								4500	15.8	17.62	24.74	0.2000	0.03362
								4750	16.1	18.32	25.90	0.2137	0.03360
								5000	16.3	19.00	27.05	0.2273	0.03357
								5250	16.6	19.66	28.21	0.2409	0.03355
								5500	16.8	20.31	29.36	0.2545	0.03352
								6000	17.3	21.55	31.65	0.2815	0.03347
								6500	17.7	22.72	33.93	0.3085	0.03342
								7000	18.2	23.84	36.20	0.3353	0.03337
USA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.41	24.12	0.1771	0.03501
								4500	16.3	17.12	25.30	0.1904	0.03498
								4750	16.5	17.80	26.49	0.2037	0.03496
								5000	16.8	18.47	27.67	0.2170	0.03493
								5250	17.0	19.12	28.85	0.2302	0.03491
								5500	17.3	19.76	30.02	0.2434	0.03489
								6000	17.7	20.98	32.36	0.2696	0.03484
								6500	18.2	22.13	34.69	0.2958	0.03479
								7000	18.7	23.24	37.01	0.3219	0.03474
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.59	23.89	0.1798	0.03450
								4500	16.1	17.31	25.07	0.1930	0.03448
								4750	16.4	18.00	26.24	0.2062	0.03446
								5000	16.6	18.68	27.41	0.2193	0.03443
								5250	16.8	19.34	28.58	0.2323	0.03441
								5500	17.1	19.98	29.75	0.2454	0.03439
								6000	17.5	21.20	32.07	0.2713	0.03435
								6500	18.0	22.37	34.39	0.2972	0.03431
								7000	18.5	23.48	36.69	0.3230	0.03426
USA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.22	27.22	0.2497	0.03285
								4500	16.5	16.92	28.30	0.2661	0.03280
								4750	16.7	17.61	29.37	0.2825	0.03275
								5000	17.0	18.28	30.45	0.2988	0.03270
								5250	17.2	18.93	31.52	0.3150	0.03265
								5500	17.4	19.56	32.58	0.3312	0.03260
								6000	17.9	20.78	34.71	0.3636	0.03250
								6500	18.3	21.94	36.83	0.3958	0.03240
								7000	18.8	23.04	38.94	0.4278	0.03230
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.17	23.56	0.2993	0.03350
								4500	16.5	16.87	24.72	0.3133	0.03347
								4750	16.8	17.55	25.88	0.3273	0.03344
								5000	17.0	18.21	27.03	0.3412	0.03341
								5250	17.3	18.86	28.18	0.3551	0.03338
								5500	17.5	19.49	29.33	0.3690	0.03335
								6000	18.0	20.70	31.61	0.3967	0.03329
								6500	18.4	21.85	33.89	0.4242	0.03324
								7000	18.9	22.95	36.15	0.4516	0.03318
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.34	23.34	0.3069	0.03290
								4500	16.4	17.05	24.49	0.3208	0.03288
								4750	16.6	17.74	25.64	0.3346	0.03285
								5000	16.8	18.41	26.78	0.3484	0.03282
								5250	17.1	19.06	27.92	0.3621	0.03280
								5500	17.3	19.70	29.06	0.3759	0.03277
								6000	17.8	20.92	31.33	0.4032	0.03272
								6500	18.2	22.08	33.58	0.4304	0.03267
								7000	18.7	23.18	35.83	0.4575	0.03262
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.91	23.79	0.2951	0.03429
								4500	16.8	16.60	24.96	0.3088	0.03426
								4750	17.0	17.28	26.13	0.3224	0.03424
								5000	17.3	17.93	27.29	0.3361	0.03421
								5250	17.5	18.58	28.45	0.3496	0.03418
								5500	17.8	19.20	29.61	0.3632	0.03416
								6000	18.2	20.40	31.92	0.3902	0.03410
								6500	18.7	21.54	34.22	0.4171	0.03405
								7000	19.2	22.63	36.51	0.4439	0.03400

							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.08	23.56	0.3028	0.03369
								4500	16.6	16.78	24.72	0.3164	0.03367
								4750	16.9	17.46	25.88	0.3299	0.03365
								5000	17.1	18.12	27.04	0.3433	0.03362
								5250	17.3	18.77	28.19	0.3568	0.03360
								5500	17.6	19.40	29.34	0.3701	0.03357
								6000	18.0	20.61	31.63	0.3968	0.03353
								6500	18.5	21.76	33.91	0.4234	0.03348
								7000	19.0	22.86	36.18	0.4499	0.03343
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.48	24.22	0.2870	0.03565
								4500	17.3	16.16	25.41	0.3001	0.03563
								4750	17.5	16.83	26.60	0.3131	0.03561
								5000	17.7	17.47	27.79	0.3260	0.03559
								5250	18.0	18.10	28.97	0.3390	0.03557
								5500	18.2	18.72	30.15	0.3519	0.03554
								6000	18.7	19.90	32.50	0.3776	0.03550
								6500	19.2	21.02	34.85	0.4032	0.03546
								7000	19.6	22.10	37.18	0.4286	0.03541
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.64	23.98	0.2950	0.03506
								4500	17.1	16.33	25.17	0.3078	0.03504
								4750	17.3	17.00	26.35	0.3207	0.03502
								5000	17.6	17.65	27.53	0.3335	0.03500
								5250	17.8	18.29	28.70	0.3463	0.03498
								5500	18.0	18.91	29.87	0.3590	0.03496
								6000	18.5	20.10	32.21	0.3844	0.03493
								6500	19.0	21.23	34.53	0.4097	0.03489
								7000	19.4	22.32	36.85	0.4349	0.03485
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.4	16.10	23.43	0.3172	0.03340
								4500	16.6	16.80	24.59	0.3313	0.03337
								4750	16.8	17.48	25.75	0.3453	0.03334
								5000	17.1	18.14	26.90	0.3593	0.03331
								5250	17.3	18.78	28.05	0.3733	0.03328
								5500	17.6	19.41	29.19	0.3872	0.03325
								6000	18.0	20.62	31.48	0.4149	0.03319
								6500	18.5	21.78	33.75	0.4425	0.03312
								7000	19.0	22.87	36.01	0.4700	0.03306
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.2	16.27	23.20	0.3263	0.03280
								4500	16.4	16.97	24.35	0.3402	0.03278
								4750	16.7	17.66	25.49	0.3541	0.03275
								5000	16.9	18.33	26.64	0.3679	0.03272
								5250	17.1	18.98	27.78	0.3817	0.03269
								5500	17.4	19.61	28.91	0.3954	0.03266
								6000	17.8	20.83	31.18	0.4229	0.03261
								6500	18.3	21.99	33.43	0.4501	0.03255
								7000	18.8	23.10	35.68	0.4773	0.03249
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.84	23.66	0.3134	0.03419
								4500	16.9	16.53	24.83	0.3271	0.03416
								4750	17.1	17.21	25.99	0.3408	0.03413
								5000	17.4	17.86	27.16	0.3545	0.03410
								5250	17.6	18.50	28.32	0.3681	0.03407
								5500	17.8	19.13	29.47	0.3817	0.03404
								6000	18.3	20.32	31.78	0.4087	0.03399
								6500	18.8	21.47	34.08	0.4357	0.03393
								7000	19.2	22.56	36.36	0.4625	0.03387
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.00	23.42	0.3226	0.03359
								4500	16.7	16.70	24.58	0.3362	0.03356
								4750	16.9	17.38	25.74	0.3497	0.03354
								5000	17.2	18.04	26.89	0.3632	0.03351
								5250	17.4	18.69	28.04	0.3767	0.03348
								5500	17.6	19.32	29.19	0.3901	0.03346
								6000	18.1	20.52	31.48	0.4168	0.03341
								6500	18.6	21.68	33.76	0.4435	0.03335
								7000	19.0	22.77	36.03	0.4701	0.03330
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.42	24.08	0.3059	0.03554
								4500	17.3	16.10	25.27	0.3189	0.03551
								4750	17.6	16.76	26.46	0.3320	0.03549
								5000	17.8	17.40	27.65	0.3450	0.03547
								5250	18.0	18.04	28.83	0.3579	0.03544
								5500	18.3	18.65	30.01	0.3709	0.03542
								6000	18.7	19.83	32.36	0.3966	0.03537
								6500	19.2	20.96	34.70	0.4223	0.03532
								7000	19.7	22.03	37.03	0.4479	0.03528
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.57	23.84	0.3153	0.03494
								4500	17.2	16.26	25.02	0.3282	0.03492
								4750	17.4	16.92	26.20	0.3411	0.03490
								5000	17.6	17.58	27.38	0.3540	0.03487
								5250	17.9	18.21	28.55	0.3668	0.03485
								5500	18.1	18.83	29.72	0.3795	0.03483

								6000	18.6	20.02	32.05	0.4050	0.03479
								6500	19.0	21.15	34.38	0.4304	0.03475
								7000	19.5	22.24	36.69	0.4557	0.03471
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.61	26.63	0.3984	0.03201
								4500	17.1	16.30	27.69	0.4150	0.03195
								4750	17.3	16.97	28.76	0.4316	0.03190
								5000	17.6	17.63	29.82	0.4481	0.03184
								5250	17.8	18.26	30.88	0.4646	0.03179
								5500	18.0	18.89	31.93	0.4810	0.03173
								6000	18.5	20.08	34.03	0.5138	0.03162
								6500	19.0	21.23	36.13	0.5464	0.03151
								7000	19.4	22.31	38.21	0.5789	0.03141
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.37	26.90	0.3928	0.03280
								4500	17.4	16.05	27.98	0.4091	0.03274
								4750	17.6	16.72	29.06	0.4253	0.03269
								5000	17.8	17.37	30.13	0.4415	0.03264
								5250	18.1	18.00	31.20	0.4577	0.03259
								5500	18.3	18.62	32.26	0.4738	0.03253
								6000	18.8	19.80	34.39	0.5059	0.03243
								6500	19.2	20.94	36.51	0.5379	0.03232
								7000	19.7	22.02	38.61	0.5697	0.03222
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.16	24.38	0.3110	0.03295
								4500	16.6	16.86	25.52	0.3272	0.03290
								4750	16.8	17.53	26.65	0.3434	0.03285
								5000	17.0	18.19	27.77	0.3596	0.03280
								5250	17.3	18.83	28.90	0.3757	0.03275
								5500	17.5	19.46	30.02	0.3917	0.03270
								6000	18.0	20.66	32.25	0.4238	0.03260
								6500	18.5	21.80	34.47	0.4556	0.03250
								7000	18.9	22.89	36.69	0.4874	0.03240
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.35	24.23	0.3132	0.03238
								4500	16.4	17.05	25.36	0.3293	0.03234
								4750	16.6	17.74	26.48	0.3453	0.03229
								5000	16.8	18.41	27.59	0.3612	0.03224
								5250	17.1	19.05	28.71	0.3772	0.03220
								5500	17.3	19.68	29.82	0.3931	0.03215
								6000	17.8	20.89	32.04	0.4247	0.03206
								6500	18.3	22.04	34.24	0.4563	0.03197
								7000	18.7	23.14	36.44	0.4877	0.03187
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.47	24.08	0.4457	0.03256
								4500	17.3	16.15	25.21	0.4622	0.03250
								4750	17.5	16.81	26.32	0.4787	0.03245
								5000	17.8	17.45	27.44	0.4951	0.03239
								5250	18.0	18.08	28.55	0.5115	0.03233
								5500	18.2	18.69	29.66	0.5278	0.03228
								6000	18.7	19.87	31.88	0.5604	0.03216
								6500	19.2	20.99	34.08	0.5928	0.03205
								7000	19.6	22.06	36.27	0.6251	0.03194
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.62	23.91	0.4549	0.03193
								4500	17.1	16.31	25.02	0.4713	0.03188
								4750	17.3	16.98	26.13	0.4876	0.03182
								5000	17.6	17.63	27.23	0.5038	0.03177
								5250	17.8	18.26	28.34	0.5200	0.03172
								5500	18.1	18.88	29.44	0.5362	0.03166
								6000	18.5	20.06	31.63	0.5684	0.03156
								6500	19.0	21.19	33.82	0.6005	0.03145
								7000	19.5	22.27	35.99	0.6325	0.03134
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.6	14.94	24.61	0.4376	0.03432
								4500	17.9	15.60	25.76	0.4534	0.03427
								4750	18.1	16.25	26.90	0.4691	0.03422
								5000	18.4	16.88	28.05	0.4848	0.03417
								5250	18.6	17.49	29.19	0.5004	0.03412
								5500	18.8	18.09	30.32	0.5160	0.03407
								6000	19.3	19.25	32.59	0.5471	0.03396
								6500	19.8	20.35	34.84	0.5781	0.03386
								7000	20.3	21.40	37.09	0.6089	0.03376
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.5	15.09	24.43	0.4469	0.03369
								4500	17.7	15.75	25.57	0.4625	0.03365
								4750	17.9	16.40	26.70	0.4781	0.03360
								5000	18.2	17.04	27.84	0.4936	0.03355
								5250	18.4	17.66	28.97	0.5091	0.03350
								5500	18.7	18.26	30.09	0.5245	0.03345
								6000	19.1	19.43	32.34	0.5553	0.03336
								6500	19.6	20.54	34.57	0.5860	0.03326
								7000	20.1	21.60	36.80	0.6165	0.03317
USA | CANADA | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.5	15.09	26.80	0.5210	0.03123
								4500	17.7	15.76	27.84	0.5398	0.03116
								4750	17.9	16.41	28.88	0.5586	0.03108

								5000	18.2	17.05	29.92	0.5773	0.03100
								5250	18.4	17.67	30.95	0.5959	0.03092
								5500	18.6	18.27	31.98	0.6145	0.03085
								6000	19.1	19.44	34.03	0.6516	0.03069
								6500	19.6	20.56	36.07	0.6885	0.03054
								7000	20.0	21.62	38.10	0.7252	0.03039
USA | CANADA | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	18.1	14.59	27.44	0.5090	0.03301
								4500	18.3	15.24	28.50	0.5271	0.03294
								4750	18.5	15.88	29.57	0.5451	0.03287
								5000	18.8	16.50	30.63	0.5631	0.03280
								5250	19.0	17.11	31.69	0.5810	0.03272
								5500	19.2	17.71	32.74	0.5988	0.03265
								6000	19.7	18.85	34.85	0.6344	0.03251
								6500	20.2	19.94	36.94	0.6699	0.03237
								7000	20.6	20.99	39.02	0.7052	0.03222
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.19	25.62	0.2132	0.03432
								4500	16.5	16.89	26.77	0.2272	0.03429
								4750	16.8	17.58	27.93	0.2411	0.03426
								5000	17.0	18.24	29.08	0.2549	0.03424
								5250	17.2	18.89	30.23	0.2688	0.03421
								5500	17.5	19.52	31.38	0.2826	0.03419
								6000	17.9	20.73	33.66	0.3100	0.03414
								6500	18.4	21.88	35.94	0.3374	0.03409
								7000	18.9	22.97	38.20	0.3647	0.03404
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.38	25.44	0.2165	0.03375
								4500	16.3	17.09	26.59	0.2302	0.03373
								4750	16.6	17.78	27.74	0.2440	0.03371
								5000	16.8	18.45	28.88	0.2577	0.03369
								5250	17.0	19.10	30.02	0.2714	0.03366
								5500	17.3	19.74	31.16	0.2850	0.03364
								6000	17.7	20.96	33.43	0.3122	0.03360
								6500	18.2	22.12	35.68	0.3392	0.03355
								7000	18.7	23.22	37.93	0.3662	0.03351
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.17	25.72	0.2102	0.03439
								4500	16.5	16.88	26.89	0.2239	0.03436
								4750	16.8	17.56	28.05	0.2376	0.03434
								5000	17.0	18.22	29.20	0.2513	0.03431
								5250	17.2	18.87	30.36	0.2649	0.03429
								5500	17.5	19.50	31.51	0.2785	0.03427
								6000	18.0	20.71	33.80	0.3055	0.03422
								6500	18.4	21.86	36.09	0.3325	0.03417
								7000	18.9	22.96	38.37	0.3593	0.03412
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.36	25.55	0.2134	0.03383
								4500	16.3	17.07	26.70	0.2270	0.03381
								4750	16.6	17.76	27.85	0.2405	0.03379
								5000	16.8	18.43	29.00	0.2540	0.03377
								5250	17.1	19.08	30.15	0.2675	0.03375
								5500	17.3	19.71	31.29	0.2809	0.03373
								6000	17.8	20.94	33.57	0.3077	0.03368
								6500	18.2	22.10	35.83	0.3343	0.03364
								7000	18.7	23.20	38.09	0.3609	0.03360
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.16	25.60	0.2193	0.03429
								4500	16.5	16.87	26.76	0.2332	0.03426
								4750	16.8	17.55	27.91	0.2472	0.03424
								5000	17.0	18.21	29.06	0.2611	0.03421
								5250	17.3	18.86	30.21	0.2749	0.03418
								5500	17.5	19.48	31.36	0.2888	0.03416
								6000	18.0	20.70	33.64	0.3163	0.03410
								6500	18.4	21.85	35.91	0.3438	0.03405
								7000	18.9	22.94	38.18	0.3711	0.03400
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.35	25.42	0.2229	0.03373
								4500	16.4	17.05	26.57	0.2368	0.03371
								4750	16.6	17.75	27.72	0.2505	0.03368
								5000	16.8	18.41	28.86	0.2643	0.03366
								5250	17.1	19.06	30.00	0.2780	0.03364
								5500	17.3	19.70	31.13	0.2917	0.03361
								6000	17.8	20.92	33.40	0.3189	0.03356
								6500	18.2	22.08	35.65	0.3461	0.03352
								7000	18.7	23.19	37.90	0.3731	0.03347
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.14	25.71	0.2162	0.03436
								4500	16.6	16.84	26.87	0.2300	0.03434
								4750	16.8	17.53	28.03	0.2437	0.03431
								5000	17.0	18.19	29.19	0.2574	0.03429
								5250	17.3	18.84	30.34	0.2711	0.03426
								5500	17.5	19.47	31.49	0.2847	0.03423
								6000	18.0	20.68	33.78	0.3118	0.03419
								6500	18.4	21.83	36.07	0.3388	0.03414

							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	7000	18.9	22.92	38.34	0.3657	0.03409
								4250	16.1	16.33	25.53	0.2199	0.03381
								4500	16.4	17.04	26.68	0.2335	0.03378
								4750	16.6	17.73	27.83	0.2471	0.03376
								5000	16.8	18.39	28.98	0.2606	0.03374
								5250	17.1	19.05	30.12	0.2741	0.03372
								5500	17.3	19.68	31.27	0.2876	0.03369
								6000	17.8	20.90	33.54	0.3145	0.03365
								6500	18.3	22.06	35.81	0.3412	0.03361
								7000	18.7	23.17	38.06	0.3678	0.03356
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.02	23.49	0.2946	0.03407
								4500	16.7	16.72	24.67	0.3078	0.03405
								4750	16.9	17.40	25.85	0.3209	0.03403
								5000	17.2	18.05	27.03	0.3340	0.03401
								5250	17.4	18.70	28.21	0.3471	0.03399
								5500	17.6	19.32	29.38	0.3601	0.03397
								6000	18.1	20.52	31.72	0.3861	0.03393
								6500	18.6	21.67	34.04	0.4119	0.03389
								7000	19.0	22.76	36.36	0.4377	0.03385
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.20	23.23	0.3024	0.03346
								4500	16.5	16.91	24.41	0.3154	0.03344
								4750	16.7	17.59	25.58	0.3284	0.03342
								5000	17.0	18.25	26.75	0.3413	0.03341
								5250	17.2	18.90	27.92	0.3542	0.03339
								5500	17.4	19.54	29.08	0.3670	0.03337
								6000	17.9	20.75	31.40	0.3926	0.03334
								6500	18.4	21.90	33.71	0.4181	0.03331
								7000	18.9	23.00	36.02	0.4435	0.03328
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.37	24.09	0.2833	0.03614
								4500	17.4	16.05	25.31	0.2955	0.03612
								4750	17.6	16.71	26.52	0.3077	0.03611
								5000	17.9	17.35	27.73	0.3199	0.03610
								5250	18.1	17.98	28.94	0.3320	0.03608
								5500	18.3	18.59	30.15	0.3441	0.03607
								6000	18.8	19.77	32.55	0.3682	0.03605
								6500	19.3	20.89	34.94	0.3922	0.03602
								7000	19.7	21.96	37.32	0.4161	0.03599
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.54	23.83	0.2913	0.03553
								4500	17.2	16.22	25.04	0.3034	0.03552
								4750	17.4	16.89	26.24	0.3154	0.03551
								5000	17.7	17.54	27.45	0.3274	0.03550
								5250	17.9	18.17	28.65	0.3393	0.03549
								5500	18.1	18.79	29.84	0.3512	0.03548
								6000	18.6	19.97	32.23	0.3750	0.03546
								6500	19.1	21.10	34.60	0.3986	0.03544
								7000	19.5	22.18	36.96	0.4222	0.03542
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	15.98	23.37	0.3066	0.03399
								4500	16.7	16.68	24.56	0.3198	0.03397
								4750	17.0	17.36	25.74	0.3329	0.03395
								5000	17.2	18.01	26.92	0.3460	0.03393
								5250	17.4	18.66	28.09	0.3590	0.03391
								5500	17.7	19.28	29.26	0.3720	0.03389
								6000	18.2	20.48	31.60	0.3980	0.03385
								6500	18.6	21.63	33.93	0.4238	0.03381
								7000	19.1	22.72	36.24	0.4495	0.03377
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.3	16.16	23.11	0.3154	0.03338
								4500	16.5	16.86	24.29	0.3283	0.03336
								4750	16.8	17.55	25.46	0.3413	0.03334
								5000	17.0	18.21	26.63	0.3542	0.03332
								5250	17.3	18.86	27.80	0.3670	0.03331
								5500	17.5	19.49	28.96	0.3798	0.03329
								6000	18.0	20.70	31.28	0.4054	0.03326
								6500	18.4	21.85	33.59	0.4309	0.03322
								7000	18.9	22.95	35.89	0.4562	0.03319
USA | CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.2	15.34	23.97	0.2958	0.03605
								4500	17.4	16.02	25.19	0.3080	0.03603
								4750	17.7	16.68	26.40	0.3202	0.03602
								5000	17.9	17.32	27.61	0.3323	0.03601
								5250	18.1	17.95	28.82	0.3444	0.03599
								5500	18.4	18.55	30.03	0.3565	0.03598
								6000	18.8	19.73	32.43	0.3805	0.03595
								6500	19.3	20.85	34.82	0.4045	0.03593
								7000	19.8	21.92	37.20	0.4283	0.03590
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.50	23.70	0.3048	0.03543
								4500	17.2	16.19	24.91	0.3168	0.03542
								4750	17.5	16.85	26.12	0.3288	0.03541
								5000	17.7	17.50	27.32	0.3407	0.03540
								5250	18.0	18.13	28.52	0.3526	0.03539

CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	5500	18.2	18.75	29.71	0.3645	0.03538
								6000	18.7	19.93	32.10	0.3882	0.03536
								6500	19.1	21.06	34.47	0.4119	0.03534
								7000	19.6	22.14	36.84	0.4354	0.03532
								4250	15.7	16.75	23.92	0.1768	0.03411
								4500	16.0	17.46	25.09	0.1906	0.03409
								4750	16.2	18.16	26.25	0.2044	0.03406
								5000	16.5	18.84	27.42	0.2182	0.03403
								5250	16.7	19.49	28.58	0.2319	0.03401
								5500	16.9	20.14	29.73	0.2456	0.03398
								6000	17.4	21.37	32.04	0.2728	0.03393
								6500	17.9	22.53	34.34	0.3000	0.03388
								7000	18.3	23.64	36.62	0.3270	0.03383
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.5	16.95	23.70	0.1785	0.03360
								4500	15.8	17.68	24.87	0.1922	0.03357
								4750	16.0	18.38	26.02	0.2058	0.03355
								5000	16.3	19.06	27.18	0.2194	0.03353
								5250	16.5	19.73	28.33	0.2330	0.03350
								5500	16.7	20.37	29.48	0.2465	0.03348
								6000	17.2	21.61	31.77	0.2734	0.03343
								6500	17.7	22.79	34.05	0.3003	0.03339
								7000	18.1	23.91	36.32	0.3270	0.03334
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.0	16.45	24.23	0.1698	0.03497
								4500	16.3	17.17	25.42	0.1831	0.03494
								4750	16.5	17.85	26.61	0.1963	0.03492
								5000	16.7	18.52	27.79	0.2095	0.03490
								5250	17.0	19.17	28.96	0.2227	0.03488
								5500	17.2	19.81	30.14	0.2358	0.03486
								6000	17.7	21.03	32.48	0.2620	0.03481
								6500	18.2	22.19	34.81	0.2881	0.03477
								7000	18.6	23.29	37.13	0.3141	0.03473
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.8	16.65	24.02	0.1716	0.03445
								4500	16.1	17.37	25.20	0.1848	0.03443
								4750	16.3	18.06	26.37	0.1979	0.03442
								5000	16.5	18.74	27.54	0.2109	0.03440
								5250	16.8	19.39	28.71	0.2239	0.03438
								5500	17.0	20.03	29.88	0.2369	0.03436
								6000	17.5	21.26	32.20	0.2628	0.03432
								6500	18.0	22.43	34.51	0.2886	0.03428
								7000	18.4	23.54	36.82	0.3143	0.03424
CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.8	16.70	23.80	0.1837	0.03416
								4500	16.0	17.42	24.97	0.1976	0.03413
								4750	16.3	18.11	26.14	0.2114	0.03410
								5000	16.5	18.78	27.30	0.2252	0.03408
								5250	16.7	19.44	28.46	0.2390	0.03405
								5500	17.0	20.08	29.62	0.2527	0.03402
								6000	17.4	21.31	31.93	0.2800	0.03396
								6500	17.9	22.48	34.23	0.3073	0.03391
								7000	18.4	23.59	36.51	0.3344	0.03385
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.6	16.89	23.58	0.1863	0.03365
								4500	15.8	17.62	24.74	0.2000	0.03362
								4750	16.1	18.32	25.90	0.2137	0.03360
								5000	16.3	19.00	27.05	0.2273	0.03357
								5250	16.6	19.66	28.21	0.2409	0.03355
								5500	16.8	20.31	29.36	0.2545	0.03352
								6000	17.3	21.55	31.65	0.2815	0.03347
								6500	17.7	22.72	33.93	0.3085	0.03342
								7000	18.2	23.84	36.20	0.3353	0.03337
CANADA | MEXICO | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.41	24.12	0.1771	0.03501
								4500	16.3	17.12	25.30	0.1904	0.03498
								4750	16.5	17.80	26.49	0.2037	0.03496
								5000	16.8	18.47	27.67	0.2170	0.03493
								5250	17.0	19.12	28.85	0.2302	0.03491
								5500	17.3	19.76	30.02	0.2434	0.03489
								6000	17.7	20.98	32.36	0.2696	0.03484
								6500	18.2	22.13	34.69	0.2958	0.03479
								7000	18.7	23.24	37.01	0.3219	0.03474
							LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	15.9	16.59	23.89	0.1798	0.03450
								4500	16.1	17.31	25.07	0.1930	0.03448
								4750	16.4	18.00	26.24	0.2062	0.03446
								5000	16.6	18.68	27.41	0.2193	0.03443
								5250	16.8	19.34	28.58	0.2323	0.03441
								5500	17.1	19.98	29.75	0.2454	0.03439
								6000	17.5	21.20	32.07	0.2713	0.03435
								6500	18.0	22.37	34.39	0.2972	0.03431
								7000	18.5	23.48	36.69	0.3230	0.03426
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.42	26.80	0.4137	0.03225
								4500	17.3	16.11	27.87	0.4303	0.03219

								4750	17.6	16.77	28.93	0.4469	0.03214
								5000	17.8	17.42	29.99	0.4634	0.03208
								5250	18.0	18.06	31.05	0.4799	0.03202
								5500	18.2	18.67	32.11	0.4963	0.03197
								6000	18.7	19.87	34.21	0.5291	0.03185
								6500	19.2	21.00	36.30	0.5617	0.03174
								7000	19.6	22.09	38.39	0.5941	0.03163
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 18 AT FALKEN (FALKEN) / D3HGR AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.61	26.63	0.3984	0.03201
								4500	17.1	16.30	27.69	0.4150	0.03195
								4750	17.3	16.97	28.76	0.4316	0.03190
								5000	17.6	17.63	29.82	0.4481	0.03184
								5250	17.8	18.26	30.88	0.4646	0.03179
								5500	18.0	18.89	31.93	0.4810	0.03173
								6000	18.5	20.08	34.03	0.5138	0.03162
								6500	19.0	21.23	36.13	0.5464	0.03151
								7000	19.4	22.31	38.21	0.5789	0.03141
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 122.44/3110MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.5	16.00	24.25	0.1797	0.03613
								4500	16.7	16.70	25.46	0.1921	0.03611
								4750	16.9	17.38	26.66	0.2045	0.03609
								5000	17.2	18.04	27.86	0.2169	0.03607
								5250	17.4	18.68	29.05	0.2292	0.03606
								5500	17.7	19.31	30.25	0.2415	0.03604
								6000	18.1	20.52	32.62	0.2660	0.03600
								6500	18.6	21.66	34.99	0.2905	0.03597
								7000	19.1	22.76	37.35	0.3148	0.03593
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.53	24.61	0.1753	0.03757
								4500	17.2	16.22	25.83	0.1872	0.03756
								4750	17.4	16.88	27.05	0.1991	0.03754
								5000	17.7	17.53	28.27	0.2110	0.03753
								5250	17.9	18.16	29.49	0.2228	0.03752
								5500	18.2	18.78	30.70	0.2346	0.03750
								6000	18.6	19.96	33.12	0.2581	0.03747
								6500	19.1	21.09	35.52	0.2815	0.03745
								7000	19.6	22.17	37.92	0.3048	0.03742
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80RWD975-3/4 | LESS TRANSFER CASE	4X2	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.6	15.87	27.79	0.2476	0.03373
								4500	16.8	16.57	28.88	0.2633	0.03369
								4750	17.1	17.25	29.97	0.2789	0.03364
								5000	17.3	17.91	31.05	0.2945	0.03360
								5250	17.5	18.55	32.14	0.3100	0.03355
								5500	17.8	19.18	33.21	0.3256	0.03350
								6000	18.2	20.39	35.36	0.3565	0.03341
								6500	18.7	21.54	37.50	0.3873	0.03332
								7000	19.2	22.63	39.64	0.4180	0.03324
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.5	15.10	24.62	0.2834	0.03685
								4500	17.7	15.78	25.83	0.2953	0.03683
								4750	17.9	16.43	27.05	0.3071	0.03682
								5000	18.2	17.07	28.26	0.3189	0.03681
								5250	18.4	17.69	29.47	0.3306	0.03680
								5500	18.6	18.29	30.67	0.3423	0.03679
								6000	19.1	19.46	33.07	0.3657	0.03677
								6500	19.6	20.58	35.46	0.3890	0.03674
								7000	20.0	21.65	37.84	0.4121	0.03672
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 122.44/3110MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.45	23.91	0.3277	0.03507
								4500	17.3	16.13	25.10	0.3403	0.03505
								4750	17.5	16.80	26.29	0.3528	0.03503
								5000	17.8	17.44	27.47	0.3653	0.03501
								5250	18.0	18.08	28.66	0.3778	0.03499
								5500	18.2	18.69	29.84	0.3902	0.03497
								6000	18.7	19.88	32.19	0.4150	0.03493
								6500	19.2	21.01	34.53	0.4397	0.03489
								7000	19.6	22.09	36.86	0.4643	0.03485
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.6	14.98	24.34	0.3223	0.03659
								4500	17.8	15.66	25.55	0.3342	0.03657
								4750	18.1	16.31	26.76	0.3461	0.03656
								5000	18.3	16.94	27.97	0.3580	0.03654
								5250	18.5	17.56	29.18	0.3698	0.03652
								5500	18.8	18.17	30.38	0.3816	0.03651
								6000	19.2	19.33	32.78	0.4051	0.03648
								6500	19.7	20.45	35.16	0.4285	0.03645
								7000	20.2	21.51	37.54	0.4518	0.03642
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.6	14.96	27.44	0.4113	0.03364
								4500	17.8	15.63	28.52	0.4268	0.03359
								4750	18.1	16.28	29.61	0.4424	0.03354
								5000	18.3	16.92	30.69	0.4578	0.03350
								5250	18.5	17.54	31.77	0.4733	0.03345

USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	5.0L DOHC NA PFDI GAS - COYOTE | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	8.8" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	5500	18.8	18.15	32.85	0.4887	0.03340
								6000	19.2	19.33	34.99	0.5194	0.03330
								6500	19.7	20.45	37.13	0.5500	0.03321
								7000	20.1	21.52	39.26	0.5805	0.03311
								4250	17.3	15.25	23.86	0.2663	0.03699
								4500	17.5	15.93	25.10	0.2775	0.03698
								4750	17.8	16.58	26.34	0.2886	0.03698
								5000	18.0	17.22	27.57	0.2997	0.03698
								5250	18.2	17.85	28.79	0.3108	0.03698
								5500	18.5	18.45	30.02	0.3218	0.03698
								6000	18.9	19.63	32.46	0.3438	0.03697
								6500	19.4	20.75	34.89	0.3657	0.03697
								7000	19.9	21.82	37.31	0.3876	0.03696
USA | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.50	24.98	0.1550	0.03794
								4500	17.2	16.18	26.21	0.1667	0.03793
								4750	17.5	16.84	27.44	0.1783	0.03793
								5000	17.7	17.49	28.66	0.1899	0.03792
								5250	18.0	18.12	29.88	0.2015	0.03791
								5500	18.2	18.73	31.10	0.2130	0.03790
								6000	18.7	19.92	33.53	0.2360	0.03788
								6500	19.1	21.04	35.95	0.2589	0.03787
								7000	19.6	22.12	38.35	0.2818	0.03785
USA | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.45	24.84	0.1649	0.03795
								4500	17.3	16.13	26.07	0.1766	0.03794
								4750	17.5	16.80	27.29	0.1883	0.03793
								5000	17.8	17.44	28.52	0.2000	0.03792
								5250	18.0	18.07	29.74	0.2116	0.03791
								5500	18.2	18.68	30.96	0.2232	0.03790
								6000	18.7	19.87	33.38	0.2463	0.03788
								6500	19.2	20.99	35.80	0.2693	0.03786
								7000	19.7	22.07	38.21	0.2922	0.03783
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.19	24.54	0.2846	0.03656
								4500	17.6	15.86	25.75	0.2966	0.03654
								4750	17.8	16.52	26.96	0.3085	0.03653
								5000	18.1	17.16	28.16	0.3204	0.03652
								5250	18.3	17.78	29.37	0.3323	0.03651
								5500	18.5	18.39	30.57	0.3441	0.03649
								6000	19.0	19.57	32.96	0.3678	0.03647
								6500	19.5	20.68	35.34	0.3913	0.03645
								7000	19.9	21.75	37.71	0.4147	0.03642
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.12	24.38	0.3057	0.03642
								4500	17.7	15.79	25.60	0.3177	0.03641
								4750	17.9	16.45	26.80	0.3297	0.03639
								5000	18.1	17.09	28.01	0.3416	0.03638
								5250	18.4	17.71	29.21	0.3535	0.03636
								5500	18.6	18.32	30.41	0.3654	0.03635
								6000	19.1	19.49	32.80	0.3891	0.03632
								6500	19.5	20.61	35.18	0.4127	0.03629
								7000	20.0	21.68	37.55	0.4361	0.03626
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | 145"/3675MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80AWDESOF975-3/4 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	9.75" AXLE SIZE	FAJAM F150 HD MaxT	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.4	15.11	27.30	0.3933	0.03352
								4500	17.7	15.78	28.39	0.4088	0.03348
								4750	17.9	16.44	29.48	0.4243	0.03343
								5000	18.1	17.09	30.56	0.4398	0.03338
								5250	18.4	17.71	31.64	0.4552	0.03334
								5500	18.6	18.32	32.72	0.4705	0.03329
								6000	19.1	19.50	34.87	0.5012	0.03320
								6500	19.5	20.63	37.01	0.5317	0.03311
								7000	20.0	21.70	39.14	0.5621	0.03302
USA | CANADA | MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.7	15.76	24.85	0.3035	0.03416
								4500	17.0	16.44	26.00	0.3188	0.03412
								4750	17.2	17.11	27.15	0.3341	0.03408
								5000	17.4	17.76	28.29	0.3494	0.03404
								5250	17.7	18.39	29.43	0.3646	0.03400
								5500	17.9	19.01	30.57	0.3797	0.03396
								6000	18.4	20.20	32.84	0.4100	0.03388
								6500	18.9	21.33	35.09	0.4401	0.03379
								7000	19.3	22.41	37.34	0.4701	0.03371
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.25	26.59	0.1928	0.03736
								4500	17.5	15.92	27.80	0.2049	0.03735
								4750	17.8	16.58	29.00	0.2169	0.03734
								5000	18.0	17.22	30.20	0.2290	0.03733
								5250	18.2	17.85	31.40	0.2410	0.03732
								5500	18.5	18.46	32.60	0.2530	0.03731
								6000	18.9	19.63	34.98	0.2768	0.03729
								6500	19.4	20.75	37.35	0.3006	0.03727
								7000	19.9	21.82	39.71	0.3243	0.03724

USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80RWD880 | LESS TRANSFER CASE	4X2	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.3	15.22	26.57	0.1998	0.03732
								4500	17.6	15.90	27.78	0.2120	0.03731
								4750	17.8	16.55	28.98	0.2241	0.03730
								5000	18.0	17.20	30.18	0.2362	0.03728
								5250	18.3	17.82	31.38	0.2482	0.03727
								5500	18.5	18.43	32.57	0.2602	0.03726
								6000	19.0	19.60	34.95	0.2842	0.03724
								6500	19.4	20.72	37.32	0.3080	0.03722
								7000	19.9	21.79	39.68	0.3318	0.03719
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.55	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.5	15.03	24.41	0.2807	0.03722
								4500	17.8	15.70	25.65	0.2917	0.03722
								4750	18.0	16.35	26.89	0.3027	0.03722
								5000	18.2	16.99	28.12	0.3137	0.03722
								5250	18.5	17.61	29.35	0.3247	0.03721
								5500	18.7	18.21	30.58	0.3356	0.03721
								6000	19.2	19.38	33.03	0.3574	0.03721
								6500	19.7	20.49	35.47	0.3791	0.03720
								7000	20.1	21.55	37.89	0.4007	0.03720
USA | CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	2.7L DOHC 4V DI GT V6 GAS/FFV | LESS ELECTRIC BATTERY	10R80AWDESOF880 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	8.8" AXLE SIZE	FAJAK F150 LD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.6	15.00	24.28	0.2945	0.03712
								4500	17.8	15.67	25.52	0.3055	0.03712
								4750	18.1	16.32	26.76	0.3165	0.03712
								5000	18.3	16.95	27.99	0.3275	0.03711
								5250	18.5	17.57	29.22	0.3384	0.03711
								5500	18.8	18.17	30.45	0.3494	0.03711
								6000	19.2	19.34	32.90	0.3711	0.03710
								6500	19.7	20.45	35.34	0.3928	0.03709
								7000	20.2	21.51	37.77	0.4144	0.03709
CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.0	15.50	24.98	0.1550	0.03794
								4500	17.2	16.18	26.21	0.1667	0.03793
								4750	17.5	16.84	27.44	0.1783	0.03793
								5000	17.7	17.49	28.66	0.1899	0.03792
								5250	18.0	18.12	29.88	0.2015	0.03791
								5500	18.2	18.73	31.10	0.2130	0.03790
								6000	18.7	19.92	33.53	0.2360	0.03788
								6500	19.1	21.04	35.95	0.2589	0.03787
								7000	19.6	22.12	38.35	0.2818	0.03785
CANADA | MEXICO | SINGLE CAB (REGULAR CAB) | 141"/3581MM WHEELBASE |	3.5L CYCLON-D4- G-DI-TIVCT-UPG | LESS ELECTRIC BATTERY	10R80RWD975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.1	15.45	24.84	0.1649	0.03795
								4500	17.3	16.13	26.07	0.1766	0.03794
								4750	17.5	16.80	27.29	0.1883	0.03793
								5000	17.8	17.44	28.52	0.2000	0.03792
								5250	18.0	18.07	29.74	0.2116	0.03791
								5500	18.2	18.68	30.96	0.2232	0.03790
								6000	18.7	19.87	33.38	0.2463	0.03788
								6500	19.2	20.99	35.80	0.2693	0.03786
								7000	19.7	22.07	38.21	0.2922	0.03783
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHT975 | LESS TRANSFER CASE	4X2	3.55	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.1	16.34	24.33	0.3132	0.03238
								4500	16.4	17.04	25.46	0.3293	0.03234
								4750	16.6	17.73	26.58	0.3453	0.03229
								5000	16.8	18.39	27.69	0.3612	0.03224
								5250	17.1	19.04	28.81	0.3772	0.03220
								5500	17.3	19.67	29.92	0.3931	0.03215
								6000	17.8	20.88	32.14	0.4247	0.03206
								6500	18.3	22.03	34.34	0.4563	0.03197
								7000	18.7	23.12	36.54	0.4877	0.03187
MEXICO | DOUBLE CAB (CREW CAB) | 145"/3675MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	16.9	15.62	23.91	0.4549	0.03193
								4500	17.1	16.31	25.02	0.4713	0.03188
								4750	17.3	16.98	26.13	0.4876	0.03182
								5000	17.6	17.63	27.23	0.5038	0.03177
								5250	17.8	18.26	28.34	0.5200	0.03172
								5500	18.1	18.88	29.44	0.5362	0.03166
								6000	18.5	20.06	31.63	0.5684	0.03156
								6500	19.0	21.19	33.82	0.6005	0.03145
								7000	19.5	22.27	35.99	0.6325	0.03134
MEXICO | DOUBLE CAB (CREW CAB) | 157"/3989MM WHEELBASE |	3.5L V6 | LESS ELECTRIC BATTERY	10R80MHTAWDESOF975 | ELECTRIC TRANS CASE W/ IWE'S	4x4	3.73	9.75" AXLE SIZE	FAJAL F150 HD	LT265/70R 17 AT FALKEN (FALKEN) / D3KFS AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	4250	17.5	15.09	24.43	0.4469	0.03369
								4500	17.7	15.75	25.57	0.4625	0.03365
								4750	17.9	16.40	26.70	0.4781	0.03360
								5000	18.2	17.04	27.84	0.4936	0.03355
								5250	18.4	17.66	28.97	0.5091	0.03350
								5500	18.7	18.26	30.09	0.5245	0.03345
								6000	19.1	19.43	32.34	0.5553	0.03336
								6500	19.6	20.54	34.57	0.5860	0.03326
								7000	20.1	21.60	36.80	0.6165	0.03317

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P703N

Coverage Chart	Model Year	Program	Date	Author			Comments
26P703.3-0	2026	P703N	08/25/2025	SPARKS			Auto 10R80 requires a coastdown mode.

Vehicle Description									TRLHP Specification					
												3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | US VIRGIN ISLANDS | MILITARY PERSONNEL SALES | AMERICAN SAMOA | PUERTO RICO | NORTHERN MARIANA ISLANDS | GUAM | REDBACK SERIES	3.0L	RAPAWD	AWD	4.27		RaptP703	LT285/70R 17 AT BFGOODRICH (ALL-TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5000	21.6	14.37	48.72	0.1828	0.04152
								5250	21.8	14.89	50.51	0.1848	0.04160
								5500	22.1	15.40	52.30	0.1867	0.04169
								6000	22.7	16.38	55.88	0.1907	0.04185
								6500	23.2	17.32	59.46	0.1946	0.04202
USA | CANADA | US VIRGIN ISLANDS | MILITARY PERSONNEL SALES | AMERICAN SAMOA | PUERTO RICO | NORTHERN MARIANA ISLANDS | GUAM	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X4	4X4ESOF	3.73		BaseP703	P255/65R 18 AT GOODYEAR (WRANGLER AT) / D3HFS AT 30 DRIVEN PSI AND 30 NONDRIVEN PSI	4250	17.0	15.52	32.20	0.2774	0.03247
								4500	17.2	16.22	33.40	0.2890	0.03243
								4750	17.4	16.89	34.61	0.3006	0.03240
								5000	17.6	17.55	35.81	0.3122	0.03237
								5250	17.9	18.19	37.01	0.3239	0.03233
							P255/70R 17 AT GOODYEAR (WRANGLER AT) / D3KGR AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	16.2	16.26	28.61	0.2218	0.03271
								4500	16.4	17.02	29.63	0.2299	0.03272
								4750	16.6	17.75	30.64	0.2379	0.03273
								5000	16.8	18.47	31.66	0.2460	0.03274
								5250	17.0	19.17	32.67	0.2541	0.03275
							LT255/70R 17 AT GENERAL (GRABBER AT) / D3KGX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	16.9	15.55	33.74	0.2335	0.03262
								4500	17.2	16.23	35.06	0.2433	0.03263
								4750	17.4	16.89	36.38	0.2532	0.03263
								5000	17.7	17.53	37.71	0.2631	0.03264
								5250	17.9	18.16	39.03	0.2730	0.03264
USA | CANADA | US VIRGIN ISLANDS | MILITARY PERSONNEL SALES | AMERICAN SAMOA | PUERTO RICO | NORTHERN MARIANA ISLANDS | GUAM	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X2	RWD	3.73		BaseP703	P255/65R 18 AT GOODYEAR (WRANGLER AT) / D3HFS AT 30 DRIVEN PSI AND 30 NONDRIVEN PSI	4000	15.5	15.96	31.64	-0.0874	0.03571
								4250	15.8	16.70	32.86	-0.0751	0.03567
								4500	16.0	17.43	34.08	-0.0627	0.03563
								4750	16.2	18.13	35.30	-0.0504	0.03560
								5000	16.5	18.81	36.52	-0.0381	0.03556
							P255/70R 17 AT GOODYEAR (WRANGLER AT) / D3KGR AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4000	14.8	16.76	28.21	-0.1408	0.03593
								4250	15.0	17.58	29.24	-0.1323	0.03593
								4500	15.2	18.37	30.27	-0.1237	0.03594
								4750	15.4	19.14	31.30	-0.1151	0.03595
								5000	15.6	19.88	32.34	-0.1065	0.03596
							LT255/70R 17 AT GENERAL (GRABBER AT) / D3KGX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4000	15.6	15.94	33.22	-0.1203	0.03577
								4250	15.8	16.67	34.57	-0.1097	0.03577
								4500	16.0	17.37	35.91	-0.0992	0.03577
								4750	16.3	18.05	37.26	-0.0886	0.03578
								5000	16.6	18.71	38.61	-0.0780	0.03578
USA | CANADA | US VIRGIN ISLANDS | MILITARY PERSONNEL SALES | AMERICAN SAMOA | PUERTO RICO | NORTHERN MARIANA ISLANDS | GUAM	2.7L DOHC 4V DI GT V6 GAS/FFV	10R604X4	4X4ESOF	3.73		BaseP703	P255/65R 18 AT GOODYEAR (WRANGLER AT) / D3HFS AT 30 DRIVEN PSI AND 30 NONDRIVEN PSI	4500	18.0	15.54	31.22	0.2717	0.03593
								4750	18.1	16.23	32.37	0.2763	0.03595
								5000	18.3	16.90	33.52	0.2809	0.03598
								5250	18.5	17.56	34.67	0.2856	0.03601
								5500	18.7	18.20	35.83	0.2902	0.03603
							P255/70R 17 AT GOODYEAR (WRANGLER AT) / D3KGR AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4500	17.0	16.39	27.47	0.2054	0.03597
								4750	17.2	17.13	28.45	0.2078	0.03603
								5000	17.4	17.87	29.44	0.2097	0.03608
								5250	17.5	18.58	30.42	0.2118	0.03614
								5500	17.7	19.28	31.41	0.2139	0.03620
							LT255/70R 17 AT GENERAL (GRABBER AT) / D3KGX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4500	18.4	15.19	34.47	0.1902	0.03747
								4750	18.6	15.85	35.83	0.1911	0.03756
								5000	18.8	16.49	37.20	0.1919	0.03764
								5250	19.0	17.12	38.56	0.1927	0.03772
								5500	19.2	17.73	39.93	0.1936	0.03780

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P708DSL

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P708DSL TRLHP Chart	2026	P708DSL	01/07/2026	EROMER31	26P708DSL-3.1	10R100/140 Transmissions Require Coastdown Mode.

Vehicle Description								TRLHP Specification					
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.09	57.37	0.2411	0.05008
								8500	26.3	19.98	59.50	0.2594	0.05005
								9000	26.7	20.84	61.61	0.2775	0.05002
								9500	27.1	21.68	63.70	0.2954	0.04999
								10000	27.5	22.50	65.77	0.3132	0.04996

	10500	27.9	23.31	67.81	0.3307	0.04992
	11000	28.3	24.09	69.84	0.3481	0.04989
	11500	28.6	24.86	71.85	0.3653	0.04986
	12000	29.0	25.60	73.84	0.3824	0.04983
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.36	53.67	0.3444	0.04464
	8500	24.8	21.22	56.00	0.3744	0.04451
	9000	25.3	22.05	58.33	0.4042	0.04439
	9500	25.7	22.85	60.65	0.4339	0.04427
	10000	26.2	23.62	62.95	0.4635	0.04415

	10500	26.7	24.37	65.26	0.4930	0.04403
	11000	27.1	25.10	67.55	0.5224	0.04390
	11500	27.6	25.80	69.84	0.5518	0.04378
	12000	28.0	26.48	72.12	0.5810	0.04366
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.51	52.53	0.3208	0.04504
	8500	24.6	21.40	54.71	0.3478	0.04495
	9000	25.0	22.26	56.88	0.3746	0.04487
	9500	25.5	23.08	59.04	0.4013	0.04479
	10000	25.9	23.89	61.19	0.4278	0.04471

								10500	26.4	24.66	63.32	0.4542	0.04464
								11000	26.8	25.42	65.45	0.4805	0.04456
								11500	27.2	26.15	67.56	0.5066	0.04448
								12000	27.6	26.86	69.67	0.5326	0.04440
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.09	57.37	0.2411	0.05008
								8500	26.3	19.98	59.50	0.2594	0.05005
								9000	26.7	20.84	61.61	0.2775	0.05002
								9500	27.1	21.68	63.70	0.2954	0.04999
								10000	27.5	22.50	65.77	0.3132	0.04996
								10500	27.9	23.31	67.81	0.3307	0.04992
								11000	28.3	24.09	69.84	0.3481	0.04989
								11500	28.6	24.86	71.85	0.3653	0.04986
								12000	29.0	25.60	73.84	0.3824	0.04983
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.36	53.67	0.3444	0.04464

	8500	24.8	21.22	56.00	0.3744	0.04451
	9000	25.3	22.05	58.33	0.4042	0.04439
	9500	25.7	22.85	60.65	0.4339	0.04427
	10000	26.2	23.62	62.95	0.4635	0.04415
	10500	26.7	24.37	65.26	0.4930	0.04403
	11000	27.1	25.10	67.55	0.5224	0.04390
	11500	27.6	25.80	69.84	0.5518	0.04378
	12000	28.0	26.48	72.12	0.5810	0.04366
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.51	52.53	0.3208	0.04504
	8500	24.6	21.40	54.71	0.3478	0.04495
	9000	25.0	22.26	56.88	0.3746	0.04487
	9500	25.5	23.08	59.04	0.4013	0.04479
	10000	25.9	23.89	61.19	0.4278	0.04471
	10500	26.4	24.66	63.32	0.4542	0.04464
	11000	26.8	25.42	65.45	0.4805	0.04456
	11500	27.2	26.15	67.56	0.5066	0.04448
	12000	27.6	26.86	69.67	0.5326	0.04440

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.03	55.33	0.2865	0.04632
								8500	25.1	20.95	57.37	0.3074	0.04627
								9000	25.5	21.84	59.39	0.3280	0.04621
								9500	25.9	22.71	61.39	0.3485	0.04616
								10000	26.3	23.56	63.37	0.3688	0.04611
								10500	26.7	24.38	65.33	0.3888	0.04606
								11000	27.0	25.19	67.27	0.4087	0.04601
								11500	27.4	25.97	69.19	0.4284	0.04596
								12000	27.8	26.74	71.10	0.4479	0.04592

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.35	51.25	0.4080	0.04094
	8500	23.7	22.23	53.46	0.4416	0.04079
	9000	24.1	23.08	55.66	0.4751	0.04064
	9500	24.6	23.90	57.86	0.5085	0.04049
	10000	25.1	24.69	60.05	0.5417	0.04034
	10500	25.5	25.45	62.23	0.5749	0.04019
	11000	26.0	26.19	64.40	0.6079	0.04004
	11500	26.4	26.90	66.57	0.6408	0.03990
	12000	26.9	27.59	68.73	0.6736	0.03975

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.52	50.23	0.3803	0.04135
	8500	23.5	22.43	52.30	0.4106	0.04124
	9000	23.9	23.31	54.35	0.4407	0.04114
	9500	24.3	24.16	56.40	0.4707	0.04103
	10000	24.8	24.99	58.44	0.5005	0.04093
	10500	25.2	25.78	60.46	0.5302	0.04082
	11000	25.6	26.55	62.48	0.5597	0.04072
	11500	26.1	27.30	64.49	0.5891	0.04062
	12000	26.5	28.03	66.48	0.6183	0.04051

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.03	55.33	0.2865	0.04632
								8500	25.1	20.95	57.37	0.3074	0.04627
								9000	25.5	21.84	59.39	0.3280	0.04621
								9500	25.9	22.71	61.39	0.3485	0.04616
								10000	26.3	23.56	63.37	0.3688	0.04611
								10500	26.7	24.38	65.33	0.3888	0.04606
								11000	27.0	25.19	67.27	0.4087	0.04601
								11500	27.4	25.97	69.19	0.4284	0.04596
								12000	27.8	26.74	71.10	0.4479	0.04592
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.35	51.25	0.4080	0.04094
								8500	23.7	22.23	53.46	0.4416	0.04079
								9000	24.1	23.08	55.66	0.4751	0.04064
								9500	24.6	23.90	57.86	0.5085	0.04049
								10000	25.1	24.69	60.05	0.5417	0.04034
								10500	25.5	25.45	62.23	0.5749	0.04019
								11000	26.0	26.19	64.40	0.6079	0.04004
								11500	26.4	26.90	66.57	0.6408	0.03990
								12000	26.9	27.59	68.73	0.6736	0.03975

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.52	50.23	0.3803	0.04135
								8500	23.5	22.43	52.30	0.4106	0.04124
								9000	23.9	23.31	54.35	0.4407	0.04114
								9500	24.3	24.16	56.40	0.4707	0.04103
								10000	24.8	24.99	58.44	0.5005	0.04093
								10500	25.2	25.78	60.46	0.5302	0.04082
								11000	25.6	26.55	62.48	0.5597	0.04072
								11500	26.1	27.30	64.49	0.5891	0.04062
								12000	26.5	28.03	66.48	0.6183	0.04051
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.84	55.79	0.2754	0.04708
								8500	25.4	20.75	57.85	0.2957	0.04704
								9000	25.8	21.64	59.90	0.3157	0.04699
								9500	26.1	22.50	61.91	0.3356	0.04694

	10000	26.5	23.34	63.91	0.3552	0.04690
	10500	26.9	24.16	65.89	0.3747	0.04685
	11000	27.3	24.96	67.85	0.3940	0.04681
	11500	27.6	25.74	69.80	0.4131	0.04676
	12000	28.0	26.51	71.72	0.4320	0.04672
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.15	51.80	0.3928	0.04170
	8500	23.9	22.02	54.04	0.4256	0.04156
	9000	24.4	22.87	56.27	0.4582	0.04141
	9500	24.8	23.68	58.49	0.4907	0.04127

	10000	25.3	24.47	60.71	0.5231	0.04113
	10500	25.8	25.23	62.91	0.5554	0.04098
	11000	26.2	25.97	65.11	0.5875	0.04084
	11500	26.7	26.68	67.31	0.6196	0.04070
	12000	27.1	27.36	69.49	0.6516	0.04056
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.32	50.75	0.3661	0.04210
	8500	23.7	22.22	52.84	0.3956	0.04200
	9000	24.1	23.10	54.93	0.4249	0.04190
	9500	24.6	23.94	57.00	0.4541	0.04180

								10000	25.0	24.76	59.06	0.4831	0.04171
								10500	25.4	25.55	61.11	0.5120	0.04161
								11000	25.9	26.32	63.15	0.5408	0.04151
								11500	26.3	27.07	65.18	0.5694	0.04141
								12000	26.7	27.79	67.21	0.5979	0.04132
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.84	55.79	0.2754	0.04708
								8500	25.4	20.75	57.85	0.2957	0.04704
								9000	25.8	21.64	59.90	0.3157	0.04699
								9500	26.1	22.50	61.91	0.3356	0.04694
								10000	26.5	23.34	63.91	0.3552	0.04690
								10500	26.9	24.16	65.89	0.3747	0.04685
								11000	27.3	24.96	67.85	0.3940	0.04681
								11500	27.6	25.74	69.80	0.4131	0.04676

	12000	28.0	26.51	71.72	0.4320	0.04672
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.15	51.80	0.3928	0.04170
	8500	23.9	22.02	54.04	0.4256	0.04156
	9000	24.4	22.87	56.27	0.4582	0.04141
	9500	24.8	23.68	58.49	0.4907	0.04127
	10000	25.3	24.47	60.71	0.5231	0.04113
	10500	25.8	25.23	62.91	0.5554	0.04098
	11000	26.2	25.97	65.11	0.5875	0.04084
	11500	26.7	26.68	67.31	0.6196	0.04070
	12000	27.1	27.36	69.49	0.6516	0.04056
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.32	50.75	0.3661	0.04210
	8500	23.7	22.22	52.84	0.3956	0.04200
	9000	24.1	23.10	54.93	0.4249	0.04190
	9500	24.6	23.94	57.00	0.4541	0.04180
	10000	25.0	24.76	59.06	0.4831	0.04171
	10500	25.4	25.55	61.11	0.5120	0.04161
	11000	25.9	26.32	63.15	0.5408	0.04151
	11500	26.3	27.07	65.18	0.5694	0.04141

								12000	26.7	27.79	67.21	0.5979	0.04132
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.22	57.02	0.2492	0.04956
								8500	26.2	20.10	59.14	0.2680	0.04953
								9000	26.6	20.97	61.23	0.2866	0.04949
								9500	27.0	21.82	63.30	0.3050	0.04945
								10000	27.3	22.64	65.35	0.3232	0.04942
								10500	27.7	23.45	67.38	0.3412	0.04938
								11000	28.1	24.23	69.40	0.3590	0.04935
								11500	28.5	25.00	71.39	0.3767	0.04932

	12000	28.8	25.75	73.37	0.3943	0.04928
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.49	53.25	0.3556	0.04412
	8500	24.6	21.35	55.57	0.3862	0.04399
	9000	25.1	22.19	57.87	0.4167	0.04386
	9500	25.6	22.99	60.17	0.4471	0.04373
	10000	26.0	23.76	62.46	0.4774	0.04361
	10500	26.5	24.51	64.74	0.5076	0.04348
	11000	27.0	25.24	67.01	0.5376	0.04335
	11500	27.4	25.94	69.28	0.5676	0.04323

	12000	27.9	26.62	71.54	0.5975	0.04310
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.0	20.64	52.13	0.3313	0.04452
	8500	24.4	21.53	54.30	0.3588	0.04443
	9000	24.9	22.39	56.45	0.3863	0.04435
	9500	25.3	23.22	58.59	0.4136	0.04426
	10000	25.8	24.03	60.72	0.4407	0.04418
	10500	26.2	24.81	62.83	0.4677	0.04409
	11000	26.6	25.57	64.94	0.4945	0.04401
	11500	27.1	26.30	67.04	0.5213	0.04393

								12000	27.5	27.01	69.13	0.5479	0.04385
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.17	57.22	0.2674	0.04931
								8500	26.2	20.06	59.32	0.2867	0.04927
								9000	26.6	20.93	61.39	0.3058	0.04922
								9500	27.0	21.77	63.45	0.3246	0.04918
								10000	27.4	22.59	65.48	0.3433	0.04914
								10500	27.8	23.40	67.50	0.3618	0.04910
								11000	28.2	24.18	69.49	0.3802	0.04906
								11500	28.5	24.95	71.47	0.3983	0.04902
								12000	28.9	25.70	73.43	0.4164	0.04898
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.45	53.23	0.3793	0.04381
								8500	24.7	21.31	55.53	0.4107	0.04367
								9000	25.2	22.14	57.81	0.4419	0.04354
								9500	25.6	22.94	60.08	0.4730	0.04340
								10000	26.1	23.72	62.34	0.5040	0.04326
								10500	26.6	24.47	64.60	0.5349	0.04313
								11000	27.0	25.19	66.85	0.5657	0.04300

								11500	27.5	25.90	69.09	0.5964	0.04286
								12000	27.9	26.58	71.33	0.6270	0.04273
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.1	20.60	52.15	0.3541	0.04422
								8500	24.5	21.49	54.29	0.3824	0.04412
								9000	24.9	22.35	56.42	0.4105	0.04403
								9500	25.4	23.18	58.54	0.4384	0.04394
								10000	25.8	23.98	60.65	0.4662	0.04385
								10500	26.2	24.76	62.74	0.4939	0.04376
								11000	26.7	25.52	64.83	0.5214	0.04366
								11500	27.1	26.26	66.90	0.5487	0.04357
								12000	27.5	26.97	68.97	0.5760	0.04348
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.83	57.07	0.4046	0.04800
								8500	26.7	19.71	59.16	0.4234	0.04796
								9000	27.1	20.57	61.22	0.4420	0.04792

	9500	27.5	21.41	63.27	0.4604	0.04788
	10000	27.8	22.23	65.29	0.4786	0.04784
	10500	28.2	23.03	67.29	0.4967	0.04780
	11000	28.6	23.82	69.27	0.5146	0.04776
	11500	29.0	24.58	71.24	0.5323	0.04772
	12000	29.3	25.33	73.19	0.5499	0.04768
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.12	52.81	0.5109	0.04253
	8500	25.1	20.98	55.08	0.5416	0.04240
	9000	25.5	21.81	57.35	0.5722	0.04226

	9500	26.0	22.61	59.60	0.6027	0.04213
	10000	26.5	23.39	61.85	0.6331	0.04199
	10500	26.9	24.14	64.09	0.6634	0.04186
	11000	27.4	24.86	66.32	0.6936	0.04173
	11500	27.8	25.57	68.54	0.7237	0.04159
	12000	28.3	26.25	70.76	0.7537	0.04146
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.25	51.76	0.4873	0.04293
	8500	24.9	21.14	53.89	0.5150	0.04284
	9000	25.3	21.99	56.00	0.5425	0.04275

								9500	25.8	22.82	58.10	0.5699	0.04266
								10000	26.2	23.63	60.19	0.5972	0.04257
								10500	26.6	24.41	62.27	0.6243	0.04248
								11000	27.0	25.17	64.34	0.6512	0.04238
								11500	27.5	25.90	66.39	0.6781	0.04230
								12000	27.9	26.62	68.44	0.7048	0.04221
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.83	57.07	0.4046	0.04800
								8500	26.7	19.71	59.16	0.4234	0.04796
								9000	27.1	20.57	61.22	0.4420	0.04792
								9500	27.5	21.41	63.27	0.4604	0.04788
								10000	27.8	22.23	65.29	0.4786	0.04784
								10500	28.2	23.03	67.29	0.4967	0.04780

	11000	28.6	23.82	69.27	0.5146	0.04776
	11500	29.0	24.58	71.24	0.5323	0.04772
	12000	29.3	25.33	73.19	0.5499	0.04768
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.12	52.81	0.5109	0.04253
	8500	25.1	20.98	55.08	0.5416	0.04240
	9000	25.5	21.81	57.35	0.5722	0.04226
	9500	26.0	22.61	59.60	0.6027	0.04213
	10000	26.5	23.39	61.85	0.6331	0.04199
	10500	26.9	24.14	64.09	0.6634	0.04186
	11000	27.4	24.86	66.32	0.6936	0.04173
	11500	27.8	25.57	68.54	0.7237	0.04159
	12000	28.3	26.25	70.76	0.7537	0.04146
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.25	51.76	0.4873	0.04293
	8500	24.9	21.14	53.89	0.5150	0.04284
	9000	25.3	21.99	56.00	0.5425	0.04275
	9500	25.8	22.82	58.10	0.5699	0.04266
	10000	26.2	23.63	60.19	0.5972	0.04257
	10500	26.6	24.41	62.27	0.6243	0.04248

								11000	27.0	25.17	64.34	0.6512	0.04238
								11500	27.5	25.90	66.39	0.6781	0.04230
								12000	27.9	26.62	68.44	0.7048	0.04221
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.95	56.81	0.3993	0.04771
								8500	26.5	19.84	58.89	0.4178	0.04767
								9000	26.9	20.71	60.94	0.4361	0.04763
								9500	27.3	21.55	62.97	0.4542	0.04759
								10000	27.7	22.37	64.98	0.4722	0.04756
								10500	28.0	23.18	66.97	0.4900	0.04752
								11000	28.4	23.97	68.94	0.5076	0.04748

	11500	28.8	24.74	70.90	0.5250	0.04744
	12000	29.1	25.50	72.83	0.5423	0.04740
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	52.85	0.5080	0.04227
	8500	25.0	21.06	55.12	0.5386	0.04213
	9000	25.4	21.89	57.39	0.5690	0.04200
	9500	25.9	22.70	59.64	0.5993	0.04186
	10000	26.4	23.48	61.89	0.6295	0.04173
	10500	26.8	24.23	64.13	0.6596	0.04160
	11000	27.3	24.96	66.36	0.6896	0.04147

	11500	27.7	25.67	68.59	0.7195	0.04134
	12000	28.2	26.35	70.81	0.7493	0.04121
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.80	0.4846	0.04267
	8500	24.8	21.23	53.92	0.5121	0.04257
	9000	25.2	22.08	56.04	0.5394	0.04248
	9500	25.7	22.92	58.14	0.5666	0.04239
	10000	26.1	23.72	60.23	0.5937	0.04230
	10500	26.5	24.51	62.31	0.6206	0.04221
	11000	26.9	25.26	64.38	0.6474	0.04213

								11500	27.4	26.00	66.44	0.6741	0.04204
								12000	27.8	26.72	68.49	0.7006	0.04195
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.95	56.81	0.3993	0.04771
								8500	26.5	19.84	58.89	0.4178	0.04767
								9000	26.9	20.71	60.94	0.4361	0.04763
								9500	27.3	21.55	62.97	0.4542	0.04759
								10000	27.7	22.37	64.98	0.4722	0.04756
								10500	28.0	23.18	66.97	0.4900	0.04752
								11000	28.4	23.97	68.94	0.5076	0.04748
								11500	28.8	24.74	70.90	0.5250	0.04744
								12000	29.1	25.50	72.83	0.5423	0.04740
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	52.85	0.5080	0.04227
								8500	25.0	21.06	55.12	0.5386	0.04213
								9000	25.4	21.89	57.39	0.5690	0.04200
								9500	25.9	22.70	59.64	0.5993	0.04186
								10000	26.4	23.48	61.89	0.6295	0.04173

								10500	26.8	24.23	64.13	0.6596	0.04160
								11000	27.3	24.96	66.36	0.6896	0.04147
								11500	27.7	25.67	68.59	0.7195	0.04134
								12000	28.2	26.35	70.81	0.7493	0.04121
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.80	0.4846	0.04267
								8500	24.8	21.23	53.92	0.5121	0.04257
								9000	25.2	22.08	56.04	0.5394	0.04248
								9500	25.7	22.92	58.14	0.5666	0.04239
								10000	26.1	23.72	60.23	0.5937	0.04230
								10500	26.5	24.51	62.31	0.6206	0.04221
								11000	26.9	25.26	64.38	0.6474	0.04213
								11500	27.4	26.00	66.44	0.6741	0.04204
								12000	27.8	26.72	68.49	0.7006	0.04195
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	54.96	0.4502	0.04430
								8500	25.5	20.65	56.96	0.4716	0.04424

	9000	25.9	21.54	58.93	0.4928	0.04418
	9500	26.2	22.40	60.89	0.5137	0.04412
	10000	26.6	23.25	62.82	0.5345	0.04406
	10500	27.0	24.07	64.74	0.5550	0.04400
	11000	27.4	24.87	66.64	0.5754	0.04395
	11500	27.7	25.66	68.52	0.5956	0.04389
	12000	28.1	26.42	70.39	0.6156	0.04383
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.06	50.33	0.5747	0.03891
	8500	24.0	21.95	52.48	0.6091	0.03874

	9000	24.4	22.80	54.62	0.6434	0.03858
	9500	24.9	23.62	56.75	0.6776	0.03842
	10000	25.3	24.41	58.87	0.7116	0.03826
	10500	25.8	25.18	60.99	0.7455	0.03809
	11000	26.3	25.92	63.10	0.7794	0.03793
	11500	26.7	26.64	65.20	0.8131	0.03777
	12000	27.2	27.34	67.30	0.8467	0.03761
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.23	49.39	0.5470	0.03931
	8500	23.8	22.14	51.40	0.5781	0.03919

								9000	24.2	23.01	53.40	0.6089	0.03908
								9500	24.6	23.87	55.39	0.6396	0.03896
								10000	25.1	24.69	57.37	0.6702	0.03885
								10500	25.5	25.49	59.34	0.7006	0.03873
								11000	25.9	26.26	61.30	0.7308	0.03862
								11500	26.3	27.01	63.25	0.7609	0.03850
								12000	26.8	27.74	65.19	0.7908	0.03839
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	54.96	0.4502	0.04430
								8500	25.5	20.65	56.96	0.4716	0.04424
								9000	25.9	21.54	58.93	0.4928	0.04418
								9500	26.2	22.40	60.89	0.5137	0.04412

	10000	26.6	23.25	62.82	0.5345	0.04406
	10500	27.0	24.07	64.74	0.5550	0.04400
	11000	27.4	24.87	66.64	0.5754	0.04395
	11500	27.7	25.66	68.52	0.5956	0.04389
	12000	28.1	26.42	70.39	0.6156	0.04383
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.06	50.33	0.5747	0.03891
	8500	24.0	21.95	52.48	0.6091	0.03874
	9000	24.4	22.80	54.62	0.6434	0.03858
	9500	24.9	23.62	56.75	0.6776	0.03842
	10000	25.3	24.41	58.87	0.7116	0.03826
	10500	25.8	25.18	60.99	0.7455	0.03809
	11000	26.3	25.92	63.10	0.7794	0.03793
	11500	26.7	26.64	65.20	0.8131	0.03777
	12000	27.2	27.34	67.30	0.8467	0.03761
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.23	49.39	0.5470	0.03931
	8500	23.8	22.14	51.40	0.5781	0.03919
	9000	24.2	23.01	53.40	0.6089	0.03908
	9500	24.6	23.87	55.39	0.6396	0.03896

								10000	25.1	24.69	57.37	0.6702	0.03885
								10500	25.5	25.49	59.34	0.7006	0.03873
								11000	25.9	26.26	61.30	0.7308	0.03862
								11500	26.3	27.01	63.25	0.7609	0.03850
								12000	26.8	27.74	65.19	0.7908	0.03839
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	55.44	0.4390	0.04505
								8500	25.7	20.46	57.46	0.4598	0.04500
								9000	26.1	21.34	59.45	0.4803	0.04494
								9500	26.5	22.20	61.43	0.5007	0.04489
								10000	26.9	23.04	63.38	0.5208	0.04483
								10500	27.2	23.86	65.32	0.5408	0.04478

	11000	27.6	24.65	67.24	0.5605	0.04473
	11500	28.0	25.44	69.14	0.5801	0.04467
	12000	28.3	26.20	71.03	0.5996	0.04462
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	50.89	0.5594	0.03965
	8500	24.2	21.75	53.07	0.5929	0.03949
	9000	24.7	22.60	55.23	0.6264	0.03934
	9500	25.1	23.41	57.39	0.6597	0.03918
	10000	25.6	24.20	59.55	0.6928	0.03903
	10500	26.0	24.97	61.69	0.7259	0.03887

	11000	26.5	25.71	63.83	0.7588	0.03872
	11500	26.9	26.42	65.96	0.7917	0.03856
	12000	27.4	27.12	68.08	0.8245	0.03841
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.93	0.5326	0.04006
	8500	24.0	21.93	51.96	0.5629	0.03994
	9000	24.4	22.81	53.99	0.5930	0.03983
	9500	24.9	23.65	56.00	0.6229	0.03972
	10000	25.3	24.47	58.01	0.6526	0.03961
	10500	25.7	25.27	60.00	0.6822	0.03950

								11000	26.1	26.04	61.99	0.7117	0.03939
								11500	26.6	26.79	63.96	0.7410	0.03928
								12000	27.0	27.51	65.93	0.7702	0.03918
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.45	55.52	0.4897	0.04438
								8500	25.8	20.36	57.51	0.5111	0.04432
								9000	26.2	21.24	59.48	0.5321	0.04426
								9500	26.6	22.10	61.43	0.5530	0.04420
								10000	27.0	22.94	63.36	0.5736	0.04414
								10500	27.4	23.75	65.28	0.5941	0.04408
								11000	27.7	24.55	67.17	0.6143	0.04402
								11500	28.1	25.33	69.05	0.6344	0.04396
								12000	28.4	26.10	70.91	0.6543	0.04390
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.78	50.65	0.6154	0.03894
								8500	24.3	21.66	52.80	0.6497	0.03877
								9000	24.8	22.50	54.93	0.6839	0.03861

								9500	25.2	23.32	57.05	0.7179	0.03844
								10000	25.7	24.11	59.17	0.7518	0.03828
								10500	26.1	24.88	61.28	0.7856	0.03812
								11000	26.6	25.62	63.38	0.8193	0.03795
								11500	27.0	26.34	65.48	0.8529	0.03779
								12000	27.5	27.03	67.57	0.8864	0.03763
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.93	49.74	0.5880	0.03935
								8500	24.1	21.83	51.75	0.6189	0.03923
								9000	24.5	22.71	53.74	0.6497	0.03911
								9500	25.0	23.56	55.72	0.6803	0.03899
								10000	25.4	24.38	57.69	0.7107	0.03887
								10500	25.8	25.17	59.66	0.7410	0.03876
								11000	26.2	25.94	61.61	0.7711	0.03864
								11500	26.7	26.69	63.55	0.8011	0.03852
								12000	27.1	27.42	65.49	0.8310	0.03841
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	54.75	0.4418	0.04377

	8500	25.2	20.87	56.74	0.4628	0.04371
	9000	25.6	21.76	58.70	0.4835	0.04365
	9500	26.0	22.63	60.65	0.5040	0.04360
	10000	26.4	23.49	62.57	0.5244	0.04354
	10500	26.7	24.32	64.48	0.5445	0.04348
	11000	27.1	25.13	66.37	0.5644	0.04343
	11500	27.4	25.92	68.24	0.5842	0.04337
	12000	27.8	26.70	70.09	0.6037	0.04332
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.24	50.40	0.5691	0.03841

	8500	23.8	22.13	52.55	0.6031	0.03825
	9000	24.2	22.98	54.70	0.6370	0.03809
	9500	24.7	23.81	56.83	0.6707	0.03794
	10000	25.2	24.60	58.96	0.7044	0.03778
	10500	25.6	25.37	61.08	0.7379	0.03762
	11000	26.1	26.12	63.19	0.7713	0.03746
	11500	26.5	26.84	65.30	0.8046	0.03730
	12000	27.0	27.54	67.40	0.8379	0.03715
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.1	21.40	49.46	0.5416	0.03882

								8500	23.6	22.31	51.48	0.5723	0.03871
								9000	24.0	23.20	53.48	0.6028	0.03859
								9500	24.4	24.05	55.47	0.6331	0.03848
								10000	24.9	24.88	57.45	0.6633	0.03837
								10500	25.3	25.69	59.42	0.6933	0.03825
								11000	25.7	26.46	61.39	0.7232	0.03814
								11500	26.1	27.22	63.34	0.7529	0.03803
								12000	26.6	27.95	65.29	0.7825	0.03792
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	54.75	0.4418	0.04377
								8500	25.2	20.87	56.74	0.4628	0.04371

	9000	25.6	21.76	58.70	0.4835	0.04365
	9500	26.0	22.63	60.65	0.5040	0.04360
	10000	26.4	23.49	62.57	0.5244	0.04354
	10500	26.7	24.32	64.48	0.5445	0.04348
	11000	27.1	25.13	66.37	0.5644	0.04343
	11500	27.4	25.92	68.24	0.5842	0.04337
	12000	27.8	26.70	70.09	0.6037	0.04332
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.24	50.40	0.5691	0.03841
	8500	23.8	22.13	52.55	0.6031	0.03825
	9000	24.2	22.98	54.70	0.6370	0.03809
	9500	24.7	23.81	56.83	0.6707	0.03794
	10000	25.2	24.60	58.96	0.7044	0.03778
	10500	25.6	25.37	61.08	0.7379	0.03762
	11000	26.1	26.12	63.19	0.7713	0.03746
	11500	26.5	26.84	65.30	0.8046	0.03730
	12000	27.0	27.54	67.40	0.8379	0.03715
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.1	21.40	49.46	0.5416	0.03882
	8500	23.6	22.31	51.48	0.5723	0.03871

								9000	24.0	23.20	53.48	0.6028	0.03859
								9500	24.4	24.05	55.47	0.6331	0.03848
								10000	24.9	24.88	57.45	0.6633	0.03837
								10500	25.3	25.69	59.42	0.6933	0.03825
								11000	25.7	26.46	61.39	0.7232	0.03814
								11500	26.1	27.22	63.34	0.7529	0.03803
								12000	26.6	27.95	65.29	0.7825	0.03792
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.76	55.23	0.4306	0.04451
								8500	25.5	20.67	57.23	0.4510	0.04446
								9000	25.8	21.56	59.22	0.4711	0.04440
								9500	26.2	22.43	61.18	0.4911	0.04435
								10000	26.6	23.28	63.13	0.5108	0.04430

	10500	27.0	24.10	65.05	0.5303	0.04425
	11000	27.3	24.91	66.96	0.5496	0.04420
	11500	27.7	25.70	68.85	0.5688	0.04415
	12000	28.0	26.47	70.73	0.5878	0.04410
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.04	50.96	0.5537	0.03915
	8500	24.0	21.92	53.14	0.5869	0.03900
	9000	24.5	22.78	55.31	0.6199	0.03884
	9500	24.9	23.60	57.48	0.6528	0.03869
	10000	25.4	24.39	59.63	0.6856	0.03854

	10500	25.8	25.16	61.78	0.7182	0.03839
	11000	26.3	25.90	63.92	0.7508	0.03824
	11500	26.7	26.62	66.06	0.7833	0.03808
	12000	27.2	27.32	68.19	0.8156	0.03793
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.20	50.00	0.5272	0.03956
	8500	23.8	22.11	52.04	0.5571	0.03945
	9000	24.2	22.99	54.07	0.5868	0.03934
	9500	24.7	23.84	56.09	0.6164	0.03923
	10000	25.1	24.67	58.09	0.6458	0.03912

								10500	25.5	25.46	60.09	0.6750	0.03902
								11000	25.9	26.24	62.08	0.7041	0.03891
								11500	26.4	26.99	64.05	0.7331	0.03880
								12000	26.8	27.72	66.02	0.7619	0.03870
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.76	55.23	0.4306	0.04451
								8500	25.5	20.67	57.23	0.4510	0.04446
								9000	25.8	21.56	59.22	0.4711	0.04440
								9500	26.2	22.43	61.18	0.4911	0.04435
								10000	26.6	23.28	63.13	0.5108	0.04430
								10500	27.0	24.10	65.05	0.5303	0.04425
								11000	27.3	24.91	66.96	0.5496	0.04420
								11500	27.7	25.70	68.85	0.5688	0.04415
								12000	28.0	26.47	70.73	0.5878	0.04410
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.04	50.96	0.5537	0.03915

	8500	24.0	21.92	53.14	0.5869	0.03900
	9000	24.5	22.78	55.31	0.6199	0.03884
	9500	24.9	23.60	57.48	0.6528	0.03869
	10000	25.4	24.39	59.63	0.6856	0.03854
	10500	25.8	25.16	61.78	0.7182	0.03839
	11000	26.3	25.90	63.92	0.7508	0.03824
	11500	26.7	26.62	66.06	0.7833	0.03808
	12000	27.2	27.32	68.19	0.8156	0.03793
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.20	50.00	0.5272	0.03956
	8500	23.8	22.11	52.04	0.5571	0.03945
	9000	24.2	22.99	54.07	0.5868	0.03934
	9500	24.7	23.84	56.09	0.6164	0.03923
	10000	25.1	24.67	58.09	0.6458	0.03912
	10500	25.5	25.46	60.09	0.6750	0.03902
	11000	25.9	26.24	62.08	0.7041	0.03891
	11500	26.4	26.99	64.05	0.7331	0.03880
	12000	26.8	27.72	66.02	0.7619	0.03870

USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.3	18.16	52.61	0.6528	0.04777
								8500	27.8	18.95	54.87	0.6913	0.04757
								9000	28.3	19.71	57.13	0.7297	0.04738
								9500	28.8	20.45	59.37	0.7679	0.04719
								10000	29.3	21.16	61.61	0.8060	0.04699
								10500	29.7	21.86	63.83	0.8440	0.04680
								11000	30.2	22.53	66.06	0.8819	0.04661
								11500	30.7	23.18	68.27	0.9196	0.04642
								12000	31.2	23.81	70.48	0.9572	0.04623

NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.2	18.24	51.86	0.6278	0.04818
	8500	27.6	19.05	54.00	0.6629	0.04803
	9000	28.1	19.84	56.12	0.6977	0.04789
	9500	28.6	20.60	58.22	0.7324	0.04774
	10000	29.0	21.33	60.32	0.7668	0.04760
	10500	29.5	22.05	62.41	0.8011	0.04746
	11000	29.9	22.74	64.48	0.8353	0.04732
	11500	30.4	23.42	66.55	0.8692	0.04718
	12000	30.8	24.07	68.61	0.9031	0.04704

USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.3	18.16	52.61	0.6528	0.04777
								8500	27.8	18.95	54.87	0.6913	0.04757
								9000	28.3	19.71	57.13	0.7297	0.04738
								9500	28.8	20.45	59.37	0.7679	0.04719
								10000	29.3	21.16	61.61	0.8060	0.04699
								10500	29.7	21.86	63.83	0.8440	0.04680
								11000	30.2	22.53	66.06	0.8819	0.04661
								11500	30.7	23.18	68.27	0.9196	0.04642
								12000	31.2	23.81	70.48	0.9572	0.04623
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.2	18.24	51.86	0.6278	0.04818
								8500	27.6	19.05	54.00	0.6629	0.04803
								9000	28.1	19.84	56.12	0.6977	0.04789
								9500	28.6	20.60	58.22	0.7324	0.04774
								10000	29.0	21.33	60.32	0.7668	0.04760
								10500	29.5	22.05	62.41	0.8011	0.04746
								11000	29.9	22.74	64.48	0.8353	0.04732
								11500	30.4	23.42	66.55	0.8692	0.04718
								12000	30.8	24.07	68.61	0.9031	0.04704

USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.1	19.00	50.51	0.7051	0.04391
								8500	26.6	19.81	52.66	0.7465	0.04370
								9000	27.1	20.60	54.81	0.7878	0.04348
								9500	27.5	21.35	56.95	0.8289	0.04327
								10000	28.0	22.08	59.09	0.8699	0.04305
								10500	28.5	22.79	61.21	0.9108	0.04284
								11000	29.0	23.48	63.33	0.9515	0.04263
								11500	29.5	24.14	65.45	0.9921	0.04242
								12000	30.0	24.78	67.55	1.0325	0.04221

NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	25.9	19.10	49.85	0.6770	0.04433
	8500	26.4	19.94	51.88	0.7147	0.04416
	9000	26.9	20.74	53.91	0.7522	0.04400
	9500	27.3	21.52	55.92	0.7895	0.04383
	10000	27.8	22.28	57.92	0.8266	0.04367
	10500	28.2	23.01	59.91	0.8635	0.04351
	11000	28.7	23.72	61.90	0.9002	0.04335
	11500	29.2	24.41	63.87	0.9367	0.04319
	12000	29.6	25.08	65.84	0.9731	0.04303

USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.1	19.00	50.51	0.7051	0.04391
								8500	26.6	19.81	52.66	0.7465	0.04370
								9000	27.1	20.60	54.81	0.7878	0.04348
								9500	27.5	21.35	56.95	0.8289	0.04327
								10000	28.0	22.08	59.09	0.8699	0.04305
								10500	28.5	22.79	61.21	0.9108	0.04284
								11000	29.0	23.48	63.33	0.9515	0.04263
								11500	29.5	24.14	65.45	0.9921	0.04242
								12000	30.0	24.78	67.55	1.0325	0.04221
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	25.9	19.10	49.85	0.6770	0.04433
								8500	26.4	19.94	51.88	0.7147	0.04416
								9000	26.9	20.74	53.91	0.7522	0.04400
								9500	27.3	21.52	55.92	0.7895	0.04383
								10000	27.8	22.28	57.92	0.8266	0.04367
								10500	28.2	23.01	59.91	0.8635	0.04351
								11000	28.7	23.72	61.90	0.9002	0.04335
								11500	29.2	24.41	63.87	0.9367	0.04319
								12000	29.6	25.08	65.84	0.9731	0.04303

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.74	57.18	0.4548	0.04732
								8500	26.8	19.63	59.24	0.4742	0.04727
								9000	27.2	20.49	61.28	0.4933	0.04722
								9500	27.6	21.32	63.30	0.5122	0.04718
								10000	28.0	22.14	65.30	0.5309	0.04713
								10500	28.3	22.94	67.28	0.5494	0.04708
								11000	28.7	23.72	69.24	0.5678	0.04704
								11500	29.1	24.49	71.18	0.5860	0.04699
								12000	29.4	25.24	73.11	0.6040	0.04695

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.03	52.61	0.5662	0.04181
	8500	25.2	20.89	54.84	0.5977	0.04166
	9000	25.6	21.72	57.07	0.6291	0.04152
	9500	26.1	22.53	59.29	0.6604	0.04138
	10000	26.6	23.31	61.50	0.6915	0.04123
	10500	27.0	24.06	63.71	0.7226	0.04109
	11000	27.5	24.79	65.90	0.7535	0.04095
	11500	27.9	25.49	68.09	0.7843	0.04081
	12000	28.4	26.18	70.28	0.8151	0.04067

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.17	51.60	0.5420	0.04221
	8500	25.0	21.05	53.70	0.5704	0.04211
	9000	25.4	21.91	55.78	0.5986	0.04201
	9500	25.9	22.74	57.85	0.6267	0.04191
	10000	26.3	23.54	59.90	0.6546	0.04181
	10500	26.7	24.32	61.95	0.6824	0.04172
	11000	27.1	25.08	63.99	0.7100	0.04162
	11500	27.6	25.82	66.02	0.7375	0.04152
	12000	28.0	26.54	68.04	0.7649	0.04142

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.78	57.13	0.4330	0.04761
								8500	26.8	19.66	59.21	0.4521	0.04757
								9000	27.1	20.52	61.26	0.4710	0.04752
								9500	27.5	21.36	63.29	0.4897	0.04748
								10000	27.9	22.18	65.30	0.5082	0.04744
								10500	28.3	22.98	67.29	0.5265	0.04739
								11000	28.6	23.76	69.26	0.5447	0.04735
								11500	29.0	24.53	71.21	0.5627	0.04731
								12000	29.4	25.27	73.15	0.5805	0.04727
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.07	52.70	0.5422	0.04212
								8500	25.1	20.93	54.95	0.5734	0.04198
								9000	25.6	21.76	57.19	0.6045	0.04184
								9500	26.1	22.56	59.43	0.6354	0.04170
								10000	26.5	23.34	61.65	0.6662	0.04156
								10500	27.0	24.09	63.87	0.6969	0.04142
								11000	27.4	24.82	66.08	0.7276	0.04129
								11500	27.9	25.52	68.29	0.7581	0.04115
								12000	28.3	26.21	70.49	0.7885	0.04101

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	51.67	0.5183	0.04253
								8500	25.0	21.09	53.78	0.5464	0.04243
								9000	25.4	21.94	55.88	0.5743	0.04233
								9500	25.8	22.77	57.96	0.6021	0.04224
								10000	26.2	23.58	60.03	0.6297	0.04214
								10500	26.7	24.36	62.09	0.6572	0.04205
								11000	27.1	25.12	64.14	0.6846	0.04195
								11500	27.5	25.85	66.18	0.7118	0.04186
								12000	27.9	26.57	68.22	0.7389	0.04176
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.88	0.4276	0.04733
								8500	26.6	19.79	58.94	0.4464	0.04728
								9000	27.0	20.65	60.98	0.4650	0.04724
								9500	27.4	21.50	63.00	0.4834	0.04720

		10000	27.7	22.32	64.99	0.5016	0.04716
		10500	28.1	23.13	66.97	0.5197	0.04712
		11000	28.5	23.92	68.93	0.5376	0.04707
		11500	28.8	24.69	70.87	0.5553	0.04703
		12000	29.2	25.44	72.79	0.5729	0.04699
	LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.74	0.5393	0.04186
		8500	25.0	21.01	54.99	0.5703	0.04172
		9000	25.5	21.85	57.23	0.6012	0.04158
		9500	26.0	22.65	59.47	0.6319	0.04144

	10000	26.4	23.43	61.70	0.6625	0.04130
	10500	26.9	24.18	63.92	0.6930	0.04117
	11000	27.3	24.92	66.13	0.7235	0.04103
	11500	27.8	25.62	68.34	0.7538	0.04089
	12000	28.2	26.31	70.54	0.7840	0.04076
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.71	0.5155	0.04226
	8500	24.9	21.18	53.82	0.5434	0.04216
	9000	25.3	22.03	55.91	0.5711	0.04207
	9500	25.7	22.87	58.00	0.5987	0.04197

								10000	26.1	23.67	60.07	0.6262	0.04188
								10500	26.6	24.46	62.13	0.6535	0.04179
								11000	27.0	25.22	64.19	0.6807	0.04169
								11500	27.4	25.96	66.23	0.7077	0.04160
								12000	27.8	26.67	68.26	0.7347	0.04151
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.88	0.4276	0.04733
								8500	26.6	19.79	58.94	0.4464	0.04728
								9000	27.0	20.65	60.98	0.4650	0.04724
								9500	27.4	21.50	63.00	0.4834	0.04720
								10000	27.7	22.32	64.99	0.5016	0.04716
								10500	28.1	23.13	66.97	0.5197	0.04712
								11000	28.5	23.92	68.93	0.5376	0.04707
								11500	28.8	24.69	70.87	0.5553	0.04703

	12000	29.2	25.44	72.79	0.5729	0.04699
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.74	0.5393	0.04186
	8500	25.0	21.01	54.99	0.5703	0.04172
	9000	25.5	21.85	57.23	0.6012	0.04158
	9500	26.0	22.65	59.47	0.6319	0.04144
	10000	26.4	23.43	61.70	0.6625	0.04130
	10500	26.9	24.18	63.92	0.6930	0.04117
	11000	27.3	24.92	66.13	0.7235	0.04103
	11500	27.8	25.62	68.34	0.7538	0.04089
	12000	28.2	26.31	70.54	0.7840	0.04076
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.71	0.5155	0.04226
	8500	24.9	21.18	53.82	0.5434	0.04216
	9000	25.3	22.03	55.91	0.5711	0.04207
	9500	25.7	22.87	58.00	0.5987	0.04197
	10000	26.1	23.67	60.07	0.6262	0.04188
	10500	26.6	24.46	62.13	0.6535	0.04179
	11000	27.0	25.22	64.19	0.6807	0.04169
	11500	27.4	25.96	66.23	0.7077	0.04160

								12000	27.8	26.67	68.26	0.7347	0.04151
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.68	55.00	0.4790	0.04392
								8500	25.6	20.59	56.99	0.5007	0.04386
								9000	25.9	21.48	58.95	0.5222	0.04379
								9500	26.3	22.34	60.89	0.5435	0.04373
								10000	26.7	23.19	62.81	0.5645	0.04367
								10500	27.1	24.01	64.72	0.5853	0.04361
								11000	27.4	24.81	66.60	0.6060	0.04355
								11500	27.8	25.60	68.47	0.6264	0.04349

	12000	28.2	26.36	70.33	0.6467	0.04343
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.01	50.19	0.6065	0.03850
	8500	24.0	21.90	52.32	0.6414	0.03833
	9000	24.5	22.75	54.44	0.6761	0.03817
	9500	24.9	23.57	56.55	0.7107	0.03800
	10000	25.4	24.36	58.66	0.7452	0.03783
	10500	25.9	25.13	60.75	0.7795	0.03767
	11000	26.3	25.87	62.84	0.8138	0.03750
	11500	26.8	26.59	64.93	0.8479	0.03734

	12000	27.2	27.29	67.01	0.8819	0.03717
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.17	49.28	0.5785	0.03891
	8500	23.8	22.08	51.28	0.6099	0.03879
	9000	24.3	22.96	53.26	0.6412	0.03867
	9500	24.7	23.81	55.23	0.6723	0.03855
	10000	25.1	24.63	57.19	0.7032	0.03843
	10500	25.5	25.43	59.14	0.7340	0.03831
	11000	26.0	26.21	61.08	0.7646	0.03819
	11500	26.4	26.96	63.01	0.7951	0.03807

								12000	26.8	27.69	64.94	0.8254	0.03795
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.68	55.00	0.4790	0.04392
								8500	25.6	20.59	56.99	0.5007	0.04386
								9000	25.9	21.48	58.95	0.5222	0.04379
								9500	26.3	22.34	60.89	0.5435	0.04373
								10000	26.7	23.19	62.81	0.5645	0.04367
								10500	27.1	24.01	64.72	0.5853	0.04361
								11000	27.4	24.81	66.60	0.6060	0.04355
								11500	27.8	25.60	68.47	0.6264	0.04349
								12000	28.2	26.36	70.33	0.6467	0.04343
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.01	50.19	0.6065	0.03850
								8500	24.0	21.90	52.32	0.6414	0.03833
								9000	24.5	22.75	54.44	0.6761	0.03817
								9500	24.9	23.57	56.55	0.7107	0.03800
								10000	25.4	24.36	58.66	0.7452	0.03783
								10500	25.9	25.13	60.75	0.7795	0.03767
								11000	26.3	25.87	62.84	0.8138	0.03750

								11500	26.8	26.59	64.93	0.8479	0.03734
								12000	27.2	27.29	67.01	0.8819	0.03717
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.17	49.28	0.5785	0.03891
								8500	23.8	22.08	51.28	0.6099	0.03879
								9000	24.3	22.96	53.26	0.6412	0.03867
								9500	24.7	23.81	55.23	0.6723	0.03855
								10000	25.1	24.63	57.19	0.7032	0.03843
								10500	25.5	25.43	59.14	0.7340	0.03831
								11000	26.0	26.21	61.08	0.7646	0.03819
								11500	26.4	26.96	63.01	0.7951	0.03807
								12000	26.8	27.69	64.94	0.8254	0.03795
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.45	55.52	0.4897	0.04438
								8500	25.8	20.36	57.51	0.5111	0.04432
								9000	26.2	21.24	59.48	0.5321	0.04426

	9500	26.6	22.10	61.43	0.5530	0.04420
	10000	27.0	22.94	63.36	0.5736	0.04414
	10500	27.4	23.75	65.28	0.5941	0.04408
	11000	27.7	24.55	67.17	0.6143	0.04402
	11500	28.1	25.33	69.05	0.6344	0.04396
	12000	28.4	26.10	70.91	0.6543	0.04390
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.78	50.65	0.6154	0.03894
	8500	24.3	21.66	52.80	0.6497	0.03877
	9000	24.8	22.50	54.93	0.6839	0.03861

	9500	25.2	23.32	57.05	0.7179	0.03844
	10000	25.7	24.11	59.17	0.7518	0.03828
	10500	26.1	24.88	61.28	0.7856	0.03812
	11000	26.6	25.62	63.38	0.8193	0.03795
	11500	27.0	26.34	65.48	0.8529	0.03779
	12000	27.5	27.03	67.57	0.8864	0.03763
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.93	49.74	0.5880	0.03935
	8500	24.1	21.83	51.75	0.6189	0.03923
	9000	24.5	22.71	53.74	0.6497	0.03911

								9500	25.0	23.56	55.72	0.6803	0.03899
								10000	25.4	24.38	57.69	0.7107	0.03887
								10500	25.8	25.17	59.66	0.7410	0.03876
								11000	26.2	25.94	61.61	0.7711	0.03864
								11500	26.7	26.69	63.55	0.8011	0.03852
								12000	27.1	27.42	65.49	0.8310	0.03841
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.50	55.49	0.4677	0.04467
								8500	25.8	20.40	57.49	0.4888	0.04461
								9000	26.2	21.28	59.47	0.5096	0.04456
								9500	26.6	22.14	61.43	0.5303	0.04450
								10000	26.9	22.98	63.38	0.5507	0.04444
								10500	27.3	23.80	65.30	0.5709	0.04438

	11000	27.7	24.60	67.20	0.5910	0.04433
	11500	28.0	25.38	69.09	0.6109	0.04427
	12000	28.4	26.14	70.97	0.6306	0.04421
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	50.76	0.5911	0.03925
	8500	24.2	21.70	52.92	0.6251	0.03908
	9000	24.7	22.55	55.06	0.6589	0.03892
	9500	25.2	23.36	57.20	0.6927	0.03876
	10000	25.6	24.15	59.34	0.7263	0.03860
	10500	26.1	24.92	61.46	0.7598	0.03844
	11000	26.5	25.66	63.58	0.7931	0.03828
	11500	27.0	26.37	65.69	0.8264	0.03813
	12000	27.4	27.07	67.79	0.8596	0.03797
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.97	49.82	0.5640	0.03965
	8500	24.1	21.87	51.84	0.5946	0.03954
	9000	24.5	22.75	53.85	0.6251	0.03942
	9500	24.9	23.60	55.85	0.6554	0.03931
	10000	25.3	24.42	57.83	0.6855	0.03919
	10500	25.8	25.21	59.81	0.7155	0.03908

								11000	26.2	25.98	61.77	0.7454	0.03897
								11500	26.6	26.73	63.73	0.7751	0.03885
								12000	27.0	27.46	65.68	0.8047	0.03874
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.89	54.79	0.4705	0.04339
								8500	25.3	20.81	56.77	0.4917	0.04333
								9000	25.7	21.70	58.72	0.5128	0.04327
								9500	26.0	22.57	60.65	0.5336	0.04321
								10000	26.4	23.43	62.56	0.5542	0.04315
								10500	26.8	24.26	64.45	0.5746	0.04309
								11000	27.2	25.07	66.33	0.5948	0.04303

	11500	27.5	25.86	68.19	0.6148	0.04297
	12000	27.9	26.64	70.03	0.6347	0.04292
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.19	50.26	0.6008	0.03801
	8500	23.8	22.07	52.40	0.6352	0.03785
	9000	24.3	22.93	54.52	0.6695	0.03768
	9500	24.8	23.75	56.64	0.7037	0.03752
	10000	25.2	24.55	58.74	0.7378	0.03736
	10500	25.7	25.32	60.85	0.7718	0.03719
	11000	26.1	26.07	62.94	0.8056	0.03703

	11500	26.6	26.79	65.03	0.8393	0.03687
	12000	27.0	27.49	67.11	0.8730	0.03671
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.34	49.35	0.5729	0.03843
	8500	23.6	22.25	51.35	0.6040	0.03831
	9000	24.1	23.14	53.34	0.6349	0.03819
	9500	24.5	24.00	55.31	0.6656	0.03807
	10000	24.9	24.83	57.27	0.6962	0.03795
	10500	25.4	25.63	59.23	0.7266	0.03783
	11000	25.8	26.41	61.17	0.7568	0.03772

								11500	26.2	27.16	63.11	0.7870	0.03760
								12000	26.6	27.89	65.03	0.8170	0.03749
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.89	54.79	0.4705	0.04339
								8500	25.3	20.81	56.77	0.4917	0.04333
								9000	25.7	21.70	58.72	0.5128	0.04327
								9500	26.0	22.57	60.65	0.5336	0.04321
								10000	26.4	23.43	62.56	0.5542	0.04315
								10500	26.8	24.26	64.45	0.5746	0.04309
								11000	27.2	25.07	66.33	0.5948	0.04303
								11500	27.5	25.86	68.19	0.6148	0.04297
								12000	27.9	26.64	70.03	0.6347	0.04292
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.19	50.26	0.6008	0.03801
								8500	23.8	22.07	52.40	0.6352	0.03785
								9000	24.3	22.93	54.52	0.6695	0.03768
								9500	24.8	23.75	56.64	0.7037	0.03752
								10000	25.2	24.55	58.74	0.7378	0.03736

								10500	25.7	25.32	60.85	0.7718	0.03719
								11000	26.1	26.07	62.94	0.8056	0.03703
								11500	26.6	26.79	65.03	0.8393	0.03687
								12000	27.0	27.49	67.11	0.8730	0.03671
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.34	49.35	0.5729	0.03843
								8500	23.6	22.25	51.35	0.6040	0.03831
								9000	24.1	23.14	53.34	0.6349	0.03819
								9500	24.5	24.00	55.31	0.6656	0.03807
								10000	24.9	24.83	57.27	0.6962	0.03795
								10500	25.4	25.63	59.23	0.7266	0.03783
								11000	25.8	26.41	61.17	0.7568	0.03772
								11500	26.2	27.16	63.11	0.7870	0.03760
								12000	26.6	27.89	65.03	0.8170	0.03749
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.66	55.31	0.4811	0.04384
								8500	25.6	20.57	57.29	0.5020	0.04378

	9000	26.0	21.46	59.25	0.5227	0.04373
	9500	26.3	22.33	61.19	0.5431	0.04367
	10000	26.7	23.17	63.11	0.5633	0.04361
	10500	27.1	24.00	65.02	0.5833	0.04355
	11000	27.4	24.81	66.90	0.6031	0.04350
	11500	27.8	25.60	68.77	0.6228	0.04344
	12000	28.2	26.37	70.62	0.6423	0.04338
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.95	50.73	0.6095	0.03844
	8500	24.1	21.83	52.87	0.6434	0.03828

	9000	24.6	22.68	55.01	0.6772	0.03812
	9500	25.0	23.51	57.14	0.7108	0.03795
	10000	25.5	24.30	59.26	0.7444	0.03779
	10500	25.9	25.07	61.37	0.7778	0.03763
	11000	26.4	25.81	63.48	0.8111	0.03748
	11500	26.8	26.53	65.58	0.8443	0.03732
	12000	27.3	27.23	67.67	0.8774	0.03716
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.10	49.81	0.5823	0.03885
	8500	23.9	22.01	51.82	0.6129	0.03873

								9000	24.3	22.89	53.82	0.6433	0.03862
								9500	24.8	23.74	55.80	0.6735	0.03850
								10000	25.2	24.57	57.78	0.7036	0.03839
								10500	25.6	25.37	59.75	0.7335	0.03827
								11000	26.0	26.14	61.70	0.7633	0.03816
								11500	26.5	26.89	63.65	0.7929	0.03805
								12000	26.9	27.63	65.59	0.8224	0.03793
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.66	55.31	0.4811	0.04384
								8500	25.6	20.57	57.29	0.5020	0.04378
								9000	26.0	21.46	59.25	0.5227	0.04373
								9500	26.3	22.33	61.19	0.5431	0.04367

	10000	26.7	23.17	63.11	0.5633	0.04361
	10500	27.1	24.00	65.02	0.5833	0.04355
	11000	27.4	24.81	66.90	0.6031	0.04350
	11500	27.8	25.60	68.77	0.6228	0.04344
	12000	28.2	26.37	70.62	0.6423	0.04338
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.95	50.73	0.6095	0.03844
	8500	24.1	21.83	52.87	0.6434	0.03828
	9000	24.6	22.68	55.01	0.6772	0.03812
	9500	25.0	23.51	57.14	0.7108	0.03795
	10000	25.5	24.30	59.26	0.7444	0.03779
	10500	25.9	25.07	61.37	0.7778	0.03763
	11000	26.4	25.81	63.48	0.8111	0.03748
	11500	26.8	26.53	65.58	0.8443	0.03732
	12000	27.3	27.23	67.67	0.8774	0.03716
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.10	49.81	0.5823	0.03885
	8500	23.9	22.01	51.82	0.6129	0.03873
	9000	24.3	22.89	53.82	0.6433	0.03862
	9500	24.8	23.74	55.80	0.6735	0.03850

								10000	25.2	24.57	57.78	0.7036	0.03839
								10500	25.6	25.37	59.75	0.7335	0.03827
								11000	26.0	26.14	61.70	0.7633	0.03816
								11500	26.5	26.89	63.65	0.7929	0.03805
								12000	26.9	27.63	65.59	0.8224	0.03793
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.86	56.75	0.4428	0.04725
								8500	26.7	19.74	58.81	0.4624	0.04720
								9000	27.0	20.61	60.84	0.4819	0.04715
								9500	27.4	21.45	62.86	0.5011	0.04710
								10000	27.8	22.27	64.85	0.5202	0.04705
								10500	28.2	23.07	66.82	0.5390	0.04701

	11000	28.5	23.85	68.78	0.5577	0.04696
	11500	28.9	24.62	70.72	0.5762	0.04691
	12000	29.3	25.37	72.64	0.5946	0.04687
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.25	0.5551	0.04174
	8500	25.0	21.01	54.48	0.5870	0.04160
	9000	25.5	21.84	56.70	0.6189	0.04145
	9500	26.0	22.65	58.91	0.6506	0.04131
	10000	26.4	23.43	61.12	0.6822	0.04116
	10500	26.9	24.18	63.32	0.7137	0.04102

	11000	27.3	24.91	65.51	0.7451	0.04087
	11500	27.8	25.61	67.69	0.7764	0.04073
	12000	28.2	26.30	69.87	0.8076	0.04059
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.25	0.5303	0.04215
	8500	24.9	21.17	53.33	0.5591	0.04205
	9000	25.3	22.03	55.41	0.5878	0.04195
	9500	25.7	22.87	57.47	0.6163	0.04184
	10000	26.1	23.67	59.52	0.6446	0.04174
	10500	26.6	24.45	61.56	0.6728	0.04164

								11000	27.0	25.21	63.59	0.7008	0.04154
								11500	27.4	25.95	65.62	0.7288	0.04144
								12000	27.8	26.67	67.63	0.7566	0.04134
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.86	56.75	0.4428	0.04725
								8500	26.7	19.74	58.81	0.4624	0.04720
								9000	27.0	20.61	60.84	0.4819	0.04715
								9500	27.4	21.45	62.86	0.5011	0.04710
								10000	27.8	22.27	64.85	0.5202	0.04705
								10500	28.2	23.07	66.82	0.5390	0.04701
								11000	28.5	23.85	68.78	0.5577	0.04696
								11500	28.9	24.62	70.72	0.5762	0.04691
								12000	29.3	25.37	72.64	0.5946	0.04687
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.25	0.5551	0.04174
								8500	25.0	21.01	54.48	0.5870	0.04160
								9000	25.5	21.84	56.70	0.6189	0.04145

								9500	26.0	22.65	58.91	0.6506	0.04131
								10000	26.4	23.43	61.12	0.6822	0.04116
								10500	26.9	24.18	63.32	0.7137	0.04102
								11000	27.3	24.91	65.51	0.7451	0.04087
								11500	27.8	25.61	67.69	0.7764	0.04073
								12000	28.2	26.30	69.87	0.8076	0.04059
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.25	0.5303	0.04215
								8500	24.9	21.17	53.33	0.5591	0.04205
								9000	25.3	22.03	55.41	0.5878	0.04195
								9500	25.7	22.87	57.47	0.6163	0.04184
								10000	26.1	23.67	59.52	0.6446	0.04174
								10500	26.6	24.45	61.56	0.6728	0.04164
								11000	27.0	25.21	63.59	0.7008	0.04154
								11500	27.4	25.95	65.62	0.7288	0.04144
								12000	27.8	26.67	67.63	0.7566	0.04134
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.77	0.4414	0.04710

	8500	26.6	19.79	58.83	0.4609	0.04705
	9000	27.0	20.65	60.86	0.4803	0.04700
	9500	27.4	21.49	62.88	0.4995	0.04696
	10000	27.7	22.31	64.87	0.5185	0.04691
	10500	28.1	23.12	66.84	0.5373	0.04686
	11000	28.5	23.90	68.80	0.5559	0.04682
	11500	28.9	24.67	70.74	0.5743	0.04677
	12000	29.2	25.42	72.66	0.5926	0.04673
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.19	52.27	0.5536	0.04161

	8500	25.0	21.05	54.50	0.5855	0.04147
	9000	25.5	21.89	56.72	0.6172	0.04132
	9500	25.9	22.69	58.94	0.6488	0.04118
	10000	26.4	23.47	61.14	0.6803	0.04103
	10500	26.8	24.23	63.34	0.7117	0.04089
	11000	27.3	24.96	65.53	0.7430	0.04075
	11500	27.7	25.67	67.71	0.7742	0.04060
	12000	28.2	26.35	69.89	0.8053	0.04046
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.26	0.5289	0.04202

								8500	24.8	21.22	53.35	0.5577	0.04192
								9000	25.2	22.08	55.43	0.5862	0.04181
								9500	25.7	22.91	57.49	0.6146	0.04171
								10000	26.1	23.72	59.54	0.6428	0.04161
								10500	26.5	24.50	61.58	0.6709	0.04151
								11000	26.9	25.26	63.62	0.6989	0.04141
								11500	27.4	26.00	65.64	0.7267	0.04132
								12000	27.8	26.72	67.65	0.7545	0.04122
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.77	0.4414	0.04710
								8500	26.6	19.79	58.83	0.4609	0.04705

	9000	27.0	20.65	60.86	0.4803	0.04700
	9500	27.4	21.49	62.88	0.4995	0.04696
	10000	27.7	22.31	64.87	0.5185	0.04691
	10500	28.1	23.12	66.84	0.5373	0.04686
	11000	28.5	23.90	68.80	0.5559	0.04682
	11500	28.9	24.67	70.74	0.5743	0.04677
	12000	29.2	25.42	72.66	0.5926	0.04673
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.19	52.27	0.5536	0.04161
	8500	25.0	21.05	54.50	0.5855	0.04147
	9000	25.5	21.89	56.72	0.6172	0.04132
	9500	25.9	22.69	58.94	0.6488	0.04118
	10000	26.4	23.47	61.14	0.6803	0.04103
	10500	26.8	24.23	63.34	0.7117	0.04089
	11000	27.3	24.96	65.53	0.7430	0.04075
	11500	27.7	25.67	67.71	0.7742	0.04060
	12000	28.2	26.35	69.89	0.8053	0.04046
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.26	0.5289	0.04202
	8500	24.8	21.22	53.35	0.5577	0.04192

								9000	25.2	22.08	55.43	0.5862	0.04181
								9500	25.7	22.91	57.49	0.6146	0.04171
								10000	26.1	23.72	59.54	0.6428	0.04161
								10500	26.5	24.50	61.58	0.6709	0.04151
								11000	26.9	25.26	63.62	0.6989	0.04141
								11500	27.4	26.00	65.64	0.7267	0.04132
								12000	27.8	26.72	67.65	0.7545	0.04122
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.02	56.52	0.4358	0.04682
								8500	26.4	19.91	58.56	0.4551	0.04677
								9000	26.8	20.78	60.59	0.4742	0.04673
								9500	27.2	21.63	62.59	0.4931	0.04668
								10000	27.6	22.46	64.57	0.5118	0.04663

	10500	27.9	23.26	66.53	0.5303	0.04659
	11000	28.3	24.06	68.47	0.5487	0.04654
	11500	28.7	24.83	70.40	0.5669	0.04650
	12000	29.0	25.58	72.31	0.5849	0.04646
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.27	52.31	0.5507	0.04135
	8500	24.9	21.14	54.54	0.5824	0.04121
	9000	25.3	21.98	56.76	0.6139	0.04106
	9500	25.8	22.78	58.98	0.6453	0.04092
	10000	26.3	23.56	61.19	0.6766	0.04078

	10500	26.7	24.32	63.38	0.7078	0.04063
	11000	27.2	25.05	65.58	0.7389	0.04049
	11500	27.6	25.76	67.76	0.7699	0.04035
	12000	28.1	26.45	69.94	0.8008	0.04021
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.41	51.30	0.5262	0.04175
	8500	24.7	21.31	53.39	0.5547	0.04165
	9000	25.1	22.17	55.47	0.5831	0.04155
	9500	25.6	23.00	57.53	0.6113	0.04146
	10000	26.0	23.81	59.59	0.6393	0.04136

								10500	26.4	24.60	61.63	0.6673	0.04126
								11000	26.8	25.36	63.66	0.6950	0.04116
								11500	27.3	26.10	65.69	0.7227	0.04106
								12000	27.7	26.82	67.70	0.7502	0.04097
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.02	56.52	0.4358	0.04682
								8500	26.4	19.91	58.56	0.4551	0.04677
								9000	26.8	20.78	60.59	0.4742	0.04673
								9500	27.2	21.63	62.59	0.4931	0.04668
								10000	27.6	22.46	64.57	0.5118	0.04663
								10500	27.9	23.26	66.53	0.5303	0.04659
								11000	28.3	24.06	68.47	0.5487	0.04654
								11500	28.7	24.83	70.40	0.5669	0.04650
								12000	29.0	25.58	72.31	0.5849	0.04646
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.27	52.31	0.5507	0.04135

	8500	24.9	21.14	54.54	0.5824	0.04121
	9000	25.3	21.98	56.76	0.6139	0.04106
	9500	25.8	22.78	58.98	0.6453	0.04092
	10000	26.3	23.56	61.19	0.6766	0.04078
	10500	26.7	24.32	63.38	0.7078	0.04063
	11000	27.2	25.05	65.58	0.7389	0.04049
	11500	27.6	25.76	67.76	0.7699	0.04035
	12000	28.1	26.45	69.94	0.8008	0.04021
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.41	51.30	0.5262	0.04175
	8500	24.7	21.31	53.39	0.5547	0.04165
	9000	25.1	22.17	55.47	0.5831	0.04155
	9500	25.6	23.00	57.53	0.6113	0.04146
	10000	26.0	23.81	59.59	0.6393	0.04136
	10500	26.4	24.60	61.63	0.6673	0.04126
	11000	26.8	25.36	63.66	0.6950	0.04116
	11500	27.3	26.10	65.69	0.7227	0.04106
	12000	27.7	26.82	67.70	0.7502	0.04097

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.02	56.58	0.4562	0.04638
								8500	26.4	19.91	58.61	0.4757	0.04633
								9000	26.8	20.78	60.63	0.4949	0.04628
								9500	27.2	21.63	62.62	0.5139	0.04623
								10000	27.6	22.46	64.59	0.5328	0.04619
								10500	27.9	23.27	66.54	0.5514	0.04614
								11000	28.3	24.06	68.48	0.5699	0.04609
								11500	28.7	24.83	70.39	0.5882	0.04605
								12000	29.0	25.59	72.29	0.6064	0.04600

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.28	52.23	0.5733	0.04090
	8500	24.9	21.15	54.45	0.6052	0.04076
	9000	25.3	21.99	56.66	0.6369	0.04061
	9500	25.8	22.79	58.86	0.6686	0.04047
	10000	26.2	23.58	61.05	0.7001	0.04032
	10500	26.7	24.33	63.24	0.7315	0.04018
	11000	27.2	25.07	65.42	0.7628	0.04003
	11500	27.6	25.78	67.59	0.7940	0.03989
	12000	28.1	26.46	69.75	0.8251	0.03975

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.42	51.25	0.5485	0.04131
	8500	24.7	21.31	53.32	0.5772	0.04121
	9000	25.1	22.17	55.39	0.6058	0.04111
	9500	25.6	23.01	57.44	0.6342	0.04101
	10000	26.0	23.82	59.48	0.6625	0.04090
	10500	26.4	24.61	61.51	0.6906	0.04080
	11000	26.8	25.37	63.53	0.7186	0.04070
	11500	27.2	26.11	65.54	0.7464	0.04060
	12000	27.7	26.83	67.55	0.7741	0.04050

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.06	56.53	0.4344	0.04668
								8500	26.4	19.95	58.58	0.4537	0.04663
								9000	26.8	20.82	60.60	0.4727	0.04658
								9500	27.1	21.67	62.61	0.4915	0.04654
								10000	27.5	22.50	64.59	0.5101	0.04649
								10500	27.9	23.31	66.55	0.5286	0.04645
								11000	28.2	24.10	68.50	0.5468	0.04640
								11500	28.6	24.88	70.42	0.5650	0.04636
								12000	29.0	25.63	72.33	0.5829	0.04632
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.32	52.33	0.5493	0.04122
								8500	24.8	21.19	54.56	0.5809	0.04107
								9000	25.3	22.02	56.78	0.6123	0.04093
								9500	25.8	22.83	59.00	0.6436	0.04079
								10000	26.2	23.61	61.21	0.6748	0.04065
								10500	26.7	24.37	63.41	0.7059	0.04051
								11000	27.1	25.10	65.60	0.7369	0.04037
								11500	27.6	25.81	67.79	0.7678	0.04023
								12000	28.0	26.50	69.97	0.7986	0.04009

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.46	51.32	0.5248	0.04162
								8500	24.6	21.35	53.41	0.5532	0.04152
								9000	25.1	22.21	55.49	0.5815	0.04142
								9500	25.5	23.05	57.55	0.6096	0.04133
								10000	25.9	23.86	59.61	0.6376	0.04123
								10500	26.4	24.65	61.65	0.6654	0.04113
								11000	26.8	25.41	63.69	0.6931	0.04103
								11500	27.2	26.15	65.71	0.7207	0.04094
								12000	27.6	26.87	67.73	0.7481	0.04084
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.4	18.07	52.23	0.7319	0.04671
								8500	27.9	18.86	54.45	0.7714	0.04651
								9000	28.4	19.63	56.65	0.8108	0.04630
								9500	28.9	20.36	58.85	0.8501	0.04610

	10000	29.4	21.08	61.03	0.8892	0.04590
	10500	29.8	21.77	63.22	0.9282	0.04569
	11000	30.3	22.45	65.39	0.9670	0.04549
	11500	30.8	23.10	67.56	1.0058	0.04529
	12000	31.3	23.73	69.72	1.0444	0.04509
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.3	18.16	51.55	0.7061	0.04713
	8500	27.8	18.97	53.63	0.7421	0.04697
	9000	28.2	19.75	55.71	0.7779	0.04682
	9500	28.7	20.51	57.77	0.8135	0.04667

								10000	29.1	21.25	59.83	0.8488	0.04651
								10500	29.6	21.96	61.87	0.8841	0.04636
								11000	30.1	22.66	63.90	0.9191	0.04621
								11500	30.5	23.33	65.92	0.9540	0.04606
								12000	31.0	23.99	67.94	0.9887	0.04591
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.4	18.07	52.23	0.7319	0.04671
								8500	27.9	18.86	54.45	0.7714	0.04651
								9000	28.4	19.63	56.65	0.8108	0.04630
								9500	28.9	20.36	58.85	0.8501	0.04610
								10000	29.4	21.08	61.03	0.8892	0.04590
								10500	29.8	21.77	63.22	0.9282	0.04569
								11000	30.3	22.45	65.39	0.9670	0.04549
								11500	30.8	23.10	67.56	1.0058	0.04529

								12000	31.3	23.73	69.72	1.0444	0.04509
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.3	18.16	51.55	0.7061	0.04713
								8500	27.8	18.97	53.63	0.7421	0.04697
								9000	28.2	19.75	55.71	0.7779	0.04682
								9500	28.7	20.51	57.77	0.8135	0.04667
								10000	29.1	21.25	59.83	0.8488	0.04651
								10500	29.6	21.96	61.87	0.8841	0.04636
								11000	30.1	22.66	63.90	0.9191	0.04621
								11500	30.5	23.33	65.92	0.9540	0.04606
								12000	31.0	23.99	67.94	0.9887	0.04591
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.2	18.90	50.09	0.7849	0.04288
								8500	26.7	19.72	52.20	0.8274	0.04265
								9000	27.2	20.50	54.30	0.8697	0.04243
								9500	27.7	21.26	56.39	0.9118	0.04220

	10000	28.1	21.99	58.47	0.9538	0.04198
	10500	28.6	22.70	60.55	0.9957	0.04175
	11000	29.1	23.39	62.62	1.0374	0.04153
	11500	29.6	24.05	64.69	1.0790	0.04131
	12000	30.1	24.70	66.75	1.1204	0.04109
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	26.1	19.00	49.49	0.7561	0.04330
	8500	26.5	19.83	51.48	0.7947	0.04313
	9000	27.0	20.64	53.46	0.8331	0.04295
	9500	27.5	21.42	55.43	0.8713	0.04278

								10000	27.9	22.17	57.39	0.9094	0.04261
								10500	28.4	22.91	59.33	0.9472	0.04244
								11000	28.8	23.62	61.27	0.9848	0.04226
								11500	29.3	24.31	63.20	1.0223	0.04210
								12000	29.7	24.98	65.13	1.0596	0.04193
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.2	18.90	50.09	0.7849	0.04288
								8500	26.7	19.72	52.20	0.8274	0.04265
								9000	27.2	20.50	54.30	0.8697	0.04243
								9500	27.7	21.26	56.39	0.9118	0.04220
								10000	28.1	21.99	58.47	0.9538	0.04198
								10500	28.6	22.70	60.55	0.9957	0.04175
								11000	29.1	23.39	62.62	1.0374	0.04153
								11500	29.6	24.05	64.69	1.0790	0.04131

								12000	30.1	24.70	66.75	1.1204	0.04109
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	26.1	19.00	49.49	0.7561	0.04330
								8500	26.5	19.83	51.48	0.7947	0.04313
								9000	27.0	20.64	53.46	0.8331	0.04295
								9500	27.5	21.42	55.43	0.8713	0.04278
								10000	27.9	22.17	57.39	0.9094	0.04261
								10500	28.4	22.91	59.33	0.9472	0.04244
								11000	28.8	23.62	61.27	0.9848	0.04226
								11500	29.3	24.31	63.20	1.0223	0.04210
								12000	29.7	24.98	65.13	1.0596	0.04193
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.5	17.41	56.30	0.5582	0.05171
								8500	29.0	18.18	58.62	0.5873	0.05167
								9000	29.4	18.93	60.93	0.6163	0.05164
								9500	29.9	19.65	63.23	0.6452	0.05160

								10000	30.4	20.35	65.53	0.6740	0.05156
								10500	30.9	21.03	67.82	0.7027	0.05153
								11000	31.4	21.69	70.10	0.7314	0.05149
								11500	31.9	22.34	72.38	0.7600	0.05145
								12000	32.4	22.96	74.66	0.7885	0.05142
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.5	17.41	56.30	0.5582	0.05171
								8500	29.0	18.18	58.62	0.5873	0.05167
								9000	29.4	18.93	60.93	0.6163	0.05164
								9500	29.9	19.65	63.23	0.6452	0.05160
								10000	30.4	20.35	65.53	0.6740	0.05156
								10500	30.9	21.03	67.82	0.7027	0.05153
								11000	31.4	21.69	70.10	0.7314	0.05149
								11500	31.9	22.34	72.38	0.7600	0.05145

								12000	32.4	22.96	74.66	0.7885	0.05142
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	27.1	18.27	54.60	0.5906	0.04770
								8500	27.6	19.07	56.83	0.6217	0.04765
								9000	28.1	19.84	59.06	0.6528	0.04760
								9500	28.6	20.58	61.28	0.6837	0.04754
								10000	29.1	21.30	63.50	0.7145	0.04749
								10500	29.5	22.00	65.71	0.7453	0.04744
								11000	30.0	22.68	67.91	0.7760	0.04739
								11500	30.5	23.33	70.11	0.8066	0.04734

								12000	31.0	23.97	72.30	0.8371	0.04729
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	27.0	18.38	54.73	0.5101	0.04878
								8500	27.4	19.18	57.01	0.5403	0.04873
								9000	27.9	19.95	59.29	0.5704	0.04869
								9500	28.4	20.69	61.55	0.6004	0.04865
								10000	28.9	21.41	63.81	0.6304	0.04861
								10500	29.4	22.11	66.06	0.6602	0.04857
								11000	29.9	22.78	68.31	0.6900	0.04853
								11500	30.4	23.44	70.55	0.7197	0.04849
								12000	30.9	24.07	72.79	0.7494	0.04845
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.20	56.60	0.3459	0.04787
								8500	26.2	20.09	58.68	0.3656	0.04782
								9000	26.6	20.96	60.74	0.3851	0.04777
								9500	27.0	21.81	62.77	0.4043	0.04772
								10000	27.4	22.63	64.79	0.4234	0.04767
								10500	27.7	23.44	66.78	0.4422	0.04762
								11000	28.1	24.23	68.76	0.4609	0.04757

	11500	28.5	25.00	70.72	0.4795	0.04752
	12000	28.8	25.75	72.66	0.4979	0.04748
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.58	53.85	0.3470	0.04742
	8500	25.7	20.47	55.99	0.3690	0.04736
	9000	26.1	21.34	58.11	0.3909	0.04729
	9500	26.5	22.18	60.22	0.4126	0.04722
	10000	26.9	22.99	62.31	0.4342	0.04716
	10500	27.3	23.79	64.38	0.4556	0.04709
	11000	27.7	24.57	66.45	0.4769	0.04703
	11500	28.1	25.32	68.50	0.4980	0.04696
	12000	28.5	26.06	70.54	0.5191	0.04690
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.55	52.07	0.4550	0.04238
	8500	24.6	21.42	54.31	0.4866	0.04223
	9000	25.0	22.27	56.54	0.5181	0.04209
	9500	25.5	23.08	58.77	0.5495	0.04194
	10000	25.9	23.86	60.98	0.5807	0.04180
	10500	26.4	24.62	63.19	0.6118	0.04165
	11000	26.8	25.36	65.39	0.6428	0.04150

								11500	27.3	26.07	67.58	0.6738	0.04136
								12000	27.7	26.76	69.77	0.7046	0.04122
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.68	51.13	0.4313	0.04279
								8500	24.4	21.58	53.24	0.4599	0.04268
								9000	24.8	22.44	55.32	0.4883	0.04258
								9500	25.3	23.28	57.40	0.5166	0.04248
								10000	25.7	24.10	59.47	0.5447	0.04237
								10500	26.1	24.89	61.52	0.5726	0.04227
								11000	26.5	25.65	63.57	0.6005	0.04217
								11500	27.0	26.40	65.60	0.6282	0.04207
								12000	27.4	27.12	67.63	0.6557	0.04197
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.28	56.00	0.3402	0.04789
								8500	26.1	20.18	58.05	0.3596	0.04784
								9000	26.5	21.06	60.07	0.3788	0.04779

	9500	26.8	21.91	62.08	0.3977	0.04774
	10000	27.2	22.75	64.06	0.4165	0.04769
	10500	27.6	23.56	66.03	0.4351	0.04764
	11000	27.9	24.36	67.97	0.4535	0.04759
	11500	28.3	25.14	69.90	0.4718	0.04754
	12000	28.7	25.90	71.82	0.4899	0.04750
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.58	53.85	0.3470	0.04742
	8500	25.7	20.47	55.99	0.3690	0.04736
	9000	26.1	21.34	58.11	0.3909	0.04729

	9500	26.5	22.18	60.22	0.4126	0.04722
	10000	26.9	22.99	62.31	0.4342	0.04716
	10500	27.3	23.79	64.38	0.4556	0.04709
	11000	27.7	24.57	66.45	0.4769	0.04703
	11500	28.1	25.32	68.50	0.4980	0.04696
	12000	28.5	26.06	70.54	0.5191	0.04690
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.61	51.74	0.4503	0.04240
	8500	24.5	21.49	53.96	0.4816	0.04226
	9000	24.9	22.34	56.17	0.5128	0.04211

	9500	25.4	23.15	58.37	0.5439	0.04197
	10000	25.8	23.95	60.56	0.5748	0.04182
	10500	26.3	24.71	62.75	0.6057	0.04168
	11000	26.7	25.45	64.93	0.6364	0.04153
	11500	27.2	26.17	67.11	0.6671	0.04139
	12000	27.6	26.86	69.27	0.6977	0.04125
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.72	50.90	0.4281	0.04280
	8500	24.3	21.62	52.99	0.4565	0.04270
	9000	24.8	22.49	55.06	0.4848	0.04259

								9500	25.2	23.34	57.13	0.5128	0.04249
								10000	25.6	24.15	59.18	0.5408	0.04239
								10500	26.0	24.95	61.22	0.5685	0.04229
								11000	26.5	25.72	63.25	0.5962	0.04219
								11500	26.9	26.46	65.28	0.6237	0.04209
								12000	27.3	27.19	67.29	0.6511	0.04199
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.7	20.93	53.19	0.4185	0.04136
								8500	24.1	21.87	55.13	0.4423	0.04128
								9000	24.4	22.79	57.04	0.4659	0.04120
								9500	24.8	23.68	58.93	0.4893	0.04112
								10000	25.2	24.56	60.80	0.5124	0.04104
								10500	25.6	25.41	62.65	0.5352	0.04096

	11000	25.9	26.23	64.49	0.5579	0.04088
	11500	26.3	27.04	66.31	0.5804	0.04081
	12000	26.7	27.83	68.11	0.6027	0.04073
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.2	21.33	50.42	0.4213	0.04107
	8500	23.6	22.27	52.40	0.4480	0.04097
	9000	24.0	23.18	54.36	0.4744	0.04087
	9500	24.4	24.07	56.31	0.5006	0.04077
	10000	24.8	24.92	58.24	0.5267	0.04067
	10500	25.2	25.76	60.16	0.5526	0.04057
	11000	25.6	26.57	62.07	0.5783	0.04047
	11500	26.0	27.36	63.97	0.6039	0.04037
	12000	26.4	28.12	65.85	0.6293	0.04028
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.5	21.08	50.43	0.4145	0.04203
	8500	23.9	22.01	52.41	0.4412	0.04194
	9000	24.3	22.91	54.38	0.4677	0.04184
	9500	24.7	23.79	56.33	0.4941	0.04175
	10000	25.1	24.64	58.27	0.5202	0.04166
	10500	25.5	25.46	60.19	0.5462	0.04156

	11000	25.9	26.27	62.10	0.5720	0.04147
	11500	26.3	27.05	64.00	0.5977	0.04138
	12000	26.7	27.81	65.89	0.6232	0.04129
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.1	22.37	48.08	0.5566	0.03604
	8500	22.6	23.29	50.12	0.5940	0.03585
	9000	23.0	24.17	52.15	0.6313	0.03566
	9500	23.5	25.01	54.17	0.6685	0.03547
	10000	24.0	25.83	56.19	0.7055	0.03528
	10500	24.4	26.62	58.20	0.7424	0.03509
	11000	24.9	27.38	60.20	0.7792	0.03490
	11500	25.3	28.12	62.19	0.8158	0.03471
	12000	25.7	28.83	64.18	0.8524	0.03452
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.0	22.54	47.32	0.5265	0.03645
	8500	22.4	23.48	49.24	0.5604	0.03631
	9000	22.8	24.39	51.14	0.5941	0.03617
	9500	23.3	25.27	53.04	0.6276	0.03602
	10000	23.7	26.12	54.92	0.6610	0.03588
	10500	24.1	26.94	56.80	0.6941	0.03574

								11000	24.5	27.74	58.66	0.7272	0.03560
								11500	25.0	28.51	60.52	0.7600	0.03546
								12000	25.4	29.26	62.37	0.7927	0.03532
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	21.03	52.63	0.4115	0.04139
								8500	23.9	21.98	54.53	0.4350	0.04131
								9000	24.3	22.91	56.42	0.4583	0.04123
								9500	24.7	23.81	58.28	0.4813	0.04115
								10000	25.1	24.69	60.12	0.5040	0.04107
								10500	25.4	25.55	61.95	0.5266	0.04099
								11000	25.8	26.39	63.76	0.5489	0.04091

	11500	26.2	27.20	65.55	0.5711	0.04084
	12000	26.5	28.00	67.33	0.5930	0.04076
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.2	21.33	50.42	0.4213	0.04107
	8500	23.6	22.27	52.40	0.4480	0.04097
	9000	24.0	23.18	54.36	0.4744	0.04087
	9500	24.4	24.07	56.31	0.5006	0.04077
	10000	24.8	24.92	58.24	0.5267	0.04067
	10500	25.2	25.76	60.16	0.5526	0.04057
	11000	25.6	26.57	62.07	0.5783	0.04047

	11500	26.0	27.36	63.97	0.6039	0.04037
	12000	26.4	28.12	65.85	0.6293	0.04028
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.5	21.08	50.43	0.4145	0.04203
	8500	23.9	22.01	52.41	0.4412	0.04194
	9000	24.3	22.91	54.38	0.4677	0.04184
	9500	24.7	23.79	56.33	0.4941	0.04175
	10000	25.1	24.64	58.27	0.5202	0.04166
	10500	25.5	25.46	60.19	0.5462	0.04156
	11000	25.9	26.27	62.10	0.5720	0.04147

	11500	26.3	27.05	64.00	0.5977	0.04138
	12000	26.7	27.81	65.89	0.6232	0.04129
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.1	22.44	47.77	0.5510	0.03607
	8500	22.5	23.36	49.79	0.5881	0.03588
	9000	23.0	24.25	51.81	0.6250	0.03569
	9500	23.4	25.10	53.81	0.6619	0.03550
	10000	23.9	25.92	55.81	0.6986	0.03531
	10500	24.3	26.72	57.80	0.7351	0.03512
	11000	24.8	27.48	59.78	0.7716	0.03494

	11500	25.2	28.23	61.76	0.8079	0.03475
	12000	25.6	28.94	63.73	0.8442	0.03457
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	21.9	22.59	47.11	0.5227	0.03647
	8500	22.4	23.54	49.01	0.5564	0.03633
	9000	22.8	24.45	50.90	0.5899	0.03618
	9500	23.2	25.34	52.79	0.6232	0.03604
	10000	23.6	26.19	54.66	0.6563	0.03590
	10500	24.1	27.01	56.52	0.6893	0.03576
	11000	24.5	27.81	58.38	0.7221	0.03562

								11500	24.9	28.59	60.22	0.7548	0.03548
								12000	25.3	29.34	62.06	0.7873	0.03534
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.12	54.67	0.3863	0.04426
								8500	25.0	21.04	56.66	0.4083	0.04419
								9000	25.4	21.94	58.64	0.4302	0.04412
								9500	25.8	22.81	60.59	0.4518	0.04406
								10000	26.2	23.67	62.52	0.4732	0.04399
								10500	26.5	24.50	64.44	0.4943	0.04392
								11000	26.9	25.31	66.33	0.5153	0.04386
								11500	27.3	26.10	68.21	0.5361	0.04379
								12000	27.6	26.87	70.08	0.5567	0.04373
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.52	51.91	0.3883	0.04390
								8500	24.6	21.44	53.95	0.4130	0.04381
								9000	25.0	22.33	55.98	0.4375	0.04373
								9500	25.4	23.19	58.00	0.4618	0.04364
								10000	25.8	24.03	60.00	0.4859	0.04356

	10500	26.2	24.85	61.99	0.5099	0.04347
	11000	26.6	25.64	63.96	0.5338	0.04339
	11500	26.9	26.41	65.93	0.5575	0.04331
	12000	27.3	27.17	67.88	0.5810	0.04322
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.29	51.91	0.3820	0.04486
	8500	24.8	21.19	53.96	0.4068	0.04478
	9000	25.2	22.08	55.99	0.4314	0.04470
	9500	25.6	22.94	58.01	0.4558	0.04461
	10000	26.1	23.76	60.02	0.4801	0.04454
	10500	26.4	24.57	62.01	0.5041	0.04446
	11000	26.8	25.36	63.99	0.5281	0.04438
	11500	27.2	26.13	65.96	0.5518	0.04430
	12000	27.6	26.87	67.91	0.5755	0.04422
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.53	49.81	0.5118	0.03886
	8500	23.5	22.42	51.93	0.5468	0.03869
	9000	23.9	23.29	54.05	0.5816	0.03851
	9500	24.4	24.12	56.16	0.6163	0.03834
	10000	24.8	24.92	58.26	0.6508	0.03817

								10500	25.3	25.70	60.35	0.6853	0.03800
								11000	25.7	26.45	62.44	0.7196	0.03783
								11500	26.2	27.17	64.52	0.7538	0.03766
								12000	26.6	27.88	66.60	0.7879	0.03749
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.68	48.97	0.4845	0.03927
								8500	23.3	22.60	50.97	0.5161	0.03914
								9000	23.7	23.49	52.95	0.5476	0.03902
								9500	24.1	24.35	54.92	0.5788	0.03889
								10000	24.6	25.18	56.89	0.6099	0.03877
								10500	25.0	25.99	58.84	0.6409	0.03864
								11000	25.4	26.77	60.78	0.6717	0.03852
								11500	25.8	27.53	62.72	0.7024	0.03839
								12000	26.3	28.27	64.64	0.7329	0.03827
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.22	54.09	0.3798	0.04428
								8500	24.9	21.15	56.05	0.4016	0.04421

	9000	25.3	22.05	58.00	0.4231	0.04415
	9500	25.6	22.93	59.92	0.4444	0.04408
	10000	26.0	23.79	61.83	0.4655	0.04401
	10500	26.4	24.63	63.71	0.4863	0.04395
	11000	26.8	25.45	65.58	0.5070	0.04388
	11500	27.1	26.25	67.43	0.5275	0.04382
	12000	27.5	27.03	69.27	0.5478	0.04376
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.52	51.91	0.3883	0.04390
	8500	24.6	21.44	53.95	0.4130	0.04381

	9000	25.0	22.33	55.98	0.4375	0.04373
	9500	25.4	23.19	58.00	0.4618	0.04364
	10000	25.8	24.03	60.00	0.4859	0.04356
	10500	26.2	24.85	61.99	0.5099	0.04347
	11000	26.6	25.64	63.96	0.5338	0.04339
	11500	26.9	26.41	65.93	0.5575	0.04331
	12000	27.3	27.17	67.88	0.5810	0.04322
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.29	51.91	0.3820	0.04486
	8500	24.8	21.19	53.96	0.4068	0.04478

	9000	25.2	22.08	55.99	0.4314	0.04470
	9500	25.6	22.94	58.01	0.4558	0.04461
	10000	26.1	23.76	60.02	0.4801	0.04454
	10500	26.4	24.57	62.01	0.5041	0.04446
	11000	26.8	25.36	63.99	0.5281	0.04438
	11500	27.2	26.13	65.96	0.5518	0.04430
	12000	27.6	26.87	67.91	0.5755	0.04422
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.59	49.49	0.5066	0.03889
	8500	23.4	22.50	51.59	0.5412	0.03871

	9000	23.8	23.36	53.69	0.5757	0.03854
	9500	24.3	24.20	55.78	0.6101	0.03837
	10000	24.7	25.01	57.87	0.6444	0.03820
	10500	25.2	25.79	59.94	0.6785	0.03804
	11000	25.6	26.54	62.01	0.7125	0.03787
	11500	26.1	27.27	64.07	0.7464	0.03770
	12000	26.5	27.98	66.13	0.7803	0.03753
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.72	48.75	0.4809	0.03929
	8500	23.2	22.65	50.73	0.5124	0.03916

								9000	23.7	23.55	52.70	0.5436	0.03903
								9500	24.1	24.41	54.66	0.5747	0.03891
								10000	24.5	25.25	56.61	0.6056	0.03878
								10500	24.9	26.06	58.55	0.6364	0.03866
								11000	25.4	26.84	60.48	0.6670	0.03854
								11500	25.8	27.61	62.41	0.6975	0.03841
								12000	26.2	28.35	64.32	0.7278	0.03829
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.53	55.73	0.3654	0.04650
								8500	25.8	20.43	57.77	0.3863	0.04644
								9000	26.1	21.31	59.79	0.4069	0.04638
								9500	26.5	22.17	61.78	0.4273	0.04633

	10000	26.9	23.00	63.76	0.4475	0.04627
	10500	27.3	23.82	65.72	0.4675	0.04621
	11000	27.7	24.62	67.66	0.4873	0.04615
	11500	28.0	25.40	69.58	0.5069	0.04610
	12000	28.4	26.16	71.49	0.5264	0.04604
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.92	52.97	0.3668	0.04609
	8500	25.3	20.82	55.07	0.3902	0.04602
	9000	25.7	21.69	57.15	0.4133	0.04594
	9500	26.1	22.54	59.21	0.4363	0.04587
	10000	26.5	23.37	61.26	0.4591	0.04579
	10500	26.9	24.17	63.30	0.4818	0.04572
	11000	27.3	24.95	65.32	0.5043	0.04564
	11500	27.7	25.71	67.33	0.5267	0.04557
	12000	28.1	26.45	69.33	0.5490	0.04550
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.70	52.97	0.3609	0.04705
	8500	25.6	20.59	55.07	0.3844	0.04698
	9000	26.0	21.46	57.15	0.4076	0.04691
	9500	26.4	22.30	59.22	0.4307	0.04683

	10000	26.8	23.12	61.27	0.4536	0.04676
	10500	27.2	23.91	63.31	0.4764	0.04670
	11000	27.6	24.69	65.34	0.4990	0.04663
	11500	28.0	25.44	67.36	0.5215	0.04656
	12000	28.4	26.18	69.36	0.5439	0.04649
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.90	51.05	0.4818	0.04103
	8500	24.2	21.79	53.23	0.5151	0.04087
	9000	24.6	22.64	55.41	0.5481	0.04071
	9500	25.1	23.45	57.58	0.5811	0.04056
	10000	25.5	24.24	59.75	0.6140	0.04040
	10500	26.0	25.01	61.90	0.6467	0.04024
	11000	26.4	25.75	64.05	0.6794	0.04008
	11500	26.9	26.47	66.19	0.7119	0.03993
	12000	27.3	27.16	68.33	0.7443	0.03977
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.04	50.15	0.4564	0.04144
	8500	24.0	21.94	52.21	0.4865	0.04133
	9000	24.4	22.82	54.25	0.5164	0.04121
	9500	24.8	23.67	56.28	0.5461	0.04110

								10000	25.3	24.49	58.30	0.5757	0.04098
								10500	25.7	25.29	60.31	0.6051	0.04087
								11000	26.1	26.06	62.30	0.6344	0.04076
								11500	26.5	26.81	64.29	0.6635	0.04065
								12000	27.0	27.54	66.28	0.6925	0.04053
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.3	19.62	55.13	0.3593	0.04652
								8500	25.6	20.53	57.14	0.3799	0.04646
								9000	26.0	21.42	59.13	0.4002	0.04640
								9500	26.4	22.28	61.10	0.4203	0.04635
								10000	26.8	23.12	63.05	0.4402	0.04629
								10500	27.1	23.95	64.98	0.4599	0.04623

		11000	27.5	24.75	66.89	0.4794	0.04618
		11500	27.9	25.54	68.78	0.4988	0.04612
		12000	28.2	26.31	70.66	0.5180	0.04606
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.92	52.97	0.3668	0.04609
		8500	25.3	20.82	55.07	0.3902	0.04602
		9000	25.7	21.69	57.15	0.4133	0.04594
		9500	26.1	22.54	59.21	0.4363	0.04587
		10000	26.5	23.37	61.26	0.4591	0.04579
		10500	26.9	24.17	63.30	0.4818	0.04572

	11000	27.3	24.95	65.32	0.5043	0.04564
	11500	27.7	25.71	67.33	0.5267	0.04557
	12000	28.1	26.45	69.33	0.5490	0.04550
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.70	52.97	0.3609	0.04705
	8500	25.6	20.59	55.07	0.3844	0.04698
	9000	26.0	21.46	57.15	0.4076	0.04691
	9500	26.4	22.30	59.22	0.4307	0.04683
	10000	26.8	23.12	61.27	0.4536	0.04676
	10500	27.2	23.91	63.31	0.4764	0.04670

	11000	27.6	24.69	65.34	0.4990	0.04663
	11500	28.0	25.44	67.36	0.5215	0.04656
	12000	28.4	26.18	69.36	0.5439	0.04649
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	20.96	50.72	0.4768	0.04106
	8500	24.1	21.85	52.89	0.5098	0.04090
	9000	24.5	22.70	55.05	0.5426	0.04074
	9500	25.0	23.53	57.20	0.5752	0.04058
	10000	25.4	24.33	59.34	0.6078	0.04043
	10500	25.9	25.10	61.48	0.6403	0.04027

	11000	26.3	25.85	63.61	0.6726	0.04011
	11500	26.8	26.57	65.73	0.7049	0.03996
	12000	27.2	27.27	67.85	0.7370	0.03980
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.09	49.93	0.4530	0.04145
	8500	23.9	21.99	51.97	0.4829	0.04134
	9000	24.4	22.87	53.99	0.5126	0.04123
	9500	24.8	23.73	56.01	0.5422	0.04111
	10000	25.2	24.55	58.02	0.5716	0.04100
	10500	25.6	25.35	60.01	0.6008	0.04089

								11000	26.1	26.13	62.00	0.6299	0.04077
								11500	26.5	26.88	63.98	0.6589	0.04066
								12000	26.9	27.61	65.94	0.6877	0.04055
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	55.74	0.3641	0.04636
								8500	25.7	20.48	57.78	0.3848	0.04630
								9000	26.1	21.35	59.80	0.4054	0.04625
								9500	26.5	22.21	61.80	0.4257	0.04619
								10000	26.9	23.05	63.78	0.4458	0.04613
								10500	27.2	23.87	65.74	0.4658	0.04607
								11000	27.6	24.67	67.68	0.4855	0.04602
								11500	28.0	25.45	69.60	0.5051	0.04596
								12000	28.3	26.21	71.51	0.5245	0.04591
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.96	52.99	0.3655	0.04596
								8500	25.2	20.86	55.08	0.3888	0.04588
								9000	25.6	21.74	57.16	0.4118	0.04580

	9500	26.0	22.59	59.23	0.4347	0.04573
	10000	26.4	23.42	61.28	0.4575	0.04565
	10500	26.8	24.22	63.32	0.4801	0.04558
	11000	27.2	25.00	65.34	0.5025	0.04551
	11500	27.6	25.77	67.35	0.5249	0.04543
	12000	28.0	26.51	69.36	0.5470	0.04536
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	52.99	0.3596	0.04690
	8500	25.5	20.64	55.09	0.3830	0.04683
	9000	25.9	21.50	57.17	0.4062	0.04676
	9500	26.3	22.34	59.24	0.4292	0.04669
	10000	26.7	23.16	61.29	0.4520	0.04662
	10500	27.1	23.96	63.34	0.4747	0.04656
	11000	27.5	24.73	65.36	0.4973	0.04649
	11500	27.9	25.49	67.38	0.5197	0.04642
	12000	28.3	26.23	69.38	0.5420	0.04635
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	20.95	51.06	0.4804	0.04091
	8500	24.1	21.83	53.25	0.5136	0.04075
	9000	24.6	22.68	55.43	0.5466	0.04059

								9500	25.0	23.50	57.61	0.5794	0.04043
								10000	25.5	24.29	59.77	0.6122	0.04027
								10500	25.9	25.06	61.93	0.6448	0.04012
								11000	26.4	25.80	64.08	0.6774	0.03996
								11500	26.8	26.52	66.22	0.7098	0.03980
								12000	27.3	27.22	68.35	0.7422	0.03965
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.09	50.17	0.4551	0.04131
								8500	23.9	21.99	52.23	0.4851	0.04120
								9000	24.4	22.87	54.27	0.5149	0.04109
								9500	24.8	23.72	56.30	0.5445	0.04097
								10000	25.2	24.54	58.32	0.5740	0.04086
								10500	25.6	25.33	60.33	0.6033	0.04075
								11000	26.1	26.11	62.33	0.6325	0.04063
								11500	26.5	26.86	64.32	0.6616	0.04052
								12000	26.9	27.59	66.30	0.6905	0.04041
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.2	19.66	55.15	0.3580	0.04638

	8500	25.6	20.57	57.16	0.3785	0.04632
	9000	26.0	21.46	59.15	0.3987	0.04626
	9500	26.3	22.32	61.12	0.4188	0.04621
	10000	26.7	23.17	63.07	0.4386	0.04615
	10500	27.1	24.00	65.00	0.4582	0.04609
	11000	27.5	24.80	66.91	0.4777	0.04604
	11500	27.8	25.59	68.80	0.4970	0.04598
	12000	28.2	26.36	70.68	0.5161	0.04593
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.96	52.99	0.3655	0.04596

	8500	25.2	20.86	55.08	0.3888	0.04588
	9000	25.6	21.74	57.16	0.4118	0.04580
	9500	26.0	22.59	59.23	0.4347	0.04573
	10000	26.4	23.42	61.28	0.4575	0.04565
	10500	26.8	24.22	63.32	0.4801	0.04558
	11000	27.2	25.00	65.34	0.5025	0.04551
	11500	27.6	25.77	67.35	0.5249	0.04543
	12000	28.0	26.51	69.36	0.5470	0.04536
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	52.99	0.3596	0.04690

	8500	25.5	20.64	55.09	0.3830	0.04683
	9000	25.9	21.50	57.17	0.4062	0.04676
	9500	26.3	22.34	59.24	0.4292	0.04669
	10000	26.7	23.16	61.29	0.4520	0.04662
	10500	27.1	23.96	63.34	0.4747	0.04656
	11000	27.5	24.73	65.36	0.4973	0.04649
	11500	27.9	25.49	67.38	0.5197	0.04642
	12000	28.3	26.23	69.38	0.5420	0.04635
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	21.01	50.73	0.4754	0.04093

	8500	24.0	21.90	52.90	0.5083	0.04077
	9000	24.5	22.75	55.07	0.5410	0.04062
	9500	24.9	23.58	57.22	0.5736	0.04046
	10000	25.4	24.38	59.36	0.6061	0.04030
	10500	25.8	25.15	61.50	0.6384	0.04015
	11000	26.3	25.89	63.63	0.6707	0.03999
	11500	26.7	26.62	65.76	0.7028	0.03984
	12000	27.2	27.32	67.87	0.7349	0.03968
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.4	21.13	49.94	0.4517	0.04133

								8500	23.9	22.04	51.98	0.4815	0.04121
								9000	24.3	22.92	54.01	0.5111	0.04110
								9500	24.7	23.77	56.03	0.5406	0.04099
								10000	25.2	24.60	58.04	0.5699	0.04087
								10500	25.6	25.40	60.03	0.5990	0.04076
								11000	26.0	26.18	62.02	0.6280	0.04065
								11500	26.4	26.93	64.00	0.6569	0.04054
								12000	26.8	27.66	65.97	0.6857	0.04043
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.4	18.06	59.38	0.5709	0.04710
								8500	28.0	18.81	61.93	0.6109	0.04695

								9000	28.5	19.52	64.47	0.6507	0.04680
								9500	29.1	20.21	66.99	0.6903	0.04666
								10000	29.6	20.88	69.49	0.7296	0.04651
								10500	30.2	21.53	71.98	0.7687	0.04637
								11000	30.7	22.15	74.46	0.8076	0.04623
								11500	31.3	22.76	76.93	0.8463	0.04608
								12000	31.8	23.35	79.39	0.8849	0.04594
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.5	18.04	58.66	0.6372	0.04615
								8500	28.0	18.79	61.15	0.6782	0.04599
								9000	28.6	19.51	63.62	0.7190	0.04583
								9500	29.1	20.21	66.08	0.7595	0.04566
								10000	29.6	20.88	68.52	0.7998	0.04550

								10500	30.2	21.53	70.95	0.8398	0.04534
								11000	30.7	22.16	73.37	0.8797	0.04518
								11500	31.2	22.77	75.78	0.9193	0.04503
								12000	31.8	23.37	78.17	0.9588	0.04487
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	25.4	19.52	54.67	0.6873	0.04048
								8500	25.9	20.30	56.99	0.7338	0.04029
								9000	26.5	21.04	59.29	0.7801	0.04009
								9500	27.0	21.76	61.58	0.8260	0.03990
								10000	27.6	22.45	63.85	0.8717	0.03971
								10500	28.1	23.12	66.12	0.9172	0.03952
								11000	28.6	23.76	68.37	0.9624	0.03933
								11500	29.2	24.38	70.61	1.0074	0.03914
								12000	29.7	24.98	72.84	1.0522	0.03895

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.3	19.57	54.42	0.6822	0.04050
								8500	25.9	20.35	56.72	0.7285	0.04031
								9000	26.4	21.10	59.01	0.7744	0.04012
								9500	26.9	21.82	61.28	0.8201	0.03992
								10000	27.5	22.51	63.55	0.8655	0.03973
								10500	28.0	23.18	65.80	0.9107	0.03954
								11000	28.6	23.83	68.04	0.9557	0.03935
								11500	29.1	24.45	70.26	1.0004	0.03917
								12000	29.6	25.06	72.48	1.0449	0.03898

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.3	18.81	56.68	0.6381	0.04357
								8500	26.9	19.57	59.10	0.6820	0.04339
								9000	27.4	20.30	61.50	0.7256	0.04322
								9500	28.0	21.00	63.89	0.7690	0.04304
								10000	28.5	21.68	66.26	0.8121	0.04287
								10500	29.1	22.34	68.62	0.8550	0.04270
								11000	29.6	22.97	70.97	0.8977	0.04253
								11500	30.2	23.59	73.31	0.9401	0.04236
								12000	30.7	24.18	75.64	0.9824	0.04219
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.85	56.42	0.6333	0.04359
								8500	26.8	19.61	58.82	0.6769	0.04341
								9000	27.4	20.35	61.21	0.7203	0.04324
								9500	27.9	21.06	63.58	0.7634	0.04307

								10000	28.5	21.74	65.94	0.8063	0.04289
								10500	29.0	22.40	68.29	0.8489	0.04272
								11000	29.5	23.04	70.62	0.8913	0.04255
								11500	30.1	23.65	72.95	0.9335	0.04238
								12000	30.6	24.25	75.26	0.9755	0.04221
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.0	18.32	58.16	0.6027	0.04577
								8500	27.6	19.07	60.65	0.6446	0.04561
								9000	28.1	19.80	63.12	0.6863	0.04545
								9500	28.7	20.49	65.58	0.7277	0.04529
								10000	29.2	21.16	68.03	0.7689	0.04513
								10500	29.8	21.82	70.46	0.8098	0.04497
								11000	30.3	22.44	72.88	0.8506	0.04481
								11500	30.9	23.05	75.29	0.8911	0.04466

								12000	31.4	23.64	77.69	0.9315	0.04450
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.0	18.37	57.89	0.5981	0.04579
								8500	27.5	19.12	60.36	0.6398	0.04562
								9000	28.1	19.85	62.82	0.6812	0.04546
								9500	28.6	20.54	65.27	0.7224	0.04531
								10000	29.2	21.22	67.70	0.7633	0.04515
								10500	29.7	21.87	70.12	0.8040	0.04499
								11000	30.2	22.50	72.52	0.8445	0.04484
								11500	30.8	23.11	74.92	0.8848	0.04468

								12000	31.3	23.71	77.30	0.9249	0.04452
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.0	18.36	58.18	0.6010	0.04563
								8500	27.5	19.11	60.67	0.6428	0.04547
								9000	28.1	19.83	63.15	0.6844	0.04531
								9500	28.6	20.53	65.61	0.7257	0.04515
								10000	29.2	21.21	68.05	0.7667	0.04499
								10500	29.7	21.86	70.49	0.8076	0.04483
								11000	30.3	22.48	72.91	0.8482	0.04468
								11500	30.8	23.10	75.32	0.8886	0.04452
								12000	31.3	23.68	77.72	0.9289	0.04437
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.9	18.40	57.91	0.5965	0.04564
								8500	27.5	19.16	60.38	0.6380	0.04549
								9000	28.0	19.88	62.85	0.6793	0.04533

								9500	28.6	20.58	65.29	0.7204	0.04517
								10000	29.1	21.26	67.72	0.7612	0.04501
								10500	29.7	21.91	70.14	0.8018	0.04486
								11000	30.2	22.55	72.55	0.8422	0.04470
								11500	30.7	23.16	74.94	0.8823	0.04455
								12000	31.3	23.75	77.33	0.9224	0.04439
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.94	56.24	0.5096	0.04578
								8500	26.5	19.83	58.28	0.5298	0.04572
								9000	26.9	20.69	60.29	0.5498	0.04566
								9500	27.3	21.54	62.28	0.5695	0.04560
								10000	27.7	22.37	64.25	0.5891	0.04554
								10500	28.0	23.17	66.20	0.6085	0.04548

	11000	28.4	23.96	68.13	0.6276	0.04543
	11500	28.8	24.73	70.05	0.6466	0.04537
	12000	29.1	25.49	71.95	0.6655	0.04531
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.35	53.41	0.5015	0.04543
	8500	26.0	20.23	55.50	0.5241	0.04535
	9000	26.4	21.10	57.57	0.5465	0.04528
	9500	26.8	21.94	59.63	0.5688	0.04520
	10000	27.2	22.75	61.68	0.5909	0.04512
	10500	27.6	23.55	63.71	0.6129	0.04505
	11000	28.0	24.32	65.73	0.6347	0.04498
	11500	28.4	25.08	67.73	0.6565	0.04490
	12000	28.8	25.82	69.73	0.6780	0.04483
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.31	51.17	0.6216	0.04027
	8500	24.8	21.18	53.34	0.6539	0.04011
	9000	25.3	22.03	55.51	0.6862	0.03995
	9500	25.7	22.84	57.67	0.7183	0.03979
	10000	26.2	23.63	59.82	0.7503	0.03963
	10500	26.6	24.39	61.97	0.7822	0.03948

								11000	27.1	25.13	64.10	0.8141	0.03932
								11500	27.5	25.85	66.24	0.8458	0.03916
								12000	28.0	26.54	68.36	0.8774	0.03901
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.42	50.31	0.5979	0.04068
								8500	24.7	21.32	52.35	0.6272	0.04056
								9000	25.1	22.19	54.38	0.6563	0.04045
								9500	25.5	23.03	56.40	0.6853	0.04033
								10000	26.0	23.85	58.41	0.7141	0.04022
								10500	26.4	24.64	60.41	0.7428	0.04010
								11000	26.8	25.41	62.40	0.7713	0.03999
								11500	27.2	26.15	64.38	0.7997	0.03988
								12000	27.6	26.88	66.35	0.8280	0.03976
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.02	55.65	0.5038	0.04580
								8500	26.4	19.92	57.65	0.5237	0.04574
								9000	26.8	20.79	59.64	0.5433	0.04568

	9500	27.2	21.64	61.60	0.5628	0.04562
	10000	27.5	22.48	63.54	0.5820	0.04556
	10500	27.9	23.29	65.46	0.6011	0.04551
	11000	28.3	24.08	67.37	0.6200	0.04545
	11500	28.6	24.86	69.26	0.6388	0.04539
	12000	29.0	25.62	71.13	0.6573	0.04534
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.35	53.41	0.5015	0.04543
	8500	26.0	20.23	55.50	0.5241	0.04535
	9000	26.4	21.10	57.57	0.5465	0.04528

	9500	26.8	21.94	59.63	0.5688	0.04520
	10000	27.2	22.75	61.68	0.5909	0.04512
	10500	27.6	23.55	63.71	0.6129	0.04505
	11000	28.0	24.32	65.73	0.6347	0.04498
	11500	28.4	25.08	67.73	0.6565	0.04490
	12000	28.8	25.82	69.73	0.6780	0.04483
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.37	50.84	0.6167	0.04029
	8500	24.8	21.24	53.00	0.6488	0.04013
	9000	25.2	22.09	55.14	0.6807	0.03998

	9500	25.7	22.91	57.29	0.7126	0.03982
	10000	26.1	23.71	59.42	0.7443	0.03966
	10500	26.5	24.47	61.54	0.7760	0.03951
	11000	27.0	25.22	63.66	0.8075	0.03935
	11500	27.4	25.94	65.78	0.8389	0.03920
	12000	27.9	26.64	67.88	0.8703	0.03904
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.46	50.08	0.5946	0.04069
	8500	24.6	21.37	52.11	0.6237	0.04057
	9000	25.1	22.24	54.13	0.6527	0.04046

								9500	25.5	23.08	56.14	0.6815	0.04035
								10000	25.9	23.90	58.13	0.7101	0.04023
								10500	26.3	24.69	60.12	0.7386	0.04012
								11000	26.7	25.47	62.09	0.7670	0.04001
								11500	27.1	26.22	64.06	0.7952	0.03989
								12000	27.6	26.95	66.02	0.8233	0.03978
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	19.00	56.11	0.5016	0.04572
								8500	26.4	19.90	58.14	0.5214	0.04566
								9000	26.8	20.77	60.14	0.5409	0.04561
								9500	27.2	21.62	62.13	0.5603	0.04555
								10000	27.6	22.45	64.09	0.5794	0.04549
								10500	27.9	23.26	66.03	0.5984	0.04544

	11000	28.3	24.05	67.96	0.6171	0.04538
	11500	28.7	24.83	69.87	0.6357	0.04533
	12000	29.0	25.59	71.76	0.6542	0.04527
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.49	52.79	0.4881	0.04538
	8500	25.8	20.39	54.84	0.5099	0.04531
	9000	26.2	21.26	56.88	0.5316	0.04524
	9500	26.6	22.11	58.91	0.5531	0.04517
	10000	27.0	22.94	60.92	0.5745	0.04509
	10500	27.4	23.75	62.92	0.5958	0.04502
	11000	27.7	24.53	64.90	0.6169	0.04495
	11500	28.1	25.30	66.87	0.6378	0.04488
	12000	28.5	26.05	68.84	0.6587	0.04481
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.34	51.34	0.6153	0.04022
	8500	24.8	21.21	53.53	0.6473	0.04006
	9000	25.3	22.06	55.70	0.6791	0.03991
	9500	25.7	22.87	57.87	0.7109	0.03975
	10000	26.2	23.66	60.03	0.7425	0.03960
	10500	26.6	24.43	62.18	0.7740	0.03944

								11000	27.0	25.17	64.33	0.8055	0.03929
								11500	27.5	25.89	66.47	0.8368	0.03913
								12000	27.9	26.58	68.60	0.8680	0.03898
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.45	50.48	0.5919	0.04063
								8500	24.6	21.35	52.53	0.6209	0.04052
								9000	25.1	22.22	54.57	0.6497	0.04040
								9500	25.5	23.06	56.59	0.6783	0.04029
								10000	25.9	23.88	58.61	0.7068	0.04018
								10500	26.3	24.67	60.62	0.7351	0.04007
								11000	26.8	25.44	62.61	0.7633	0.03996
								11500	27.2	26.19	64.60	0.7913	0.03985
								12000	27.6	26.91	66.58	0.8193	0.03974
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.09	55.52	0.4958	0.04574
								8500	26.3	19.99	57.51	0.5153	0.04568
								9000	26.7	20.87	59.49	0.5346	0.04562

	9500	27.1	21.72	61.44	0.5536	0.04557
	10000	27.4	22.56	63.38	0.5725	0.04551
	10500	27.8	23.38	65.29	0.5911	0.04546
	11000	28.2	24.18	67.19	0.6096	0.04540
	11500	28.5	24.96	69.07	0.6280	0.04535
	12000	28.9	25.72	70.94	0.6462	0.04530
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.49	52.79	0.4881	0.04538
	8500	25.8	20.39	54.84	0.5099	0.04531
	9000	26.2	21.26	56.88	0.5316	0.04524

	9500	26.6	22.11	58.91	0.5531	0.04517
	10000	27.0	22.94	60.92	0.5745	0.04509
	10500	27.4	23.75	62.92	0.5958	0.04502
	11000	27.7	24.53	64.90	0.6169	0.04495
	11500	28.1	25.30	66.87	0.6378	0.04488
	12000	28.5	26.05	68.84	0.6587	0.04481
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.40	51.01	0.6105	0.04024
	8500	24.7	21.27	53.18	0.6422	0.04009
	9000	25.2	22.12	55.33	0.6738	0.03993

	9500	25.6	22.94	57.48	0.7052	0.03978
	10000	26.1	23.74	59.63	0.7366	0.03963
	10500	26.5	24.51	61.76	0.7678	0.03947
	11000	27.0	25.25	63.89	0.7990	0.03932
	11500	27.4	25.98	66.01	0.8300	0.03917
	12000	27.8	26.68	68.12	0.8610	0.03902
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.49	50.25	0.5887	0.04064
	8500	24.6	21.39	52.29	0.6175	0.04053
	9000	25.0	22.27	54.31	0.6461	0.04042

								9500	25.4	23.11	56.33	0.6745	0.04031
								10000	25.9	23.93	58.33	0.7028	0.04019
								10500	26.3	24.73	60.32	0.7309	0.04008
								11000	26.7	25.50	62.31	0.7590	0.03997
								11500	27.1	26.25	64.28	0.7868	0.03987
								12000	27.5	26.98	66.25	0.8146	0.03976
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.60	52.72	0.5822	0.03939
								8500	24.4	21.54	54.61	0.6066	0.03930
								9000	24.8	22.46	56.48	0.6307	0.03921
								9500	25.2	23.35	58.32	0.6545	0.03912
								10000	25.6	24.22	60.15	0.6781	0.03903
								10500	25.9	25.07	61.96	0.7015	0.03894

	11000	26.3	25.89	63.76	0.7246	0.03886
	11500	26.6	26.70	65.54	0.7476	0.03877
	12000	27.0	27.49	67.30	0.7703	0.03869
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.6	21.03	49.88	0.5757	0.03919
	8500	24.0	21.97	51.81	0.6029	0.03908
	9000	24.4	22.88	53.72	0.6299	0.03897
	9500	24.7	23.76	55.62	0.6567	0.03886
	10000	25.1	24.62	57.51	0.6833	0.03875
	10500	25.5	25.45	59.39	0.7098	0.03864
	11000	25.9	26.26	61.25	0.7361	0.03853
	11500	26.3	27.05	63.10	0.7622	0.03843
	12000	26.7	27.82	64.94	0.7881	0.03832
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.80	49.92	0.5622	0.04022
	8500	24.2	21.73	51.86	0.5895	0.04012
	9000	24.6	22.63	53.78	0.6166	0.04001
	9500	25.0	23.50	55.68	0.6435	0.03991
	10000	25.4	24.36	57.58	0.6702	0.03980
	10500	25.8	25.18	59.46	0.6967	0.03970

	11000	26.2	25.98	61.32	0.7230	0.03960
	11500	26.6	26.77	63.18	0.7492	0.03950
	12000	27.0	27.53	65.03	0.7753	0.03940
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.4	22.06	47.06	0.7232	0.03404
	8500	22.9	22.98	49.04	0.7615	0.03384
	9000	23.3	23.86	51.00	0.7996	0.03364
	9500	23.8	24.71	52.96	0.8375	0.03344
	10000	24.2	25.53	54.92	0.8753	0.03323
	10500	24.7	26.32	56.86	0.9130	0.03303
	11000	25.1	27.09	58.80	0.9505	0.03283
	11500	25.6	27.83	60.74	0.9880	0.03263
	12000	26.0	28.55	62.66	1.0253	0.03243
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.3	22.21	46.39	0.6932	0.03446
	8500	22.7	23.16	48.24	0.7278	0.03431
	9000	23.1	24.07	50.09	0.7623	0.03415
	9500	23.6	24.95	51.93	0.7965	0.03400
	10000	24.0	25.80	53.76	0.8306	0.03384
	10500	24.4	26.62	55.57	0.8644	0.03369

								11000	24.8	27.42	57.38	0.8982	0.03354
								11500	25.2	28.20	59.18	0.9317	0.03339
								12000	25.6	28.95	60.98	0.9652	0.03324
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.50	52.06	0.6695	0.03825
								8500	24.5	21.45	53.88	0.6943	0.03815
								9000	24.9	22.37	55.68	0.7188	0.03805
								9500	25.3	23.27	57.46	0.7430	0.03796
								10000	25.6	24.14	59.23	0.7670	0.03786
								10500	26.0	25.00	60.98	0.7908	0.03776
								11000	26.3	25.83	62.71	0.8144	0.03767

	11500	26.7	26.65	64.43	0.8377	0.03757
	12000	27.0	27.44	66.13	0.8608	0.03748
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.85	49.67	0.6662	0.03806
	8500	24.2	21.79	51.56	0.6943	0.03794
	9000	24.5	22.69	53.44	0.7221	0.03782
	9500	24.9	23.58	55.30	0.7497	0.03770
	10000	25.3	24.43	57.15	0.7772	0.03758
	10500	25.7	25.27	58.98	0.8044	0.03746
	11000	26.1	26.08	60.81	0.8315	0.03734

	11500	26.5	26.87	62.62	0.8585	0.03722
	12000	26.9	27.64	64.42	0.8852	0.03711
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.64	49.74	0.6489	0.03913
	8500	24.4	21.56	51.63	0.6770	0.03901
	9000	24.8	22.46	53.51	0.7049	0.03890
	9500	25.2	23.34	55.38	0.7326	0.03878
	10000	25.6	24.18	57.24	0.7601	0.03867
	10500	26.0	25.01	59.08	0.7874	0.03855
	11000	26.4	25.82	60.91	0.8145	0.03844

	11500	26.8	26.60	62.73	0.8415	0.03833
	12000	27.1	27.36	64.54	0.8683	0.03822
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.6	21.94	46.17	0.8191	0.03285
	8500	23.0	22.86	48.08	0.8582	0.03263
	9000	23.4	23.75	49.97	0.8970	0.03241
	9500	23.9	24.61	51.86	0.9357	0.03220
	10000	24.3	25.44	53.74	0.9743	0.03198
	10500	24.8	26.24	55.62	1.0128	0.03177
	11000	25.2	27.01	57.49	1.0511	0.03156

	11500	25.6	27.76	59.36	1.0893	0.03134
	12000	26.1	28.49	61.21	1.1274	0.03113
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.4	22.07	45.65	0.7902	0.03326
	8500	22.9	23.01	47.45	0.8256	0.03309
	9000	23.3	23.93	49.24	0.8609	0.03292
	9500	23.7	24.81	51.01	0.8959	0.03276
	10000	24.1	25.67	52.78	0.9308	0.03259
	10500	24.5	26.50	54.54	0.9655	0.03242
	11000	24.9	27.30	56.29	1.0000	0.03226

								11500	25.3	28.08	58.03	1.0344	0.03210
								12000	25.7	28.84	59.77	1.0686	0.03193
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.83	54.24	0.5501	0.04223
								8500	25.4	20.74	56.20	0.5727	0.04216
								9000	25.7	21.64	58.13	0.5950	0.04208
								9500	26.1	22.51	60.03	0.6171	0.04200
								10000	26.5	23.36	61.92	0.6390	0.04193
								10500	26.9	24.19	63.80	0.6606	0.04185
								11000	27.2	25.00	65.65	0.6821	0.04178
								11500	27.6	25.79	67.49	0.7034	0.04171
								12000	27.9	26.56	69.31	0.7245	0.04163
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.25	51.41	0.5428	0.04197
								8500	24.9	21.16	53.40	0.5681	0.04187
								9000	25.3	22.05	55.39	0.5931	0.04178
								9500	25.7	22.92	57.36	0.6180	0.04168
								10000	26.1	23.75	59.31	0.6427	0.04159

	10500	26.4	24.57	61.26	0.6673	0.04149
	11000	26.8	25.37	63.19	0.6916	0.04140
	11500	27.2	26.14	65.10	0.7159	0.04131
	12000	27.6	26.89	67.01	0.7400	0.04122
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.04	51.44	0.5299	0.04299
	8500	25.1	20.94	53.44	0.5553	0.04290
	9000	25.5	21.82	55.43	0.5804	0.04281
	9500	25.9	22.68	57.41	0.6054	0.04272
	10000	26.3	23.51	59.37	0.6302	0.04263
	10500	26.7	24.32	61.32	0.6548	0.04254
	11000	27.1	25.11	63.25	0.6793	0.04246
	11500	27.5	25.87	65.18	0.7036	0.04237
	12000	27.9	26.62	67.09	0.7278	0.04228
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.25	48.84	0.6785	0.03681
	8500	23.8	22.15	50.90	0.7142	0.03663
	9000	24.2	23.01	52.95	0.7498	0.03644
	9500	24.7	23.84	55.00	0.7853	0.03626
	10000	25.1	24.65	57.04	0.8206	0.03608

								10500	25.5	25.43	59.07	0.8559	0.03589
								11000	26.0	26.19	61.09	0.8910	0.03571
								11500	26.4	26.92	63.11	0.9260	0.03553
								12000	26.9	27.62	65.13	0.9608	0.03535
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.38	48.08	0.6512	0.03723
								8500	23.6	22.30	50.02	0.6836	0.03709
								9000	24.0	23.20	51.95	0.7157	0.03695
								9500	24.4	24.06	53.86	0.7477	0.03681
								10000	24.9	24.90	55.77	0.7796	0.03667
								10500	25.3	25.71	57.66	0.8112	0.03654
								11000	25.7	26.49	59.55	0.8427	0.03640
								11500	26.1	27.25	61.43	0.8741	0.03627
								12000	26.5	27.99	63.30	0.9053	0.03613
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.9	19.92	53.68	0.5435	0.04226
								8500	25.2	20.84	55.60	0.5657	0.04218

	9000	25.6	21.75	57.50	0.5878	0.04210
	9500	26.0	22.62	59.38	0.6095	0.04203
	10000	26.4	23.48	61.24	0.6311	0.04195
	10500	26.7	24.32	63.09	0.6524	0.04188
	11000	27.1	25.13	64.91	0.6736	0.04181
	11500	27.4	25.93	66.73	0.6945	0.04174
	12000	27.8	26.72	68.52	0.7153	0.04166
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.25	51.41	0.5428	0.04197
	8500	24.9	21.16	53.40	0.5681	0.04187

	9000	25.3	22.05	55.39	0.5931	0.04178
	9500	25.7	22.92	57.36	0.6180	0.04168
	10000	26.1	23.75	59.31	0.6427	0.04159
	10500	26.4	24.57	61.26	0.6673	0.04149
	11000	26.8	25.37	63.19	0.6916	0.04140
	11500	27.2	26.14	65.10	0.7159	0.04131
	12000	27.6	26.89	67.01	0.7400	0.04122
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.04	51.44	0.5299	0.04299
	8500	25.1	20.94	53.44	0.5553	0.04290

	9000	25.5	21.82	55.43	0.5804	0.04281
	9500	25.9	22.68	57.41	0.6054	0.04272
	10000	26.3	23.51	59.37	0.6302	0.04263
	10500	26.7	24.32	61.32	0.6548	0.04254
	11000	27.1	25.11	63.25	0.6793	0.04246
	11500	27.5	25.87	65.18	0.7036	0.04237
	12000	27.9	26.62	67.09	0.7278	0.04228
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.31	48.53	0.6731	0.03684
	8500	23.7	22.21	50.57	0.7085	0.03666

	9000	24.1	23.08	52.61	0.7438	0.03647
	9500	24.6	23.92	54.63	0.7790	0.03629
	10000	25.0	24.73	56.66	0.8140	0.03611
	10500	25.5	25.52	58.67	0.8489	0.03593
	11000	25.9	26.28	60.68	0.8837	0.03575
	11500	26.3	27.01	62.68	0.9184	0.03557
	12000	26.8	27.73	64.67	0.9530	0.03539
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.43	47.87	0.6476	0.03724
	8500	23.5	22.36	49.79	0.6797	0.03710

								9000	24.0	23.25	51.71	0.7117	0.03697
								9500	24.4	24.12	53.61	0.7435	0.03683
								10000	24.8	24.96	55.50	0.7751	0.03669
								10500	25.2	25.77	57.39	0.8066	0.03656
								11000	25.6	26.56	59.26	0.8379	0.03642
								11500	26.0	27.32	61.13	0.8691	0.03629
								12000	26.5	28.06	62.99	0.9001	0.03616
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.17	53.68	0.5496	0.04121
								8500	24.9	21.10	55.61	0.5722	0.04113
								9000	25.3	22.01	57.51	0.5946	0.04105
								9500	25.7	22.89	59.39	0.6167	0.04097

	10000	26.1	23.75	61.26	0.6386	0.04090
	10500	26.4	24.59	63.10	0.6603	0.04082
	11000	26.8	25.41	64.93	0.6818	0.04075
	11500	27.1	26.21	66.75	0.7031	0.04067
	12000	27.5	27.00	68.54	0.7242	0.04060
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.68	50.38	0.5365	0.04098
	8500	24.3	21.62	52.32	0.5615	0.04088
	9000	24.7	22.52	54.25	0.5862	0.04079
	9500	25.1	23.40	56.17	0.6108	0.04069
	10000	25.5	24.26	58.07	0.6352	0.04060
	10500	25.9	25.10	59.96	0.6594	0.04051
	11000	26.3	25.91	61.84	0.6835	0.04041
	11500	26.7	26.70	63.71	0.7075	0.04032
	12000	27.0	27.47	65.57	0.7313	0.04023
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.43	50.60	0.5259	0.04199
	8500	24.6	21.35	52.56	0.5510	0.04190
	9000	25.0	22.25	54.50	0.5760	0.04180
	9500	25.4	23.12	56.43	0.6008	0.04171

	10000	25.8	23.97	58.35	0.6254	0.04163
	10500	26.2	24.79	60.26	0.6499	0.04154
	11000	26.6	25.59	62.15	0.6742	0.04145
	11500	27.0	26.38	64.03	0.6983	0.04136
	12000	27.4	27.14	65.91	0.7223	0.04127
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.56	48.49	0.6840	0.03583
	8500	23.4	22.47	50.53	0.7200	0.03564
	9000	23.9	23.34	52.57	0.7559	0.03546
	9500	24.3	24.18	54.60	0.7916	0.03527
	10000	24.8	24.99	56.62	0.8272	0.03508
	10500	25.2	25.78	58.63	0.8627	0.03490
	11000	25.6	26.53	60.64	0.8981	0.03472
	11500	26.1	27.27	62.64	0.9334	0.03453
	12000	26.5	27.98	64.64	0.9685	0.03435
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.70	47.75	0.6562	0.03624
	8500	23.2	22.63	49.67	0.6888	0.03610
	9000	23.7	23.53	51.58	0.7212	0.03596
	9500	24.1	24.40	53.48	0.7535	0.03582

								10000	24.5	25.24	55.37	0.7856	0.03569
								10500	24.9	26.06	57.25	0.8175	0.03555
								11000	25.3	26.85	59.12	0.8492	0.03541
								11500	25.8	27.62	60.98	0.8808	0.03527
								12000	26.2	28.36	62.84	0.9123	0.03514
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.7	20.08	53.03	0.6369	0.04005
								8500	25.0	21.01	54.89	0.6600	0.03996
								9000	25.4	21.93	56.73	0.6828	0.03987
								9500	25.8	22.81	58.55	0.7053	0.03979
								10000	26.1	23.68	60.35	0.7276	0.03970
								10500	26.5	24.53	62.14	0.7497	0.03962

	11000	26.8	25.35	63.90	0.7716	0.03954
	11500	27.2	26.17	65.65	0.7933	0.03945
	12000	27.5	26.96	67.39	0.8149	0.03937
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.51	50.22	0.6264	0.03984
	8500	24.5	21.44	52.12	0.6521	0.03973
	9000	24.9	22.35	54.01	0.6777	0.03962
	9500	25.3	23.23	55.89	0.7031	0.03952
	10000	25.7	24.09	57.75	0.7283	0.03941
	10500	26.1	24.92	59.61	0.7534	0.03931

		11000	26.5	25.73	61.45	0.7783	0.03921
		11500	26.8	26.53	63.28	0.8030	0.03910
		12000	27.2	27.30	65.10	0.8276	0.03900
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.27	50.45	0.6120	0.04088
		8500	24.8	21.19	52.37	0.6379	0.04078
		9000	25.2	22.09	54.28	0.6637	0.04068
		9500	25.6	22.96	56.17	0.6893	0.04057
		10000	26.0	23.81	58.06	0.7147	0.04047
		10500	26.4	24.63	59.92	0.7399	0.04038

	11000	26.8	25.43	61.78	0.7650	0.04028
	11500	27.1	26.22	63.63	0.7899	0.04018
	12000	27.5	26.98	65.46	0.8147	0.04008
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.45	47.62	0.7799	0.03461
	8500	23.5	22.36	49.59	0.8167	0.03441
	9000	24.0	23.24	51.55	0.8534	0.03421
	9500	24.4	24.09	53.51	0.8899	0.03401
	10000	24.8	24.91	55.46	0.9263	0.03381
	10500	25.3	25.70	57.41	0.9626	0.03361

	11000	25.7	26.47	59.35	0.9988	0.03342
	11500	26.1	27.21	61.28	1.0348	0.03322
	12000	26.6	27.93	63.20	1.0708	0.03302
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.56	47.04	0.7531	0.03502
	8500	23.4	22.50	48.90	0.7865	0.03486
	9000	23.8	23.40	50.75	0.8198	0.03471
	9500	24.2	24.28	52.59	0.8528	0.03456
	10000	24.6	25.12	54.42	0.8857	0.03441
	10500	25.0	25.94	56.24	0.9184	0.03426

								11000	25.4	26.74	58.05	0.9510	0.03411
								11500	25.9	27.52	59.85	0.9834	0.03396
								12000	26.3	28.27	61.65	1.0157	0.03381
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.80	54.08	0.6326	0.04075
								8500	25.4	20.72	55.99	0.6554	0.04066
								9000	25.8	21.62	57.88	0.6779	0.04058
								9500	26.1	22.50	59.74	0.7002	0.04050
								10000	26.5	23.35	61.59	0.7222	0.04042
								10500	26.9	24.19	63.42	0.7441	0.04033
								11000	27.2	25.01	65.23	0.7657	0.04025
								11500	27.6	25.80	67.03	0.7872	0.04017
								12000	27.9	26.58	68.81	0.8084	0.04009
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.32	50.71	0.6152	0.04054
								8500	24.8	21.25	52.63	0.6403	0.04044
								9000	25.2	22.15	54.55	0.6652	0.04034

	9500	25.5	23.02	56.44	0.6899	0.04024
	10000	25.9	23.88	58.33	0.7145	0.04014
	10500	26.3	24.71	60.20	0.7389	0.04004
	11000	26.7	25.52	62.07	0.7631	0.03994
	11500	27.1	26.31	63.92	0.7872	0.03984
	12000	27.4	27.07	65.76	0.8112	0.03974
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.09	50.94	0.6009	0.04158
	8500	25.1	21.01	52.88	0.6262	0.04148
	9000	25.4	21.90	54.81	0.6513	0.04138
	9500	25.8	22.76	56.73	0.6763	0.04129
	10000	26.2	23.60	58.63	0.7010	0.04119
	10500	26.6	24.42	60.52	0.7256	0.04110
	11000	27.0	25.22	62.40	0.7500	0.04101
	11500	27.4	26.00	64.26	0.7743	0.04091
	12000	27.7	26.76	66.12	0.7984	0.04082
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.19	48.49	0.7703	0.03529
	8500	23.8	22.10	50.51	0.8066	0.03509
	9000	24.3	22.96	52.52	0.8427	0.03490

								9500	24.7	23.80	54.52	0.8787	0.03471
								10000	25.1	24.62	56.52	0.9146	0.03451
								10500	25.6	25.40	58.51	0.9503	0.03432
								11000	26.0	26.16	60.49	0.9860	0.03413
								11500	26.5	26.89	62.47	1.0215	0.03394
								12000	26.9	27.61	64.44	1.0569	0.03375
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.32	47.80	0.7425	0.03571
								8500	23.7	22.24	49.70	0.7754	0.03557
								9000	24.1	23.14	51.59	0.8081	0.03542
								9500	24.5	24.01	53.46	0.8406	0.03527
								10000	24.9	24.85	55.33	0.8729	0.03512
								10500	25.3	25.66	57.18	0.9051	0.03498
								11000	25.7	26.45	59.03	0.9371	0.03483
								11500	26.1	27.22	60.87	0.9689	0.03469
								12000	26.5	27.97	62.70	1.0006	0.03454
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.7	20.07	53.59	0.5321	0.04196

	8500	25.1	21.00	55.51	0.5538	0.04189
	9000	25.4	21.91	57.40	0.5752	0.04182
	9500	25.8	22.79	59.28	0.5964	0.04175
	10000	26.2	23.66	61.13	0.6174	0.04168
	10500	26.5	24.50	62.97	0.6382	0.04161
	11000	26.9	25.33	64.79	0.6588	0.04154
	11500	27.2	26.13	66.60	0.6792	0.04147
	12000	27.6	26.92	68.39	0.6994	0.04140
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.49	50.86	0.5254	0.04169

	8500	24.6	21.42	52.82	0.5497	0.04160
	9000	25.0	22.32	54.77	0.5738	0.04151
	9500	25.4	23.19	56.71	0.5977	0.04142
	10000	25.7	24.05	58.64	0.6215	0.04133
	10500	26.1	24.88	60.55	0.6451	0.04124
	11000	26.5	25.68	62.45	0.6685	0.04116
	11500	26.9	26.47	64.34	0.6918	0.04107
	12000	27.3	27.24	66.21	0.7150	0.04098
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.24	51.07	0.5149	0.04269

	8500	24.9	21.16	53.06	0.5394	0.04261
	9000	25.3	22.05	55.02	0.5637	0.04252
	9500	25.7	22.92	56.98	0.5879	0.04244
	10000	26.1	23.76	58.92	0.6118	0.04235
	10500	26.4	24.58	60.84	0.6356	0.04227
	11000	26.8	25.38	62.76	0.6593	0.04219
	11500	27.2	26.16	64.66	0.6828	0.04210
	12000	27.6	26.92	66.55	0.7061	0.04202
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.42	48.74	0.6636	0.03658

	8500	23.6	22.33	50.79	0.6985	0.03640
	9000	24.0	23.20	52.84	0.7332	0.03622
	9500	24.4	24.05	54.88	0.7678	0.03604
	10000	24.9	24.86	56.91	0.8022	0.03587
	10500	25.3	25.65	58.93	0.8365	0.03569
	11000	25.8	26.41	60.95	0.8708	0.03552
	11500	26.2	27.15	62.96	0.9049	0.03534
	12000	26.6	27.86	64.97	0.9389	0.03517
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.54	48.07	0.6385	0.03698

								8500	23.4	22.47	50.01	0.6701	0.03685
								9000	23.8	23.37	51.93	0.7016	0.03671
								9500	24.3	24.24	53.84	0.7328	0.03658
								10000	24.7	25.08	55.75	0.7639	0.03645
								10500	25.1	25.89	57.64	0.7949	0.03632
								11000	25.5	26.69	59.52	0.8257	0.03619
								11500	25.9	27.45	61.40	0.8563	0.03606
								12000	26.3	28.20	63.26	0.8868	0.03593
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.26	55.33	0.5294	0.04443
								8500	26.1	20.16	57.33	0.5508	0.04437

	9000	26.5	21.04	59.30	0.5719	0.04430
	9500	26.9	21.89	61.26	0.5928	0.04423
	10000	27.2	22.73	63.19	0.6135	0.04416
	10500	27.6	23.54	65.11	0.6340	0.04410
	11000	28.0	24.34	67.00	0.6543	0.04403
	11500	28.3	25.11	68.89	0.6744	0.04397
	12000	28.7	25.87	70.75	0.6944	0.04390
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.50	0.5216	0.04412
	8500	25.6	20.57	54.55	0.5455	0.04404
	9000	26.0	21.44	56.58	0.5692	0.04395
	9500	26.4	22.29	58.60	0.5927	0.04386
	10000	26.8	23.11	60.60	0.6161	0.04378
	10500	27.2	23.91	62.59	0.6394	0.04370
	11000	27.6	24.70	64.57	0.6624	0.04361
	11500	28.0	25.46	66.54	0.6854	0.04353
	12000	28.3	26.20	68.50	0.7082	0.04345
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.47	52.53	0.5091	0.04514
	8500	25.9	20.36	54.58	0.5331	0.04506

	9000	26.3	21.22	56.62	0.5569	0.04498
	9500	26.7	22.06	58.64	0.5805	0.04490
	10000	27.1	22.88	60.65	0.6040	0.04482
	10500	27.4	23.68	62.65	0.6273	0.04474
	11000	27.8	24.45	64.63	0.6505	0.04466
	11500	28.2	25.21	66.61	0.6736	0.04459
	12000	28.6	25.94	68.57	0.6965	0.04451
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.65	50.11	0.6487	0.03894
	8500	24.4	21.53	52.23	0.6827	0.03877
	9000	24.9	22.38	54.35	0.7166	0.03860
	9500	25.3	23.20	56.46	0.7503	0.03843
	10000	25.8	24.00	58.56	0.7840	0.03826
	10500	26.2	24.77	60.65	0.8175	0.03809
	11000	26.7	25.51	62.74	0.8509	0.03792
	11500	27.1	26.23	64.82	0.8842	0.03775
	12000	27.6	26.93	66.89	0.9174	0.03758
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.77	49.30	0.6233	0.03935
	8500	24.3	21.67	51.30	0.6541	0.03923

								9000	24.7	22.55	53.28	0.6847	0.03910
								9500	25.1	23.40	55.25	0.7152	0.03897
								10000	25.5	24.22	57.21	0.7455	0.03885
								10500	26.0	25.02	59.16	0.7756	0.03872
								11000	26.4	25.80	61.11	0.8056	0.03860
								11500	26.8	26.55	63.04	0.8354	0.03848
								12000	27.2	27.28	64.97	0.8652	0.03835
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.35	54.75	0.5232	0.04445
								8500	26.0	20.25	56.72	0.5442	0.04439
								9000	26.4	21.13	58.66	0.5651	0.04432
								9500	26.7	22.00	60.59	0.5857	0.04425
								10000	27.1	22.84	62.50	0.6060	0.04419

	10500	27.5	23.66	64.38	0.6262	0.04412
	11000	27.8	24.46	66.25	0.6462	0.04406
	11500	28.2	25.25	68.11	0.6661	0.04399
	12000	28.5	26.02	69.94	0.6857	0.04393
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.50	0.5216	0.04412
	8500	25.6	20.57	54.55	0.5455	0.04404
	9000	26.0	21.44	56.58	0.5692	0.04395
	9500	26.4	22.29	58.60	0.5927	0.04386
	10000	26.8	23.11	60.60	0.6161	0.04378

		10500	27.2	23.91	62.59	0.6394	0.04370
		11000	27.6	24.70	64.57	0.6624	0.04361
		11500	28.0	25.46	66.54	0.6854	0.04353
		12000	28.3	26.20	68.50	0.7082	0.04345
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.47	52.53	0.5091	0.04514
		8500	25.9	20.36	54.58	0.5331	0.04506
		9000	26.3	21.22	56.62	0.5569	0.04498
		9500	26.7	22.06	58.64	0.5805	0.04490
		10000	27.1	22.88	60.65	0.6040	0.04482

	10500	27.4	23.68	62.65	0.6273	0.04474
	11000	27.8	24.45	64.63	0.6505	0.04466
	11500	28.2	25.21	66.61	0.6736	0.04459
	12000	28.6	25.94	68.57	0.6965	0.04451
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.71	49.79	0.6435	0.03897
	8500	24.4	21.59	51.90	0.6773	0.03880
	9000	24.8	22.45	53.99	0.7108	0.03863
	9500	25.3	23.28	56.08	0.7443	0.03846
	10000	25.7	24.08	58.16	0.7776	0.03829

	10500	26.1	24.85	60.24	0.8109	0.03812
	11000	26.6	25.60	62.31	0.8440	0.03795
	11500	27.0	26.33	64.37	0.8770	0.03779
	12000	27.5	27.03	66.43	0.9099	0.03762
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.81	49.08	0.6199	0.03937
	8500	24.2	21.72	51.06	0.6505	0.03924
	9000	24.6	22.60	53.03	0.6809	0.03912
	9500	25.1	23.45	54.99	0.7112	0.03899
	10000	25.5	24.28	56.94	0.7413	0.03887

								10500	25.9	25.08	58.88	0.7712	0.03874
								11000	26.3	25.86	60.81	0.8010	0.03862
								11500	26.7	26.61	62.73	0.8307	0.03850
								12000	27.1	27.35	64.64	0.8602	0.03837
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.30	55.35	0.5279	0.04430
								8500	26.1	20.20	57.35	0.5492	0.04423
								9000	26.4	21.08	59.32	0.5702	0.04416
								9500	26.8	21.93	61.28	0.5911	0.04410
								10000	27.2	22.77	63.21	0.6117	0.04403
								10500	27.6	23.59	65.13	0.6321	0.04396
								11000	27.9	24.38	67.03	0.6523	0.04390
								11500	28.3	25.16	68.91	0.6724	0.04383
								12000	28.6	25.92	70.77	0.6923	0.04377
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.71	52.52	0.5201	0.04399

	8500	25.5	20.61	54.57	0.5439	0.04390
	9000	25.9	21.48	56.60	0.5676	0.04381
	9500	26.3	22.33	58.62	0.5910	0.04373
	10000	26.7	23.16	60.62	0.6143	0.04365
	10500	27.1	23.96	62.62	0.6375	0.04356
	11000	27.5	24.75	64.60	0.6605	0.04348
	11500	27.9	25.51	66.56	0.6834	0.04340
	12000	28.3	26.25	68.52	0.7061	0.04332
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.51	52.55	0.5076	0.04500
	8500	25.8	20.40	54.60	0.5316	0.04492
	9000	26.2	21.27	56.64	0.5553	0.04484
	9500	26.6	22.11	58.66	0.5789	0.04476
	10000	27.0	22.93	60.67	0.6023	0.04468
	10500	27.4	23.72	62.67	0.6255	0.04461
	11000	27.8	24.50	64.66	0.6486	0.04453
	11500	28.2	25.26	66.63	0.6715	0.04445
	12000	28.6	26.00	68.59	0.6944	0.04437
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.69	50.13	0.6471	0.03882

	8500	24.4	21.57	52.25	0.6810	0.03865
	9000	24.8	22.42	54.37	0.7148	0.03848
	9500	25.3	23.25	56.48	0.7485	0.03831
	10000	25.7	24.04	58.58	0.7820	0.03814
	10500	26.2	24.81	60.68	0.8154	0.03797
	11000	26.6	25.56	62.76	0.8487	0.03780
	11500	27.1	26.28	64.84	0.8820	0.03763
	12000	27.5	26.98	66.92	0.9151	0.03747
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.81	49.32	0.6218	0.03923
	8500	24.2	21.72	51.31	0.6525	0.03910
	9000	24.7	22.60	53.30	0.6830	0.03898
	9500	25.1	23.45	55.27	0.7134	0.03885
	10000	25.5	24.27	57.23	0.7436	0.03873
	10500	25.9	25.07	59.19	0.7736	0.03860
	11000	26.3	25.85	61.13	0.8035	0.03848
	11500	26.8	26.60	63.06	0.8333	0.03836
	12000	27.2	27.33	64.99	0.8629	0.03824

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.38	54.77	0.5217	0.04432
								8500	25.9	20.29	56.74	0.5427	0.04425
								9000	26.3	21.18	58.68	0.5634	0.04418
								9500	26.7	22.04	60.61	0.5839	0.04412
								10000	27.0	22.88	62.52	0.6042	0.04405
								10500	27.4	23.71	64.40	0.6244	0.04399
								11000	27.8	24.51	66.27	0.6443	0.04392
								11500	28.1	25.30	68.13	0.6641	0.04386
								12000	28.5	26.06	69.97	0.6837	0.04380

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.71	52.52	0.5201	0.04399
	8500	25.5	20.61	54.57	0.5439	0.04390
	9000	25.9	21.48	56.60	0.5676	0.04381
	9500	26.3	22.33	58.62	0.5910	0.04373
	10000	26.7	23.16	60.62	0.6143	0.04365
	10500	27.1	23.96	62.62	0.6375	0.04356
	11000	27.5	24.75	64.60	0.6605	0.04348
	11500	27.9	25.51	66.56	0.6834	0.04340
	12000	28.3	26.25	68.52	0.7061	0.04332

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.51	52.55	0.5076	0.04500
	8500	25.8	20.40	54.60	0.5316	0.04492
	9000	26.2	21.27	56.64	0.5553	0.04484
	9500	26.6	22.11	58.66	0.5789	0.04476
	10000	27.0	22.93	60.67	0.6023	0.04468
	10500	27.4	23.72	62.67	0.6255	0.04461
	11000	27.8	24.50	64.66	0.6486	0.04453
	11500	28.2	25.26	66.63	0.6715	0.04445
	12000	28.6	26.00	68.59	0.6944	0.04437

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.75	49.81	0.6420	0.03885
	8500	24.3	21.64	51.92	0.6756	0.03868
	9000	24.8	22.49	54.01	0.7091	0.03851
	9500	25.2	23.32	56.10	0.7425	0.03834
	10000	25.7	24.12	58.19	0.7757	0.03817
	10500	26.1	24.90	60.26	0.8088	0.03800
	11000	26.5	25.65	62.33	0.8419	0.03784
	11500	27.0	26.37	64.40	0.8748	0.03767
	12000	27.4	27.08	66.45	0.9076	0.03750

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.85	49.10	0.6184	0.03925
	8500	24.2	21.77	51.08	0.6489	0.03912
	9000	24.6	22.65	53.05	0.6792	0.03899
	9500	25.0	23.50	55.01	0.7094	0.03887
	10000	25.4	24.33	56.96	0.7394	0.03875
	10500	25.9	25.13	58.90	0.7693	0.03862
	11000	26.3	25.91	60.83	0.7990	0.03850
	11500	26.7	26.66	62.76	0.8285	0.03838
	12000	27.1	27.40	64.67	0.8580	0.03826

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.36	55.23	0.5197	0.04425
								8500	26.0	20.27	57.22	0.5405	0.04419
								9000	26.3	21.15	59.18	0.5611	0.04412
								9500	26.7	22.01	61.13	0.5815	0.04406
								10000	27.1	22.85	63.06	0.6017	0.04399
								10500	27.5	23.67	64.97	0.6217	0.04393
								11000	27.8	24.47	66.86	0.6416	0.04387
								11500	28.2	25.26	68.73	0.6612	0.04381
								12000	28.5	26.02	70.59	0.6807	0.04374
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	51.91	0.5062	0.04395
								8500	25.3	20.77	53.93	0.5292	0.04387
								9000	25.7	21.65	55.93	0.5521	0.04379
								9500	26.1	22.51	57.91	0.5748	0.04371
								10000	26.5	23.35	59.88	0.5973	0.04363
								10500	26.9	24.17	61.84	0.6197	0.04355
								11000	27.3	24.96	63.79	0.6420	0.04347
								11500	27.7	25.74	65.72	0.6641	0.04339
								12000	28.0	26.49	67.65	0.6861	0.04332

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.13	0.4960	0.04496
	8500	25.6	20.53	54.16	0.5192	0.04488
	9000	26.0	21.40	56.18	0.5423	0.04480
	9500	26.4	22.25	58.18	0.5652	0.04473
	10000	26.8	23.08	60.17	0.5879	0.04465
	10500	27.2	23.88	62.14	0.6105	0.04458
	11000	27.6	24.67	64.10	0.6330	0.04450
	11500	28.0	25.43	66.05	0.6553	0.04443
	12000	28.4	26.18	67.99	0.6775	0.04435
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.72	50.30	0.6408	0.03878
	8500	24.4	21.60	52.44	0.6743	0.03861
	9000	24.8	22.45	54.56	0.7077	0.03845
	9500	25.3	23.28	56.68	0.7410	0.03828
	10000	25.7	24.08	58.79	0.7741	0.03811
	10500	26.1	24.85	60.89	0.8071	0.03795
	11000	26.6	25.59	62.99	0.8401	0.03778
	11500	27.0	26.31	65.08	0.8729	0.03762
	12000	27.5	27.02	67.16	0.9056	0.03745

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.84	49.49	0.6158	0.03919
								8500	24.2	21.75	51.49	0.6461	0.03907
								9000	24.6	22.63	53.48	0.6763	0.03895
								9500	25.0	23.48	55.46	0.7063	0.03882
								10000	25.5	24.30	57.43	0.7361	0.03870
								10500	25.9	25.10	59.39	0.7658	0.03858
								11000	26.3	25.88	61.34	0.7954	0.03846
								11500	26.7	26.63	63.29	0.8248	0.03834
								12000	27.1	27.36	65.22	0.8541	0.03822
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.45	54.64	0.5135	0.04427
								8500	25.8	20.36	56.60	0.5341	0.04421
								9000	26.2	21.25	58.54	0.5544	0.04414
								9500	26.6	22.12	60.46	0.5745	0.04408

	10000	27.0	22.97	62.36	0.5944	0.04402
	10500	27.3	23.80	64.24	0.6141	0.04395
	11000	27.7	24.60	66.10	0.6336	0.04389
	11500	28.0	25.39	67.95	0.6530	0.04383
	12000	28.4	26.17	69.78	0.6722	0.04377
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	51.91	0.5062	0.04395
	8500	25.3	20.77	53.93	0.5292	0.04387
	9000	25.7	21.65	55.93	0.5521	0.04379
	9500	26.1	22.51	57.91	0.5748	0.04371

	10000	26.5	23.35	59.88	0.5973	0.04363
	10500	26.9	24.17	61.84	0.6197	0.04355
	11000	27.3	24.96	63.79	0.6420	0.04347
	11500	27.7	25.74	65.72	0.6641	0.04339
	12000	28.0	26.49	67.65	0.6861	0.04332
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.13	0.4960	0.04496
	8500	25.6	20.53	54.16	0.5192	0.04488
	9000	26.0	21.40	56.18	0.5423	0.04480
	9500	26.4	22.25	58.18	0.5652	0.04473

	10000	26.8	23.08	60.17	0.5879	0.04465
	10500	27.2	23.88	62.14	0.6105	0.04458
	11000	27.6	24.67	64.10	0.6330	0.04450
	11500	28.0	25.43	66.05	0.6553	0.04443
	12000	28.4	26.18	67.99	0.6775	0.04435
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.78	49.98	0.6357	0.03881
	8500	24.3	21.67	52.10	0.6689	0.03864
	9000	24.7	22.52	54.20	0.7020	0.03848
	9500	25.2	23.35	56.30	0.7350	0.03831

		10000	25.6	24.15	58.40	0.7679	0.03814
		10500	26.1	24.93	60.48	0.8006	0.03798
		11000	26.5	25.68	62.56	0.8333	0.03782
		11500	26.9	26.41	64.63	0.8658	0.03765
		12000	27.4	27.12	66.69	0.8983	0.03749
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.88	49.26	0.6124	0.03921
		8500	24.1	21.79	51.25	0.6425	0.03908
		9000	24.6	22.68	53.23	0.6725	0.03896
		9500	25.0	23.53	55.20	0.7023	0.03884

								10000	25.4	24.36	57.16	0.7320	0.03872
								10500	25.8	25.16	59.11	0.7615	0.03860
								11000	26.2	25.94	61.05	0.7909	0.03848
								11500	26.7	26.70	62.98	0.8201	0.03836
								12000	27.1	27.43	64.90	0.8492	0.03824
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.40	55.24	0.5182	0.04412
								8500	25.9	20.31	57.24	0.5389	0.04405
								9000	26.3	21.19	59.20	0.5595	0.04399
								9500	26.7	22.06	61.15	0.5798	0.04392
								10000	27.0	22.90	63.08	0.5999	0.04386
								10500	27.4	23.72	64.99	0.6199	0.04380
								11000	27.8	24.52	66.88	0.6396	0.04373
								11500	28.1	25.31	68.75	0.6592	0.04367

	12000	28.5	26.07	70.61	0.6786	0.04361
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	51.93	0.5047	0.04382
	8500	25.3	20.81	53.95	0.5277	0.04374
	9000	25.7	21.69	55.95	0.5505	0.04366
	9500	26.1	22.56	57.93	0.5731	0.04358
	10000	26.5	23.40	59.90	0.5956	0.04350
	10500	26.8	24.21	61.86	0.6179	0.04342
	11000	27.2	25.01	63.81	0.6400	0.04334
	11500	27.6	25.78	65.75	0.6621	0.04326
	12000	28.0	26.54	67.67	0.6840	0.04318
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.15	0.4945	0.04482
	8500	25.6	20.57	54.18	0.5177	0.04474
	9000	26.0	21.44	56.20	0.5407	0.04466
	9500	26.4	22.29	58.20	0.5635	0.04459
	10000	26.8	23.12	60.19	0.5862	0.04451
	10500	27.2	23.93	62.16	0.6087	0.04444
	11000	27.5	24.71	64.12	0.6311	0.04437
	11500	27.9	25.48	66.07	0.6533	0.04429

	12000	28.3	26.23	68.01	0.6754	0.04422
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.76	50.32	0.6392	0.03866
	8500	24.3	21.64	52.46	0.6726	0.03849
	9000	24.8	22.50	54.58	0.7059	0.03832
	9500	25.2	23.32	56.70	0.7391	0.03816
	10000	25.7	24.12	58.81	0.7721	0.03799
	10500	26.1	24.89	60.92	0.8051	0.03783
	11000	26.5	25.64	63.01	0.8379	0.03766
	11500	27.0	26.36	65.10	0.8707	0.03750
	12000	27.4	27.07	67.19	0.9033	0.03733
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.88	49.51	0.6143	0.03907
	8500	24.1	21.79	51.51	0.6445	0.03895
	9000	24.6	22.67	53.50	0.6746	0.03882
	9500	25.0	23.52	55.48	0.7045	0.03870
	10000	25.4	24.35	57.46	0.7343	0.03858
	10500	25.8	25.15	59.42	0.7639	0.03846
	11000	26.3	25.93	61.37	0.7933	0.03834
	11500	26.7	26.68	63.31	0.8227	0.03822

								12000	27.1	27.42	65.24	0.8519	0.03810
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.4	19.49	54.66	0.5121	0.04413
								8500	25.8	20.41	56.62	0.5325	0.04407
								9000	26.2	21.29	58.56	0.5528	0.04401
								9500	26.5	22.17	60.48	0.5728	0.04394
								10000	26.9	23.01	62.38	0.5926	0.04388
								10500	27.3	23.84	64.26	0.6123	0.04382
								11000	27.6	24.65	66.12	0.6317	0.04376
								11500	28.0	25.44	67.97	0.6510	0.04370

	12000	28.3	26.22	69.80	0.6701	0.04364
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	51.93	0.5047	0.04382
	8500	25.3	20.81	53.95	0.5277	0.04374
	9000	25.7	21.69	55.95	0.5505	0.04366
	9500	26.1	22.56	57.93	0.5731	0.04358
	10000	26.5	23.40	59.90	0.5956	0.04350
	10500	26.8	24.21	61.86	0.6179	0.04342
	11000	27.2	25.01	63.81	0.6400	0.04334
	11500	27.6	25.78	65.75	0.6621	0.04326

	12000	28.0	26.54	67.67	0.6840	0.04318
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.15	0.4945	0.04482
	8500	25.6	20.57	54.18	0.5177	0.04474
	9000	26.0	21.44	56.20	0.5407	0.04466
	9500	26.4	22.29	58.20	0.5635	0.04459
	10000	26.8	23.12	60.19	0.5862	0.04451
	10500	27.2	23.93	62.16	0.6087	0.04444
	11000	27.5	24.71	64.12	0.6311	0.04437
	11500	27.9	25.48	66.07	0.6533	0.04429

	12000	28.3	26.23	68.01	0.6754	0.04422
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.82	50.00	0.6342	0.03868
	8500	24.2	21.71	52.12	0.6673	0.03852
	9000	24.7	22.57	54.23	0.7003	0.03835
	9500	25.1	23.40	56.33	0.7332	0.03819
	10000	25.6	24.20	58.42	0.7660	0.03802
	10500	26.0	24.98	60.50	0.7986	0.03786
	11000	26.5	25.73	62.58	0.8311	0.03770
	11500	26.9	26.46	64.65	0.8636	0.03753

	12000	27.3	27.17	66.72	0.8959	0.03737
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.93	49.28	0.6109	0.03908
	8500	24.1	21.84	51.27	0.6410	0.03896
	9000	24.5	22.72	53.25	0.6709	0.03884
	9500	24.9	23.58	55.22	0.7006	0.03872
	10000	25.4	24.41	57.18	0.7301	0.03860
	10500	25.8	25.21	59.13	0.7596	0.03848
	11000	26.2	25.99	61.07	0.7888	0.03836
	11500	26.6	26.75	63.00	0.8180	0.03824

								12000	27.0	27.49	64.92	0.8470	0.03812
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.93	58.30	0.7280	0.04498
								8500	28.2	18.68	60.78	0.7689	0.04482
								9000	28.7	19.40	63.25	0.8095	0.04466
								9500	29.3	20.09	65.70	0.8499	0.04450
								10000	29.8	20.77	68.13	0.8900	0.04434
								10500	30.3	21.42	70.56	0.9300	0.04418
								11000	30.9	22.05	72.97	0.9697	0.04402
								11500	31.4	22.66	75.37	1.0092	0.04387
								12000	31.9	23.25	77.76	1.0486	0.04371
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.97	58.03	0.7235	0.04500
								8500	28.1	18.72	60.49	0.7642	0.04484
								9000	28.6	19.44	62.95	0.8045	0.04468

								9500	29.2	20.14	65.38	0.8447	0.04452
								10000	29.7	20.82	67.80	0.8846	0.04436
								10500	30.3	21.47	70.21	0.9243	0.04420
								11000	30.8	22.10	72.61	0.9638	0.04405
								11500	31.3	22.72	75.00	1.0031	0.04389
								12000	31.8	23.31	77.37	1.0422	0.04373
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.96	58.50	0.7206	0.04491
								8500	28.1	18.71	61.00	0.7610	0.04475
								9000	28.7	19.43	63.47	0.8012	0.04459
								9500	29.2	20.13	65.93	0.8411	0.04444
								10000	29.7	20.80	68.38	0.8808	0.04428
								10500	30.3	21.45	70.81	0.9203	0.04412

								11000	30.8	22.08	73.23	0.9596	0.04397
								11500	31.3	22.69	75.64	0.9987	0.04382
								12000	31.9	23.29	78.04	1.0376	0.04366
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.92	57.55	0.8151	0.04357
								8500	28.2	18.68	59.97	0.8565	0.04339
								9000	28.7	19.40	62.37	0.8977	0.04322
								9500	29.2	20.11	64.76	0.9386	0.04305
								10000	29.8	20.78	67.13	0.9793	0.04288
								10500	30.3	21.44	69.49	1.0197	0.04271
								11000	30.8	22.08	71.84	1.0600	0.04254

								11500	31.3	22.70	74.18	1.1001	0.04237
								12000	31.9	23.29	76.50	1.1400	0.04220
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	25.6	19.35	53.49	0.8440	0.03849
								8500	26.1	20.13	55.73	0.8914	0.03828
								9000	26.7	20.88	57.97	0.9384	0.03807
								9500	27.2	21.60	60.19	0.9852	0.03786
								10000	27.8	22.29	62.40	1.0318	0.03766
								10500	28.3	22.97	64.59	1.0781	0.03745
								11000	28.8	23.62	66.78	1.1241	0.03725
								11500	29.3	24.25	68.95	1.1700	0.03704
								12000	29.9	24.85	71.12	1.2156	0.03684
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.9	19.85	50.38	0.9938	0.03482
								8500	25.5	20.64	52.46	1.0451	0.03457

								9000	26.0	21.41	54.52	1.0961	0.03432
								9500	26.5	22.14	56.57	1.1468	0.03408
								10000	27.1	22.85	58.61	1.1972	0.03383
								10500	27.6	23.54	60.64	1.2473	0.03359
								11000	28.1	24.20	62.65	1.2972	0.03335
								11500	28.6	24.84	64.66	1.3468	0.03311
								12000	29.2	25.46	66.66	1.3962	0.03287
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.65	55.54	0.7952	0.04152
								8500	27.1	19.42	57.89	0.8399	0.04133
								9000	27.6	20.15	60.22	0.8844	0.04114
								9500	28.2	20.86	62.54	0.9286	0.04095

								10000	28.7	21.55	64.85	0.9726	0.04076
								10500	29.3	22.21	67.14	1.0163	0.04058
								11000	29.8	22.85	69.42	1.0598	0.04039
								11500	30.3	23.47	71.69	1.1031	0.04020
								12000	30.8	24.07	73.95	1.1462	0.04002
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.5	18.70	55.29	0.7903	0.04154
								8500	27.0	19.46	57.62	0.8348	0.04135
								9000	27.6	20.20	59.94	0.8790	0.04116
								9500	28.1	20.92	62.24	0.9229	0.04097
								10000	28.6	21.60	64.53	0.9666	0.04079
								10500	29.2	22.27	66.81	1.0101	0.04060

								11000	29.7	22.91	69.08	1.0533	0.04042
								11500	30.2	23.53	71.34	1.0963	0.04023
								12000	30.8	24.14	73.58	1.1392	0.04005
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.2	18.93	55.04	0.8037	0.04039
								8500	26.7	19.70	57.37	0.8488	0.04019
								9000	27.2	20.44	59.68	0.8937	0.04000
								9500	27.8	21.16	61.97	0.9383	0.03981
								10000	28.3	21.84	64.25	0.9827	0.03962
								10500	28.9	22.51	66.52	1.0268	0.03943
								11000	29.4	23.16	68.78	1.0707	0.03924
								11500	29.9	23.78	71.03	1.1144	0.03905
								12000	30.4	24.38	73.26	1.1579	0.03886
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.1	18.97	54.79	0.7987	0.04041

								8500	26.6	19.75	57.10	0.8436	0.04021
								9000	27.2	20.49	59.39	0.8882	0.04002
								9500	27.7	21.21	61.68	0.9326	0.03983
								10000	28.2	21.90	63.94	0.9767	0.03964
								10500	28.8	22.57	66.20	1.0205	0.03945
								11000	29.3	23.22	68.44	1.0642	0.03927
								11500	29.8	23.84	70.68	1.1076	0.03908
								12000	30.4	24.45	72.90	1.1508	0.03889
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.4	18.76	55.79	0.7840	0.04121
								8500	26.9	19.52	58.15	0.8280	0.04102

								9000	27.5	20.26	60.50	0.8718	0.04084
								9500	28.0	20.97	62.83	0.9153	0.04065
								10000	28.6	21.66	65.14	0.9586	0.04047
								10500	29.1	22.32	67.45	1.0016	0.04029
								11000	29.6	22.97	69.74	1.0445	0.04011
								11500	30.2	23.59	72.03	1.0871	0.03993
								12000	30.7	24.19	74.30	1.1295	0.03975
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.80	55.54	0.7792	0.04123
								8500	26.9	19.57	57.88	0.8230	0.04104
								9000	27.4	20.31	60.21	0.8665	0.04086
								9500	28.0	21.02	62.53	0.9097	0.04068
								10000	28.5	21.71	64.83	0.9527	0.04050

								10500	29.0	22.38	67.12	0.9955	0.04032
								11000	29.6	23.03	69.40	1.0381	0.04014
								11500	30.1	23.65	71.67	1.0804	0.03996
								12000	30.6	24.26	73.93	1.1226	0.03978
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.19	57.05	0.7600	0.04368
								8500	27.8	18.94	59.47	0.8028	0.04350
								9000	28.3	19.67	61.87	0.8453	0.04332
								9500	28.9	20.37	64.26	0.8876	0.04315
								10000	29.4	21.04	66.64	0.9296	0.04298
								10500	29.9	21.70	69.01	0.9714	0.04280
								11000	30.5	22.33	71.36	1.0129	0.04263
								11500	31.0	22.94	73.70	1.0543	0.04246
								12000	31.5	23.54	76.03	1.0955	0.04229

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.23	56.79	0.7554	0.04369
								8500	27.7	18.98	59.19	0.7979	0.04352
								9000	28.3	19.71	61.58	0.8401	0.04334
								9500	28.8	20.42	63.96	0.8821	0.04317
								10000	29.3	21.09	66.32	0.9239	0.04300
								10500	29.9	21.75	68.67	0.9654	0.04283
								11000	30.4	22.39	71.01	1.0068	0.04266
								11500	30.9	23.00	73.34	1.0479	0.04249
								12000	31.5	23.60	75.65	1.0888	0.04232

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.22	57.07	0.7582	0.04354
								8500	27.7	18.98	59.49	0.8009	0.04336
								9000	28.3	19.70	61.90	0.8432	0.04319
								9500	28.8	20.40	64.29	0.8854	0.04302
								10000	29.4	21.08	66.67	0.9273	0.04284
								10500	29.9	21.74	69.04	0.9690	0.04267
								11000	30.4	22.37	71.39	1.0104	0.04250
								11500	31.0	22.99	73.73	1.0517	0.04233
								12000	31.5	23.58	76.06	1.0928	0.04216
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.26	56.81	0.7536	0.04356
								8500	27.7	19.02	59.21	0.7960	0.04338
								9000	28.2	19.75	61.61	0.8381	0.04321
								9500	28.7	20.45	63.98	0.8800	0.04304

								10000	29.3	21.13	66.35	0.9216	0.04287
								10500	29.8	21.79	68.70	0.9630	0.04270
								11000	30.3	22.43	71.04	1.0042	0.04253
								11500	30.9	23.05	73.37	1.0453	0.04236
								12000	31.4	23.65	75.68	1.0861	0.04219
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.25	57.28	0.7507	0.04348
								8500	27.7	19.01	59.71	0.7929	0.04330
								9000	28.2	19.73	62.12	0.8349	0.04313
								9500	28.8	20.44	64.53	0.8765	0.04296
								10000	29.3	21.12	66.91	0.9180	0.04279
								10500	29.8	21.77	69.29	0.9592	0.04263
								11000	30.4	22.41	71.65	1.0002	0.04246
								11500	30.9	23.02	74.01	1.0411	0.04229

								12000	31.4	23.61	76.35	1.0817	0.04213
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.29	57.01	0.7461	0.04349
								8500	27.6	19.05	59.43	0.7881	0.04332
								9000	28.2	19.78	61.83	0.8298	0.04315
								9500	28.7	20.49	64.22	0.8712	0.04298
								10000	29.2	21.17	66.59	0.9124	0.04282
								10500	29.8	21.83	68.95	0.9534	0.04265
								11000	30.3	22.47	71.30	0.9941	0.04248
								11500	30.8	23.08	73.64	1.0347	0.04232

								12000	31.3	23.68	75.97	1.0751	0.04215
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.29	57.30	0.7489	0.04334
								8500	27.6	19.04	59.73	0.7910	0.04317
								9000	28.2	19.77	62.15	0.8328	0.04300
								9500	28.7	20.48	64.55	0.8744	0.04283
								10000	29.2	21.16	66.94	0.9157	0.04266
								10500	29.8	21.81	69.32	0.9568	0.04249
								11000	30.3	22.45	71.68	0.9977	0.04233
								11500	30.8	23.06	74.04	1.0384	0.04216
								12000	31.4	23.66	76.38	1.0789	0.04200
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.25	56.33	0.8433	0.04202
								8500	27.7	19.01	58.69	0.8863	0.04183
								9000	28.2	19.74	61.04	0.9291	0.04165

								9500	28.7	20.45	63.37	0.9716	0.04146
								10000	29.3	21.14	65.68	1.0140	0.04128
								10500	29.8	21.80	67.99	1.0560	0.04110
								11000	30.3	22.44	70.28	1.0979	0.04091
								11500	30.8	23.06	72.56	1.1396	0.04073
								12000	31.4	23.66	74.83	1.1810	0.04055
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.9	17.78	52.25	0.7672	0.04734
								8500	28.3	18.57	54.49	0.8057	0.04713
								9000	28.8	19.33	56.71	0.8440	0.04692
								9500	29.3	20.07	58.93	0.8821	0.04672
								10000	29.8	20.78	61.13	0.9201	0.04651
								10500	30.3	21.47	63.33	0.9580	0.04631

								11000	30.7	22.14	65.53	0.9958	0.04611
								11500	31.2	22.80	67.71	1.0334	0.04590
								12000	31.7	23.43	69.89	1.0710	0.04570
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.8	17.85	51.61	0.7440	0.04776
								8500	28.2	18.65	53.72	0.7790	0.04760
								9000	28.7	19.43	55.82	0.8139	0.04744
								9500	29.1	20.18	57.91	0.8486	0.04729
								10000	29.6	20.92	59.98	0.8831	0.04713
								10500	30.0	21.63	62.04	0.9174	0.04698
								11000	30.5	22.33	64.10	0.9516	0.04682
								11500	30.9	23.00	66.14	0.9856	0.04667
								12000	31.4	23.66	68.18	1.0194	0.04651
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.9	17.78	52.25	0.7672	0.04734
								8500	28.3	18.57	54.49	0.8057	0.04713
								9000	28.8	19.33	56.71	0.8440	0.04692

	9500	29.3	20.07	58.93	0.8821	0.04672
	10000	29.8	20.78	61.13	0.9201	0.04651
	10500	30.3	21.47	63.33	0.9580	0.04631
	11000	30.7	22.14	65.53	0.9958	0.04611
	11500	31.2	22.80	67.71	1.0334	0.04590
	12000	31.7	23.43	69.89	1.0710	0.04570
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.8	17.85	51.61	0.7440	0.04776
	8500	28.2	18.65	53.72	0.7790	0.04760
	9000	28.7	19.43	55.82	0.8139	0.04744

								9500	29.1	20.18	57.91	0.8486	0.04729
								10000	29.6	20.92	59.98	0.8831	0.04713
								10500	30.0	21.63	62.04	0.9174	0.04698
								11000	30.5	22.33	64.10	0.9516	0.04682
								11500	30.9	23.00	66.14	0.9856	0.04667
								12000	31.4	23.66	68.18	1.0194	0.04651
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.5	18.68	49.69	0.8282	0.04314
								8500	27.0	19.48	51.79	0.8704	0.04291
								9000	27.5	20.27	53.89	0.9124	0.04267
								9500	28.0	21.02	55.98	0.9542	0.04244
								10000	28.4	21.76	58.07	0.9959	0.04220
								10500	28.9	22.47	60.14	1.0374	0.04197

								11000	29.4	23.15	62.21	1.0788	0.04174
								11500	29.9	23.82	64.27	1.1201	0.04151
								12000	30.3	24.47	66.33	1.1612	0.04128
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.4	18.76	49.15	0.8013	0.04356
								8500	26.9	19.58	51.14	0.8397	0.04338
								9000	27.3	20.38	53.12	0.8780	0.04320
								9500	27.8	21.16	55.09	0.9160	0.04301
								10000	28.2	21.92	57.05	0.9538	0.04283
								10500	28.7	22.65	59.00	0.9915	0.04265
								11000	29.1	23.36	60.94	1.0289	0.04247
								11500	29.6	24.05	62.87	1.0662	0.04229
								12000	30.0	24.72	64.80	1.1033	0.04212
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.5	18.68	49.69	0.8282	0.04314
								8500	27.0	19.48	51.79	0.8704	0.04291
								9000	27.5	20.27	53.89	0.9124	0.04267

	9500	28.0	21.02	55.98	0.9542	0.04244
	10000	28.4	21.76	58.07	0.9959	0.04220
	10500	28.9	22.47	60.14	1.0374	0.04197
	11000	29.4	23.15	62.21	1.0788	0.04174
	11500	29.9	23.82	64.27	1.1201	0.04151
	12000	30.3	24.47	66.33	1.1612	0.04128
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.4	18.76	49.15	0.8013	0.04356
	8500	26.9	19.58	51.14	0.8397	0.04338
	9000	27.3	20.38	53.12	0.8780	0.04320

								9500	27.8	21.16	55.09	0.9160	0.04301
								10000	28.2	21.92	57.05	0.9538	0.04283
								10500	28.7	22.65	59.00	0.9915	0.04265
								11000	29.1	23.36	60.94	1.0289	0.04247
								11500	29.6	24.05	62.87	1.0662	0.04229
								12000	30.0	24.72	64.80	1.1033	0.04212
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.85	56.22	0.5628	0.04508
								8500	26.7	19.74	58.24	0.5834	0.04501
								9000	27.0	20.60	60.23	0.6038	0.04495
								9500	27.4	21.45	62.20	0.6240	0.04488
								10000	27.8	22.27	64.15	0.6440	0.04482
								10500	28.2	23.08	66.08	0.6638	0.04475

	11000	28.5	23.87	67.99	0.6834	0.04469
	11500	28.9	24.64	69.89	0.7028	0.04463
	12000	29.2	25.39	71.77	0.7221	0.04457
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.27	53.35	0.5523	0.04475
	8500	26.1	20.15	55.41	0.5754	0.04467
	9000	26.5	21.01	57.47	0.5984	0.04459
	9500	26.9	21.86	59.50	0.6211	0.04450
	10000	27.3	22.67	61.52	0.6437	0.04442
	10500	27.7	23.47	63.53	0.6661	0.04434
	11000	28.1	24.24	65.53	0.6884	0.04426
	11500	28.5	25.00	67.52	0.7106	0.04418
	12000	28.8	25.74	69.49	0.7326	0.04410
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.23	50.88	0.6789	0.03953
	8500	24.9	21.10	53.03	0.7119	0.03936
	9000	25.4	21.95	55.16	0.7448	0.03919
	9500	25.8	22.76	57.29	0.7776	0.03903
	10000	26.3	23.55	59.42	0.8102	0.03886
	10500	26.7	24.32	61.53	0.8428	0.03869

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	11000	27.2	25.06	63.64	0.8752	0.03853
								11500	27.6	25.78	65.74	0.9076	0.03836
								12000	28.0	26.47	67.83	0.9398	0.03820
								8000	24.4	20.34	50.07	0.6547	0.03994
								8500	24.8	21.23	52.08	0.6846	0.03982
								9000	25.2	22.10	54.08	0.7143	0.03970
								9500	25.6	22.94	56.08	0.7439	0.03957
								10000	26.0	23.76	58.06	0.7733	0.03945
								10500	26.5	24.55	60.03	0.8026	0.03933
								11000	26.9	25.32	61.99	0.8317	0.03921
								11500	27.3	26.07	63.94	0.8607	0.03909
								12000	27.7	26.80	65.89	0.8895	0.03897
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.93	55.64	0.5568	0.04510
								8500	26.5	19.83	57.62	0.5771	0.04503
								9000	26.9	20.70	59.58	0.5972	0.04497

		9500	27.3	21.55	61.52	0.6171	0.04490
		10000	27.7	22.38	63.45	0.6368	0.04484
		10500	28.0	23.20	65.35	0.6563	0.04478
		11000	28.4	23.99	67.23	0.6756	0.04472
		11500	28.7	24.77	69.10	0.6948	0.04466
		12000	29.1	25.53	70.95	0.7138	0.04459
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.27	53.35	0.5523	0.04475
		8500	26.1	20.15	55.41	0.5754	0.04467
		9000	26.5	21.01	57.47	0.5984	0.04459

	9500	26.9	21.86	59.50	0.6211	0.04450
	10000	27.3	22.67	61.52	0.6437	0.04442
	10500	27.7	23.47	63.53	0.6661	0.04434
	11000	28.1	24.24	65.53	0.6884	0.04426
	11500	28.5	25.00	67.52	0.7106	0.04418
	12000	28.8	25.74	69.49	0.7326	0.04410
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.4	20.28	50.56	0.6739	0.03955
	8500	24.9	21.16	52.69	0.7066	0.03939
	9000	25.3	22.01	54.80	0.7392	0.03922

	9500	25.8	22.83	56.91	0.7717	0.03906
	10000	26.2	23.63	59.02	0.8041	0.03889
	10500	26.6	24.39	61.11	0.8364	0.03873
	11000	27.1	25.14	63.20	0.8685	0.03856
	11500	27.5	25.86	65.29	0.9006	0.03840
	12000	27.9	26.57	67.36	0.9325	0.03824
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.38	49.84	0.6514	0.03996
	8500	24.7	21.28	51.84	0.6811	0.03983
	9000	25.2	22.15	53.83	0.7106	0.03971

								9500	25.6	22.99	55.81	0.7400	0.03959
								10000	26.0	23.81	57.78	0.7692	0.03947
								10500	26.4	24.61	59.74	0.7983	0.03935
								11000	26.8	25.38	61.69	0.8272	0.03923
								11500	27.2	26.13	63.63	0.8560	0.03911
								12000	27.6	26.86	65.56	0.8847	0.03899
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.92	56.10	0.5546	0.04502
								8500	26.6	19.81	58.11	0.5748	0.04496
								9000	26.9	20.68	60.09	0.5948	0.04490
								9500	27.3	21.53	62.05	0.6146	0.04483
								10000	27.7	22.36	63.99	0.6341	0.04477
								10500	28.0	23.17	65.92	0.6535	0.04471

	11000	28.4	23.96	67.82	0.6727	0.04465
	11500	28.8	24.73	69.71	0.6917	0.04459
	12000	29.1	25.49	71.58	0.7106	0.04453
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	52.74	0.5386	0.04471
	8500	25.9	20.31	54.77	0.5609	0.04463
	9000	26.3	21.18	56.79	0.5831	0.04455
	9500	26.7	22.03	58.79	0.6051	0.04447
	10000	27.1	22.86	60.78	0.6269	0.04440
	10500	27.5	23.66	62.75	0.6486	0.04432
	11000	27.8	24.45	64.72	0.6702	0.04424
	11500	28.2	25.22	66.67	0.6916	0.04417
	12000	28.6	25.97	68.61	0.7129	0.04409
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.26	51.06	0.6725	0.03948
	8500	24.9	21.13	53.21	0.7051	0.03932
	9000	25.3	21.98	55.36	0.7376	0.03915
	9500	25.8	22.79	57.50	0.7700	0.03899
	10000	26.2	23.58	59.63	0.8023	0.03882
	10500	26.7	24.35	61.75	0.8344	0.03866

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	11000	27.1	25.09	63.87	0.8665	0.03850
								11500	27.6	25.81	65.97	0.8984	0.03834
								12000	28.0	26.51	68.08	0.9303	0.03818
								8000	24.3	20.36	50.24	0.6486	0.03990
								8500	24.7	21.26	52.26	0.6782	0.03978
								9000	25.2	22.13	54.27	0.7075	0.03965
								9500	25.6	22.98	56.27	0.7367	0.03953
								10000	26.0	23.79	58.26	0.7658	0.03941
								10500	26.4	24.58	60.24	0.7947	0.03930
								11000	26.8	25.36	62.21	0.8235	0.03918
								11500	27.3	26.11	64.17	0.8521	0.03906
								12000	27.7	26.83	66.12	0.8806	0.03894
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.93	55.49	0.5898	0.04450
								8500	26.5	19.83	57.45	0.6100	0.04443
								9000	26.9	20.71	59.39	0.6300	0.04436

		9500	27.3	21.56	61.31	0.6498	0.04430
		10000	27.6	22.40	63.20	0.6694	0.04423
		10500	28.0	23.21	65.08	0.6888	0.04417
		11000	28.3	24.01	66.95	0.7080	0.04411
		11500	28.7	24.80	68.79	0.7271	0.04404
		12000	29.0	25.56	70.62	0.7460	0.04398
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.35	52.68	0.5779	0.04419
		8500	26.0	20.24	54.70	0.6006	0.04410
		9000	26.4	21.12	56.70	0.6231	0.04402

	9500	26.8	21.97	58.68	0.6454	0.04393
	10000	27.2	22.79	60.66	0.6676	0.04385
	10500	27.5	23.60	62.62	0.6896	0.04377
	11000	27.9	24.39	64.56	0.7115	0.04369
	11500	28.3	25.15	66.50	0.7333	0.04361
	12000	28.7	25.90	68.42	0.7550	0.04353
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.5	20.25	50.51	0.7118	0.03893
	8500	24.9	21.13	52.62	0.7446	0.03876
	9000	25.3	21.98	54.72	0.7773	0.03859

	9500	25.8	22.80	56.82	0.8099	0.03842
	10000	26.2	23.60	58.91	0.8423	0.03826
	10500	26.7	24.37	60.99	0.8747	0.03809
	11000	27.1	25.12	63.06	0.9069	0.03792
	11500	27.5	25.84	65.13	0.9391	0.03776
	12000	28.0	26.55	67.19	0.9711	0.03759
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.34	49.81	0.6892	0.03934
	8500	24.8	21.24	51.80	0.7190	0.03921
	9000	25.2	22.11	53.78	0.7486	0.03909

								9500	25.6	22.96	55.74	0.7781	0.03896
								10000	26.0	23.78	57.70	0.8074	0.03884
								10500	26.4	24.58	59.64	0.8365	0.03872
								11000	26.8	25.36	61.58	0.8656	0.03859
								11500	27.3	26.11	63.51	0.8945	0.03847
								12000	27.7	26.84	65.43	0.9232	0.03835
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.49	52.66	0.6355	0.03873
								8500	24.6	21.43	54.53	0.6603	0.03864
								9000	24.9	22.34	56.37	0.6848	0.03854
								9500	25.3	23.23	58.20	0.7091	0.03845
								10000	25.7	24.11	60.00	0.7331	0.03835
								10500	26.0	24.95	61.79	0.7569	0.03826

	11000	26.4	25.78	63.57	0.7805	0.03817
	11500	26.8	26.58	65.33	0.8039	0.03808
	12000	27.1	27.38	67.07	0.8270	0.03798
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.7	20.93	49.77	0.6267	0.03855
	8500	24.1	21.86	51.68	0.6544	0.03844
	9000	24.5	22.77	53.57	0.6818	0.03832
	9500	24.9	23.66	55.45	0.7091	0.03820
	10000	25.2	24.51	57.31	0.7362	0.03809
	10500	25.6	25.34	59.17	0.7631	0.03798
	11000	26.0	26.16	61.01	0.7898	0.03786
	11500	26.4	26.95	62.84	0.8164	0.03775
	12000	26.8	27.71	64.66	0.8429	0.03764
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
	8500	24.3	21.64	51.74	0.6388	0.03949
	9000	24.7	22.54	53.64	0.6663	0.03938
	9500	25.1	23.41	55.52	0.6936	0.03927
	10000	25.5	24.26	57.39	0.7208	0.03916
	10500	25.9	25.08	59.25	0.7478	0.03906

	11000	26.3	25.89	61.10	0.7746	0.03895
	11500	26.7	26.67	62.93	0.8012	0.03884
	12000	27.1	27.43	64.76	0.8277	0.03873
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.6	21.96	46.73	0.7806	0.03335
	8500	23.0	22.87	48.67	0.8195	0.03314
	9000	23.4	23.75	50.61	0.8582	0.03293
	9500	23.9	24.61	52.54	0.8968	0.03272
	10000	24.3	25.43	54.46	0.9353	0.03251
	10500	24.8	26.22	56.38	0.9736	0.03230
	11000	25.2	26.99	58.29	1.0118	0.03209
	11500	25.7	27.73	60.19	1.0498	0.03188
	12000	26.1	28.45	62.09	1.0878	0.03167
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.4	22.10	46.09	0.7501	0.03378
	8500	22.8	23.05	47.92	0.7853	0.03361
	9000	23.3	23.96	49.74	0.8203	0.03345
	9500	23.7	24.83	51.55	0.8552	0.03329
	10000	24.1	25.69	53.35	0.8898	0.03312
	10500	24.5	26.52	55.14	0.9243	0.03296

								11000	24.9	27.32	56.92	0.9586	0.03280
								11500	25.3	28.09	58.70	0.9927	0.03265
								12000	25.7	28.84	60.46	1.0267	0.03249
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.50	52.06	0.6695	0.03825
								8500	24.5	21.45	53.88	0.6943	0.03815
								9000	24.9	22.37	55.68	0.7188	0.03805
								9500	25.3	23.27	57.46	0.7430	0.03796
								10000	25.6	24.14	59.23	0.7670	0.03786
								10500	26.0	25.00	60.98	0.7908	0.03776
								11000	26.3	25.83	62.71	0.8144	0.03767

	11500	26.7	26.65	64.43	0.8377	0.03757
	12000	27.0	27.44	66.13	0.8608	0.03748
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.85	49.67	0.6662	0.03806
	8500	24.2	21.79	51.56	0.6943	0.03794
	9000	24.5	22.69	53.44	0.7221	0.03782
	9500	24.9	23.58	55.30	0.7497	0.03770
	10000	25.3	24.43	57.15	0.7772	0.03758
	10500	25.7	25.27	58.98	0.8044	0.03746
	11000	26.1	26.08	60.81	0.8315	0.03734

	11500	26.5	26.87	62.62	0.8585	0.03722
	12000	26.9	27.64	64.42	0.8852	0.03711
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.64	49.74	0.6489	0.03913
	8500	24.4	21.56	51.63	0.6770	0.03901
	9000	24.8	22.46	53.51	0.7049	0.03890
	9500	25.2	23.34	55.38	0.7326	0.03878
	10000	25.6	24.18	57.24	0.7601	0.03867
	10500	26.0	25.01	59.08	0.7874	0.03855
	11000	26.4	25.82	60.91	0.8145	0.03844

	11500	26.8	26.60	62.73	0.8415	0.03833
	12000	27.1	27.36	64.54	0.8683	0.03822
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.6	21.94	46.17	0.8191	0.03285
	8500	23.0	22.86	48.08	0.8582	0.03263
	9000	23.4	23.75	49.97	0.8970	0.03241
	9500	23.9	24.61	51.86	0.9357	0.03220
	10000	24.3	25.44	53.74	0.9743	0.03198
	10500	24.8	26.24	55.62	1.0128	0.03177
	11000	25.2	27.01	57.49	1.0511	0.03156

	11500	25.6	27.76	59.36	1.0893	0.03134
	12000	26.1	28.49	61.21	1.1274	0.03113
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.4	22.07	45.65	0.7902	0.03326
	8500	22.9	23.01	47.45	0.8256	0.03309
	9000	23.3	23.93	49.24	0.8609	0.03292
	9500	23.7	24.81	51.01	0.8959	0.03276
	10000	24.1	25.67	52.78	0.9308	0.03259
	10500	24.5	26.50	54.54	0.9655	0.03242
	11000	24.9	27.30	56.29	1.0000	0.03226

								11500	25.3	28.08	58.03	1.0344	0.03210
								12000	25.7	28.84	59.77	1.0686	0.03193
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.73	54.20	0.6033	0.04156
								8500	25.5	20.65	56.13	0.6263	0.04148
								9000	25.9	21.54	58.04	0.6491	0.04139
								9500	26.2	22.41	59.93	0.6717	0.04131
								10000	26.6	23.26	61.80	0.6940	0.04123
								10500	27.0	24.09	63.65	0.7161	0.04115
								11000	27.3	24.90	65.48	0.7379	0.04107
								11500	27.7	25.69	67.30	0.7596	0.04099
								12000	28.1	26.46	69.10	0.7812	0.04091
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	51.32	0.5938	0.04132
								8500	25.0	21.07	53.29	0.6195	0.04121
								9000	25.4	21.96	55.25	0.6450	0.04111
								9500	25.8	22.82	57.20	0.6704	0.04101
								10000	26.2	23.66	59.13	0.6956	0.04091

	10500	26.5	24.48	61.05	0.7206	0.04081
	11000	26.9	25.27	62.96	0.7454	0.04071
	11500	27.3	26.05	64.86	0.7701	0.04061
	12000	27.7	26.80	66.75	0.7947	0.04051
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	51.36	0.5787	0.04236
	8500	25.2	20.86	53.34	0.6045	0.04226
	9000	25.6	21.74	55.31	0.6301	0.04217
	9500	26.0	22.59	57.26	0.6555	0.04207
	10000	26.4	23.43	59.20	0.6808	0.04197
	10500	26.8	24.23	61.13	0.7059	0.04188
	11000	27.2	25.02	63.04	0.7308	0.04179
	11500	27.6	25.79	64.95	0.7556	0.04169
	12000	28.0	26.54	66.84	0.7802	0.04160
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.16	48.52	0.7359	0.03610
	8500	23.9	22.05	50.56	0.7723	0.03590
	9000	24.3	22.92	52.58	0.8085	0.03571
	9500	24.8	23.75	54.60	0.8446	0.03552
	10000	25.2	24.56	56.60	0.8806	0.03533

								10500	25.6	25.34	58.61	0.9165	0.03514
								11000	26.1	26.10	60.60	0.9522	0.03495
								11500	26.5	26.83	62.59	0.9878	0.03476
								12000	27.0	27.54	64.57	1.0233	0.03457
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.28	47.81	0.7081	0.03652
								8500	23.7	22.21	49.72	0.7410	0.03637
								9000	24.1	23.10	51.62	0.7738	0.03623
								9500	24.5	23.96	53.51	0.8064	0.03608
								10000	25.0	24.80	55.39	0.8388	0.03593
								10500	25.4	25.61	57.25	0.8711	0.03579
								11000	25.8	26.39	59.11	0.9032	0.03565
								11500	26.2	27.16	60.96	0.9351	0.03551
								12000	26.6	27.90	62.81	0.9669	0.03536
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.0	19.82	53.64	0.5966	0.04158
								8500	25.4	20.74	55.54	0.6193	0.04150

	9000	25.7	21.64	57.42	0.6417	0.04142
	9500	26.1	22.52	59.28	0.6639	0.04134
	10000	26.5	23.38	61.12	0.6859	0.04126
	10500	26.8	24.21	62.95	0.7077	0.04118
	11000	27.2	25.03	64.75	0.7293	0.04110
	11500	27.5	25.83	66.54	0.7506	0.04102
	12000	27.9	26.61	68.32	0.7718	0.04094
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	51.32	0.5938	0.04132
	8500	25.0	21.07	53.29	0.6195	0.04121

	9000	25.4	21.96	55.25	0.6450	0.04111
	9500	25.8	22.82	57.20	0.6704	0.04101
	10000	26.2	23.66	59.13	0.6956	0.04091
	10500	26.5	24.48	61.05	0.7206	0.04081
	11000	26.9	25.27	62.96	0.7454	0.04071
	11500	27.3	26.05	64.86	0.7701	0.04061
	12000	27.7	26.80	66.75	0.7947	0.04051
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	51.36	0.5787	0.04236
	8500	25.2	20.86	53.34	0.6045	0.04226

	9000	25.6	21.74	55.31	0.6301	0.04217
	9500	26.0	22.59	57.26	0.6555	0.04207
	10000	26.4	23.43	59.20	0.6808	0.04197
	10500	26.8	24.23	61.13	0.7059	0.04188
	11000	27.2	25.02	63.04	0.7308	0.04179
	11500	27.6	25.79	64.95	0.7556	0.04169
	12000	28.0	26.54	66.84	0.7802	0.04160
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.3	21.22	48.22	0.7304	0.03613
	8500	23.8	22.12	50.23	0.7665	0.03594

	9000	24.2	22.99	52.24	0.8024	0.03574
	9500	24.7	23.83	54.24	0.8382	0.03555
	10000	25.1	24.64	56.23	0.8738	0.03536
	10500	25.5	25.43	58.21	0.9094	0.03517
	11000	26.0	26.19	60.19	0.9448	0.03499
	11500	26.4	26.93	62.16	0.9801	0.03480
	12000	26.9	27.64	64.13	1.0153	0.03461
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.33	47.60	0.7044	0.03653
	8500	23.6	22.25	49.50	0.7371	0.03639

								9000	24.1	23.15	51.38	0.7697	0.03624
								9500	24.5	24.02	53.26	0.8021	0.03610
								10000	24.9	24.85	55.12	0.8343	0.03596
								10500	25.3	25.67	56.98	0.8663	0.03581
								11000	25.7	26.46	58.83	0.8982	0.03567
								11500	26.1	27.23	60.67	0.9300	0.03553
								12000	26.5	27.97	62.50	0.9616	0.03539
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.06	53.64	0.6026	0.04054
								8500	25.1	20.99	55.54	0.6257	0.04046
								9000	25.4	21.90	57.42	0.6485	0.04037
								9500	25.8	22.78	59.29	0.6710	0.04029

	10000	26.2	23.64	61.13	0.6934	0.04021
	10500	26.5	24.48	62.95	0.7155	0.04013
	11000	26.9	25.30	64.76	0.7374	0.04005
	11500	27.3	26.10	66.56	0.7591	0.03997
	12000	27.6	26.89	68.33	0.7806	0.03989
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.58	50.29	0.5871	0.04034
	8500	24.5	21.51	52.22	0.6125	0.04024
	9000	24.8	22.42	54.13	0.6377	0.04013
	9500	25.2	23.30	56.02	0.6628	0.04003
	10000	25.6	24.16	57.90	0.6876	0.03993
	10500	26.0	25.00	59.77	0.7123	0.03983
	11000	26.4	25.81	61.63	0.7369	0.03973
	11500	26.8	26.60	63.47	0.7613	0.03964
	12000	27.1	27.37	65.31	0.7856	0.03954
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.34	50.52	0.5743	0.04136
	8500	24.8	21.26	52.46	0.5999	0.04127
	9000	25.1	22.16	54.39	0.6254	0.04117
	9500	25.5	23.03	56.30	0.6506	0.04107

	10000	25.9	23.88	58.19	0.6757	0.04098
	10500	26.3	24.70	60.08	0.7006	0.04088
	11000	26.7	25.50	61.95	0.7253	0.04079
	11500	27.1	26.28	63.81	0.7499	0.04070
	12000	27.5	27.05	65.66	0.7744	0.04060
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.1	21.46	48.17	0.7412	0.03512
	8500	23.5	22.37	50.19	0.7778	0.03493
	9000	24.0	23.24	52.19	0.8144	0.03473
	9500	24.4	24.08	54.19	0.8507	0.03454
	10000	24.9	24.90	56.18	0.8870	0.03435
	10500	25.3	25.68	58.17	0.9231	0.03415
	11000	25.7	26.45	60.14	0.9591	0.03396
	11500	26.2	27.18	62.12	0.9950	0.03377
	12000	26.6	27.89	64.08	1.0308	0.03358
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.9	21.60	47.48	0.7129	0.03554
	8500	23.4	22.53	49.37	0.7461	0.03540
	9000	23.8	23.43	51.25	0.7791	0.03525
	9500	24.2	24.30	53.12	0.8120	0.03510

								10000	24.6	25.14	54.99	0.8446	0.03495
								10500	25.0	25.96	56.84	0.8771	0.03481
								11000	25.4	26.75	58.68	0.9094	0.03466
								11500	25.9	27.52	60.52	0.9416	0.03452
								12000	26.3	28.26	62.34	0.9737	0.03438
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.6	20.15	53.08	0.5958	0.04057
								8500	24.9	21.09	54.95	0.6186	0.04048
								9000	25.3	22.01	56.81	0.6410	0.04040
								9500	25.7	22.89	58.64	0.6633	0.04032
								10000	26.0	23.76	60.46	0.6853	0.04024
								10500	26.4	24.61	62.26	0.7070	0.04016

	11000	26.8	25.44	64.04	0.7286	0.04008
	11500	27.1	26.25	65.81	0.7500	0.04000
	12000	27.5	27.04	67.56	0.7713	0.03992
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.58	50.29	0.5871	0.04034
	8500	24.5	21.51	52.22	0.6125	0.04024
	9000	24.8	22.42	54.13	0.6377	0.04013
	9500	25.2	23.30	56.02	0.6628	0.04003
	10000	25.6	24.16	57.90	0.6876	0.03993
	10500	26.0	25.00	59.77	0.7123	0.03983

	11000	26.4	25.81	61.63	0.7369	0.03973
	11500	26.8	26.60	63.47	0.7613	0.03964
	12000	27.1	27.37	65.31	0.7856	0.03954
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.34	50.52	0.5743	0.04136
	8500	24.8	21.26	52.46	0.5999	0.04127
	9000	25.1	22.16	54.39	0.6254	0.04117
	9500	25.5	23.03	56.30	0.6506	0.04107
	10000	25.9	23.88	58.19	0.6757	0.04098
	10500	26.3	24.70	60.08	0.7006	0.04088

	11000	26.7	25.50	61.95	0.7253	0.04079
	11500	27.1	26.28	63.81	0.7499	0.04070
	12000	27.5	27.05	65.66	0.7744	0.04060
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.53	47.87	0.7356	0.03515
	8500	23.4	22.44	49.86	0.7720	0.03496
	9000	23.9	23.31	51.85	0.8082	0.03477
	9500	24.3	24.16	53.83	0.8443	0.03457
	10000	24.8	24.98	55.81	0.8802	0.03438
	10500	25.2	25.77	57.77	0.9160	0.03419

	11000	25.6	26.54	59.74	0.9517	0.03400
	11500	26.1	27.28	61.69	0.9873	0.03381
	12000	26.5	28.00	63.64	1.0228	0.03362
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.64	47.26	0.7092	0.03556
	8500	23.3	22.58	49.15	0.7422	0.03541
	9000	23.7	23.48	51.02	0.7750	0.03527
	9500	24.1	24.35	52.88	0.8076	0.03512
	10000	24.6	25.20	54.73	0.8401	0.03497
	10500	25.0	26.02	56.57	0.8724	0.03483

								11000	25.4	26.82	58.40	0.9045	0.03469
								11500	25.8	27.59	60.22	0.9365	0.03454
								12000	26.2	28.34	62.04	0.9683	0.03440
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.88	54.13	0.5915	0.04127
								8500	25.3	20.80	56.05	0.6139	0.04119
								9000	25.7	21.70	57.95	0.6361	0.04111
								9500	26.0	22.58	59.83	0.6581	0.04103
								10000	26.4	23.43	61.70	0.6798	0.04096
								10500	26.8	24.27	63.54	0.7013	0.04088
								11000	27.1	25.08	65.37	0.7226	0.04080
								11500	27.5	25.88	67.18	0.7438	0.04073
								12000	27.8	26.66	68.98	0.7647	0.04065
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.39	50.78	0.5759	0.04105
								8500	24.7	21.32	52.72	0.6007	0.04095
								9000	25.1	22.22	54.65	0.6253	0.04085

	9500	25.5	23.10	56.57	0.6496	0.04076
	10000	25.8	23.95	58.47	0.6738	0.04066
	10500	26.2	24.78	60.36	0.6979	0.04057
	11000	26.6	25.59	62.24	0.7218	0.04047
	11500	27.0	26.38	64.11	0.7456	0.04038
	12000	27.4	27.14	65.96	0.7692	0.04029
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.15	51.01	0.5633	0.04207
	8500	25.0	21.07	52.97	0.5883	0.04197
	9000	25.4	21.96	54.91	0.6130	0.04188
	9500	25.8	22.83	56.85	0.6376	0.04179
	10000	26.1	23.67	58.76	0.6620	0.04170
	10500	26.5	24.49	60.67	0.6863	0.04161
	11000	26.9	25.29	62.56	0.7104	0.04152
	11500	27.3	26.07	64.44	0.7343	0.04143
	12000	27.7	26.83	66.32	0.7581	0.04134
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.27	48.74	0.7260	0.03584
	8500	23.7	22.17	50.78	0.7618	0.03565
	9000	24.2	23.04	52.82	0.7975	0.03546

								9500	24.6	23.87	54.84	0.8330	0.03528
								10000	25.1	24.68	56.86	0.8684	0.03509
								10500	25.5	25.47	58.87	0.9037	0.03490
								11000	26.0	26.22	60.88	0.9389	0.03472
								11500	26.4	26.96	62.88	0.9739	0.03453
								12000	26.8	27.67	64.87	1.0089	0.03435
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.1	21.39	48.02	0.6987	0.03626
								8500	23.6	22.32	49.94	0.7311	0.03612
								9000	24.0	23.21	51.85	0.7633	0.03598
								9500	24.4	24.08	53.75	0.7954	0.03584
								10000	24.8	24.92	55.63	0.8273	0.03569
								10500	25.2	25.73	57.51	0.8590	0.03556
								11000	25.7	26.52	59.38	0.8905	0.03542
								11500	26.1	27.29	61.24	0.9220	0.03528
								12000	26.5	28.03	63.09	0.9533	0.03514
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.8	19.96	53.56	0.5849	0.04130

	8500	25.2	20.90	55.46	0.6070	0.04122
	9000	25.6	21.80	57.33	0.6289	0.04114
	9500	25.9	22.69	59.19	0.6505	0.04106
	10000	26.3	23.55	61.02	0.6719	0.04098
	10500	26.6	24.39	62.84	0.6931	0.04091
	11000	27.0	25.22	64.64	0.7141	0.04083
	11500	27.3	26.02	66.43	0.7349	0.04076
	12000	27.7	26.81	68.20	0.7556	0.04069
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.39	50.78	0.5759	0.04105

	8500	24.7	21.32	52.72	0.6007	0.04095
	9000	25.1	22.22	54.65	0.6253	0.04085
	9500	25.5	23.10	56.57	0.6496	0.04076
	10000	25.8	23.95	58.47	0.6738	0.04066
	10500	26.2	24.78	60.36	0.6979	0.04057
	11000	26.6	25.59	62.24	0.7218	0.04047
	11500	27.0	26.38	64.11	0.7456	0.04038
	12000	27.4	27.14	65.96	0.7692	0.04029
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.15	51.01	0.5633	0.04207

	8500	25.0	21.07	52.97	0.5883	0.04197
	9000	25.4	21.96	54.91	0.6130	0.04188
	9500	25.8	22.83	56.85	0.6376	0.04179
	10000	26.1	23.67	58.76	0.6620	0.04170
	10500	26.5	24.49	60.67	0.6863	0.04161
	11000	26.9	25.29	62.56	0.7104	0.04152
	11500	27.3	26.07	64.44	0.7343	0.04143
	12000	27.7	26.83	66.32	0.7581	0.04134
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.33	48.44	0.7206	0.03587

	8500	23.7	22.23	50.46	0.7561	0.03568
	9000	24.1	23.10	52.48	0.7915	0.03550
	9500	24.5	23.95	54.48	0.8267	0.03531
	10000	25.0	24.77	56.48	0.8618	0.03512
	10500	25.4	25.55	58.48	0.8967	0.03494
	11000	25.9	26.32	60.47	0.9316	0.03476
	11500	26.3	27.06	62.45	0.9663	0.03457
	12000	26.7	27.77	64.42	1.0010	0.03439
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.44	47.81	0.6950	0.03628

								8500	23.5	22.37	49.71	0.7273	0.03614
								9000	23.9	23.27	51.61	0.7593	0.03599
								9500	24.4	24.14	53.50	0.7911	0.03585
								10000	24.8	24.98	55.37	0.8228	0.03571
								10500	25.2	25.79	57.24	0.8543	0.03558
								11000	25.6	26.59	59.09	0.8857	0.03544
								11500	26.0	27.36	60.94	0.9169	0.03530
								12000	26.4	28.11	62.78	0.9480	0.03516
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.9	19.10	55.26	0.6242	0.04321
								8500	26.3	20.00	57.22	0.6463	0.04313

	9000	26.7	20.87	59.16	0.6682	0.04305
	9500	27.1	21.72	61.08	0.6899	0.04297
	10000	27.4	22.56	62.97	0.7113	0.04289
	10500	27.8	23.37	64.85	0.7325	0.04282
	11000	28.2	24.17	66.71	0.7536	0.04274
	11500	28.5	24.94	68.56	0.7744	0.04267
	12000	28.9	25.71	70.39	0.7951	0.04259
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	52.35	0.6122	0.04293
	8500	25.8	20.42	54.36	0.6369	0.04284
	9000	26.2	21.29	56.35	0.6615	0.04274
	9500	26.6	22.14	58.33	0.6859	0.04264
	10000	27.0	22.96	60.30	0.7101	0.04255
	10500	27.3	23.77	62.25	0.7341	0.04245
	11000	27.7	24.55	64.19	0.7580	0.04236
	11500	28.1	25.31	66.12	0.7818	0.04226
	12000	28.5	26.06	68.03	0.8054	0.04217
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.33	52.40	0.5958	0.04399
	8500	26.0	20.22	54.41	0.6207	0.04390

	9000	26.4	21.08	56.41	0.6453	0.04381
	9500	26.8	21.92	58.40	0.6697	0.04372
	10000	27.2	22.74	60.37	0.6940	0.04363
	10500	27.6	23.54	62.33	0.7181	0.04354
	11000	28.0	24.31	64.28	0.7421	0.04345
	11500	28.4	25.07	66.21	0.7659	0.04336
	12000	28.8	25.81	68.13	0.7896	0.04327
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.50	49.57	0.7506	0.03765
	8500	24.6	21.38	51.64	0.7857	0.03746
	9000	25.1	22.23	53.70	0.8208	0.03727
	9500	25.5	23.05	55.76	0.8556	0.03709
	10000	25.9	23.85	57.80	0.8904	0.03690
	10500	26.4	24.62	59.84	0.9250	0.03672
	11000	26.8	25.37	61.88	0.9596	0.03653
	11500	27.3	26.10	63.90	0.9940	0.03635
	12000	27.7	26.80	65.93	1.0283	0.03617
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.61	48.83	0.7244	0.03807
	8500	24.5	21.52	50.78	0.7562	0.03793

								9000	24.9	22.39	52.71	0.7879	0.03779
								9500	25.3	23.24	54.63	0.8194	0.03765
								10000	25.7	24.07	56.55	0.8507	0.03751
								10500	26.1	24.87	58.45	0.8818	0.03737
								11000	26.5	25.64	60.34	0.9128	0.03723
								11500	27.0	26.40	62.23	0.9437	0.03709
								12000	27.4	27.13	64.11	0.9744	0.03696
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.25	54.73	0.5764	0.04377
								8500	26.1	20.16	56.67	0.5979	0.04369
								9000	26.5	21.04	58.60	0.6191	0.04362
								9500	26.9	21.90	60.50	0.6401	0.04355
								10000	27.2	22.74	62.39	0.6609	0.04347

		10500	27.6	23.56	64.25	0.6816	0.04340
		11000	27.9	24.37	66.10	0.7020	0.04333
		11500	28.3	25.15	67.94	0.7222	0.04326
		12000	28.6	25.92	69.76	0.7423	0.04319
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.59	52.42	0.5726	0.04345
		8500	25.7	20.48	54.45	0.5970	0.04336
		9000	26.1	21.35	56.46	0.6212	0.04327
		9500	26.5	22.20	58.46	0.6452	0.04318
		10000	26.9	23.03	60.44	0.6690	0.04309

		10500	27.3	23.83	62.41	0.6927	0.04300
		11000	27.7	24.61	64.36	0.7163	0.04291
		11500	28.0	25.37	66.31	0.7397	0.04282
		12000	28.4	26.12	68.24	0.7630	0.04273
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	52.46	0.5579	0.04450
		8500	26.0	20.28	54.50	0.5824	0.04441
		9000	26.4	21.14	56.51	0.6067	0.04432
		9500	26.8	21.99	58.51	0.6308	0.04423
		10000	27.1	22.80	60.50	0.6547	0.04415

	10500	27.5	23.60	62.48	0.6785	0.04406
	11000	27.9	24.37	64.44	0.7021	0.04398
	11500	28.3	25.13	66.39	0.7256	0.04390
	12000	28.7	25.87	68.33	0.7489	0.04381
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.62	49.50	0.7009	0.03824
	8500	24.5	21.51	51.57	0.7352	0.03806
	9000	24.9	22.36	53.64	0.7695	0.03788
	9500	25.4	23.19	55.70	0.8036	0.03771
	10000	25.8	23.99	57.75	0.8375	0.03753

	10500	26.2	24.77	59.80	0.8714	0.03735
	11000	26.7	25.52	61.83	0.9052	0.03718
	11500	27.1	26.25	63.87	0.9388	0.03700
	12000	27.5	26.95	65.89	0.9724	0.03683
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.72	48.82	0.6767	0.03865
	8500	24.3	21.63	50.78	0.7079	0.03851
	9000	24.7	22.51	52.72	0.7390	0.03838
	9500	25.2	23.36	54.65	0.7698	0.03824
	10000	25.6	24.19	56.58	0.8005	0.03811

								10500	26.0	24.99	58.49	0.8310	0.03798
								11000	26.4	25.77	60.39	0.8614	0.03785
								11500	26.8	26.53	62.28	0.8916	0.03772
								12000	27.2	27.26	64.17	0.9217	0.03759
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.21	55.32	0.5811	0.04361
								8500	26.2	20.11	57.30	0.6029	0.04353
								9000	26.5	20.98	59.25	0.6244	0.04346
								9500	26.9	21.84	61.19	0.6456	0.04339
								10000	27.3	22.67	63.10	0.6667	0.04332
								10500	27.7	23.49	64.99	0.6875	0.04324
								11000	28.0	24.29	66.87	0.7082	0.04317
								11500	28.4	25.07	68.73	0.7286	0.04310
								12000	28.7	25.83	70.58	0.7489	0.04303
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.44	0.5710	0.04332

	8500	25.6	20.52	54.47	0.5953	0.04323
	9000	26.0	21.40	56.48	0.6195	0.04313
	9500	26.4	22.25	58.48	0.6434	0.04304
	10000	26.8	23.07	60.46	0.6672	0.04295
	10500	27.2	23.88	62.43	0.6908	0.04286
	11000	27.6	24.66	64.39	0.7143	0.04277
	11500	28.0	25.42	66.33	0.7376	0.04269
	12000	28.4	26.17	68.27	0.7608	0.04260
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	52.48	0.5564	0.04436
	8500	25.9	20.32	54.51	0.5808	0.04427
	9000	26.3	21.19	56.53	0.6050	0.04418
	9500	26.7	22.03	58.53	0.6290	0.04410
	10000	27.1	22.85	60.52	0.6529	0.04401
	10500	27.5	23.64	62.50	0.6766	0.04393
	11000	27.9	24.42	64.46	0.7001	0.04385
	11500	28.3	25.18	66.41	0.7235	0.04376
	12000	28.7	25.92	68.35	0.7468	0.04368
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.60	49.83	0.7045	0.03809

	8500	24.5	21.49	51.93	0.7390	0.03791
	9000	24.9	22.34	54.01	0.7735	0.03773
	9500	25.4	23.16	56.09	0.8078	0.03755
	10000	25.8	23.96	58.16	0.8420	0.03738
	10500	26.3	24.73	60.23	0.8760	0.03720
	11000	26.7	25.48	62.28	0.9100	0.03702
	11500	27.2	26.20	64.34	0.9438	0.03684
	12000	27.6	26.90	66.38	0.9776	0.03667
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.72	49.06	0.6787	0.03851
	8500	24.3	21.63	51.03	0.7100	0.03837
	9000	24.8	22.51	52.99	0.7411	0.03824
	9500	25.2	23.36	54.93	0.7721	0.03811
	10000	25.6	24.18	56.87	0.8028	0.03797
	10500	26.0	24.98	58.79	0.8335	0.03784
	11000	26.4	25.76	60.71	0.8640	0.03771
	11500	26.8	26.51	62.61	0.8943	0.03758
	12000	27.2	27.25	64.51	0.9245	0.03745

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.29	54.75	0.5748	0.04363
								8500	26.1	20.20	56.69	0.5962	0.04356
								9000	26.4	21.08	58.62	0.6174	0.04348
								9500	26.8	21.95	60.52	0.6383	0.04341
								10000	27.2	22.79	62.41	0.6591	0.04334
								10500	27.5	23.61	64.28	0.6796	0.04327
								11000	27.9	24.41	66.13	0.7000	0.04320
								11500	28.2	25.20	67.96	0.7202	0.04313
								12000	28.6	25.97	69.78	0.7402	0.04306

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.44	0.5710	0.04332
	8500	25.6	20.52	54.47	0.5953	0.04323
	9000	26.0	21.40	56.48	0.6195	0.04313
	9500	26.4	22.25	58.48	0.6434	0.04304
	10000	26.8	23.07	60.46	0.6672	0.04295
	10500	27.2	23.88	62.43	0.6908	0.04286
	11000	27.6	24.66	64.39	0.7143	0.04277
	11500	28.0	25.42	66.33	0.7376	0.04269
	12000	28.4	26.17	68.27	0.7608	0.04260

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	52.48	0.5564	0.04436
	8500	25.9	20.32	54.51	0.5808	0.04427
	9000	26.3	21.19	56.53	0.6050	0.04418
	9500	26.7	22.03	58.53	0.6290	0.04410
	10000	27.1	22.85	60.52	0.6529	0.04401
	10500	27.5	23.64	62.50	0.6766	0.04393
	11000	27.9	24.42	64.46	0.7001	0.04385
	11500	28.3	25.18	66.41	0.7235	0.04376
	12000	28.7	25.92	68.35	0.7468	0.04368

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.66	49.52	0.6993	0.03812
	8500	24.4	21.55	51.59	0.7335	0.03794
	9000	24.9	22.41	53.66	0.7677	0.03776
	9500	25.3	23.24	55.72	0.8017	0.03758
	10000	25.7	24.04	57.77	0.8355	0.03741
	10500	26.2	24.82	59.82	0.8693	0.03723
	11000	26.6	25.57	61.86	0.9030	0.03706
	11500	27.1	26.30	63.89	0.9365	0.03688
	12000	27.5	27.00	65.92	0.9700	0.03671

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.76	48.84	0.6752	0.03852
	8500	24.3	21.67	50.80	0.7063	0.03839
	9000	24.7	22.55	52.74	0.7372	0.03826
	9500	25.1	23.41	54.68	0.7680	0.03812
	10000	25.5	24.24	56.60	0.7986	0.03799
	10500	25.9	25.04	58.51	0.8290	0.03786
	11000	26.4	25.82	60.41	0.8593	0.03773
	11500	26.8	26.58	62.31	0.8894	0.03760
	12000	27.2	27.31	64.20	0.9195	0.03747

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.27	55.20	0.5727	0.04356
								8500	26.1	20.18	57.17	0.5940	0.04349
								9000	26.5	21.06	59.12	0.6151	0.04342
								9500	26.8	21.92	61.04	0.6359	0.04335
								10000	27.2	22.76	62.95	0.6565	0.04328
								10500	27.6	23.58	64.84	0.6770	0.04321
								11000	27.9	24.38	66.71	0.6972	0.04314
								11500	28.3	25.16	68.56	0.7173	0.04308
								12000	28.6	25.93	70.40	0.7372	0.04301
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.77	51.85	0.5568	0.04329
								8500	25.4	20.68	53.84	0.5803	0.04320
								9000	25.8	21.56	55.82	0.6036	0.04312
								9500	26.2	22.42	57.78	0.6268	0.04303
								10000	26.6	23.26	59.73	0.6498	0.04294
								10500	27.0	24.07	61.67	0.6727	0.04286
								11000	27.4	24.87	63.59	0.6954	0.04277
								11500	27.8	25.64	65.51	0.7179	0.04269
								12000	28.1	26.40	67.41	0.7404	0.04260

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	52.07	0.5445	0.04431
	8500	25.7	20.45	54.08	0.5682	0.04423
	9000	26.1	21.32	56.08	0.5917	0.04415
	9500	26.5	22.17	58.06	0.6151	0.04406
	10000	26.9	23.00	60.02	0.6383	0.04398
	10500	27.3	23.80	61.98	0.6613	0.04390
	11000	27.7	24.59	63.92	0.6842	0.04382
	11500	28.1	25.35	65.85	0.7070	0.04374
	12000	28.5	26.10	67.76	0.7296	0.04366
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.63	50.01	0.6980	0.03805
	8500	24.5	21.51	52.11	0.7322	0.03788
	9000	24.9	22.37	54.21	0.7662	0.03770
	9500	25.4	23.19	56.30	0.8001	0.03753
	10000	25.8	23.99	58.37	0.8339	0.03735
	10500	26.2	24.76	60.45	0.8676	0.03718
	11000	26.7	25.51	62.51	0.9012	0.03700
	11500	27.1	26.24	64.57	0.9346	0.03683
	12000	27.6	26.94	66.63	0.9680	0.03666

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.75	49.23	0.6725	0.03847
								8500	24.3	21.66	51.21	0.7035	0.03834
								9000	24.7	22.53	53.17	0.7342	0.03821
								9500	25.1	23.39	55.13	0.7648	0.03808
								10000	25.6	24.21	57.07	0.7953	0.03795
								10500	26.0	25.01	59.00	0.8255	0.03782
								11000	26.4	25.79	60.92	0.8557	0.03769
								11500	26.8	26.55	62.84	0.8857	0.03756
								12000	27.2	27.28	64.75	0.9155	0.03744
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.36	54.63	0.5665	0.04359
								8500	26.0	20.27	56.57	0.5874	0.04351
								9000	26.3	21.16	58.48	0.6082	0.04344
								9500	26.7	22.02	60.38	0.6287	0.04338

	10000	27.1	22.87	62.26	0.6490	0.04331
	10500	27.4	23.70	64.12	0.6692	0.04324
	11000	27.8	24.50	65.96	0.6891	0.04317
	11500	28.1	25.30	67.79	0.7089	0.04310
	12000	28.5	26.07	69.60	0.7285	0.04304
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.77	51.85	0.5568	0.04329
	8500	25.4	20.68	53.84	0.5803	0.04320
	9000	25.8	21.56	55.82	0.6036	0.04312
	9500	26.2	22.42	57.78	0.6268	0.04303

	10000	26.6	23.26	59.73	0.6498	0.04294
	10500	27.0	24.07	61.67	0.6727	0.04286
	11000	27.4	24.87	63.59	0.6954	0.04277
	11500	27.8	25.64	65.51	0.7179	0.04269
	12000	28.1	26.40	67.41	0.7404	0.04260
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	52.07	0.5445	0.04431
	8500	25.7	20.45	54.08	0.5682	0.04423
	9000	26.1	21.32	56.08	0.5917	0.04415
	9500	26.5	22.17	58.06	0.6151	0.04406

	10000	26.9	23.00	60.02	0.6383	0.04398
	10500	27.3	23.80	61.98	0.6613	0.04390
	11000	27.7	24.59	63.92	0.6842	0.04382
	11500	28.1	25.35	65.85	0.7070	0.04374
	12000	28.5	26.10	67.76	0.7296	0.04366
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.69	49.69	0.6928	0.03808
	8500	24.4	21.58	51.78	0.7267	0.03791
	9000	24.8	22.44	53.85	0.7605	0.03773
	9500	25.3	23.27	55.92	0.7941	0.03756

	10000	25.7	24.07	57.98	0.8276	0.03738
	10500	26.1	24.85	60.04	0.8610	0.03721
	11000	26.6	25.60	62.09	0.8942	0.03704
	11500	27.0	26.33	64.13	0.9274	0.03687
	12000	27.5	27.04	66.16	0.9605	0.03670
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.79	49.01	0.6691	0.03849
	8500	24.2	21.70	50.98	0.6998	0.03836
	9000	24.7	22.58	52.93	0.7304	0.03822
	9500	25.1	23.44	54.87	0.7608	0.03810

								10000	25.5	24.27	56.80	0.7910	0.03797
								10500	25.9	25.07	58.72	0.8211	0.03784
								11000	26.3	25.85	60.63	0.8511	0.03771
								11500	26.7	26.61	62.53	0.8809	0.03758
								12000	27.1	27.35	64.43	0.9105	0.03746
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.31	55.22	0.5711	0.04343
								8500	26.0	20.22	57.19	0.5924	0.04336
								9000	26.4	21.10	59.14	0.6133	0.04329
								9500	26.8	21.96	61.07	0.6341	0.04322
								10000	27.1	22.80	62.97	0.6547	0.04315
								10500	27.5	23.62	64.86	0.6750	0.04308
								11000	27.9	24.42	66.73	0.6952	0.04301
								11500	28.2	25.21	68.59	0.7152	0.04295

	12000	28.6	25.97	70.43	0.7350	0.04288
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.81	51.87	0.5553	0.04316
	8500	25.4	20.72	53.86	0.5787	0.04307
	9000	25.8	21.61	55.84	0.6020	0.04298
	9500	26.2	22.47	57.80	0.6251	0.04289
	10000	26.6	23.31	59.75	0.6480	0.04281
	10500	26.9	24.12	61.69	0.6708	0.04272
	11000	27.3	24.92	63.62	0.6934	0.04264
	11500	27.7	25.69	65.53	0.7159	0.04256
	12000	28.1	26.45	67.43	0.7382	0.04247
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.59	52.09	0.5430	0.04417
	8500	25.7	20.49	54.10	0.5666	0.04409
	9000	26.1	21.36	56.10	0.5901	0.04401
	9500	26.5	22.21	58.08	0.6133	0.04393
	10000	26.9	23.04	60.05	0.6365	0.04385
	10500	27.3	23.85	62.00	0.6594	0.04377
	11000	27.6	24.63	63.94	0.6822	0.04369
	11500	28.0	25.40	65.87	0.7049	0.04361

	12000	28.4	26.15	67.79	0.7275	0.04353
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.67	50.03	0.6964	0.03793
	8500	24.4	21.56	52.13	0.7305	0.03776
	9000	24.9	22.41	54.23	0.7644	0.03758
	9500	25.3	23.24	56.32	0.7982	0.03741
	10000	25.7	24.04	58.40	0.8319	0.03723
	10500	26.2	24.81	60.47	0.8655	0.03706
	11000	26.6	25.56	62.54	0.8989	0.03689
	11500	27.1	26.29	64.60	0.9323	0.03671
	12000	27.5	26.99	66.65	0.9656	0.03654
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.79	49.25	0.6709	0.03835
	8500	24.2	21.70	51.23	0.7018	0.03822
	9000	24.7	22.58	53.19	0.7325	0.03809
	9500	25.1	23.43	55.15	0.7630	0.03796
	10000	25.5	24.26	57.09	0.7933	0.03783
	10500	25.9	25.06	59.02	0.8235	0.03770
	11000	26.3	25.84	60.95	0.8536	0.03757
	11500	26.8	26.59	62.86	0.8835	0.03745

								12000	27.2	27.33	64.77	0.9132	0.03732
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.40	54.64	0.5649	0.04345
								8500	25.9	20.31	56.59	0.5858	0.04338
								9000	26.3	21.20	58.50	0.6065	0.04331
								9500	26.6	22.07	60.40	0.6269	0.04324
								10000	27.0	22.92	62.28	0.6472	0.04317
								10500	27.4	23.74	64.14	0.6673	0.04311
								11000	27.7	24.55	65.98	0.6871	0.04304
								11500	28.1	25.34	67.81	0.7068	0.04297

	12000	28.4	26.12	69.62	0.7264	0.04291
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.81	51.87	0.5553	0.04316
	8500	25.4	20.72	53.86	0.5787	0.04307
	9000	25.8	21.61	55.84	0.6020	0.04298
	9500	26.2	22.47	57.80	0.6251	0.04289
	10000	26.6	23.31	59.75	0.6480	0.04281
	10500	26.9	24.12	61.69	0.6708	0.04272
	11000	27.3	24.92	63.62	0.6934	0.04264
	11500	27.7	25.69	65.53	0.7159	0.04256

	12000	28.1	26.45	67.43	0.7382	0.04247
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.59	52.09	0.5430	0.04417
	8500	25.7	20.49	54.10	0.5666	0.04409
	9000	26.1	21.36	56.10	0.5901	0.04401
	9500	26.5	22.21	58.08	0.6133	0.04393
	10000	26.9	23.04	60.05	0.6365	0.04385
	10500	27.3	23.85	62.00	0.6594	0.04377
	11000	27.6	24.63	63.94	0.6822	0.04369
	11500	28.0	25.40	65.87	0.7049	0.04361

	12000	28.4	26.15	67.79	0.7275	0.04353
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.73	49.71	0.6912	0.03796
	8500	24.3	21.62	51.80	0.7250	0.03778
	9000	24.8	22.48	53.88	0.7587	0.03761
	9500	25.2	23.31	55.95	0.7922	0.03744
	10000	25.7	24.12	58.01	0.8256	0.03726
	10500	26.1	24.89	60.06	0.8589	0.03709
	11000	26.5	25.65	62.11	0.8920	0.03692
	11500	27.0	26.38	64.15	0.9251	0.03675

	12000	27.4	27.09	66.19	0.9581	0.03658
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.83	49.03	0.6675	0.03836
	8500	24.2	21.74	51.00	0.6982	0.03823
	9000	24.6	22.63	52.95	0.7286	0.03810
	9500	25.0	23.49	54.89	0.7590	0.03797
	10000	25.5	24.31	56.82	0.7891	0.03785
	10500	25.9	25.12	58.74	0.8191	0.03772
	11000	26.3	25.90	60.65	0.8490	0.03759
	11500	26.7	26.66	62.56	0.8787	0.03747

								12000	27.1	27.40	64.45	0.9083	0.03734
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | TREMOR VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-TREMOR	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/75R18MT GOODYEAR (WD) / D3HFW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	28.0	17.69	58.91	0.8067	0.04427
								8500	28.6	18.42	61.48	0.8530	0.04405
								9000	29.1	19.11	64.03	0.8990	0.04383
								9500	29.7	19.79	66.57	0.9447	0.04361
								10000	30.3	20.44	69.10	0.9902	0.04339
								10500	30.8	21.06	71.62	1.0356	0.04317
								11000	31.4	21.67	74.12	1.0807	0.04295
								11500	32.0	22.26	76.61	1.1256	0.04274
								12000	32.5	22.82	79.10	1.1703	0.04252
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | TREMOR VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-TREMOR	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/75R18MT GOODYEAR (WD) / D3HFW AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	27.9	17.72	58.58	0.7937	0.04453
								8500	28.5	18.45	61.13	0.8392	0.04431
								9000	29.1	19.15	63.67	0.8845	0.04409
								9500	29.6	19.83	66.19	0.9295	0.04388
								10000	30.2	20.48	68.69	0.9743	0.04366
								10500	30.8	21.12	71.19	1.0189	0.04345
								11000	31.3	21.73	73.67	1.0632	0.04324
								11500	31.9	22.32	76.15	1.1074	0.04302
								12000	32.4	22.89	78.61	1.1514	0.04281

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.7	17.89	57.91	0.7840	0.04422
								8500	28.2	18.64	60.36	0.8256	0.04404
								9000	28.8	19.36	62.79	0.8669	0.04387
								9500	29.3	20.06	65.21	0.9080	0.04370
								10000	29.8	20.73	67.61	0.9488	0.04353
								10500	30.4	21.38	70.00	0.9895	0.04337
								11000	30.9	22.01	72.38	1.0299	0.04320
								11500	31.4	22.63	74.75	1.0702	0.04303
								12000	32.0	23.22	77.11	1.1102	0.04287
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.93	57.65	0.7794	0.04423
								8500	28.2	18.68	60.08	0.8208	0.04406
								9000	28.7	19.40	62.50	0.8619	0.04389
								9500	29.2	20.10	64.90	0.9027	0.04372

								10000	29.8	20.78	67.29	0.9433	0.04356
								10500	30.3	21.44	69.66	0.9837	0.04339
								11000	30.8	22.07	72.03	1.0239	0.04322
								11500	31.4	22.68	74.38	1.0639	0.04306
								12000	31.9	23.28	76.72	1.1037	0.04289
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.92	58.12	0.7764	0.04414
								8500	28.2	18.67	60.58	0.8176	0.04397
								9000	28.7	19.39	63.02	0.8585	0.04381
								9500	29.3	20.09	65.45	0.8991	0.04364
								10000	29.8	20.76	67.86	0.9395	0.04348
								10500	30.3	21.42	70.26	0.9797	0.04331
								11000	30.9	22.05	72.65	1.0197	0.04315
								11500	31.4	22.66	75.03	1.0595	0.04298

								12000	31.9	23.26	77.39	1.0991	0.04282
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.96	57.86	0.7720	0.04416
								8500	28.1	18.71	60.30	0.8128	0.04399
								9000	28.7	19.43	62.72	0.8535	0.04383
								9500	29.2	20.14	65.14	0.8939	0.04366
								10000	29.7	20.81	67.54	0.9340	0.04350
								10500	30.3	21.47	69.92	0.9740	0.04333
								11000	30.8	22.11	72.30	1.0137	0.04317
								11500	31.3	22.72	74.66	1.0533	0.04301

								12000	31.8	23.32	77.01	1.0927	0.04285
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	25.7	19.29	53.06	0.8999	0.03777
								8500	26.2	20.07	55.27	0.9480	0.03755
								9000	26.7	20.82	57.47	0.9958	0.03733
								9500	27.3	21.55	59.66	1.0433	0.03711
								10000	27.8	22.24	61.83	1.0906	0.03690
								10500	28.3	22.92	63.99	1.1376	0.03668
								11000	28.9	23.57	66.15	1.1843	0.03647
								11500	29.4	24.20	68.29	1.2308	0.03625
								12000	29.9	24.81	70.42	1.2772	0.03604
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.9	19.85	50.38	0.9938	0.03482
								8500	25.5	20.64	52.46	1.0451	0.03457
								9000	26.0	21.41	54.52	1.0961	0.03432

								9500	26.5	22.14	56.57	1.1468	0.03408
								10000	27.1	22.85	58.61	1.1972	0.03383
								10500	27.6	23.54	60.64	1.2473	0.03359
								11000	28.1	24.20	62.65	1.2972	0.03335
								11500	28.6	24.84	64.66	1.3468	0.03311
								12000	29.2	25.46	66.66	1.3962	0.03287
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.6	18.60	55.13	0.8513	0.04078
								8500	27.2	19.37	57.44	0.8967	0.04058
								9000	27.7	20.10	59.74	0.9419	0.04038
								9500	28.2	20.82	62.03	0.9868	0.04018
								10000	28.8	21.50	64.30	1.0315	0.03998
								10500	29.3	22.17	66.56	1.0759	0.03978

								11000	29.8	22.81	68.81	1.1201	0.03959
								11500	30.4	23.43	71.05	1.1641	0.03940
								12000	30.9	24.03	73.27	1.2079	0.03920
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.6	18.65	54.88	0.8463	0.04080
								8500	27.1	19.41	57.18	0.8915	0.04060
								9000	27.6	20.15	59.46	0.9364	0.04040
								9500	28.2	20.87	61.73	0.9810	0.04020
								10000	28.7	21.56	63.99	1.0254	0.04001
								10500	29.2	22.22	66.24	1.0696	0.03981
								11000	29.8	22.87	68.47	1.1135	0.03962

								11500	30.3	23.49	70.70	1.1572	0.03943
								12000	30.8	24.10	72.91	1.2008	0.03923
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.2	18.88	54.63	0.8595	0.03965
								8500	26.8	19.65	56.92	0.9054	0.03945
								9000	27.3	20.39	59.19	0.9510	0.03925
								9500	27.9	21.11	61.45	0.9963	0.03905
								10000	28.4	21.80	63.70	1.0414	0.03885
								10500	28.9	22.47	65.94	1.0862	0.03865
								11000	29.4	23.11	68.16	1.1308	0.03845
								11500	30.0	23.74	70.38	1.1752	0.03825
								12000	30.5	24.34	72.58	1.2194	0.03805
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.92	54.38	0.8545	0.03967
								8500	26.7	19.69	56.66	0.9001	0.03947

								9000	27.2	20.44	58.92	0.9455	0.03927
								9500	27.8	21.16	61.16	0.9905	0.03907
								10000	28.3	21.85	63.40	1.0353	0.03887
								10500	28.8	22.53	65.62	1.0798	0.03867
								11000	29.4	23.17	67.83	1.1242	0.03848
								11500	29.9	23.80	70.03	1.1683	0.03828
								12000	30.4	24.41	72.22	1.2122	0.03809
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.70	55.39	0.8398	0.04047
								8500	27.0	19.47	57.71	0.8846	0.04027
								9000	27.6	20.21	60.02	0.9290	0.04008
								9500	28.1	20.92	62.32	0.9733	0.03989

								10000	28.6	21.62	64.60	1.0172	0.03969
								10500	29.2	22.28	66.87	1.0610	0.03950
								11000	29.7	22.93	69.13	1.1045	0.03931
								11500	30.2	23.55	71.38	1.1478	0.03912
								12000	30.7	24.15	73.62	1.1909	0.03893
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.4	18.75	55.13	0.8349	0.04049
								8500	27.0	19.52	57.44	0.8794	0.04029
								9000	27.5	20.26	59.74	0.9236	0.04010
								9500	28.0	20.98	62.02	0.9676	0.03991
								10000	28.6	21.67	64.29	1.0113	0.03972
								10500	29.1	22.34	66.55	1.0548	0.03953

								11000	29.6	22.99	68.80	1.0980	0.03934
								11500	30.1	23.61	71.03	1.1411	0.03915
								12000	30.7	24.22	73.26	1.1839	0.03897
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.3	18.14	56.65	0.8162	0.04292
								8500	27.8	18.89	59.04	0.8596	0.04273
								9000	28.4	19.62	61.41	0.9029	0.04255
								9500	28.9	20.32	63.77	0.9458	0.04236
								10000	29.5	21.00	66.11	0.9885	0.04218
								10500	30.0	21.66	68.44	1.0310	0.04200
								11000	30.5	22.29	70.76	1.0733	0.04182
								11500	31.1	22.91	73.07	1.1154	0.04164
								12000	31.6	23.50	75.37	1.1573	0.04146
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.18	56.39	0.8114	0.04294

								8500	27.8	18.94	58.76	0.8546	0.04275
								9000	28.3	19.67	61.12	0.8976	0.04257
								9500	28.9	20.37	63.46	0.9403	0.04239
								10000	29.4	21.05	65.79	0.9828	0.04220
								10500	29.9	21.71	68.11	1.0250	0.04202
								11000	30.4	22.35	70.42	1.0670	0.04184
								11500	31.0	22.97	72.71	1.1088	0.04166
								12000	31.5	23.57	74.99	1.1505	0.04149
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.3	18.14	56.36	0.8576	0.04219
								8500	27.8	18.90	58.72	0.9015	0.04200

								9000	28.4	19.63	61.07	0.9451	0.04181
								9500	28.9	20.33	63.40	0.9885	0.04162
								10000	29.5	21.01	65.72	1.0317	0.04143
								10500	30.0	21.67	68.03	1.0746	0.04124
								11000	30.5	22.31	70.32	1.1172	0.04106
								11500	31.0	22.92	72.61	1.1597	0.04087
								12000	31.6	23.52	74.88	1.2020	0.04068
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.22	56.42	0.8095	0.04280
								8500	27.7	18.97	58.79	0.8527	0.04262
								9000	28.3	19.71	61.15	0.8955	0.04243
								9500	28.8	20.41	63.49	0.9381	0.04225
								10000	29.3	21.09	65.82	0.9804	0.04207

								10500	29.9	21.75	68.14	1.0225	0.04189
								11000	30.4	22.39	70.45	1.0644	0.04171
								11500	30.9	23.01	72.74	1.1062	0.04153
								12000	31.4	23.61	75.03	1.1477	0.04136
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.21	56.88	0.8067	0.04272
								8500	27.7	18.96	59.28	0.8496	0.04254
								9000	28.3	19.69	61.66	0.8922	0.04236
								9500	28.8	20.39	64.03	0.9346	0.04218
								10000	29.4	21.07	66.39	0.9768	0.04200
								10500	29.9	21.73	68.73	1.0187	0.04182
								11000	30.4	22.37	71.06	1.0604	0.04165
								11500	31.0	22.98	73.38	1.1019	0.04147
								12000	31.5	23.58	75.69	1.1432	0.04129

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.25	56.62	0.8020	0.04274
								8500	27.7	19.00	59.01	0.8446	0.04256
								9000	28.2	19.74	61.37	0.8870	0.04238
								9500	28.8	20.44	63.73	0.9292	0.04220
								10000	29.3	21.13	66.07	0.9711	0.04202
								10500	29.8	21.79	68.40	1.0127	0.04185
								11000	30.3	22.43	70.71	1.0542	0.04167
								11500	30.9	23.04	73.02	1.0955	0.04150
								12000	31.4	23.65	75.31	1.1365	0.04132

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.24	56.91	0.8048	0.04258
								8500	27.7	19.00	59.31	0.8476	0.04240
								9000	28.2	19.73	61.69	0.8901	0.04222
								9500	28.8	20.43	64.06	0.9324	0.04204
								10000	29.3	21.11	66.41	0.9744	0.04187
								10500	29.8	21.77	68.76	1.0162	0.04169
								11000	30.4	22.41	71.09	1.0578	0.04151
								11500	30.9	23.03	73.41	1.0992	0.04134
								12000	31.4	23.62	75.72	1.1404	0.04117
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.28	56.65	0.8001	0.04260
								8500	27.6	19.04	59.03	0.8427	0.04242
								9000	28.2	19.77	61.40	0.8849	0.04225
								9500	28.7	20.48	63.75	0.9269	0.04207

								10000	29.2	21.17	66.09	0.9687	0.04189
								10500	29.8	21.83	68.42	1.0103	0.04172
								11000	30.3	22.47	70.74	1.0516	0.04154
								11500	30.8	23.09	73.05	1.0928	0.04137
								12000	31.3	23.69	75.34	1.1337	0.04119
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.1	17.65	51.37	0.9158	0.04533
								8500	28.5	18.44	53.53	0.9558	0.04510
								9000	29.0	19.20	55.68	0.9956	0.04487
								9500	29.5	19.94	57.83	1.0353	0.04465
								10000	30.0	20.66	59.96	1.0748	0.04442
								10500	30.4	21.35	62.09	1.1142	0.04420
								11000	30.9	22.03	64.21	1.1535	0.04397
								11500	31.4	22.68	66.32	1.1926	0.04375

								12000	31.8	23.32	68.43	1.2316	0.04353
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.0	17.71	50.83	0.8915	0.04576
								8500	28.4	18.51	52.87	0.9280	0.04559
								9000	28.9	19.29	54.90	0.9643	0.04541
								9500	29.3	20.05	56.91	1.0004	0.04523
								10000	29.8	20.78	58.92	1.0363	0.04506
								10500	30.2	21.50	60.92	1.0720	0.04488
								11000	30.7	22.20	62.90	1.1075	0.04471
								11500	31.1	22.87	64.88	1.1429	0.04454
								12000	31.6	23.53	66.85	1.1781	0.04437
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.1	17.65	51.37	0.9158	0.04533
								8500	28.5	18.44	53.53	0.9558	0.04510
								9000	29.0	19.20	55.68	0.9956	0.04487
								9500	29.5	19.94	57.83	1.0353	0.04465

	10000	30.0	20.66	59.96	1.0748	0.04442
	10500	30.4	21.35	62.09	1.1142	0.04420
	11000	30.9	22.03	64.21	1.1535	0.04397
	11500	31.4	22.68	66.32	1.1926	0.04375
	12000	31.8	23.32	68.43	1.2316	0.04353
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.0	17.71	50.83	0.8915	0.04576
	8500	28.4	18.51	52.87	0.9280	0.04559
	9000	28.9	19.29	54.90	0.9643	0.04541
	9500	29.3	20.05	56.91	1.0004	0.04523

								10000	29.8	20.78	58.92	1.0363	0.04506
								10500	30.2	21.50	60.92	1.0720	0.04488
								11000	30.7	22.20	62.90	1.1075	0.04471
								11500	31.1	22.87	64.88	1.1429	0.04454
								12000	31.6	23.53	66.85	1.1781	0.04437
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.7	18.52	48.74	0.9767	0.04121
								8500	27.2	19.33	50.78	1.0204	0.04095
								9000	27.7	20.11	52.80	1.0639	0.04070
								9500	28.2	20.87	54.82	1.1072	0.04044
								10000	28.6	21.61	56.83	1.1504	0.04019
								10500	29.1	22.32	58.83	1.1935	0.03994
								11000	29.6	23.01	60.82	1.2364	0.03969
								11500	30.0	23.68	62.81	1.2792	0.03944

								12000	30.5	24.33	64.80	1.3218	0.03919
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.6	18.59	48.30	0.9487	0.04164
								8500	27.1	19.42	50.22	0.9886	0.04144
								9000	27.6	20.22	52.13	1.0283	0.04124
								9500	28.0	21.00	54.03	1.0677	0.04104
								10000	28.4	21.76	55.93	1.1069	0.04084
								10500	28.9	22.49	57.81	1.1460	0.04064
								11000	29.3	23.21	59.68	1.1848	0.04044
								11500	29.8	23.90	61.55	1.2235	0.04024
								12000	30.2	24.57	63.40	1.2620	0.04005
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.7	18.52	48.74	0.9767	0.04121
								8500	27.2	19.33	50.78	1.0204	0.04095
								9000	27.7	20.11	52.80	1.0639	0.04070
								9500	28.2	20.87	54.82	1.1072	0.04044

	10000	28.6	21.61	56.83	1.1504	0.04019
	10500	29.1	22.32	58.83	1.1935	0.03994
	11000	29.6	23.01	60.82	1.2364	0.03969
	11500	30.0	23.68	62.81	1.2792	0.03944
	12000	30.5	24.33	64.80	1.3218	0.03919
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.6	18.59	48.30	0.9487	0.04164
	8500	27.1	19.42	50.22	0.9886	0.04144
	9000	27.6	20.22	52.13	1.0283	0.04124
	9500	28.0	21.00	54.03	1.0677	0.04104

								10000	28.4	21.76	55.93	1.1069	0.04084
								10500	28.9	22.49	57.81	1.1460	0.04064
								11000	29.3	23.21	59.68	1.1848	0.04044
								11500	29.8	23.90	61.55	1.2235	0.04024
								12000	30.2	24.57	63.40	1.2620	0.04005
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	29.3	16.92	55.85	0.7790	0.04994
								8500	29.8	17.68	58.12	0.8090	0.04987
								9000	30.2	18.43	60.39	0.8389	0.04980
								9500	30.7	19.14	62.64	0.8687	0.04974
								10000	31.2	19.84	64.90	0.8985	0.04967
								10500	31.7	20.52	67.14	0.9281	0.04961
								11000	32.1	21.18	69.38	0.9577	0.04954
								11500	32.6	21.82	71.61	0.9872	0.04947

								12000	33.1	22.44	73.84	1.0166	0.04941
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	29.3	16.92	55.85	0.7790	0.04994
								8500	29.8	17.68	58.12	0.8090	0.04987
								9000	30.2	18.43	60.39	0.8389	0.04980
								9500	30.7	19.14	62.64	0.8687	0.04974
								10000	31.2	19.84	64.90	0.8985	0.04967
								10500	31.7	20.52	67.14	0.9281	0.04961
								11000	32.1	21.18	69.38	0.9577	0.04954
								11500	32.6	21.82	71.61	0.9872	0.04947

								12000	33.1	22.44	73.84	1.0166	0.04941
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.1	17.65	54.34	0.8011	0.04646
								8500	28.6	18.43	56.53	0.8329	0.04638
								9000	29.0	19.20	58.72	0.8646	0.04630
								9500	29.5	19.93	60.91	0.8961	0.04622
								10000	30.0	20.65	63.09	0.9276	0.04614
								10500	30.5	21.34	65.26	0.9591	0.04607
								11000	30.9	22.02	67.43	0.9904	0.04599
								11500	31.4	22.67	69.59	1.0216	0.04591
								12000	31.9	23.31	71.74	1.0528	0.04583
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.1	17.65	54.34	0.8011	0.04646
								8500	28.6	18.43	56.53	0.8329	0.04638
								9000	29.0	19.20	58.72	0.8646	0.04630

								9500	29.5	19.93	60.91	0.8961	0.04622
								10000	30.0	20.65	63.09	0.9276	0.04614
								10500	30.5	21.34	65.26	0.9591	0.04607
								11000	30.9	22.02	67.43	0.9904	0.04599
								11500	31.4	22.67	69.59	1.0216	0.04591
								12000	31.9	23.31	71.74	1.0528	0.04583
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.83	57.07	0.4046	0.04800
								8500	26.7	19.71	59.16	0.4234	0.04796
								9000	27.1	20.57	61.22	0.4420	0.04792

	9500	27.5	21.41	63.27	0.4604	0.04788
	10000	27.8	22.23	65.29	0.4786	0.04784
	10500	28.2	23.03	67.29	0.4967	0.04780
	11000	28.6	23.82	69.27	0.5146	0.04776
	11500	29.0	24.58	71.24	0.5323	0.04772
	12000	29.3	25.33	73.19	0.5499	0.04768
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.12	52.81	0.5109	0.04253
	8500	25.1	20.98	55.08	0.5416	0.04240
	9000	25.5	21.81	57.35	0.5722	0.04226

	9500	26.0	22.61	59.60	0.6027	0.04213
	10000	26.5	23.39	61.85	0.6331	0.04199
	10500	26.9	24.14	64.09	0.6634	0.04186
	11000	27.4	24.86	66.32	0.6936	0.04173
	11500	27.8	25.57	68.54	0.7237	0.04159
	12000	28.3	26.25	70.76	0.7537	0.04146
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.25	51.76	0.4873	0.04293
	8500	24.9	21.14	53.89	0.5150	0.04284
	9000	25.3	21.99	56.00	0.5425	0.04275

								9500	25.8	22.82	58.10	0.5699	0.04266
								10000	26.2	23.63	60.19	0.5972	0.04257
								10500	26.6	24.41	62.27	0.6243	0.04248
								11000	27.0	25.17	64.34	0.6512	0.04238
								11500	27.5	25.90	66.39	0.6781	0.04230
								12000	27.9	26.62	68.44	0.7048	0.04221
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.83	57.07	0.4046	0.04800
								8500	26.7	19.71	59.16	0.4234	0.04796
								9000	27.1	20.57	61.22	0.4420	0.04792
								9500	27.5	21.41	63.27	0.4604	0.04788
								10000	27.8	22.23	65.29	0.4786	0.04784
								10500	28.2	23.03	67.29	0.4967	0.04780

	11000	28.6	23.82	69.27	0.5146	0.04776
	11500	29.0	24.58	71.24	0.5323	0.04772
	12000	29.3	25.33	73.19	0.5499	0.04768
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.12	52.81	0.5109	0.04253
	8500	25.1	20.98	55.08	0.5416	0.04240
	9000	25.5	21.81	57.35	0.5722	0.04226
	9500	26.0	22.61	59.60	0.6027	0.04213
	10000	26.5	23.39	61.85	0.6331	0.04199
	10500	26.9	24.14	64.09	0.6634	0.04186
	11000	27.4	24.86	66.32	0.6936	0.04173
	11500	27.8	25.57	68.54	0.7237	0.04159
	12000	28.3	26.25	70.76	0.7537	0.04146
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.25	51.76	0.4873	0.04293
	8500	24.9	21.14	53.89	0.5150	0.04284
	9000	25.3	21.99	56.00	0.5425	0.04275
	9500	25.8	22.82	58.10	0.5699	0.04266
	10000	26.2	23.63	60.19	0.5972	0.04257
	10500	26.6	24.41	62.27	0.6243	0.04248

								11000	27.0	25.17	64.34	0.6512	0.04238
								11500	27.5	25.90	66.39	0.6781	0.04230
								12000	27.9	26.62	68.44	0.7048	0.04221
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.95	56.81	0.3993	0.04771
								8500	26.5	19.84	58.89	0.4178	0.04767
								9000	26.9	20.71	60.94	0.4361	0.04763
								9500	27.3	21.55	62.97	0.4542	0.04759
								10000	27.7	22.37	64.98	0.4722	0.04756
								10500	28.0	23.18	66.97	0.4900	0.04752
								11000	28.4	23.97	68.94	0.5076	0.04748

	11500	28.8	24.74	70.90	0.5250	0.04744
	12000	29.1	25.50	72.83	0.5423	0.04740
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	52.85	0.5080	0.04227
	8500	25.0	21.06	55.12	0.5386	0.04213
	9000	25.4	21.89	57.39	0.5690	0.04200
	9500	25.9	22.70	59.64	0.5993	0.04186
	10000	26.4	23.48	61.89	0.6295	0.04173
	10500	26.8	24.23	64.13	0.6596	0.04160
	11000	27.3	24.96	66.36	0.6896	0.04147

	11500	27.7	25.67	68.59	0.7195	0.04134
	12000	28.2	26.35	70.81	0.7493	0.04121
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.80	0.4846	0.04267
	8500	24.8	21.23	53.92	0.5121	0.04257
	9000	25.2	22.08	56.04	0.5394	0.04248
	9500	25.7	22.92	58.14	0.5666	0.04239
	10000	26.1	23.72	60.23	0.5937	0.04230
	10500	26.5	24.51	62.31	0.6206	0.04221
	11000	26.9	25.26	64.38	0.6474	0.04213

								11500	27.4	26.00	66.44	0.6741	0.04204
								12000	27.8	26.72	68.49	0.7006	0.04195
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.95	56.81	0.3993	0.04771
								8500	26.5	19.84	58.89	0.4178	0.04767
								9000	26.9	20.71	60.94	0.4361	0.04763
								9500	27.3	21.55	62.97	0.4542	0.04759
								10000	27.7	22.37	64.98	0.4722	0.04756
								10500	28.0	23.18	66.97	0.4900	0.04752
								11000	28.4	23.97	68.94	0.5076	0.04748
								11500	28.8	24.74	70.90	0.5250	0.04744
								12000	29.1	25.50	72.83	0.5423	0.04740
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	52.85	0.5080	0.04227
								8500	25.0	21.06	55.12	0.5386	0.04213
								9000	25.4	21.89	57.39	0.5690	0.04200
								9500	25.9	22.70	59.64	0.5993	0.04186
								10000	26.4	23.48	61.89	0.6295	0.04173

								10500	26.8	24.23	64.13	0.6596	0.04160
								11000	27.3	24.96	66.36	0.6896	0.04147
								11500	27.7	25.67	68.59	0.7195	0.04134
								12000	28.2	26.35	70.81	0.7493	0.04121
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.80	0.4846	0.04267
								8500	24.8	21.23	53.92	0.5121	0.04257
								9000	25.2	22.08	56.04	0.5394	0.04248
								9500	25.7	22.92	58.14	0.5666	0.04239
								10000	26.1	23.72	60.23	0.5937	0.04230
								10500	26.5	24.51	62.31	0.6206	0.04221
								11000	26.9	25.26	64.38	0.6474	0.04213
								11500	27.4	26.00	66.44	0.6741	0.04204
								12000	27.8	26.72	68.49	0.7006	0.04195
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	54.96	0.4502	0.04430
								8500	25.5	20.65	56.96	0.4716	0.04424

	9000	25.9	21.54	58.93	0.4928	0.04418
	9500	26.2	22.40	60.89	0.5137	0.04412
	10000	26.6	23.25	62.82	0.5345	0.04406
	10500	27.0	24.07	64.74	0.5550	0.04400
	11000	27.4	24.87	66.64	0.5754	0.04395
	11500	27.7	25.66	68.52	0.5956	0.04389
	12000	28.1	26.42	70.39	0.6156	0.04383
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.06	50.33	0.5747	0.03891
	8500	24.0	21.95	52.48	0.6091	0.03874

	9000	24.4	22.80	54.62	0.6434	0.03858
	9500	24.9	23.62	56.75	0.6776	0.03842
	10000	25.3	24.41	58.87	0.7116	0.03826
	10500	25.8	25.18	60.99	0.7455	0.03809
	11000	26.3	25.92	63.10	0.7794	0.03793
	11500	26.7	26.64	65.20	0.8131	0.03777
	12000	27.2	27.34	67.30	0.8467	0.03761
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.23	49.39	0.5470	0.03931
	8500	23.8	22.14	51.40	0.5781	0.03919

								9000	24.2	23.01	53.40	0.6089	0.03908
								9500	24.6	23.87	55.39	0.6396	0.03896
								10000	25.1	24.69	57.37	0.6702	0.03885
								10500	25.5	25.49	59.34	0.7006	0.03873
								11000	25.9	26.26	61.30	0.7308	0.03862
								11500	26.3	27.01	63.25	0.7609	0.03850
								12000	26.8	27.74	65.19	0.7908	0.03839
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	54.96	0.4502	0.04430
								8500	25.5	20.65	56.96	0.4716	0.04424
								9000	25.9	21.54	58.93	0.4928	0.04418
								9500	26.2	22.40	60.89	0.5137	0.04412

	10000	26.6	23.25	62.82	0.5345	0.04406
	10500	27.0	24.07	64.74	0.5550	0.04400
	11000	27.4	24.87	66.64	0.5754	0.04395
	11500	27.7	25.66	68.52	0.5956	0.04389
	12000	28.1	26.42	70.39	0.6156	0.04383
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.06	50.33	0.5747	0.03891
	8500	24.0	21.95	52.48	0.6091	0.03874
	9000	24.4	22.80	54.62	0.6434	0.03858
	9500	24.9	23.62	56.75	0.6776	0.03842
	10000	25.3	24.41	58.87	0.7116	0.03826
	10500	25.8	25.18	60.99	0.7455	0.03809
	11000	26.3	25.92	63.10	0.7794	0.03793
	11500	26.7	26.64	65.20	0.8131	0.03777
	12000	27.2	27.34	67.30	0.8467	0.03761
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.23	49.39	0.5470	0.03931
	8500	23.8	22.14	51.40	0.5781	0.03919
	9000	24.2	23.01	53.40	0.6089	0.03908
	9500	24.6	23.87	55.39	0.6396	0.03896

								10000	25.1	24.69	57.37	0.6702	0.03885
								10500	25.5	25.49	59.34	0.7006	0.03873
								11000	25.9	26.26	61.30	0.7308	0.03862
								11500	26.3	27.01	63.25	0.7609	0.03850
								12000	26.8	27.74	65.19	0.7908	0.03839
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	55.44	0.4390	0.04505
								8500	25.7	20.46	57.46	0.4598	0.04500
								9000	26.1	21.34	59.45	0.4803	0.04494
								9500	26.5	22.20	61.43	0.5007	0.04489
								10000	26.9	23.04	63.38	0.5208	0.04483
								10500	27.2	23.86	65.32	0.5408	0.04478

	11000	27.6	24.65	67.24	0.5605	0.04473
	11500	28.0	25.44	69.14	0.5801	0.04467
	12000	28.3	26.20	71.03	0.5996	0.04462
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	50.89	0.5594	0.03965
	8500	24.2	21.75	53.07	0.5929	0.03949
	9000	24.7	22.60	55.23	0.6264	0.03934
	9500	25.1	23.41	57.39	0.6597	0.03918
	10000	25.6	24.20	59.55	0.6928	0.03903
	10500	26.0	24.97	61.69	0.7259	0.03887

	11000	26.5	25.71	63.83	0.7588	0.03872
	11500	26.9	26.42	65.96	0.7917	0.03856
	12000	27.4	27.12	68.08	0.8245	0.03841
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.93	0.5326	0.04006
	8500	24.0	21.93	51.96	0.5629	0.03994
	9000	24.4	22.81	53.99	0.5930	0.03983
	9500	24.9	23.65	56.00	0.6229	0.03972
	10000	25.3	24.47	58.01	0.6526	0.03961
	10500	25.7	25.27	60.00	0.6822	0.03950

								11000	26.1	26.04	61.99	0.7117	0.03939
								11500	26.6	26.79	63.96	0.7410	0.03928
								12000	27.0	27.51	65.93	0.7702	0.03918
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	55.44	0.4390	0.04505
								8500	25.7	20.46	57.46	0.4598	0.04500
								9000	26.1	21.34	59.45	0.4803	0.04494
								9500	26.5	22.20	61.43	0.5007	0.04489
								10000	26.9	23.04	63.38	0.5208	0.04483
								10500	27.2	23.86	65.32	0.5408	0.04478
								11000	27.6	24.65	67.24	0.5605	0.04473
								11500	28.0	25.44	69.14	0.5801	0.04467
								12000	28.3	26.20	71.03	0.5996	0.04462
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	50.89	0.5594	0.03965
								8500	24.2	21.75	53.07	0.5929	0.03949
								9000	24.7	22.60	55.23	0.6264	0.03934

								9500	25.1	23.41	57.39	0.6597	0.03918
								10000	25.6	24.20	59.55	0.6928	0.03903
								10500	26.0	24.97	61.69	0.7259	0.03887
								11000	26.5	25.71	63.83	0.7588	0.03872
								11500	26.9	26.42	65.96	0.7917	0.03856
								12000	27.4	27.12	68.08	0.8245	0.03841
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.93	0.5326	0.04006
								8500	24.0	21.93	51.96	0.5629	0.03994
								9000	24.4	22.81	53.99	0.5930	0.03983
								9500	24.9	23.65	56.00	0.6229	0.03972
								10000	25.3	24.47	58.01	0.6526	0.03961
								10500	25.7	25.27	60.00	0.6822	0.03950
								11000	26.1	26.04	61.99	0.7117	0.03939
								11500	26.6	26.79	63.96	0.7410	0.03928
								12000	27.0	27.51	65.93	0.7702	0.03918
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.76	55.23	0.4306	0.04451

	8500	25.5	20.67	57.23	0.4510	0.04446
	9000	25.8	21.56	59.22	0.4711	0.04440
	9500	26.2	22.43	61.18	0.4911	0.04435
	10000	26.6	23.28	63.13	0.5108	0.04430
	10500	27.0	24.10	65.05	0.5303	0.04425
	11000	27.3	24.91	66.96	0.5496	0.04420
	11500	27.7	25.70	68.85	0.5688	0.04415
	12000	28.0	26.47	70.73	0.5878	0.04410
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.04	50.96	0.5537	0.03915

	8500	24.0	21.92	53.14	0.5869	0.03900
	9000	24.5	22.78	55.31	0.6199	0.03884
	9500	24.9	23.60	57.48	0.6528	0.03869
	10000	25.4	24.39	59.63	0.6856	0.03854
	10500	25.8	25.16	61.78	0.7182	0.03839
	11000	26.3	25.90	63.92	0.7508	0.03824
	11500	26.7	26.62	66.06	0.7833	0.03808
	12000	27.2	27.32	68.19	0.8156	0.03793
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.20	50.00	0.5272	0.03956

								8500	23.8	22.11	52.04	0.5571	0.03945
								9000	24.2	22.99	54.07	0.5868	0.03934
								9500	24.7	23.84	56.09	0.6164	0.03923
								10000	25.1	24.67	58.09	0.6458	0.03912
								10500	25.5	25.46	60.09	0.6750	0.03902
								11000	25.9	26.24	62.08	0.7041	0.03891
								11500	26.4	26.99	64.05	0.7331	0.03880
								12000	26.8	27.72	66.02	0.7619	0.03870
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.76	55.23	0.4306	0.04451
								8500	25.5	20.67	57.23	0.4510	0.04446

	9000	25.8	21.56	59.22	0.4711	0.04440
	9500	26.2	22.43	61.18	0.4911	0.04435
	10000	26.6	23.28	63.13	0.5108	0.04430
	10500	27.0	24.10	65.05	0.5303	0.04425
	11000	27.3	24.91	66.96	0.5496	0.04420
	11500	27.7	25.70	68.85	0.5688	0.04415
	12000	28.0	26.47	70.73	0.5878	0.04410
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.04	50.96	0.5537	0.03915
	8500	24.0	21.92	53.14	0.5869	0.03900
	9000	24.5	22.78	55.31	0.6199	0.03884
	9500	24.9	23.60	57.48	0.6528	0.03869
	10000	25.4	24.39	59.63	0.6856	0.03854
	10500	25.8	25.16	61.78	0.7182	0.03839
	11000	26.3	25.90	63.92	0.7508	0.03824
	11500	26.7	26.62	66.06	0.7833	0.03808
	12000	27.2	27.32	68.19	0.8156	0.03793
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.20	50.00	0.5272	0.03956
	8500	23.8	22.11	52.04	0.5571	0.03945

								9000	24.2	22.99	54.07	0.5868	0.03934
								9500	24.7	23.84	56.09	0.6164	0.03923
								10000	25.1	24.67	58.09	0.6458	0.03912
								10500	25.5	25.46	60.09	0.6750	0.03902
								11000	25.9	26.24	62.08	0.7041	0.03891
								11500	26.4	26.99	64.05	0.7331	0.03880
								12000	26.8	27.72	66.02	0.7619	0.03870
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.88	0.4276	0.04733
								8500	26.6	19.79	58.94	0.4464	0.04728
								9000	27.0	20.65	60.98	0.4650	0.04724
								9500	27.4	21.50	63.00	0.4834	0.04720
								10000	27.7	22.32	64.99	0.5016	0.04716

	10500	28.1	23.13	66.97	0.5197	0.04712
	11000	28.5	23.92	68.93	0.5376	0.04707
	11500	28.8	24.69	70.87	0.5553	0.04703
	12000	29.2	25.44	72.79	0.5729	0.04699
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.74	0.5393	0.04186
	8500	25.0	21.01	54.99	0.5703	0.04172
	9000	25.5	21.85	57.23	0.6012	0.04158
	9500	26.0	22.65	59.47	0.6319	0.04144
	10000	26.4	23.43	61.70	0.6625	0.04130

	10500	26.9	24.18	63.92	0.6930	0.04117
	11000	27.3	24.92	66.13	0.7235	0.04103
	11500	27.8	25.62	68.34	0.7538	0.04089
	12000	28.2	26.31	70.54	0.7840	0.04076
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.71	0.5155	0.04226
	8500	24.9	21.18	53.82	0.5434	0.04216
	9000	25.3	22.03	55.91	0.5711	0.04207
	9500	25.7	22.87	58.00	0.5987	0.04197
	10000	26.1	23.67	60.07	0.6262	0.04188

								10500	26.6	24.46	62.13	0.6535	0.04179
								11000	27.0	25.22	64.19	0.6807	0.04169
								11500	27.4	25.96	66.23	0.7077	0.04160
								12000	27.8	26.67	68.26	0.7347	0.04151
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.86	56.93	0.4493	0.04703
								8500	26.6	19.75	58.98	0.4683	0.04699
								9000	27.0	20.62	61.00	0.4872	0.04694
								9500	27.4	21.46	63.01	0.5058	0.04689
								10000	27.8	22.28	65.00	0.5242	0.04685
								10500	28.1	23.09	66.96	0.5425	0.04681
								11000	28.5	23.88	68.91	0.5606	0.04676
								11500	28.9	24.65	70.84	0.5785	0.04672
								12000	29.2	25.40	72.76	0.5963	0.04668
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.12	52.64	0.5633	0.04154

	8500	25.1	20.98	54.88	0.5946	0.04140
	9000	25.5	21.81	57.11	0.6258	0.04126
	9500	26.0	22.62	59.33	0.6568	0.04112
	10000	26.4	23.40	61.55	0.6878	0.04097
	10500	26.9	24.15	63.75	0.7186	0.04083
	11000	27.4	24.88	65.95	0.7493	0.04069
	11500	27.8	25.59	68.14	0.7800	0.04055
	12000	28.3	26.27	70.33	0.8105	0.04042
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.25	51.64	0.5391	0.04195
	8500	24.9	21.14	53.74	0.5673	0.04185
	9000	25.3	22.00	55.82	0.5954	0.04175
	9500	25.8	22.83	57.89	0.6233	0.04165
	10000	26.2	23.64	59.95	0.6510	0.04155
	10500	26.6	24.42	62.00	0.6786	0.04146
	11000	27.0	25.18	64.03	0.7061	0.04136
	11500	27.5	25.92	66.06	0.7334	0.04127
	12000	27.9	26.64	68.09	0.7607	0.04117

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.70	55.28	0.4592	0.04413
								8500	25.5	20.61	57.27	0.4799	0.04408
								9000	25.9	21.50	59.24	0.5003	0.04402
								9500	26.3	22.37	61.19	0.5205	0.04396
								10000	26.7	23.22	63.12	0.5405	0.04391
								10500	27.0	24.04	65.03	0.5603	0.04386
								11000	27.4	24.85	66.93	0.5799	0.04380
								11500	27.8	25.64	68.81	0.5994	0.04375
								12000	28.1	26.41	70.67	0.6186	0.04369

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.99	50.83	0.5853	0.03875
	8500	24.1	21.87	52.99	0.6189	0.03859
	9000	24.5	22.72	55.15	0.6524	0.03843
	9500	25.0	23.55	57.29	0.6857	0.03827
	10000	25.4	24.34	59.42	0.7189	0.03812
	10500	25.9	25.11	61.55	0.7520	0.03796
	11000	26.3	25.85	63.67	0.7850	0.03780
	11500	26.8	26.57	65.79	0.8178	0.03765
	12000	27.2	27.27	67.90	0.8506	0.03749

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.14	49.90	0.5584	0.03916
	8500	23.9	22.05	51.92	0.5887	0.03904
	9000	24.3	22.93	53.93	0.6188	0.03893
	9500	24.7	23.78	55.93	0.6487	0.03882
	10000	25.1	24.61	57.92	0.6785	0.03871
	10500	25.6	25.41	59.90	0.7082	0.03860
	11000	26.0	26.18	61.87	0.7376	0.03849
	11500	26.4	26.94	63.83	0.7670	0.03837
	12000	26.8	27.66	65.78	0.7962	0.03827

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.70	55.28	0.4592	0.04413
								8500	25.5	20.61	57.27	0.4799	0.04408
								9000	25.9	21.50	59.24	0.5003	0.04402
								9500	26.3	22.37	61.19	0.5205	0.04396
								10000	26.7	23.22	63.12	0.5405	0.04391
								10500	27.0	24.04	65.03	0.5603	0.04386
								11000	27.4	24.85	66.93	0.5799	0.04380
								11500	27.8	25.64	68.81	0.5994	0.04375
								12000	28.1	26.41	70.67	0.6186	0.04369
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.99	50.83	0.5853	0.03875
								8500	24.1	21.87	52.99	0.6189	0.03859
								9000	24.5	22.72	55.15	0.6524	0.03843
								9500	25.0	23.55	57.29	0.6857	0.03827
								10000	25.4	24.34	59.42	0.7189	0.03812
								10500	25.9	25.11	61.55	0.7520	0.03796
								11000	26.3	25.85	63.67	0.7850	0.03780
								11500	26.8	26.57	65.79	0.8178	0.03765
								12000	27.2	27.27	67.90	0.8506	0.03749

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.14	49.90	0.5584	0.03916
								8500	23.9	22.05	51.92	0.5887	0.03904
								9000	24.3	22.93	53.93	0.6188	0.03893
								9500	24.7	23.78	55.93	0.6487	0.03882
								10000	25.1	24.61	57.92	0.6785	0.03871
								10500	25.6	25.41	59.90	0.7082	0.03860
								11000	26.0	26.18	61.87	0.7376	0.03849
								11500	26.4	26.94	63.83	0.7670	0.03837
								12000	26.8	27.66	65.78	0.7962	0.03827
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.06	56.53	0.4344	0.04668
								8500	26.4	19.95	58.58	0.4537	0.04663
								9000	26.8	20.82	60.60	0.4727	0.04658
								9500	27.1	21.67	62.61	0.4915	0.04654

	10000	27.5	22.50	64.59	0.5101	0.04649
	10500	27.9	23.31	66.55	0.5286	0.04645
	11000	28.2	24.10	68.50	0.5468	0.04640
	11500	28.6	24.88	70.42	0.5650	0.04636
	12000	29.0	25.63	72.33	0.5829	0.04632
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.32	52.33	0.5493	0.04122
	8500	24.8	21.19	54.56	0.5809	0.04107
	9000	25.3	22.02	56.78	0.6123	0.04093
	9500	25.8	22.83	59.00	0.6436	0.04079

	10000	26.2	23.61	61.21	0.6748	0.04065
	10500	26.7	24.37	63.41	0.7059	0.04051
	11000	27.1	25.10	65.60	0.7369	0.04037
	11500	27.6	25.81	67.79	0.7678	0.04023
	12000	28.0	26.50	69.97	0.7986	0.04009
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.46	51.32	0.5248	0.04162
	8500	24.6	21.35	53.41	0.5532	0.04152
	9000	25.1	22.21	55.49	0.5815	0.04142
	9500	25.5	23.05	57.55	0.6096	0.04133

								10000	25.9	23.86	59.61	0.6376	0.04123
								10500	26.4	24.65	61.65	0.6654	0.04113
								11000	26.8	25.41	63.69	0.6931	0.04103
								11500	27.2	26.15	65.71	0.7207	0.04094
								12000	27.6	26.87	67.73	0.7481	0.04084
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.02	56.58	0.4562	0.04638
								8500	26.4	19.91	58.61	0.4757	0.04633
								9000	26.8	20.78	60.63	0.4949	0.04628
								9500	27.2	21.63	62.62	0.5139	0.04623
								10000	27.6	22.46	64.59	0.5328	0.04619
								10500	27.9	23.27	66.54	0.5514	0.04614
								11000	28.3	24.06	68.48	0.5699	0.04609
								11500	28.7	24.83	70.39	0.5882	0.04605

	12000	29.0	25.59	72.29	0.6064	0.04600
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.28	52.23	0.5733	0.04090
	8500	24.9	21.15	54.45	0.6052	0.04076
	9000	25.3	21.99	56.66	0.6369	0.04061
	9500	25.8	22.79	58.86	0.6686	0.04047
	10000	26.2	23.58	61.05	0.7001	0.04032
	10500	26.7	24.33	63.24	0.7315	0.04018
	11000	27.2	25.07	65.42	0.7628	0.04003
	11500	27.6	25.78	67.59	0.7940	0.03989
	12000	28.1	26.46	69.75	0.8251	0.03975
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.42	51.25	0.5485	0.04131
	8500	24.7	21.31	53.32	0.5772	0.04121
	9000	25.1	22.17	55.39	0.6058	0.04111
	9500	25.6	23.01	57.44	0.6342	0.04101
	10000	26.0	23.82	59.48	0.6625	0.04090
	10500	26.4	24.61	61.51	0.6906	0.04080
	11000	26.8	25.37	63.53	0.7186	0.04070
	11500	27.2	26.11	65.54	0.7464	0.04060

								12000	27.7	26.83	67.55	0.7741	0.04050
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.3	18.16	52.61	0.6528	0.04777
								8500	27.8	18.95	54.87	0.6913	0.04757
								9000	28.3	19.71	57.13	0.7297	0.04738
								9500	28.8	20.45	59.37	0.7679	0.04719
								10000	29.3	21.16	61.61	0.8060	0.04699
								10500	29.7	21.86	63.83	0.8440	0.04680
								11000	30.2	22.53	66.06	0.8819	0.04661
								11500	30.7	23.18	68.27	0.9196	0.04642

	12000	31.2	23.81	70.48	0.9572	0.04623
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.2	18.24	51.86	0.6278	0.04818
	8500	27.6	19.05	54.00	0.6629	0.04803
	9000	28.1	19.84	56.12	0.6977	0.04789
	9500	28.6	20.60	58.22	0.7324	0.04774
	10000	29.0	21.33	60.32	0.7668	0.04760
	10500	29.5	22.05	62.41	0.8011	0.04746
	11000	29.9	22.74	64.48	0.8353	0.04732
	11500	30.4	23.42	66.55	0.8692	0.04718

								12000	30.8	24.07	68.61	0.9031	0.04704
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.3	18.16	52.61	0.6528	0.04777
								8500	27.8	18.95	54.87	0.6913	0.04757
								9000	28.3	19.71	57.13	0.7297	0.04738
								9500	28.8	20.45	59.37	0.7679	0.04719
								10000	29.3	21.16	61.61	0.8060	0.04699
								10500	29.7	21.86	63.83	0.8440	0.04680
								11000	30.2	22.53	66.06	0.8819	0.04661
								11500	30.7	23.18	68.27	0.9196	0.04642
								12000	31.2	23.81	70.48	0.9572	0.04623
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.2	18.24	51.86	0.6278	0.04818
								8500	27.6	19.05	54.00	0.6629	0.04803
								9000	28.1	19.84	56.12	0.6977	0.04789
								9500	28.6	20.60	58.22	0.7324	0.04774
								10000	29.0	21.33	60.32	0.7668	0.04760
								10500	29.5	22.05	62.41	0.8011	0.04746
								11000	29.9	22.74	64.48	0.8353	0.04732

								11500	30.4	23.42	66.55	0.8692	0.04718
								12000	30.8	24.07	68.61	0.9031	0.04704
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER VACCUM_HYDRO BOOST	4 - NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.1	19.00	50.51	0.7051	0.04391
								8500	26.6	19.81	52.66	0.7465	0.04370
								9000	27.1	20.60	54.81	0.7878	0.04348
								9500	27.5	21.35	56.95	0.8289	0.04327
								10000	28.0	22.08	59.09	0.8699	0.04305
								10500	28.5	22.79	61.21	0.9108	0.04284
								11000	29.0	23.48	63.33	0.9515	0.04263
								11500	29.5	24.14	65.45	0.9921	0.04242

	12000	30.0	24.78	67.55	1.0325	0.04221
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	25.9	19.10	49.85	0.6770	0.04433
	8500	26.4	19.94	51.88	0.7147	0.04416
	9000	26.9	20.74	53.91	0.7522	0.04400
	9500	27.3	21.52	55.92	0.7895	0.04383
	10000	27.8	22.28	57.92	0.8266	0.04367
	10500	28.2	23.01	59.91	0.8635	0.04351
	11000	28.7	23.72	61.90	0.9002	0.04335
	11500	29.2	24.41	63.87	0.9367	0.04319

								12000	29.6	25.08	65.84	0.9731	0.04303
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.1	19.00	50.51	0.7051	0.04391
								8500	26.6	19.81	52.66	0.7465	0.04370
								9000	27.1	20.60	54.81	0.7878	0.04348
								9500	27.5	21.35	56.95	0.8289	0.04327
								10000	28.0	22.08	59.09	0.8699	0.04305
								10500	28.5	22.79	61.21	0.9108	0.04284
								11000	29.0	23.48	63.33	0.9515	0.04263
								11500	29.5	24.14	65.45	0.9921	0.04242
								12000	30.0	24.78	67.55	1.0325	0.04221
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	25.9	19.10	49.85	0.6770	0.04433
								8500	26.4	19.94	51.88	0.7147	0.04416
								9000	26.9	20.74	53.91	0.7522	0.04400
								9500	27.3	21.52	55.92	0.7895	0.04383
								10000	27.8	22.28	57.92	0.8266	0.04367
								10500	28.2	23.01	59.91	0.8635	0.04351
								11000	28.7	23.72	61.90	0.9002	0.04335

								11500	29.2	24.41	63.87	0.9367	0.04319
								12000	29.6	25.08	65.84	0.9731	0.04303
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.78	57.13	0.4330	0.04761
								8500	26.8	19.66	59.21	0.4521	0.04757
								9000	27.1	20.52	61.26	0.4710	0.04752
								9500	27.5	21.36	63.29	0.4897	0.04748
								10000	27.9	22.18	65.30	0.5082	0.04744
								10500	28.3	22.98	67.29	0.5265	0.04739
								11000	28.6	23.76	69.26	0.5447	0.04735
								11500	29.0	24.53	71.21	0.5627	0.04731

	12000	29.4	25.27	73.15	0.5805	0.04727
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.07	52.70	0.5422	0.04212
	8500	25.1	20.93	54.95	0.5734	0.04198
	9000	25.6	21.76	57.19	0.6045	0.04184
	9500	26.1	22.56	59.43	0.6354	0.04170
	10000	26.5	23.34	61.65	0.6662	0.04156
	10500	27.0	24.09	63.87	0.6969	0.04142
	11000	27.4	24.82	66.08	0.7276	0.04129
	11500	27.9	25.52	68.29	0.7581	0.04115

	12000	28.3	26.21	70.49	0.7885	0.04101
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	51.67	0.5183	0.04253
	8500	25.0	21.09	53.78	0.5464	0.04243
	9000	25.4	21.94	55.88	0.5743	0.04233
	9500	25.8	22.77	57.96	0.6021	0.04224
	10000	26.2	23.58	60.03	0.6297	0.04214
	10500	26.7	24.36	62.09	0.6572	0.04205
	11000	27.1	25.12	64.14	0.6846	0.04195
	11500	27.5	25.85	66.18	0.7118	0.04186

								12000	27.9	26.57	68.22	0.7389	0.04176
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.78	57.13	0.4330	0.04761
								8500	26.8	19.66	59.21	0.4521	0.04757
								9000	27.1	20.52	61.26	0.4710	0.04752
								9500	27.5	21.36	63.29	0.4897	0.04748
								10000	27.9	22.18	65.30	0.5082	0.04744
								10500	28.3	22.98	67.29	0.5265	0.04739
								11000	28.6	23.76	69.26	0.5447	0.04735
								11500	29.0	24.53	71.21	0.5627	0.04731
								12000	29.4	25.27	73.15	0.5805	0.04727
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.07	52.70	0.5422	0.04212
								8500	25.1	20.93	54.95	0.5734	0.04198
								9000	25.6	21.76	57.19	0.6045	0.04184
								9500	26.1	22.56	59.43	0.6354	0.04170
								10000	26.5	23.34	61.65	0.6662	0.04156
								10500	27.0	24.09	63.87	0.6969	0.04142
								11000	27.4	24.82	66.08	0.7276	0.04129

								11500	27.9	25.52	68.29	0.7581	0.04115
								12000	28.3	26.21	70.49	0.7885	0.04101
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.20	51.67	0.5183	0.04253
								8500	25.0	21.09	53.78	0.5464	0.04243
								9000	25.4	21.94	55.88	0.5743	0.04233
								9500	25.8	22.77	57.96	0.6021	0.04224
								10000	26.2	23.58	60.03	0.6297	0.04214
								10500	26.7	24.36	62.09	0.6572	0.04205
								11000	27.1	25.12	64.14	0.6846	0.04195
								11500	27.5	25.85	66.18	0.7118	0.04186
								12000	27.9	26.57	68.22	0.7389	0.04176
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.64	55.03	0.5012	0.04363
								8500	25.6	20.55	57.00	0.5231	0.04356
								9000	26.0	21.43	58.95	0.5448	0.04350

	9500	26.4	22.30	60.88	0.5663	0.04343
	10000	26.7	23.14	62.80	0.5875	0.04337
	10500	27.1	23.96	64.69	0.6086	0.04330
	11000	27.5	24.77	66.57	0.6294	0.04324
	11500	27.9	25.55	68.43	0.6501	0.04318
	12000	28.2	26.32	70.27	0.6706	0.04311
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.97	50.08	0.6309	0.03819
	8500	24.1	21.86	52.20	0.6661	0.03802
	9000	24.5	22.71	54.30	0.7011	0.03785

	9500	25.0	23.53	56.40	0.7361	0.03768
	10000	25.4	24.32	58.49	0.7708	0.03751
	10500	25.9	25.09	60.57	0.8055	0.03734
	11000	26.3	25.83	62.64	0.8401	0.03717
	11500	26.8	26.55	64.71	0.8745	0.03700
	12000	27.2	27.25	66.78	0.9089	0.03684
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.13	49.19	0.6025	0.03861
	8500	23.9	22.04	51.17	0.6343	0.03848
	9000	24.3	22.92	53.14	0.6658	0.03836

								9500	24.7	23.77	55.10	0.6972	0.03823
								10000	25.2	24.59	57.05	0.7284	0.03811
								10500	25.6	25.39	58.98	0.7595	0.03799
								11000	26.0	26.17	60.91	0.7904	0.03786
								11500	26.4	26.92	62.83	0.8212	0.03774
								12000	26.9	27.65	64.74	0.8518	0.03762
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.68	55.00	0.4790	0.04392
								8500	25.6	20.59	56.99	0.5007	0.04386
								9000	25.9	21.48	58.95	0.5222	0.04379
								9500	26.3	22.34	60.89	0.5435	0.04373
								10000	26.7	23.19	62.81	0.5645	0.04367
								10500	27.1	24.01	64.72	0.5853	0.04361

	11000	27.4	24.81	66.60	0.6060	0.04355
	11500	27.8	25.60	68.47	0.6264	0.04349
	12000	28.2	26.36	70.33	0.6467	0.04343
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.01	50.19	0.6065	0.03850
	8500	24.0	21.90	52.32	0.6414	0.03833
	9000	24.5	22.75	54.44	0.6761	0.03817
	9500	24.9	23.57	56.55	0.7107	0.03800
	10000	25.4	24.36	58.66	0.7452	0.03783
	10500	25.9	25.13	60.75	0.7795	0.03767
	11000	26.3	25.87	62.84	0.8138	0.03750
	11500	26.8	26.59	64.93	0.8479	0.03734
	12000	27.2	27.29	67.01	0.8819	0.03717
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.17	49.28	0.5785	0.03891
	8500	23.8	22.08	51.28	0.6099	0.03879
	9000	24.3	22.96	53.26	0.6412	0.03867
	9500	24.7	23.81	55.23	0.6723	0.03855
	10000	25.1	24.63	57.19	0.7032	0.03843
	10500	25.5	25.43	59.14	0.7340	0.03831

								11000	26.0	26.21	61.08	0.7646	0.03819
								11500	26.4	26.96	63.01	0.7951	0.03807
								12000	26.8	27.69	64.94	0.8254	0.03795
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.50	55.49	0.4677	0.04467
								8500	25.8	20.40	57.49	0.4888	0.04461
								9000	26.2	21.28	59.47	0.5096	0.04456
								9500	26.6	22.14	61.43	0.5303	0.04450
								10000	26.9	22.98	63.38	0.5507	0.04444
								10500	27.3	23.80	65.30	0.5709	0.04438
								11000	27.7	24.60	67.20	0.5910	0.04433

	11500	28.0	25.38	69.09	0.6109	0.04427
	12000	28.4	26.14	70.97	0.6306	0.04421
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	50.76	0.5911	0.03925
	8500	24.2	21.70	52.92	0.6251	0.03908
	9000	24.7	22.55	55.06	0.6589	0.03892
	9500	25.2	23.36	57.20	0.6927	0.03876
	10000	25.6	24.15	59.34	0.7263	0.03860
	10500	26.1	24.92	61.46	0.7598	0.03844
	11000	26.5	25.66	63.58	0.7931	0.03828

	11500	27.0	26.37	65.69	0.8264	0.03813
	12000	27.4	27.07	67.79	0.8596	0.03797
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.97	49.82	0.5640	0.03965
	8500	24.1	21.87	51.84	0.5946	0.03954
	9000	24.5	22.75	53.85	0.6251	0.03942
	9500	24.9	23.60	55.85	0.6554	0.03931
	10000	25.3	24.42	57.83	0.6855	0.03919
	10500	25.8	25.21	59.81	0.7155	0.03908
	11000	26.2	25.98	61.77	0.7454	0.03897

								11500	26.6	26.73	63.73	0.7751	0.03885
								12000	27.0	27.46	65.68	0.8047	0.03874
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.50	55.49	0.4677	0.04467
								8500	25.8	20.40	57.49	0.4888	0.04461
								9000	26.2	21.28	59.47	0.5096	0.04456
								9500	26.6	22.14	61.43	0.5303	0.04450
								10000	26.9	22.98	63.38	0.5507	0.04444
								10500	27.3	23.80	65.30	0.5709	0.04438
								11000	27.7	24.60	67.20	0.5910	0.04433
								11500	28.0	25.38	69.09	0.6109	0.04427
								12000	28.4	26.14	70.97	0.6306	0.04421
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	50.76	0.5911	0.03925
								8500	24.2	21.70	52.92	0.6251	0.03908
								9000	24.7	22.55	55.06	0.6589	0.03892
								9500	25.2	23.36	57.20	0.6927	0.03876
								10000	25.6	24.15	59.34	0.7263	0.03860

								10500	26.1	24.92	61.46	0.7598	0.03844
								11000	26.5	25.66	63.58	0.7931	0.03828
								11500	27.0	26.37	65.69	0.8264	0.03813
								12000	27.4	27.07	67.79	0.8596	0.03797
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.97	49.82	0.5640	0.03965
								8500	24.1	21.87	51.84	0.5946	0.03954
								9000	24.5	22.75	53.85	0.6251	0.03942
								9500	24.9	23.60	55.85	0.6554	0.03931
								10000	25.3	24.42	57.83	0.6855	0.03919
								10500	25.8	25.21	59.81	0.7155	0.03908
								11000	26.2	25.98	61.77	0.7454	0.03897
								11500	26.6	26.73	63.73	0.7751	0.03885
								12000	27.0	27.46	65.68	0.8047	0.03874
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.86	56.75	0.4428	0.04725
								8500	26.7	19.74	58.81	0.4624	0.04720

	9000	27.0	20.61	60.84	0.4819	0.04715
	9500	27.4	21.45	62.86	0.5011	0.04710
	10000	27.8	22.27	64.85	0.5202	0.04705
	10500	28.2	23.07	66.82	0.5390	0.04701
	11000	28.5	23.85	68.78	0.5577	0.04696
	11500	28.9	24.62	70.72	0.5762	0.04691
	12000	29.3	25.37	72.64	0.5946	0.04687
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.25	0.5551	0.04174
	8500	25.0	21.01	54.48	0.5870	0.04160

	9000	25.5	21.84	56.70	0.6189	0.04145
	9500	26.0	22.65	58.91	0.6506	0.04131
	10000	26.4	23.43	61.12	0.6822	0.04116
	10500	26.9	24.18	63.32	0.7137	0.04102
	11000	27.3	24.91	65.51	0.7451	0.04087
	11500	27.8	25.61	67.69	0.7764	0.04073
	12000	28.2	26.30	69.87	0.8076	0.04059
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.25	0.5303	0.04215
	8500	24.9	21.17	53.33	0.5591	0.04205

								9000	25.3	22.03	55.41	0.5878	0.04195
								9500	25.7	22.87	57.47	0.6163	0.04184
								10000	26.1	23.67	59.52	0.6446	0.04174
								10500	26.6	24.45	61.56	0.6728	0.04164
								11000	27.0	25.21	63.59	0.7008	0.04154
								11500	27.4	25.95	65.62	0.7288	0.04144
								12000	27.8	26.67	67.63	0.7566	0.04134
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.86	56.75	0.4428	0.04725
								8500	26.7	19.74	58.81	0.4624	0.04720
								9000	27.0	20.61	60.84	0.4819	0.04715
								9500	27.4	21.45	62.86	0.5011	0.04710

	10000	27.8	22.27	64.85	0.5202	0.04705
	10500	28.2	23.07	66.82	0.5390	0.04701
	11000	28.5	23.85	68.78	0.5577	0.04696
	11500	28.9	24.62	70.72	0.5762	0.04691
	12000	29.3	25.37	72.64	0.5946	0.04687
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	52.25	0.5551	0.04174
	8500	25.0	21.01	54.48	0.5870	0.04160
	9000	25.5	21.84	56.70	0.6189	0.04145
	9500	26.0	22.65	58.91	0.6506	0.04131
	10000	26.4	23.43	61.12	0.6822	0.04116
	10500	26.9	24.18	63.32	0.7137	0.04102
	11000	27.3	24.91	65.51	0.7451	0.04087
	11500	27.8	25.61	67.69	0.7764	0.04073
	12000	28.2	26.30	69.87	0.8076	0.04059
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.29	51.25	0.5303	0.04215
	8500	24.9	21.17	53.33	0.5591	0.04205
	9000	25.3	22.03	55.41	0.5878	0.04195
	9500	25.7	22.87	57.47	0.6163	0.04184

								10000	26.1	23.67	59.52	0.6446	0.04174
								10500	26.6	24.45	61.56	0.6728	0.04164
								11000	27.0	25.21	63.59	0.7008	0.04154
								11500	27.4	25.95	65.62	0.7288	0.04144
								12000	27.8	26.67	67.63	0.7566	0.04134
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.77	0.4414	0.04710
								8500	26.6	19.79	58.83	0.4609	0.04705
								9000	27.0	20.65	60.86	0.4803	0.04700
								9500	27.4	21.49	62.88	0.4995	0.04696
								10000	27.7	22.31	64.87	0.5185	0.04691
								10500	28.1	23.12	66.84	0.5373	0.04686

	11000	28.5	23.90	68.80	0.5559	0.04682
	11500	28.9	24.67	70.74	0.5743	0.04677
	12000	29.2	25.42	72.66	0.5926	0.04673
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.19	52.27	0.5536	0.04161
	8500	25.0	21.05	54.50	0.5855	0.04147
	9000	25.5	21.89	56.72	0.6172	0.04132
	9500	25.9	22.69	58.94	0.6488	0.04118
	10000	26.4	23.47	61.14	0.6803	0.04103
	10500	26.8	24.23	63.34	0.7117	0.04089

	11000	27.3	24.96	65.53	0.7430	0.04075
	11500	27.7	25.67	67.71	0.7742	0.04060
	12000	28.2	26.35	69.89	0.8053	0.04046
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.26	0.5289	0.04202
	8500	24.8	21.22	53.35	0.5577	0.04192
	9000	25.2	22.08	55.43	0.5862	0.04181
	9500	25.7	22.91	57.49	0.6146	0.04171
	10000	26.1	23.72	59.54	0.6428	0.04161
	10500	26.5	24.50	61.58	0.6709	0.04151

								11000	26.9	25.26	63.62	0.6989	0.04141
								11500	27.4	26.00	65.64	0.7267	0.04132
								12000	27.8	26.72	67.65	0.7545	0.04122
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.90	56.77	0.4414	0.04710
								8500	26.6	19.79	58.83	0.4609	0.04705
								9000	27.0	20.65	60.86	0.4803	0.04700
								9500	27.4	21.49	62.88	0.4995	0.04696
								10000	27.7	22.31	64.87	0.5185	0.04691
								10500	28.1	23.12	66.84	0.5373	0.04686
								11000	28.5	23.90	68.80	0.5559	0.04682
								11500	28.9	24.67	70.74	0.5743	0.04677
								12000	29.2	25.42	72.66	0.5926	0.04673
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.19	52.27	0.5536	0.04161
								8500	25.0	21.05	54.50	0.5855	0.04147
								9000	25.5	21.89	56.72	0.6172	0.04132

								9500	25.9	22.69	58.94	0.6488	0.04118
								10000	26.4	23.47	61.14	0.6803	0.04103
								10500	26.8	24.23	63.34	0.7117	0.04089
								11000	27.3	24.96	65.53	0.7430	0.04075
								11500	27.7	25.67	67.71	0.7742	0.04060
								12000	28.2	26.35	69.89	0.8053	0.04046
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.33	51.26	0.5289	0.04202
								8500	24.8	21.22	53.35	0.5577	0.04192
								9000	25.2	22.08	55.43	0.5862	0.04181
								9500	25.7	22.91	57.49	0.6146	0.04171
								10000	26.1	23.72	59.54	0.6428	0.04161
								10500	26.5	24.50	61.58	0.6709	0.04151
								11000	26.9	25.26	63.62	0.6989	0.04141
								11500	27.4	26.00	65.64	0.7267	0.04132
								12000	27.8	26.72	67.65	0.7545	0.04122
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.4	18.07	52.23	0.7319	0.04671

	8500	27.9	18.86	54.45	0.7714	0.04651
	9000	28.4	19.63	56.65	0.8108	0.04630
	9500	28.9	20.36	58.85	0.8501	0.04610
	10000	29.4	21.08	61.03	0.8892	0.04590
	10500	29.8	21.77	63.22	0.9282	0.04569
	11000	30.3	22.45	65.39	0.9670	0.04549
	11500	30.8	23.10	67.56	1.0058	0.04529
	12000	31.3	23.73	69.72	1.0444	0.04509
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.3	18.16	51.55	0.7061	0.04713

								8500	27.8	18.97	53.63	0.7421	0.04697
								9000	28.2	19.75	55.71	0.7779	0.04682
								9500	28.7	20.51	57.77	0.8135	0.04667
								10000	29.1	21.25	59.83	0.8488	0.04651
								10500	29.6	21.96	61.87	0.8841	0.04636
								11000	30.1	22.66	63.90	0.9191	0.04621
								11500	30.5	23.33	65.92	0.9540	0.04606
								12000	31.0	23.99	67.94	0.9887	0.04591
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.4	18.07	52.23	0.7319	0.04671
								8500	27.9	18.86	54.45	0.7714	0.04651

								9000	28.4	19.63	56.65	0.8108	0.04630
								9500	28.9	20.36	58.85	0.8501	0.04610
								10000	29.4	21.08	61.03	0.8892	0.04590
								10500	29.8	21.77	63.22	0.9282	0.04569
								11000	30.3	22.45	65.39	0.9670	0.04549
								11500	30.8	23.10	67.56	1.0058	0.04529
								12000	31.3	23.73	69.72	1.0444	0.04509
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.3	18.16	51.55	0.7061	0.04713
								8500	27.8	18.97	53.63	0.7421	0.04697
								9000	28.2	19.75	55.71	0.7779	0.04682
								9500	28.7	20.51	57.77	0.8135	0.04667
								10000	29.1	21.25	59.83	0.8488	0.04651
								10500	29.6	21.96	61.87	0.8841	0.04636
								11000	30.1	22.66	63.90	0.9191	0.04621
								11500	30.5	23.33	65.92	0.9540	0.04606
								12000	31.0	23.99	67.94	0.9887	0.04591
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.2	18.90	50.09	0.7849	0.04288

	8500	26.7	19.72	52.20	0.8274	0.04265
	9000	27.2	20.50	54.30	0.8697	0.04243
	9500	27.7	21.26	56.39	0.9118	0.04220
	10000	28.1	21.99	58.47	0.9538	0.04198
	10500	28.6	22.70	60.55	0.9957	0.04175
	11000	29.1	23.39	62.62	1.0374	0.04153
	11500	29.6	24.05	64.69	1.0790	0.04131
	12000	30.1	24.70	66.75	1.1204	0.04109
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	26.1	19.00	49.49	0.7561	0.04330

								8500	26.5	19.83	51.48	0.7947	0.04313
								9000	27.0	20.64	53.46	0.8331	0.04295
								9500	27.5	21.42	55.43	0.8713	0.04278
								10000	27.9	22.17	57.39	0.9094	0.04261
								10500	28.4	22.91	59.33	0.9472	0.04244
								11000	28.8	23.62	61.27	0.9848	0.04226
								11500	29.3	24.31	63.20	1.0223	0.04210
								12000	29.7	24.98	65.13	1.0596	0.04193
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	26.1	18.97	50.38	0.7308	0.04358
								8500	26.6	19.78	52.52	0.7726	0.04336

								9000	27.1	20.56	54.65	0.8142	0.04314
								9500	27.6	21.32	56.78	0.8557	0.04292
								10000	28.1	22.05	58.89	0.8970	0.04271
								10500	28.6	22.76	61.00	0.9382	0.04249
								11000	29.0	23.45	63.11	0.9792	0.04227
								11500	29.5	24.11	65.20	1.0201	0.04206
								12000	30.0	24.75	67.30	1.0609	0.04185
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	26.0	19.07	49.74	0.7025	0.04400
								8500	26.4	19.90	51.76	0.7405	0.04383
								9000	26.9	20.71	53.77	0.7783	0.04366
								9500	27.4	21.49	55.76	0.8159	0.04349
								10000	27.8	22.24	57.75	0.8533	0.04333
								10500	28.3	22.98	59.73	0.8905	0.04316
								11000	28.7	23.69	61.70	0.9275	0.04300
								11500	29.2	24.38	63.66	0.9644	0.04284
								12000	29.6	25.05	65.61	1.0011	0.04267
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.5	17.41	56.30	0.5582	0.05171

								8500	29.0	18.18	58.62	0.5873	0.05167
								9000	29.4	18.93	60.93	0.6163	0.05164
								9500	29.9	19.65	63.23	0.6452	0.05160
								10000	30.4	20.35	65.53	0.6740	0.05156
								10500	30.9	21.03	67.82	0.7027	0.05153
								11000	31.4	21.69	70.10	0.7314	0.05149
								11500	31.9	22.34	72.38	0.7600	0.05145
								12000	32.4	22.96	74.66	0.7885	0.05142
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.5	17.41	56.30	0.5582	0.05171
								8500	29.0	18.18	58.62	0.5873	0.05167

								9000	29.4	18.93	60.93	0.6163	0.05164
								9500	29.9	19.65	63.23	0.6452	0.05160
								10000	30.4	20.35	65.53	0.6740	0.05156
								10500	30.9	21.03	67.82	0.7027	0.05153
								11000	31.4	21.69	70.10	0.7314	0.05149
								11500	31.9	22.34	72.38	0.7600	0.05145
								12000	32.4	22.96	74.66	0.7885	0.05142
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	27.1	18.27	54.60	0.5906	0.04770
								8500	27.6	19.07	56.83	0.6217	0.04765
								9000	28.1	19.84	59.06	0.6528	0.04760
								9500	28.6	20.58	61.28	0.6837	0.04754
								10000	29.1	21.30	63.50	0.7145	0.04749

								10500	29.5	22.00	65.71	0.7453	0.04744
								11000	30.0	22.68	67.91	0.7760	0.04739
								11500	30.5	23.33	70.11	0.8066	0.04734
								12000	31.0	23.97	72.30	0.8371	0.04729
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	10R100/140	4X2	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	27.1	18.27	54.60	0.5906	0.04770
								8500	27.6	19.07	56.83	0.6217	0.04765
								9000	28.1	19.84	59.06	0.6528	0.04760
								9500	28.6	20.58	61.28	0.6837	0.04754
								10000	29.1	21.30	63.50	0.7145	0.04749
								10500	29.5	22.00	65.71	0.7453	0.04744
								11000	30.0	22.68	67.91	0.7760	0.04739
								11500	30.5	23.33	70.11	0.8066	0.04734
								12000	31.0	23.97	72.30	0.8371	0.04729
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.94	56.24	0.5096	0.04578

	8500	26.5	19.83	58.28	0.5298	0.04572
	9000	26.9	20.69	60.29	0.5498	0.04566
	9500	27.3	21.54	62.28	0.5695	0.04560
	10000	27.7	22.37	64.25	0.5891	0.04554
	10500	28.0	23.17	66.20	0.6085	0.04548
	11000	28.4	23.96	68.13	0.6276	0.04543
	11500	28.8	24.73	70.05	0.6466	0.04537
	12000	29.1	25.49	71.95	0.6655	0.04531
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.35	53.41	0.5015	0.04543
	8500	26.0	20.23	55.50	0.5241	0.04535
	9000	26.4	21.10	57.57	0.5465	0.04528
	9500	26.8	21.94	59.63	0.5688	0.04520
	10000	27.2	22.75	61.68	0.5909	0.04512
	10500	27.6	23.55	63.71	0.6129	0.04505
	11000	28.0	24.32	65.73	0.6347	0.04498
	11500	28.4	25.08	67.73	0.6565	0.04490
	12000	28.8	25.82	69.73	0.6780	0.04483
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.31	51.17	0.6216	0.04027

	8500	24.8	21.18	53.34	0.6539	0.04011
	9000	25.3	22.03	55.51	0.6862	0.03995
	9500	25.7	22.84	57.67	0.7183	0.03979
	10000	26.2	23.63	59.82	0.7503	0.03963
	10500	26.6	24.39	61.97	0.7822	0.03948
	11000	27.1	25.13	64.10	0.8141	0.03932
	11500	27.5	25.85	66.24	0.8458	0.03916
	12000	28.0	26.54	68.36	0.8774	0.03901
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.42	50.31	0.5979	0.04068
	8500	24.7	21.32	52.35	0.6272	0.04056
	9000	25.1	22.19	54.38	0.6563	0.04045
	9500	25.5	23.03	56.40	0.6853	0.04033
	10000	26.0	23.85	58.41	0.7141	0.04022
	10500	26.4	24.64	60.41	0.7428	0.04010
	11000	26.8	25.41	62.40	0.7713	0.03999
	11500	27.2	26.15	64.38	0.7997	0.03988
	12000	27.6	26.88	66.35	0.8280	0.03976

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.02	55.65	0.5038	0.04580
								8500	26.4	19.92	57.65	0.5237	0.04574
								9000	26.8	20.79	59.64	0.5433	0.04568
								9500	27.2	21.64	61.60	0.5628	0.04562
								10000	27.5	22.48	63.54	0.5820	0.04556
								10500	27.9	23.29	65.46	0.6011	0.04551
								11000	28.3	24.08	67.37	0.6200	0.04545
								11500	28.6	24.86	69.26	0.6388	0.04539
								12000	29.0	25.62	71.13	0.6573	0.04534

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.35	53.41	0.5015	0.04543
	8500	26.0	20.23	55.50	0.5241	0.04535
	9000	26.4	21.10	57.57	0.5465	0.04528
	9500	26.8	21.94	59.63	0.5688	0.04520
	10000	27.2	22.75	61.68	0.5909	0.04512
	10500	27.6	23.55	63.71	0.6129	0.04505
	11000	28.0	24.32	65.73	0.6347	0.04498
	11500	28.4	25.08	67.73	0.6565	0.04490
	12000	28.8	25.82	69.73	0.6780	0.04483

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.37	50.84	0.6167	0.04029
	8500	24.8	21.24	53.00	0.6488	0.04013
	9000	25.2	22.09	55.14	0.6807	0.03998
	9500	25.7	22.91	57.29	0.7126	0.03982
	10000	26.1	23.71	59.42	0.7443	0.03966
	10500	26.5	24.47	61.54	0.7760	0.03951
	11000	27.0	25.22	63.66	0.8075	0.03935
	11500	27.4	25.94	65.78	0.8389	0.03920
	12000	27.9	26.64	67.88	0.8703	0.03904

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.46	50.08	0.5946	0.04069
	8500	24.6	21.37	52.11	0.6237	0.04057
	9000	25.1	22.24	54.13	0.6527	0.04046
	9500	25.5	23.08	56.14	0.6815	0.04035
	10000	25.9	23.90	58.13	0.7101	0.04023
	10500	26.3	24.69	60.12	0.7386	0.04012
	11000	26.7	25.47	62.09	0.7670	0.04001
	11500	27.1	26.22	64.06	0.7952	0.03989
	12000	27.6	26.95	66.02	0.8233	0.03978

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	19.00	56.11	0.5016	0.04572
								8500	26.4	19.90	58.14	0.5214	0.04566
								9000	26.8	20.77	60.14	0.5409	0.04561
								9500	27.2	21.62	62.13	0.5603	0.04555
								10000	27.6	22.45	64.09	0.5794	0.04549
								10500	27.9	23.26	66.03	0.5984	0.04544
								11000	28.3	24.05	67.96	0.6171	0.04538
								11500	28.7	24.83	69.87	0.6357	0.04533
								12000	29.0	25.59	71.76	0.6542	0.04527
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.49	52.79	0.4881	0.04538
								8500	25.8	20.39	54.84	0.5099	0.04531
								9000	26.2	21.26	56.88	0.5316	0.04524
								9500	26.6	22.11	58.91	0.5531	0.04517
								10000	27.0	22.94	60.92	0.5745	0.04509
								10500	27.4	23.75	62.92	0.5958	0.04502
								11000	27.7	24.53	64.90	0.6169	0.04495
								11500	28.1	25.30	66.87	0.6378	0.04488
								12000	28.5	26.05	68.84	0.6587	0.04481

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.34	51.34	0.6153	0.04022
	8500	24.8	21.21	53.53	0.6473	0.04006
	9000	25.3	22.06	55.70	0.6791	0.03991
	9500	25.7	22.87	57.87	0.7109	0.03975
	10000	26.2	23.66	60.03	0.7425	0.03960
	10500	26.6	24.43	62.18	0.7740	0.03944
	11000	27.0	25.17	64.33	0.8055	0.03929
	11500	27.5	25.89	66.47	0.8368	0.03913
	12000	27.9	26.58	68.60	0.8680	0.03898
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.45	50.48	0.5919	0.04063
	8500	24.6	21.35	52.53	0.6209	0.04052
	9000	25.1	22.22	54.57	0.6497	0.04040
	9500	25.5	23.06	56.59	0.6783	0.04029
	10000	25.9	23.88	58.61	0.7068	0.04018
	10500	26.3	24.67	60.62	0.7351	0.04007
	11000	26.8	25.44	62.61	0.7633	0.03996
	11500	27.2	26.19	64.60	0.7913	0.03985
	12000	27.6	26.91	66.58	0.8193	0.03974

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.09	55.52	0.4958	0.04574
								8500	26.3	19.99	57.51	0.5153	0.04568
								9000	26.7	20.87	59.49	0.5346	0.04562
								9500	27.1	21.72	61.44	0.5536	0.04557
								10000	27.4	22.56	63.38	0.5725	0.04551
								10500	27.8	23.38	65.29	0.5911	0.04546
								11000	28.2	24.18	67.19	0.6096	0.04540
								11500	28.5	24.96	69.07	0.6280	0.04535
								12000	28.9	25.72	70.94	0.6462	0.04530

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.49	52.79	0.4881	0.04538
	8500	25.8	20.39	54.84	0.5099	0.04531
	9000	26.2	21.26	56.88	0.5316	0.04524
	9500	26.6	22.11	58.91	0.5531	0.04517
	10000	27.0	22.94	60.92	0.5745	0.04509
	10500	27.4	23.75	62.92	0.5958	0.04502
	11000	27.7	24.53	64.90	0.6169	0.04495
	11500	28.1	25.30	66.87	0.6378	0.04488
	12000	28.5	26.05	68.84	0.6587	0.04481

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.40	51.01	0.6105	0.04024
	8500	24.7	21.27	53.18	0.6422	0.04009
	9000	25.2	22.12	55.33	0.6738	0.03993
	9500	25.6	22.94	57.48	0.7052	0.03978
	10000	26.1	23.74	59.63	0.7366	0.03963
	10500	26.5	24.51	61.76	0.7678	0.03947
	11000	27.0	25.25	63.89	0.7990	0.03932
	11500	27.4	25.98	66.01	0.8300	0.03917
	12000	27.8	26.68	68.12	0.8610	0.03902

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.49	50.25	0.5887	0.04064
	8500	24.6	21.39	52.29	0.6175	0.04053
	9000	25.0	22.27	54.31	0.6461	0.04042
	9500	25.4	23.11	56.33	0.6745	0.04031
	10000	25.9	23.93	58.33	0.7028	0.04019
	10500	26.3	24.73	60.32	0.7309	0.04008
	11000	26.7	25.50	62.31	0.7590	0.03997
	11500	27.1	26.25	64.28	0.7868	0.03987
	12000	27.5	26.98	66.25	0.8146	0.03976

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.41	52.60	0.6768	0.03822
								8500	24.6	21.35	54.45	0.7020	0.03812
								9000	25.0	22.26	56.27	0.7269	0.03802
								9500	25.4	23.15	58.08	0.7515	0.03792
								10000	25.8	24.02	59.87	0.7758	0.03782
								10500	26.1	24.86	61.65	0.7999	0.03773
								11000	26.5	25.69	63.41	0.8238	0.03763
								11500	26.8	26.50	65.15	0.8475	0.03753
								12000	27.2	27.29	66.88	0.8710	0.03744
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.85	49.67	0.6662	0.03806
								8500	24.2	21.79	51.56	0.6943	0.03794
								9000	24.5	22.69	53.44	0.7221	0.03782
								9500	24.9	23.58	55.30	0.7497	0.03770
								10000	25.3	24.43	57.15	0.7772	0.03758
								10500	25.7	25.27	58.98	0.8044	0.03746
								11000	26.1	26.08	60.81	0.8315	0.03734
								11500	26.5	26.87	62.62	0.8585	0.03722
								12000	26.9	27.64	64.42	0.8852	0.03711

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.64	49.74	0.6489	0.03913
	8500	24.4	21.56	51.63	0.6770	0.03901
	9000	24.8	22.46	53.51	0.7049	0.03890
	9500	25.2	23.34	55.38	0.7326	0.03878
	10000	25.6	24.18	57.24	0.7601	0.03867
	10500	26.0	25.01	59.08	0.7874	0.03855
	11000	26.4	25.82	60.91	0.8145	0.03844
	11500	26.8	26.60	62.73	0.8415	0.03833
	12000	27.1	27.36	64.54	0.8683	0.03822
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.6	21.88	46.46	0.8251	0.03281
	8500	23.1	22.80	48.38	0.8644	0.03259
	9000	23.5	23.68	50.29	0.9036	0.03238
	9500	24.0	24.53	52.20	0.9427	0.03216
	10000	24.4	25.35	54.10	0.9816	0.03194
	10500	24.8	26.15	55.99	1.0204	0.03173
	11000	25.3	26.92	57.88	1.0591	0.03151
	11500	25.7	27.66	59.76	1.0976	0.03130
	12000	26.2	28.38	61.64	1.1361	0.03108

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.5	22.02	45.86	0.7942	0.03324
								8500	22.9	22.96	47.66	0.8298	0.03307
								9000	23.3	23.87	49.46	0.8653	0.03290
								9500	23.7	24.75	51.25	0.9006	0.03273
								10000	24.2	25.60	53.03	0.9357	0.03257
								10500	24.6	26.43	54.80	0.9706	0.03240
								11000	25.0	27.24	56.56	1.0053	0.03223
								11500	25.4	28.01	58.31	1.0399	0.03207
								12000	25.8	28.76	60.06	1.0743	0.03191
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.70	52.17	0.5751	0.03942
								8500	24.3	21.64	54.03	0.5991	0.03933
								9000	24.7	22.57	55.87	0.6229	0.03924
								9500	25.1	23.47	57.69	0.6463	0.03915

	10000	25.4	24.35	59.49	0.6696	0.03906
	10500	25.8	25.20	61.28	0.6926	0.03898
	11000	26.1	26.04	63.05	0.7154	0.03889
	11500	26.5	26.85	64.80	0.7381	0.03881
	12000	26.8	27.65	66.54	0.7605	0.03872
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.6	21.03	49.88	0.5757	0.03919
	8500	24.0	21.97	51.81	0.6029	0.03908
	9000	24.4	22.88	53.72	0.6299	0.03897
	9500	24.7	23.76	55.62	0.6567	0.03886

	10000	25.1	24.62	57.51	0.6833	0.03875
	10500	25.5	25.45	59.39	0.7098	0.03864
	11000	25.9	26.26	61.25	0.7361	0.03853
	11500	26.3	27.05	63.10	0.7622	0.03843
	12000	26.7	27.82	64.94	0.7881	0.03832
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.80	49.92	0.5622	0.04022
	8500	24.2	21.73	51.86	0.5895	0.04012
	9000	24.6	22.63	53.78	0.6166	0.04001
	9500	25.0	23.50	55.68	0.6435	0.03991

	10000	25.4	24.36	57.58	0.6702	0.03980
	10500	25.8	25.18	59.46	0.6967	0.03970
	11000	26.2	25.98	61.32	0.7230	0.03960
	11500	26.6	26.77	63.18	0.7492	0.03950
	12000	27.0	27.53	65.03	0.7753	0.03940
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.4	22.13	46.77	0.7175	0.03408
	8500	22.8	23.05	48.72	0.7554	0.03387
	9000	23.3	23.94	50.67	0.7931	0.03367
	9500	23.7	24.79	52.62	0.8307	0.03347

	10000	24.2	25.62	54.55	0.8682	0.03327
	10500	24.6	26.42	56.48	0.9056	0.03307
	11000	25.0	27.19	58.40	0.9428	0.03287
	11500	25.5	27.93	60.32	0.9799	0.03268
	12000	25.9	28.65	62.23	1.0169	0.03248
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.2	22.26	46.18	0.6893	0.03448
	8500	22.7	23.21	48.02	0.7237	0.03432
	9000	23.1	24.12	49.86	0.7580	0.03417
	9500	23.5	25.00	51.69	0.7920	0.03402

								10000	23.9	25.86	53.50	0.8258	0.03386
								10500	24.3	26.69	55.31	0.8595	0.03371
								11000	24.8	27.49	57.11	0.8930	0.03356
								11500	25.2	28.27	58.89	0.9264	0.03341
								12000	25.6	29.03	60.68	0.9596	0.03326
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.83	54.24	0.5501	0.04223
								8500	25.4	20.74	56.20	0.5727	0.04216
								9000	25.7	21.64	58.13	0.5950	0.04208
								9500	26.1	22.51	60.03	0.6171	0.04200
								10000	26.5	23.36	61.92	0.6390	0.04193
								10500	26.9	24.19	63.80	0.6606	0.04185
								11000	27.2	25.00	65.65	0.6821	0.04178
								11500	27.6	25.79	67.49	0.7034	0.04171

	12000	27.9	26.56	69.31	0.7245	0.04163
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.25	51.41	0.5428	0.04197
	8500	24.9	21.16	53.40	0.5681	0.04187
	9000	25.3	22.05	55.39	0.5931	0.04178
	9500	25.7	22.92	57.36	0.6180	0.04168
	10000	26.1	23.75	59.31	0.6427	0.04159
	10500	26.4	24.57	61.26	0.6673	0.04149
	11000	26.8	25.37	63.19	0.6916	0.04140
	11500	27.2	26.14	65.10	0.7159	0.04131
	12000	27.6	26.89	67.01	0.7400	0.04122
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.04	51.44	0.5299	0.04299
	8500	25.1	20.94	53.44	0.5553	0.04290
	9000	25.5	21.82	55.43	0.5804	0.04281
	9500	25.9	22.68	57.41	0.6054	0.04272
	10000	26.3	23.51	59.37	0.6302	0.04263
	10500	26.7	24.32	61.32	0.6548	0.04254
	11000	27.1	25.11	63.25	0.6793	0.04246
	11500	27.5	25.87	65.18	0.7036	0.04237

	12000	27.9	26.62	67.09	0.7278	0.04228
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.25	48.84	0.6785	0.03681
	8500	23.8	22.15	50.90	0.7142	0.03663
	9000	24.2	23.01	52.95	0.7498	0.03644
	9500	24.7	23.84	55.00	0.7853	0.03626
	10000	25.1	24.65	57.04	0.8206	0.03608
	10500	25.5	25.43	59.07	0.8559	0.03589
	11000	26.0	26.19	61.09	0.8910	0.03571
	11500	26.4	26.92	63.11	0.9260	0.03553
	12000	26.9	27.62	65.13	0.9608	0.03535
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.38	48.08	0.6512	0.03723
	8500	23.6	22.30	50.02	0.6836	0.03709
	9000	24.0	23.20	51.95	0.7157	0.03695
	9500	24.4	24.06	53.86	0.7477	0.03681
	10000	24.9	24.90	55.77	0.7796	0.03667
	10500	25.3	25.71	57.66	0.8112	0.03654
	11000	25.7	26.49	59.55	0.8427	0.03640
	11500	26.1	27.25	61.43	0.8741	0.03627

								12000	26.5	27.99	63.30	0.9053	0.03613
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.9	19.92	53.68	0.5435	0.04226
								8500	25.2	20.84	55.60	0.5657	0.04218
								9000	25.6	21.75	57.50	0.5878	0.04210
								9500	26.0	22.62	59.38	0.6095	0.04203
								10000	26.4	23.48	61.24	0.6311	0.04195
								10500	26.7	24.32	63.09	0.6524	0.04188
								11000	27.1	25.13	64.91	0.6736	0.04181
								11500	27.4	25.93	66.73	0.6945	0.04174

	12000	27.8	26.72	68.52	0.7153	0.04166
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.25	51.41	0.5428	0.04197
	8500	24.9	21.16	53.40	0.5681	0.04187
	9000	25.3	22.05	55.39	0.5931	0.04178
	9500	25.7	22.92	57.36	0.6180	0.04168
	10000	26.1	23.75	59.31	0.6427	0.04159
	10500	26.4	24.57	61.26	0.6673	0.04149
	11000	26.8	25.37	63.19	0.6916	0.04140
	11500	27.2	26.14	65.10	0.7159	0.04131

	12000	27.6	26.89	67.01	0.7400	0.04122
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.04	51.44	0.5299	0.04299
	8500	25.1	20.94	53.44	0.5553	0.04290
	9000	25.5	21.82	55.43	0.5804	0.04281
	9500	25.9	22.68	57.41	0.6054	0.04272
	10000	26.3	23.51	59.37	0.6302	0.04263
	10500	26.7	24.32	61.32	0.6548	0.04254
	11000	27.1	25.11	63.25	0.6793	0.04246
	11500	27.5	25.87	65.18	0.7036	0.04237

	12000	27.9	26.62	67.09	0.7278	0.04228
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.31	48.53	0.6731	0.03684
	8500	23.7	22.21	50.57	0.7085	0.03666
	9000	24.1	23.08	52.61	0.7438	0.03647
	9500	24.6	23.92	54.63	0.7790	0.03629
	10000	25.0	24.73	56.66	0.8140	0.03611
	10500	25.5	25.52	58.67	0.8489	0.03593
	11000	25.9	26.28	60.68	0.8837	0.03575
	11500	26.3	27.01	62.68	0.9184	0.03557

	12000	26.8	27.73	64.67	0.9530	0.03539
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.43	47.87	0.6476	0.03724
	8500	23.5	22.36	49.79	0.6797	0.03710
	9000	24.0	23.25	51.71	0.7117	0.03697
	9500	24.4	24.12	53.61	0.7435	0.03683
	10000	24.8	24.96	55.50	0.7751	0.03669
	10500	25.2	25.77	57.39	0.8066	0.03656
	11000	25.6	26.56	59.26	0.8379	0.03642
	11500	26.0	27.32	61.13	0.8691	0.03629

								12000	26.5	28.06	62.99	0.9001	0.03616
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.17	53.68	0.5496	0.04121
								8500	24.9	21.10	55.61	0.5722	0.04113
								9000	25.3	22.01	57.51	0.5946	0.04105
								9500	25.7	22.89	59.39	0.6167	0.04097
								10000	26.1	23.75	61.26	0.6386	0.04090
								10500	26.4	24.59	63.10	0.6603	0.04082
								11000	26.8	25.41	64.93	0.6818	0.04075
								11500	27.1	26.21	66.75	0.7031	0.04067
								12000	27.5	27.00	68.54	0.7242	0.04060
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.68	50.38	0.5365	0.04098
								8500	24.3	21.62	52.32	0.5615	0.04088
								9000	24.7	22.52	54.25	0.5862	0.04079
								9500	25.1	23.40	56.17	0.6108	0.04069
								10000	25.5	24.26	58.07	0.6352	0.04060
								10500	25.9	25.10	59.96	0.6594	0.04051
								11000	26.3	25.91	61.84	0.6835	0.04041

	11500	26.7	26.70	63.71	0.7075	0.04032
	12000	27.0	27.47	65.57	0.7313	0.04023
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.43	50.60	0.5259	0.04199
	8500	24.6	21.35	52.56	0.5510	0.04190
	9000	25.0	22.25	54.50	0.5760	0.04180
	9500	25.4	23.12	56.43	0.6008	0.04171
	10000	25.8	23.97	58.35	0.6254	0.04163
	10500	26.2	24.79	60.26	0.6499	0.04154
	11000	26.6	25.59	62.15	0.6742	0.04145
	11500	27.0	26.38	64.03	0.6983	0.04136
	12000	27.4	27.14	65.91	0.7223	0.04127
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.56	48.49	0.6840	0.03583
	8500	23.4	22.47	50.53	0.7200	0.03564
	9000	23.9	23.34	52.57	0.7559	0.03546
	9500	24.3	24.18	54.60	0.7916	0.03527
	10000	24.8	24.99	56.62	0.8272	0.03508
	10500	25.2	25.78	58.63	0.8627	0.03490
	11000	25.6	26.53	60.64	0.8981	0.03472

								11500	26.1	27.27	62.64	0.9334	0.03453
								12000	26.5	27.98	64.64	0.9685	0.03435
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.70	47.75	0.6562	0.03624
								8500	23.2	22.63	49.67	0.6888	0.03610
								9000	23.7	23.53	51.58	0.7212	0.03596
								9500	24.1	24.40	53.48	0.7535	0.03582
								10000	24.5	25.24	55.37	0.7856	0.03569
								10500	24.9	26.06	57.25	0.8175	0.03555
								11000	25.3	26.85	59.12	0.8492	0.03541
								11500	25.8	27.62	60.98	0.8808	0.03527
								12000	26.2	28.36	62.84	0.9123	0.03514
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.26	53.11	0.5430	0.04123
								8500	24.8	21.20	55.01	0.5653	0.04115
								9000	25.2	22.11	56.89	0.5873	0.04108

		9500	25.6	23.00	58.74	0.6091	0.04100
		10000	25.9	23.87	60.58	0.6307	0.04093
		10500	26.3	24.72	62.40	0.6520	0.04085
		11000	26.6	25.55	64.20	0.6732	0.04078
		11500	27.0	26.36	65.99	0.6942	0.04070
		12000	27.3	27.15	67.76	0.7150	0.04063
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.0	20.68	50.38	0.5365	0.04098
		8500	24.3	21.62	52.32	0.5615	0.04088
		9000	24.7	22.52	54.25	0.5862	0.04079

	9500	25.1	23.40	56.17	0.6108	0.04069
	10000	25.5	24.26	58.07	0.6352	0.04060
	10500	25.9	25.10	59.96	0.6594	0.04051
	11000	26.3	25.91	61.84	0.6835	0.04041
	11500	26.7	26.70	63.71	0.7075	0.04032
	12000	27.0	27.47	65.57	0.7313	0.04023
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.43	50.60	0.5259	0.04199
	8500	24.6	21.35	52.56	0.5510	0.04190
	9000	25.0	22.25	54.50	0.5760	0.04180

	9500	25.4	23.12	56.43	0.6008	0.04171
	10000	25.8	23.97	58.35	0.6254	0.04163
	10500	26.2	24.79	60.26	0.6499	0.04154
	11000	26.6	25.59	62.15	0.6742	0.04145
	11500	27.0	26.38	64.03	0.6983	0.04136
	12000	27.4	27.14	65.91	0.7223	0.04127
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.62	48.18	0.6786	0.03586
	8500	23.3	22.53	50.21	0.7143	0.03567
	9000	23.8	23.41	52.22	0.7498	0.03549

	9500	24.2	24.26	54.23	0.7852	0.03530
	10000	24.7	25.08	56.24	0.8205	0.03512
	10500	25.1	25.87	58.24	0.8557	0.03494
	11000	25.6	26.63	60.23	0.8908	0.03475
	11500	26.0	27.37	62.21	0.9257	0.03457
	12000	26.4	28.09	64.19	0.9606	0.03439
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.75	47.53	0.6526	0.03626
	8500	23.2	22.68	49.44	0.6850	0.03612
	9000	23.6	23.58	51.34	0.7172	0.03598

								9500	24.0	24.46	53.23	0.7492	0.03584
								10000	24.5	25.30	55.11	0.7811	0.03570
								10500	24.9	26.12	56.98	0.8128	0.03557
								11000	25.3	26.92	58.84	0.8444	0.03543
								11500	25.7	27.69	60.69	0.8758	0.03530
								12000	26.1	28.44	62.53	0.9071	0.03516
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.98	54.16	0.5386	0.04194
								8500	25.2	20.90	56.11	0.5606	0.04187
								9000	25.5	21.80	58.03	0.5823	0.04179
								9500	25.9	22.68	59.93	0.6038	0.04172
								10000	26.3	23.54	61.82	0.6251	0.04165
								10500	26.7	24.37	63.68	0.6462	0.04158

	11000	27.0	25.19	65.53	0.6671	0.04151
	11500	27.4	25.99	67.36	0.6878	0.04144
	12000	27.7	26.77	69.18	0.7084	0.04137
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.49	50.86	0.5254	0.04169
	8500	24.6	21.42	52.82	0.5497	0.04160
	9000	25.0	22.32	54.77	0.5738	0.04151
	9500	25.4	23.19	56.71	0.5977	0.04142
	10000	25.7	24.05	58.64	0.6215	0.04133
	10500	26.1	24.88	60.55	0.6451	0.04124
	11000	26.5	25.68	62.45	0.6685	0.04116
	11500	26.9	26.47	64.34	0.6918	0.04107
	12000	27.3	27.24	66.21	0.7150	0.04098
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.24	51.07	0.5149	0.04269
	8500	24.9	21.16	53.06	0.5394	0.04261
	9000	25.3	22.05	55.02	0.5637	0.04252
	9500	25.7	22.92	56.98	0.5879	0.04244
	10000	26.1	23.76	58.92	0.6118	0.04235
	10500	26.4	24.58	60.84	0.6356	0.04227

	11000	26.8	25.38	62.76	0.6593	0.04219
	11500	27.2	26.16	64.66	0.6828	0.04210
	12000	27.6	26.92	66.55	0.7061	0.04202
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.36	49.05	0.6689	0.03655
	8500	23.6	22.26	51.12	0.7041	0.03637
	9000	24.1	23.13	53.19	0.7391	0.03619
	9500	24.5	23.97	55.24	0.7740	0.03601
	10000	25.0	24.78	57.29	0.8087	0.03583
	10500	25.4	25.56	59.33	0.8434	0.03566
	11000	25.9	26.31	61.37	0.8779	0.03548
	11500	26.3	27.05	63.40	0.9123	0.03530
	12000	26.7	27.76	65.42	0.9466	0.03513
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.49	48.29	0.6420	0.03697
	8500	23.5	22.42	50.24	0.6739	0.03683
	9000	23.9	23.31	52.17	0.7055	0.03670
	9500	24.3	24.18	54.10	0.7370	0.03656
	10000	24.7	25.02	56.01	0.7683	0.03643
	10500	25.2	25.83	57.92	0.7994	0.03630

								11000	25.6	26.62	59.81	0.8304	0.03617
								11500	26.0	27.38	61.70	0.8612	0.03604
								12000	26.4	28.13	63.58	0.8920	0.03591
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.7	20.07	53.59	0.5321	0.04196
								8500	25.1	21.00	55.51	0.5538	0.04189
								9000	25.4	21.91	57.40	0.5752	0.04182
								9500	25.8	22.79	59.28	0.5964	0.04175
								10000	26.2	23.66	61.13	0.6174	0.04168
								10500	26.5	24.50	62.97	0.6382	0.04161
								11000	26.9	25.33	64.79	0.6588	0.04154

	11500	27.2	26.13	66.60	0.6792	0.04147
	12000	27.6	26.92	68.39	0.6994	0.04140
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.49	50.86	0.5254	0.04169
	8500	24.6	21.42	52.82	0.5497	0.04160
	9000	25.0	22.32	54.77	0.5738	0.04151
	9500	25.4	23.19	56.71	0.5977	0.04142
	10000	25.7	24.05	58.64	0.6215	0.04133
	10500	26.1	24.88	60.55	0.6451	0.04124
	11000	26.5	25.68	62.45	0.6685	0.04116

	11500	26.9	26.47	64.34	0.6918	0.04107
	12000	27.3	27.24	66.21	0.7150	0.04098
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.24	51.07	0.5149	0.04269
	8500	24.9	21.16	53.06	0.5394	0.04261
	9000	25.3	22.05	55.02	0.5637	0.04252
	9500	25.7	22.92	56.98	0.5879	0.04244
	10000	26.1	23.76	58.92	0.6118	0.04235
	10500	26.4	24.58	60.84	0.6356	0.04227
	11000	26.8	25.38	62.76	0.6593	0.04219

	11500	27.2	26.16	64.66	0.6828	0.04210
	12000	27.6	26.92	66.55	0.7061	0.04202
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.42	48.74	0.6636	0.03658
	8500	23.6	22.33	50.79	0.6985	0.03640
	9000	24.0	23.20	52.84	0.7332	0.03622
	9500	24.4	24.05	54.88	0.7678	0.03604
	10000	24.9	24.86	56.91	0.8022	0.03587
	10500	25.3	25.65	58.93	0.8365	0.03569
	11000	25.8	26.41	60.95	0.8708	0.03552

	11500	26.2	27.15	62.96	0.9049	0.03534
	12000	26.6	27.86	64.97	0.9389	0.03517
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.54	48.07	0.6385	0.03698
	8500	23.4	22.47	50.01	0.6701	0.03685
	9000	23.8	23.37	51.93	0.7016	0.03671
	9500	24.3	24.24	53.84	0.7328	0.03658
	10000	24.7	25.08	55.75	0.7639	0.03645
	10500	25.1	25.89	57.64	0.7949	0.03632
	11000	25.5	26.69	59.52	0.8257	0.03619

								11500	25.9	27.45	61.40	0.8563	0.03606
								12000	26.3	28.20	63.26	0.8868	0.03593
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.26	55.33	0.5294	0.04443
								8500	26.1	20.16	57.33	0.5508	0.04437
								9000	26.5	21.04	59.30	0.5719	0.04430
								9500	26.9	21.89	61.26	0.5928	0.04423
								10000	27.2	22.73	63.19	0.6135	0.04416
								10500	27.6	23.54	65.11	0.6340	0.04410
								11000	28.0	24.34	67.00	0.6543	0.04403
								11500	28.3	25.11	68.89	0.6744	0.04397
								12000	28.7	25.87	70.75	0.6944	0.04390
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.50	0.5216	0.04412
								8500	25.6	20.57	54.55	0.5455	0.04404
								9000	26.0	21.44	56.58	0.5692	0.04395
								9500	26.4	22.29	58.60	0.5927	0.04386
								10000	26.8	23.11	60.60	0.6161	0.04378

	10500	27.2	23.91	62.59	0.6394	0.04370
	11000	27.6	24.70	64.57	0.6624	0.04361
	11500	28.0	25.46	66.54	0.6854	0.04353
	12000	28.3	26.20	68.50	0.7082	0.04345
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.47	52.53	0.5091	0.04514
	8500	25.9	20.36	54.58	0.5331	0.04506
	9000	26.3	21.22	56.62	0.5569	0.04498
	9500	26.7	22.06	58.64	0.5805	0.04490
	10000	27.1	22.88	60.65	0.6040	0.04482
	10500	27.4	23.68	62.65	0.6273	0.04474
	11000	27.8	24.45	64.63	0.6505	0.04466
	11500	28.2	25.21	66.61	0.6736	0.04459
	12000	28.6	25.94	68.57	0.6965	0.04451
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.65	50.11	0.6487	0.03894
	8500	24.4	21.53	52.23	0.6827	0.03877
	9000	24.9	22.38	54.35	0.7166	0.03860
	9500	25.3	23.20	56.46	0.7503	0.03843
	10000	25.8	24.00	58.56	0.7840	0.03826

								10500	26.2	24.77	60.65	0.8175	0.03809
								11000	26.7	25.51	62.74	0.8509	0.03792
								11500	27.1	26.23	64.82	0.8842	0.03775
								12000	27.6	26.93	66.89	0.9174	0.03758
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.77	49.30	0.6233	0.03935
								8500	24.3	21.67	51.30	0.6541	0.03923
								9000	24.7	22.55	53.28	0.6847	0.03910
								9500	25.1	23.40	55.25	0.7152	0.03897
								10000	25.5	24.22	57.21	0.7455	0.03885
								10500	26.0	25.02	59.16	0.7756	0.03872
								11000	26.4	25.80	61.11	0.8056	0.03860
								11500	26.8	26.55	63.04	0.8354	0.03848
								12000	27.2	27.28	64.97	0.8652	0.03835
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.35	54.75	0.5232	0.04445
								8500	26.0	20.25	56.72	0.5442	0.04439

	9000	26.4	21.13	58.66	0.5651	0.04432
	9500	26.7	22.00	60.59	0.5857	0.04425
	10000	27.1	22.84	62.50	0.6060	0.04419
	10500	27.5	23.66	64.38	0.6262	0.04412
	11000	27.8	24.46	66.25	0.6462	0.04406
	11500	28.2	25.25	68.11	0.6661	0.04399
	12000	28.5	26.02	69.94	0.6857	0.04393
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.50	0.5216	0.04412
	8500	25.6	20.57	54.55	0.5455	0.04404

	9000	26.0	21.44	56.58	0.5692	0.04395
	9500	26.4	22.29	58.60	0.5927	0.04386
	10000	26.8	23.11	60.60	0.6161	0.04378
	10500	27.2	23.91	62.59	0.6394	0.04370
	11000	27.6	24.70	64.57	0.6624	0.04361
	11500	28.0	25.46	66.54	0.6854	0.04353
	12000	28.3	26.20	68.50	0.7082	0.04345
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.47	52.53	0.5091	0.04514
	8500	25.9	20.36	54.58	0.5331	0.04506

	9000	26.3	21.22	56.62	0.5569	0.04498
	9500	26.7	22.06	58.64	0.5805	0.04490
	10000	27.1	22.88	60.65	0.6040	0.04482
	10500	27.4	23.68	62.65	0.6273	0.04474
	11000	27.8	24.45	64.63	0.6505	0.04466
	11500	28.2	25.21	66.61	0.6736	0.04459
	12000	28.6	25.94	68.57	0.6965	0.04451
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.71	49.79	0.6435	0.03897
	8500	24.4	21.59	51.90	0.6773	0.03880

	9000	24.8	22.45	53.99	0.7108	0.03863
	9500	25.3	23.28	56.08	0.7443	0.03846
	10000	25.7	24.08	58.16	0.7776	0.03829
	10500	26.1	24.85	60.24	0.8109	0.03812
	11000	26.6	25.60	62.31	0.8440	0.03795
	11500	27.0	26.33	64.37	0.8770	0.03779
	12000	27.5	27.03	66.43	0.9099	0.03762
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.81	49.08	0.6199	0.03937
	8500	24.2	21.72	51.06	0.6505	0.03924

								9000	24.6	22.60	53.03	0.6809	0.03912
								9500	25.1	23.45	54.99	0.7112	0.03899
								10000	25.5	24.28	56.94	0.7413	0.03887
								10500	25.9	25.08	58.88	0.7712	0.03874
								11000	26.3	25.86	60.81	0.8010	0.03862
								11500	26.7	26.61	62.73	0.8307	0.03850
								12000	27.1	27.35	64.64	0.8602	0.03837
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.30	55.35	0.5279	0.04430
								8500	26.1	20.20	57.35	0.5492	0.04423
								9000	26.4	21.08	59.32	0.5702	0.04416
								9500	26.8	21.93	61.28	0.5911	0.04410

	10000	27.2	22.77	63.21	0.6117	0.04403
	10500	27.6	23.59	65.13	0.6321	0.04396
	11000	27.9	24.38	67.03	0.6523	0.04390
	11500	28.3	25.16	68.91	0.6724	0.04383
	12000	28.6	25.92	70.77	0.6923	0.04377
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.71	52.52	0.5201	0.04399
	8500	25.5	20.61	54.57	0.5439	0.04390
	9000	25.9	21.48	56.60	0.5676	0.04381
	9500	26.3	22.33	58.62	0.5910	0.04373
	10000	26.7	23.16	60.62	0.6143	0.04365
	10500	27.1	23.96	62.62	0.6375	0.04356
	11000	27.5	24.75	64.60	0.6605	0.04348
	11500	27.9	25.51	66.56	0.6834	0.04340
	12000	28.3	26.25	68.52	0.7061	0.04332
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.51	52.55	0.5076	0.04500
	8500	25.8	20.40	54.60	0.5316	0.04492
	9000	26.2	21.27	56.64	0.5553	0.04484
	9500	26.6	22.11	58.66	0.5789	0.04476

	10000	27.0	22.93	60.67	0.6023	0.04468
	10500	27.4	23.72	62.67	0.6255	0.04461
	11000	27.8	24.50	64.66	0.6486	0.04453
	11500	28.2	25.26	66.63	0.6715	0.04445
	12000	28.6	26.00	68.59	0.6944	0.04437
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.69	50.13	0.6471	0.03882
	8500	24.4	21.57	52.25	0.6810	0.03865
	9000	24.8	22.42	54.37	0.7148	0.03848
	9500	25.3	23.25	56.48	0.7485	0.03831
	10000	25.7	24.04	58.58	0.7820	0.03814
	10500	26.2	24.81	60.68	0.8154	0.03797
	11000	26.6	25.56	62.76	0.8487	0.03780
	11500	27.1	26.28	64.84	0.8820	0.03763
	12000	27.5	26.98	66.92	0.9151	0.03747
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.81	49.32	0.6218	0.03923
	8500	24.2	21.72	51.31	0.6525	0.03910
	9000	24.7	22.60	53.30	0.6830	0.03898
	9500	25.1	23.45	55.27	0.7134	0.03885

								10000	25.5	24.27	57.23	0.7436	0.03873
								10500	25.9	25.07	59.19	0.7736	0.03860
								11000	26.3	25.85	61.13	0.8035	0.03848
								11500	26.8	26.60	63.06	0.8333	0.03836
								12000	27.2	27.33	64.99	0.8629	0.03824
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.38	54.77	0.5217	0.04432
								8500	25.9	20.29	56.74	0.5427	0.04425
								9000	26.3	21.18	58.68	0.5634	0.04418
								9500	26.7	22.04	60.61	0.5839	0.04412
								10000	27.0	22.88	62.52	0.6042	0.04405
								10500	27.4	23.71	64.40	0.6244	0.04399

	11000	27.8	24.51	66.27	0.6443	0.04392
	11500	28.1	25.30	68.13	0.6641	0.04386
	12000	28.5	26.06	69.97	0.6837	0.04380
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.71	52.52	0.5201	0.04399
	8500	25.5	20.61	54.57	0.5439	0.04390
	9000	25.9	21.48	56.60	0.5676	0.04381
	9500	26.3	22.33	58.62	0.5910	0.04373
	10000	26.7	23.16	60.62	0.6143	0.04365
	10500	27.1	23.96	62.62	0.6375	0.04356

		11000	27.5	24.75	64.60	0.6605	0.04348
		11500	27.9	25.51	66.56	0.6834	0.04340
		12000	28.3	26.25	68.52	0.7061	0.04332
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.51	52.55	0.5076	0.04500
		8500	25.8	20.40	54.60	0.5316	0.04492
		9000	26.2	21.27	56.64	0.5553	0.04484
		9500	26.6	22.11	58.66	0.5789	0.04476
		10000	27.0	22.93	60.67	0.6023	0.04468
		10500	27.4	23.72	62.67	0.6255	0.04461

	11000	27.8	24.50	64.66	0.6486	0.04453
	11500	28.2	25.26	66.63	0.6715	0.04445
	12000	28.6	26.00	68.59	0.6944	0.04437
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.75	49.81	0.6420	0.03885
	8500	24.3	21.64	51.92	0.6756	0.03868
	9000	24.8	22.49	54.01	0.7091	0.03851
	9500	25.2	23.32	56.10	0.7425	0.03834
	10000	25.7	24.12	58.19	0.7757	0.03817
	10500	26.1	24.90	60.26	0.8088	0.03800

	11000	26.5	25.65	62.33	0.8419	0.03784
	11500	27.0	26.37	64.40	0.8748	0.03767
	12000	27.4	27.08	66.45	0.9076	0.03750
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.85	49.10	0.6184	0.03925
	8500	24.2	21.77	51.08	0.6489	0.03912
	9000	24.6	22.65	53.05	0.6792	0.03899
	9500	25.0	23.50	55.01	0.7094	0.03887
	10000	25.4	24.33	56.96	0.7394	0.03875
	10500	25.9	25.13	58.90	0.7693	0.03862

								11000	26.3	25.91	60.83	0.7990	0.03850
								11500	26.7	26.66	62.76	0.8285	0.03838
								12000	27.1	27.40	64.67	0.8580	0.03826
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.36	55.23	0.5197	0.04425
								8500	26.0	20.27	57.22	0.5405	0.04419
								9000	26.3	21.15	59.18	0.5611	0.04412
								9500	26.7	22.01	61.13	0.5815	0.04406
								10000	27.1	22.85	63.06	0.6017	0.04399
								10500	27.5	23.67	64.97	0.6217	0.04393
								11000	27.8	24.47	66.86	0.6416	0.04387
								11500	28.2	25.26	68.73	0.6612	0.04381
								12000	28.5	26.02	70.59	0.6807	0.04374
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	51.91	0.5062	0.04395
								8500	25.3	20.77	53.93	0.5292	0.04387
								9000	25.7	21.65	55.93	0.5521	0.04379

	9500	26.1	22.51	57.91	0.5748	0.04371
	10000	26.5	23.35	59.88	0.5973	0.04363
	10500	26.9	24.17	61.84	0.6197	0.04355
	11000	27.3	24.96	63.79	0.6420	0.04347
	11500	27.7	25.74	65.72	0.6641	0.04339
	12000	28.0	26.49	67.65	0.6861	0.04332
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.13	0.4960	0.04496
	8500	25.6	20.53	54.16	0.5192	0.04488
	9000	26.0	21.40	56.18	0.5423	0.04480
	9500	26.4	22.25	58.18	0.5652	0.04473
	10000	26.8	23.08	60.17	0.5879	0.04465
	10500	27.2	23.88	62.14	0.6105	0.04458
	11000	27.6	24.67	64.10	0.6330	0.04450
	11500	28.0	25.43	66.05	0.6553	0.04443
	12000	28.4	26.18	67.99	0.6775	0.04435
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.72	50.30	0.6408	0.03878
	8500	24.4	21.60	52.44	0.6743	0.03861
	9000	24.8	22.45	54.56	0.7077	0.03845

								9500	25.3	23.28	56.68	0.7410	0.03828
								10000	25.7	24.08	58.79	0.7741	0.03811
								10500	26.1	24.85	60.89	0.8071	0.03795
								11000	26.6	25.59	62.99	0.8401	0.03778
								11500	27.0	26.31	65.08	0.8729	0.03762
								12000	27.5	27.02	67.16	0.9056	0.03745
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.84	49.49	0.6158	0.03919
								8500	24.2	21.75	51.49	0.6461	0.03907
								9000	24.6	22.63	53.48	0.6763	0.03895
								9500	25.0	23.48	55.46	0.7063	0.03882
								10000	25.5	24.30	57.43	0.7361	0.03870
								10500	25.9	25.10	59.39	0.7658	0.03858
								11000	26.3	25.88	61.34	0.7954	0.03846
								11500	26.7	26.63	63.29	0.8248	0.03834
								12000	27.1	27.36	65.22	0.8541	0.03822
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.45	54.64	0.5135	0.04427

	8500	25.8	20.36	56.60	0.5341	0.04421
	9000	26.2	21.25	58.54	0.5544	0.04414
	9500	26.6	22.12	60.46	0.5745	0.04408
	10000	27.0	22.97	62.36	0.5944	0.04402
	10500	27.3	23.80	64.24	0.6141	0.04395
	11000	27.7	24.60	66.10	0.6336	0.04389
	11500	28.0	25.39	67.95	0.6530	0.04383
	12000	28.4	26.17	69.78	0.6722	0.04377
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	51.91	0.5062	0.04395

	8500	25.3	20.77	53.93	0.5292	0.04387
	9000	25.7	21.65	55.93	0.5521	0.04379
	9500	26.1	22.51	57.91	0.5748	0.04371
	10000	26.5	23.35	59.88	0.5973	0.04363
	10500	26.9	24.17	61.84	0.6197	0.04355
	11000	27.3	24.96	63.79	0.6420	0.04347
	11500	27.7	25.74	65.72	0.6641	0.04339
	12000	28.0	26.49	67.65	0.6861	0.04332
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.13	0.4960	0.04496

	8500	25.6	20.53	54.16	0.5192	0.04488
	9000	26.0	21.40	56.18	0.5423	0.04480
	9500	26.4	22.25	58.18	0.5652	0.04473
	10000	26.8	23.08	60.17	0.5879	0.04465
	10500	27.2	23.88	62.14	0.6105	0.04458
	11000	27.6	24.67	64.10	0.6330	0.04450
	11500	28.0	25.43	66.05	0.6553	0.04443
	12000	28.4	26.18	67.99	0.6775	0.04435
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.78	49.98	0.6357	0.03881

	8500	24.3	21.67	52.10	0.6689	0.03864
	9000	24.7	22.52	54.20	0.7020	0.03848
	9500	25.2	23.35	56.30	0.7350	0.03831
	10000	25.6	24.15	58.40	0.7679	0.03814
	10500	26.1	24.93	60.48	0.8006	0.03798
	11000	26.5	25.68	62.56	0.8333	0.03782
	11500	26.9	26.41	64.63	0.8658	0.03765
	12000	27.4	27.12	66.69	0.8983	0.03749
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.88	49.26	0.6124	0.03921

								8500	24.1	21.79	51.25	0.6425	0.03908
								9000	24.6	22.68	53.23	0.6725	0.03896
								9500	25.0	23.53	55.20	0.7023	0.03884
								10000	25.4	24.36	57.16	0.7320	0.03872
								10500	25.8	25.16	59.11	0.7615	0.03860
								11000	26.2	25.94	61.05	0.7909	0.03848
								11500	26.7	26.70	62.98	0.8201	0.03836
								12000	27.1	27.43	64.90	0.8492	0.03824
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.40	55.24	0.5182	0.04412
								8500	25.9	20.31	57.24	0.5389	0.04405

	9000	26.3	21.19	59.20	0.5595	0.04399
	9500	26.7	22.06	61.15	0.5798	0.04392
	10000	27.0	22.90	63.08	0.5999	0.04386
	10500	27.4	23.72	64.99	0.6199	0.04380
	11000	27.8	24.52	66.88	0.6396	0.04373
	11500	28.1	25.31	68.75	0.6592	0.04367
	12000	28.5	26.07	70.61	0.6786	0.04361
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	51.93	0.5047	0.04382
	8500	25.3	20.81	53.95	0.5277	0.04374
	9000	25.7	21.69	55.95	0.5505	0.04366
	9500	26.1	22.56	57.93	0.5731	0.04358
	10000	26.5	23.40	59.90	0.5956	0.04350
	10500	26.8	24.21	61.86	0.6179	0.04342
	11000	27.2	25.01	63.81	0.6400	0.04334
	11500	27.6	25.78	65.75	0.6621	0.04326
	12000	28.0	26.54	67.67	0.6840	0.04318
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.15	0.4945	0.04482
	8500	25.6	20.57	54.18	0.5177	0.04474

	9000	26.0	21.44	56.20	0.5407	0.04466
	9500	26.4	22.29	58.20	0.5635	0.04459
	10000	26.8	23.12	60.19	0.5862	0.04451
	10500	27.2	23.93	62.16	0.6087	0.04444
	11000	27.5	24.71	64.12	0.6311	0.04437
	11500	27.9	25.48	66.07	0.6533	0.04429
	12000	28.3	26.23	68.01	0.6754	0.04422
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.76	50.32	0.6392	0.03866
	8500	24.3	21.64	52.46	0.6726	0.03849
	9000	24.8	22.50	54.58	0.7059	0.03832
	9500	25.2	23.32	56.70	0.7391	0.03816
	10000	25.7	24.12	58.81	0.7721	0.03799
	10500	26.1	24.89	60.92	0.8051	0.03783
	11000	26.5	25.64	63.01	0.8379	0.03766
	11500	27.0	26.36	65.10	0.8707	0.03750
	12000	27.4	27.07	67.19	0.9033	0.03733
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.88	49.51	0.6143	0.03907
	8500	24.1	21.79	51.51	0.6445	0.03895

								9000	24.6	22.67	53.50	0.6746	0.03882
								9500	25.0	23.52	55.48	0.7045	0.03870
								10000	25.4	24.35	57.46	0.7343	0.03858
								10500	25.8	25.15	59.42	0.7639	0.03846
								11000	26.3	25.93	61.37	0.7933	0.03834
								11500	26.7	26.68	63.31	0.8227	0.03822
								12000	27.1	27.42	65.24	0.8519	0.03810
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.4	19.49	54.66	0.5121	0.04413
								8500	25.8	20.41	56.62	0.5325	0.04407
								9000	26.2	21.29	58.56	0.5528	0.04401
								9500	26.5	22.17	60.48	0.5728	0.04394
								10000	26.9	23.01	62.38	0.5926	0.04388

		10500	27.3	23.84	64.26	0.6123	0.04382
		11000	27.6	24.65	66.12	0.6317	0.04376
		11500	28.0	25.44	67.97	0.6510	0.04370
		12000	28.3	26.22	69.80	0.6701	0.04364
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	51.93	0.5047	0.04382
		8500	25.3	20.81	53.95	0.5277	0.04374
		9000	25.7	21.69	55.95	0.5505	0.04366
		9500	26.1	22.56	57.93	0.5731	0.04358
		10000	26.5	23.40	59.90	0.5956	0.04350

		10500	26.8	24.21	61.86	0.6179	0.04342
		11000	27.2	25.01	63.81	0.6400	0.04334
		11500	27.6	25.78	65.75	0.6621	0.04326
		12000	28.0	26.54	67.67	0.6840	0.04318
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.67	52.15	0.4945	0.04482
		8500	25.6	20.57	54.18	0.5177	0.04474
		9000	26.0	21.44	56.20	0.5407	0.04466
		9500	26.4	22.29	58.20	0.5635	0.04459
		10000	26.8	23.12	60.19	0.5862	0.04451

	10500	27.2	23.93	62.16	0.6087	0.04444
	11000	27.5	24.71	64.12	0.6311	0.04437
	11500	27.9	25.48	66.07	0.6533	0.04429
	12000	28.3	26.23	68.01	0.6754	0.04422
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.82	50.00	0.6342	0.03868
	8500	24.2	21.71	52.12	0.6673	0.03852
	9000	24.7	22.57	54.23	0.7003	0.03835
	9500	25.1	23.40	56.33	0.7332	0.03819
	10000	25.6	24.20	58.42	0.7660	0.03802

	10500	26.0	24.98	60.50	0.7986	0.03786
	11000	26.5	25.73	62.58	0.8311	0.03770
	11500	26.9	26.46	64.65	0.8636	0.03753
	12000	27.3	27.17	66.72	0.8959	0.03737
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.93	49.28	0.6109	0.03908
	8500	24.1	21.84	51.27	0.6410	0.03896
	9000	24.5	22.72	53.25	0.6709	0.03884
	9500	24.9	23.58	55.22	0.7006	0.03872
	10000	25.4	24.41	57.18	0.7301	0.03860

								10500	25.8	25.21	59.13	0.7596	0.03848
								11000	26.2	25.99	61.07	0.7888	0.03836
								11500	26.6	26.75	63.00	0.8180	0.03824
								12000	27.0	27.49	64.92	0.8470	0.03812
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.93	58.30	0.7280	0.04498
								8500	28.2	18.68	60.78	0.7689	0.04482
								9000	28.7	19.40	63.25	0.8095	0.04466
								9500	29.3	20.09	65.70	0.8499	0.04450
								10000	29.8	20.77	68.13	0.8900	0.04434
								10500	30.3	21.42	70.56	0.9300	0.04418
								11000	30.9	22.05	72.97	0.9697	0.04402
								11500	31.4	22.66	75.37	1.0092	0.04387
								12000	31.9	23.25	77.76	1.0486	0.04371

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.97	58.03	0.7235	0.04500
								8500	28.1	18.72	60.49	0.7642	0.04484
								9000	28.6	19.44	62.95	0.8045	0.04468
								9500	29.2	20.14	65.38	0.8447	0.04452
								10000	29.7	20.82	67.80	0.8846	0.04436
								10500	30.3	21.47	70.21	0.9243	0.04420
								11000	30.8	22.10	72.61	0.9638	0.04405
								11500	31.3	22.72	75.00	1.0031	0.04389
								12000	31.8	23.31	77.37	1.0422	0.04373

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.96	58.50	0.7206	0.04491
								8500	28.1	18.71	61.00	0.7610	0.04475
								9000	28.7	19.43	63.47	0.8012	0.04459
								9500	29.2	20.13	65.93	0.8411	0.04444
								10000	29.7	20.80	68.38	0.8808	0.04428
								10500	30.3	21.45	70.81	0.9203	0.04412
								11000	30.8	22.08	73.23	0.9596	0.04397
								11500	31.3	22.69	75.64	0.9987	0.04382
								12000	31.9	23.29	78.04	1.0376	0.04366
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.5	18.00	58.23	0.7162	0.04493
								8500	28.1	18.75	60.71	0.7564	0.04477
								9000	28.6	19.48	63.17	0.7963	0.04461
								9500	29.1	20.17	65.62	0.8360	0.04446

								10000	29.7	20.85	68.05	0.8754	0.04430
								10500	30.2	21.51	70.47	0.9147	0.04415
								11000	30.7	22.14	72.87	0.9537	0.04399
								11500	31.3	22.75	75.27	0.9926	0.04384
								12000	31.8	23.35	77.65	1.0313	0.04369
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	25.6	19.35	53.49	0.8440	0.03849
								8500	26.1	20.13	55.73	0.8914	0.03828
								9000	26.7	20.88	57.97	0.9384	0.03807
								9500	27.2	21.60	60.19	0.9852	0.03786
								10000	27.8	22.29	62.40	1.0318	0.03766
								10500	28.3	22.97	64.59	1.0781	0.03745
								11000	28.8	23.62	66.78	1.1241	0.03725
								11500	29.3	24.25	68.95	1.1700	0.03704

								12000	29.9	24.85	71.12	1.2156	0.03684
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.40	53.24	0.8388	0.03851
								8500	26.1	20.18	55.48	0.8859	0.03830
								9000	26.6	20.93	57.70	0.9327	0.03810
								9500	27.1	21.66	59.90	0.9792	0.03789
								10000	27.7	22.36	62.10	1.0255	0.03768
								10500	28.2	23.03	64.28	1.0715	0.03748
								11000	28.7	23.68	66.45	1.1173	0.03728
								11500	29.3	24.31	68.61	1.1628	0.03707

								12000	29.8	24.93	70.76	1.2082	0.03687
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.65	55.54	0.7952	0.04152
								8500	27.1	19.42	57.89	0.8399	0.04133
								9000	27.6	20.15	60.22	0.8844	0.04114
								9500	28.2	20.86	62.54	0.9286	0.04095
								10000	28.7	21.55	64.85	0.9726	0.04076
								10500	29.3	22.21	67.14	1.0163	0.04058
								11000	29.8	22.85	69.42	1.0598	0.04039
								11500	30.3	23.47	71.69	1.1031	0.04020
								12000	30.8	24.07	73.95	1.1462	0.04002
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.5	18.70	55.29	0.7903	0.04154
								8500	27.0	19.46	57.62	0.8348	0.04135
								9000	27.6	20.20	59.94	0.8790	0.04116

								9500	28.1	20.92	62.24	0.9229	0.04097
								10000	28.6	21.60	64.53	0.9666	0.04079
								10500	29.2	22.27	66.81	1.0101	0.04060
								11000	29.7	22.91	69.08	1.0533	0.04042
								11500	30.2	23.53	71.34	1.0963	0.04023
								12000	30.8	24.14	73.58	1.1392	0.04005
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.2	18.93	55.04	0.8037	0.04039
								8500	26.7	19.70	57.37	0.8488	0.04019
								9000	27.2	20.44	59.68	0.8937	0.04000
								9500	27.8	21.16	61.97	0.9383	0.03981
								10000	28.3	21.84	64.25	0.9827	0.03962
								10500	28.9	22.51	66.52	1.0268	0.03943

								11000	29.4	23.16	68.78	1.0707	0.03924
								11500	29.9	23.78	71.03	1.1144	0.03905
								12000	30.4	24.38	73.26	1.1579	0.03886
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.1	18.97	54.79	0.7987	0.04041
								8500	26.6	19.75	57.10	0.8436	0.04021
								9000	27.2	20.49	59.39	0.8882	0.04002
								9500	27.7	21.21	61.68	0.9326	0.03983
								10000	28.2	21.90	63.94	0.9767	0.03964
								10500	28.8	22.57	66.20	1.0205	0.03945
								11000	29.3	23.22	68.44	1.0642	0.03927

								11500	29.8	23.84	70.68	1.1076	0.03908
								12000	30.4	24.45	72.90	1.1508	0.03889
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.67	55.06	0.8829	0.03990
								8500	27.1	19.44	57.36	0.9282	0.03969
								9000	27.6	20.18	59.65	0.9733	0.03949
								9500	28.1	20.89	61.92	1.0180	0.03929
								10000	28.7	21.58	64.18	1.0625	0.03909
								10500	29.2	22.25	66.42	1.1068	0.03889
								11000	29.7	22.89	68.66	1.1508	0.03870
								11500	30.2	23.52	70.88	1.1946	0.03850
								12000	30.8	24.12	73.10	1.2383	0.03830
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.80	55.54	0.7792	0.04123
								8500	26.9	19.57	57.88	0.8230	0.04104

								9000	27.4	20.31	60.21	0.8665	0.04086
								9500	28.0	21.02	62.53	0.9097	0.04068
								10000	28.5	21.71	64.83	0.9527	0.04050
								10500	29.0	22.38	67.12	0.9955	0.04032
								11000	29.6	23.03	69.40	1.0381	0.04014
								11500	30.1	23.65	71.67	1.0804	0.03996
								12000	30.6	24.26	73.93	1.1226	0.03978
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.4	18.11	56.33	0.8595	0.04233
								8500	27.9	18.86	58.69	0.9036	0.04214
								9000	28.4	19.59	61.04	0.9473	0.04194
								9500	29.0	20.29	63.37	0.9908	0.04175

								10000	29.5	20.97	65.69	1.0341	0.04156
								10500	30.0	21.63	68.00	1.0771	0.04137
								11000	30.6	22.26	70.29	1.1199	0.04119
								11500	31.1	22.88	72.57	1.1625	0.04100
								12000	31.6	23.48	74.85	1.2049	0.04081
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.23	56.79	0.7554	0.04369
								8500	27.7	18.98	59.19	0.7979	0.04352
								9000	28.3	19.71	61.58	0.8401	0.04334
								9500	28.8	20.42	63.96	0.8821	0.04317
								10000	29.3	21.09	66.32	0.9239	0.04300
								10500	29.9	21.75	68.67	0.9654	0.04283

								11000	30.4	22.39	71.01	1.0068	0.04266
								11500	30.9	23.00	73.34	1.0479	0.04249
								12000	31.5	23.60	75.65	1.0888	0.04232
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.22	57.07	0.7582	0.04354
								8500	27.7	18.98	59.49	0.8009	0.04336
								9000	28.3	19.70	61.90	0.8432	0.04319
								9500	28.8	20.40	64.29	0.8854	0.04302
								10000	29.4	21.08	66.67	0.9273	0.04284
								10500	29.9	21.74	69.04	0.9690	0.04267
								11000	30.4	22.37	71.39	1.0104	0.04250
								11500	31.0	22.99	73.73	1.0517	0.04233
								12000	31.5	23.58	76.06	1.0928	0.04216
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.26	56.81	0.7536	0.04356

								8500	27.7	19.02	59.21	0.7960	0.04338
								9000	28.2	19.75	61.61	0.8381	0.04321
								9500	28.7	20.45	63.98	0.8800	0.04304
								10000	29.3	21.13	66.35	0.9216	0.04287
								10500	29.8	21.79	68.70	0.9630	0.04270
								11000	30.3	22.43	71.04	1.0042	0.04253
								11500	30.9	23.05	73.37	1.0453	0.04236
								12000	31.4	23.65	75.68	1.0861	0.04219
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.25	57.28	0.7507	0.04348
								8500	27.7	19.01	59.71	0.7929	0.04330

								9000	28.2	19.73	62.12	0.8349	0.04313
								9500	28.8	20.44	64.53	0.8765	0.04296
								10000	29.3	21.12	66.91	0.9180	0.04279
								10500	29.8	21.77	69.29	0.9592	0.04263
								11000	30.4	22.41	71.65	1.0002	0.04246
								11500	30.9	23.02	74.01	1.0411	0.04229
								12000	31.4	23.61	76.35	1.0817	0.04213
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.29	57.01	0.7461	0.04349
								8500	27.6	19.05	59.43	0.7881	0.04332
								9000	28.2	19.78	61.83	0.8298	0.04315
								9500	28.7	20.49	64.22	0.8712	0.04298
								10000	29.2	21.17	66.59	0.9124	0.04282

								10500	29.8	21.83	68.95	0.9534	0.04265
								11000	30.3	22.47	71.30	0.9941	0.04248
								11500	30.8	23.08	73.64	1.0347	0.04232
								12000	31.3	23.68	75.97	1.0751	0.04215
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.29	57.30	0.7489	0.04334
								8500	27.6	19.04	59.73	0.7910	0.04317
								9000	28.2	19.77	62.15	0.8328	0.04300
								9500	28.7	20.48	64.55	0.8744	0.04283
								10000	29.2	21.16	66.94	0.9157	0.04266
								10500	29.8	21.81	69.32	0.9568	0.04249
								11000	30.3	22.45	71.68	0.9977	0.04233
								11500	30.8	23.06	74.04	1.0384	0.04216
								12000	31.4	23.66	76.38	1.0789	0.04200

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.0	18.33	57.04	0.7443	0.04336
								8500	27.6	19.09	59.45	0.7862	0.04319
								9000	28.1	19.82	61.86	0.8277	0.04302
								9500	28.6	20.53	64.24	0.8690	0.04285
								10000	29.2	21.21	66.62	0.9101	0.04268
								10500	29.7	21.87	68.98	0.9510	0.04252
								11000	30.2	22.51	71.33	0.9916	0.04235
								11500	30.8	23.12	73.67	1.0321	0.04219
								12000	31.3	23.72	76.00	1.0723	0.04202

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.92	56.10	0.5546	0.04502
								8500	26.6	19.81	58.11	0.5748	0.04496
								9000	26.9	20.68	60.09	0.5948	0.04490
								9500	27.3	21.53	62.05	0.6146	0.04483
								10000	27.7	22.36	63.99	0.6341	0.04477
								10500	28.0	23.17	65.92	0.6535	0.04471
								11000	28.4	23.96	67.82	0.6727	0.04465
								11500	28.8	24.73	69.71	0.6917	0.04459
								12000	29.1	25.49	71.58	0.7106	0.04453
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	52.74	0.5386	0.04471
								8500	25.9	20.31	54.77	0.5609	0.04463
								9000	26.3	21.18	56.79	0.5831	0.04455
								9500	26.7	22.03	58.79	0.6051	0.04447
								10000	27.1	22.86	60.78	0.6269	0.04440
								10500	27.5	23.66	62.75	0.6486	0.04432
								11000	27.8	24.45	64.72	0.6702	0.04424
								11500	28.2	25.22	66.67	0.6916	0.04417
								12000	28.6	25.97	68.61	0.7129	0.04409

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.26	51.06	0.6725	0.03948
	8500	24.9	21.13	53.21	0.7051	0.03932
	9000	25.3	21.98	55.36	0.7376	0.03915
	9500	25.8	22.79	57.50	0.7700	0.03899
	10000	26.2	23.58	59.63	0.8023	0.03882
	10500	26.7	24.35	61.75	0.8344	0.03866
	11000	27.1	25.09	63.87	0.8665	0.03850
	11500	27.6	25.81	65.97	0.8984	0.03834
	12000	28.0	26.51	68.08	0.9303	0.03818
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.36	50.24	0.6486	0.03990
	8500	24.7	21.26	52.26	0.6782	0.03978
	9000	25.2	22.13	54.27	0.7075	0.03965
	9500	25.6	22.98	56.27	0.7367	0.03953
	10000	26.0	23.79	58.26	0.7658	0.03941
	10500	26.4	24.58	60.24	0.7947	0.03930
	11000	26.8	25.36	62.21	0.8235	0.03918
	11500	27.3	26.11	64.17	0.8521	0.03906
	12000	27.7	26.83	66.12	0.8806	0.03894

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.1	19.00	55.51	0.5487	0.04504
								8500	26.4	19.90	57.49	0.5686	0.04498
								9000	26.8	20.77	59.44	0.5883	0.04492
								9500	27.2	21.63	61.37	0.6077	0.04485
								10000	27.5	22.47	63.29	0.6270	0.04479
								10500	27.9	23.29	65.18	0.6461	0.04473
								11000	28.3	24.08	67.06	0.6650	0.04467
								11500	28.6	24.87	68.92	0.6838	0.04461
								12000	29.0	25.63	70.77	0.7024	0.04456

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	52.74	0.5386	0.04471
	8500	25.9	20.31	54.77	0.5609	0.04463
	9000	26.3	21.18	56.79	0.5831	0.04455
	9500	26.7	22.03	58.79	0.6051	0.04447
	10000	27.1	22.86	60.78	0.6269	0.04440
	10500	27.5	23.66	62.75	0.6486	0.04432
	11000	27.8	24.45	64.72	0.6702	0.04424
	11500	28.2	25.22	66.67	0.6916	0.04417
	12000	28.6	25.97	68.61	0.7129	0.04409

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.4	20.31	50.73	0.6675	0.03951
	8500	24.8	21.19	52.87	0.6999	0.03934
	9000	25.3	22.04	55.00	0.7321	0.03918
	9500	25.7	22.86	57.12	0.7642	0.03902
	10000	26.2	23.66	59.23	0.7962	0.03885
	10500	26.6	24.43	61.33	0.8281	0.03869
	11000	27.0	25.18	63.43	0.8599	0.03853
	11500	27.5	25.90	65.52	0.8915	0.03837
	12000	27.9	26.60	67.60	0.9231	0.03821

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.41	50.01	0.6453	0.03991
	8500	24.7	21.31	52.02	0.6747	0.03979
	9000	25.1	22.18	54.02	0.7039	0.03967
	9500	25.5	23.02	56.01	0.7329	0.03955
	10000	26.0	23.85	57.98	0.7618	0.03943
	10500	26.4	24.64	59.95	0.7905	0.03931
	11000	26.8	25.42	61.90	0.8191	0.03920
	11500	27.2	26.17	63.85	0.8475	0.03908
	12000	27.6	26.90	65.79	0.8759	0.03896

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.99	53.59	0.6438	0.04002
								8500	25.2	20.92	55.47	0.6672	0.03993
								9000	25.5	21.82	57.34	0.6903	0.03985
								9500	25.9	22.70	59.19	0.7132	0.03976
								10000	26.3	23.56	61.01	0.7359	0.03967
								10500	26.6	24.40	62.82	0.7583	0.03959
								11000	27.0	25.22	64.62	0.7805	0.03950
								11500	27.3	26.02	66.40	0.8025	0.03942
								12000	27.7	26.81	68.16	0.8244	0.03933
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.51	50.22	0.6264	0.03984
								8500	24.5	21.44	52.12	0.6521	0.03973
								9000	24.9	22.35	54.01	0.6777	0.03962
								9500	25.3	23.23	55.89	0.7031	0.03952
								10000	25.7	24.09	57.75	0.7283	0.03941
								10500	26.1	24.92	59.61	0.7534	0.03931
								11000	26.5	25.73	61.45	0.7783	0.03921
								11500	26.8	26.53	63.28	0.8030	0.03910
								12000	27.2	27.30	65.10	0.8276	0.03900

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.27	50.45	0.6120	0.04088
	8500	24.8	21.19	52.37	0.6379	0.04078
	9000	25.2	22.09	54.28	0.6637	0.04068
	9500	25.6	22.96	56.17	0.6893	0.04057
	10000	26.0	23.81	58.06	0.7147	0.04047
	10500	26.4	24.63	59.92	0.7399	0.04038
	11000	26.8	25.43	61.78	0.7650	0.04028
	11500	27.1	26.22	63.63	0.7899	0.04018
	12000	27.5	26.98	65.46	0.8147	0.04008
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.39	47.91	0.7855	0.03458
	8500	23.6	22.30	49.91	0.8226	0.03437
	9000	24.0	23.17	51.89	0.8596	0.03417
	9500	24.5	24.01	53.86	0.8965	0.03397
	10000	24.9	24.83	55.83	0.9332	0.03377
	10500	25.4	25.61	57.79	0.9698	0.03357
	11000	25.8	26.38	59.75	1.0063	0.03337
	11500	26.2	27.11	61.70	1.0427	0.03318
	12000	26.7	27.83	63.64	1.0789	0.03298

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.52	47.25	0.7568	0.03500
								8500	23.4	22.45	49.12	0.7905	0.03485
								9000	23.9	23.35	50.98	0.8239	0.03469
								9500	24.3	24.22	52.83	0.8572	0.03454
								10000	24.7	25.06	54.67	0.8903	0.03439
								10500	25.1	25.88	56.51	0.9232	0.03424
								11000	25.5	26.68	58.33	0.9560	0.03408
								11500	25.9	27.45	60.14	0.9886	0.03393
								12000	26.3	28.20	61.95	1.0211	0.03378
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.6	20.15	53.08	0.5958	0.04057
								8500	24.9	21.09	54.95	0.6186	0.04048
								9000	25.3	22.01	56.81	0.6410	0.04040
								9500	25.7	22.89	58.64	0.6633	0.04032

	10000	26.0	23.76	60.46	0.6853	0.04024
	10500	26.4	24.61	62.26	0.7070	0.04016
	11000	26.8	25.44	64.04	0.7286	0.04008
	11500	27.1	26.25	65.81	0.7500	0.04000
	12000	27.5	27.04	67.56	0.7713	0.03992
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.58	50.29	0.5871	0.04034
	8500	24.5	21.51	52.22	0.6125	0.04024
	9000	24.8	22.42	54.13	0.6377	0.04013
	9500	25.2	23.30	56.02	0.6628	0.04003

	10000	25.6	24.16	57.90	0.6876	0.03993
	10500	26.0	25.00	59.77	0.7123	0.03983
	11000	26.4	25.81	61.63	0.7369	0.03973
	11500	26.8	26.60	63.47	0.7613	0.03964
	12000	27.1	27.37	65.31	0.7856	0.03954
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.34	50.52	0.5743	0.04136
	8500	24.8	21.26	52.46	0.5999	0.04127
	9000	25.1	22.16	54.39	0.6254	0.04117
	9500	25.5	23.03	56.30	0.6506	0.04107

	10000	25.9	23.88	58.19	0.6757	0.04098
	10500	26.3	24.70	60.08	0.7006	0.04088
	11000	26.7	25.50	61.95	0.7253	0.04079
	11500	27.1	26.28	63.81	0.7499	0.04070
	12000	27.5	27.05	65.66	0.7744	0.04060
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.53	47.87	0.7356	0.03515
	8500	23.4	22.44	49.86	0.7720	0.03496
	9000	23.9	23.31	51.85	0.8082	0.03477
	9500	24.3	24.16	53.83	0.8443	0.03457

	10000	24.8	24.98	55.81	0.8802	0.03438
	10500	25.2	25.77	57.77	0.9160	0.03419
	11000	25.6	26.54	59.74	0.9517	0.03400
	11500	26.1	27.28	61.69	0.9873	0.03381
	12000	26.5	28.00	63.64	1.0228	0.03362
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.64	47.26	0.7092	0.03556
	8500	23.3	22.58	49.15	0.7422	0.03541
	9000	23.7	23.48	51.02	0.7750	0.03527
	9500	24.1	24.35	52.88	0.8076	0.03512

								10000	24.6	25.20	54.73	0.8401	0.03497
								10500	25.0	26.02	56.57	0.8724	0.03483
								11000	25.4	26.82	58.40	0.9045	0.03469
								11500	25.8	27.59	60.22	0.9365	0.03454
								12000	26.2	28.34	62.04	0.9683	0.03440
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.88	54.13	0.5915	0.04127
								8500	25.3	20.80	56.05	0.6139	0.04119
								9000	25.7	21.70	57.95	0.6361	0.04111
								9500	26.0	22.58	59.83	0.6581	0.04103
								10000	26.4	23.43	61.70	0.6798	0.04096
								10500	26.8	24.27	63.54	0.7013	0.04088
								11000	27.1	25.08	65.37	0.7226	0.04080
								11500	27.5	25.88	67.18	0.7438	0.04073

	12000	27.8	26.66	68.98	0.7647	0.04065
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.39	50.78	0.5759	0.04105
	8500	24.7	21.32	52.72	0.6007	0.04095
	9000	25.1	22.22	54.65	0.6253	0.04085
	9500	25.5	23.10	56.57	0.6496	0.04076
	10000	25.8	23.95	58.47	0.6738	0.04066
	10500	26.2	24.78	60.36	0.6979	0.04057
	11000	26.6	25.59	62.24	0.7218	0.04047
	11500	27.0	26.38	64.11	0.7456	0.04038
	12000	27.4	27.14	65.96	0.7692	0.04029
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.15	51.01	0.5633	0.04207
	8500	25.0	21.07	52.97	0.5883	0.04197
	9000	25.4	21.96	54.91	0.6130	0.04188
	9500	25.8	22.83	56.85	0.6376	0.04179
	10000	26.1	23.67	58.76	0.6620	0.04170
	10500	26.5	24.49	60.67	0.6863	0.04161
	11000	26.9	25.29	62.56	0.7104	0.04152
	11500	27.3	26.07	64.44	0.7343	0.04143

	12000	27.7	26.83	66.32	0.7581	0.04134
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.27	48.74	0.7260	0.03584
	8500	23.7	22.17	50.78	0.7618	0.03565
	9000	24.2	23.04	52.82	0.7975	0.03546
	9500	24.6	23.87	54.84	0.8330	0.03528
	10000	25.1	24.68	56.86	0.8684	0.03509
	10500	25.5	25.47	58.87	0.9037	0.03490
	11000	26.0	26.22	60.88	0.9389	0.03472
	11500	26.4	26.96	62.88	0.9739	0.03453
	12000	26.8	27.67	64.87	1.0089	0.03435
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.1	21.39	48.02	0.6987	0.03626
	8500	23.6	22.32	49.94	0.7311	0.03612
	9000	24.0	23.21	51.85	0.7633	0.03598
	9500	24.4	24.08	53.75	0.7954	0.03584
	10000	24.8	24.92	55.63	0.8273	0.03569
	10500	25.2	25.73	57.51	0.8590	0.03556
	11000	25.7	26.52	59.38	0.8905	0.03542
	11500	26.1	27.29	61.24	0.9220	0.03528

								12000	26.5	28.03	63.09	0.9533	0.03514
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.8	19.96	53.56	0.5849	0.04130
								8500	25.2	20.90	55.46	0.6070	0.04122
								9000	25.6	21.80	57.33	0.6289	0.04114
								9500	25.9	22.69	59.19	0.6505	0.04106
								10000	26.3	23.55	61.02	0.6719	0.04098
								10500	26.6	24.39	62.84	0.6931	0.04091
								11000	27.0	25.22	64.64	0.7141	0.04083
								11500	27.3	26.02	66.43	0.7349	0.04076

	12000	27.7	26.81	68.20	0.7556	0.04069
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.39	50.78	0.5759	0.04105
	8500	24.7	21.32	52.72	0.6007	0.04095
	9000	25.1	22.22	54.65	0.6253	0.04085
	9500	25.5	23.10	56.57	0.6496	0.04076
	10000	25.8	23.95	58.47	0.6738	0.04066
	10500	26.2	24.78	60.36	0.6979	0.04057
	11000	26.6	25.59	62.24	0.7218	0.04047
	11500	27.0	26.38	64.11	0.7456	0.04038

	12000	27.4	27.14	65.96	0.7692	0.04029
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.15	51.01	0.5633	0.04207
	8500	25.0	21.07	52.97	0.5883	0.04197
	9000	25.4	21.96	54.91	0.6130	0.04188
	9500	25.8	22.83	56.85	0.6376	0.04179
	10000	26.1	23.67	58.76	0.6620	0.04170
	10500	26.5	24.49	60.67	0.6863	0.04161
	11000	26.9	25.29	62.56	0.7104	0.04152
	11500	27.3	26.07	64.44	0.7343	0.04143

	12000	27.7	26.83	66.32	0.7581	0.04134
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.33	48.44	0.7206	0.03587
	8500	23.7	22.23	50.46	0.7561	0.03568
	9000	24.1	23.10	52.48	0.7915	0.03550
	9500	24.5	23.95	54.48	0.8267	0.03531
	10000	25.0	24.77	56.48	0.8618	0.03512
	10500	25.4	25.55	58.48	0.8967	0.03494
	11000	25.9	26.32	60.47	0.9316	0.03476
	11500	26.3	27.06	62.45	0.9663	0.03457

	12000	26.7	27.77	64.42	1.0010	0.03439
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.44	47.81	0.6950	0.03628
	8500	23.5	22.37	49.71	0.7273	0.03614
	9000	23.9	23.27	51.61	0.7593	0.03599
	9500	24.4	24.14	53.50	0.7911	0.03585
	10000	24.8	24.98	55.37	0.8228	0.03571
	10500	25.2	25.79	57.24	0.8543	0.03558
	11000	25.6	26.59	59.09	0.8857	0.03544
	11500	26.0	27.36	60.94	0.9169	0.03530

								12000	26.4	28.11	62.78	0.9480	0.03516
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.27	55.20	0.5727	0.04356
								8500	26.1	20.18	57.17	0.5940	0.04349
								9000	26.5	21.06	59.12	0.6151	0.04342
								9500	26.8	21.92	61.04	0.6359	0.04335
								10000	27.2	22.76	62.95	0.6565	0.04328
								10500	27.6	23.58	64.84	0.6770	0.04321
								11000	27.9	24.38	66.71	0.6972	0.04314
								11500	28.3	25.16	68.56	0.7173	0.04308
								12000	28.6	25.93	70.40	0.7372	0.04301
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.77	51.85	0.5568	0.04329
								8500	25.4	20.68	53.84	0.5803	0.04320
								9000	25.8	21.56	55.82	0.6036	0.04312
								9500	26.2	22.42	57.78	0.6268	0.04303
								10000	26.6	23.26	59.73	0.6498	0.04294
								10500	27.0	24.07	61.67	0.6727	0.04286
								11000	27.4	24.87	63.59	0.6954	0.04277

	11500	27.8	25.64	65.51	0.7179	0.04269
	12000	28.1	26.40	67.41	0.7404	0.04260
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	52.07	0.5445	0.04431
	8500	25.7	20.45	54.08	0.5682	0.04423
	9000	26.1	21.32	56.08	0.5917	0.04415
	9500	26.5	22.17	58.06	0.6151	0.04406
	10000	26.9	23.00	60.02	0.6383	0.04398
	10500	27.3	23.80	61.98	0.6613	0.04390
	11000	27.7	24.59	63.92	0.6842	0.04382
	11500	28.1	25.35	65.85	0.7070	0.04374
	12000	28.5	26.10	67.76	0.7296	0.04366
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.63	50.01	0.6980	0.03805
	8500	24.5	21.51	52.11	0.7322	0.03788
	9000	24.9	22.37	54.21	0.7662	0.03770
	9500	25.4	23.19	56.30	0.8001	0.03753
	10000	25.8	23.99	58.37	0.8339	0.03735
	10500	26.2	24.76	60.45	0.8676	0.03718
	11000	26.7	25.51	62.51	0.9012	0.03700

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	11500	27.1	26.24	64.57	0.9346	0.03683
								12000	27.6	26.94	66.63	0.9680	0.03666
								8000	23.9	20.75	49.23	0.6725	0.03847
								8500	24.3	21.66	51.21	0.7035	0.03834
								9000	24.7	22.53	53.17	0.7342	0.03821
								9500	25.1	23.39	55.13	0.7648	0.03808
								10000	25.6	24.21	57.07	0.7953	0.03795
								10500	26.0	25.01	59.00	0.8255	0.03782
								11000	26.4	25.79	60.92	0.8557	0.03769
								11500	26.8	26.55	62.84	0.8857	0.03756
								12000	27.2	27.28	64.75	0.9155	0.03744
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.36	54.63	0.5665	0.04359
								8500	26.0	20.27	56.57	0.5874	0.04351
								9000	26.3	21.16	58.48	0.6082	0.04344

		9500	26.7	22.02	60.38	0.6287	0.04338
		10000	27.1	22.87	62.26	0.6490	0.04331
		10500	27.4	23.70	64.12	0.6692	0.04324
		11000	27.8	24.50	65.96	0.6891	0.04317
		11500	28.1	25.30	67.79	0.7089	0.04310
		12000	28.5	26.07	69.60	0.7285	0.04304
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.77	51.85	0.5568	0.04329
		8500	25.4	20.68	53.84	0.5803	0.04320
		9000	25.8	21.56	55.82	0.6036	0.04312

		9500	26.2	22.42	57.78	0.6268	0.04303
		10000	26.6	23.26	59.73	0.6498	0.04294
		10500	27.0	24.07	61.67	0.6727	0.04286
		11000	27.4	24.87	63.59	0.6954	0.04277
		11500	27.8	25.64	65.51	0.7179	0.04269
		12000	28.1	26.40	67.41	0.7404	0.04260
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.55	52.07	0.5445	0.04431
		8500	25.7	20.45	54.08	0.5682	0.04423
		9000	26.1	21.32	56.08	0.5917	0.04415

	9500	26.5	22.17	58.06	0.6151	0.04406
	10000	26.9	23.00	60.02	0.6383	0.04398
	10500	27.3	23.80	61.98	0.6613	0.04390
	11000	27.7	24.59	63.92	0.6842	0.04382
	11500	28.1	25.35	65.85	0.7070	0.04374
	12000	28.5	26.10	67.76	0.7296	0.04366
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.69	49.69	0.6928	0.03808
	8500	24.4	21.58	51.78	0.7267	0.03791
	9000	24.8	22.44	53.85	0.7605	0.03773

	9500	25.3	23.27	55.92	0.7941	0.03756
	10000	25.7	24.07	57.98	0.8276	0.03738
	10500	26.1	24.85	60.04	0.8610	0.03721
	11000	26.6	25.60	62.09	0.8942	0.03704
	11500	27.0	26.33	64.13	0.9274	0.03687
	12000	27.5	27.04	66.16	0.9605	0.03670
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.79	49.01	0.6691	0.03849
	8500	24.2	21.70	50.98	0.6998	0.03836
	9000	24.7	22.58	52.93	0.7304	0.03822

								9500	25.1	23.44	54.87	0.7608	0.03810
								10000	25.5	24.27	56.80	0.7910	0.03797
								10500	25.9	25.07	58.72	0.8211	0.03784
								11000	26.3	25.85	60.63	0.8511	0.03771
								11500	26.7	26.61	62.53	0.8809	0.03758
								12000	27.1	27.35	64.43	0.9105	0.03746
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.31	55.22	0.5711	0.04343
								8500	26.0	20.22	57.19	0.5924	0.04336
								9000	26.4	21.10	59.14	0.6133	0.04329
								9500	26.8	21.96	61.07	0.6341	0.04322
								10000	27.1	22.80	62.97	0.6547	0.04315
								10500	27.5	23.62	64.86	0.6750	0.04308

	11000	27.9	24.42	66.73	0.6952	0.04301
	11500	28.2	25.21	68.59	0.7152	0.04295
	12000	28.6	25.97	70.43	0.7350	0.04288
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.81	51.87	0.5553	0.04316
	8500	25.4	20.72	53.86	0.5787	0.04307
	9000	25.8	21.61	55.84	0.6020	0.04298
	9500	26.2	22.47	57.80	0.6251	0.04289
	10000	26.6	23.31	59.75	0.6480	0.04281
	10500	26.9	24.12	61.69	0.6708	0.04272
	11000	27.3	24.92	63.62	0.6934	0.04264
	11500	27.7	25.69	65.53	0.7159	0.04256
	12000	28.1	26.45	67.43	0.7382	0.04247
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.59	52.09	0.5430	0.04417
	8500	25.7	20.49	54.10	0.5666	0.04409
	9000	26.1	21.36	56.10	0.5901	0.04401
	9500	26.5	22.21	58.08	0.6133	0.04393
	10000	26.9	23.04	60.05	0.6365	0.04385
	10500	27.3	23.85	62.00	0.6594	0.04377

	11000	27.6	24.63	63.94	0.6822	0.04369
	11500	28.0	25.40	65.87	0.7049	0.04361
	12000	28.4	26.15	67.79	0.7275	0.04353
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.67	50.03	0.6964	0.03793
	8500	24.4	21.56	52.13	0.7305	0.03776
	9000	24.9	22.41	54.23	0.7644	0.03758
	9500	25.3	23.24	56.32	0.7982	0.03741
	10000	25.7	24.04	58.40	0.8319	0.03723
	10500	26.2	24.81	60.47	0.8655	0.03706
	11000	26.6	25.56	62.54	0.8989	0.03689
	11500	27.1	26.29	64.60	0.9323	0.03671
	12000	27.5	26.99	66.65	0.9656	0.03654
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.79	49.25	0.6709	0.03835
	8500	24.2	21.70	51.23	0.7018	0.03822
	9000	24.7	22.58	53.19	0.7325	0.03809
	9500	25.1	23.43	55.15	0.7630	0.03796
	10000	25.5	24.26	57.09	0.7933	0.03783
	10500	25.9	25.06	59.02	0.8235	0.03770

								11000	26.3	25.84	60.95	0.8536	0.03757
								11500	26.8	26.59	62.86	0.8835	0.03745
								12000	27.2	27.33	64.77	0.9132	0.03732
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.40	54.64	0.5649	0.04345
								8500	25.9	20.31	56.59	0.5858	0.04338
								9000	26.3	21.20	58.50	0.6065	0.04331
								9500	26.6	22.07	60.40	0.6269	0.04324
								10000	27.0	22.92	62.28	0.6472	0.04317
								10500	27.4	23.74	64.14	0.6673	0.04311
								11000	27.7	24.55	65.98	0.6871	0.04304

	11500	28.1	25.34	67.81	0.7068	0.04297
	12000	28.4	26.12	69.62	0.7264	0.04291
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.81	51.87	0.5553	0.04316
	8500	25.4	20.72	53.86	0.5787	0.04307
	9000	25.8	21.61	55.84	0.6020	0.04298
	9500	26.2	22.47	57.80	0.6251	0.04289
	10000	26.6	23.31	59.75	0.6480	0.04281
	10500	26.9	24.12	61.69	0.6708	0.04272
	11000	27.3	24.92	63.62	0.6934	0.04264

	11500	27.7	25.69	65.53	0.7159	0.04256
	12000	28.1	26.45	67.43	0.7382	0.04247
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.59	52.09	0.5430	0.04417
	8500	25.7	20.49	54.10	0.5666	0.04409
	9000	26.1	21.36	56.10	0.5901	0.04401
	9500	26.5	22.21	58.08	0.6133	0.04393
	10000	26.9	23.04	60.05	0.6365	0.04385
	10500	27.3	23.85	62.00	0.6594	0.04377
	11000	27.6	24.63	63.94	0.6822	0.04369

	11500	28.0	25.40	65.87	0.7049	0.04361
	12000	28.4	26.15	67.79	0.7275	0.04353
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.73	49.71	0.6912	0.03796
	8500	24.3	21.62	51.80	0.7250	0.03778
	9000	24.8	22.48	53.88	0.7587	0.03761
	9500	25.2	23.31	55.95	0.7922	0.03744
	10000	25.7	24.12	58.01	0.8256	0.03726
	10500	26.1	24.89	60.06	0.8589	0.03709
	11000	26.5	25.65	62.11	0.8920	0.03692

	11500	27.0	26.38	64.15	0.9251	0.03675
	12000	27.4	27.09	66.19	0.9581	0.03658
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.83	49.03	0.6675	0.03836
	8500	24.2	21.74	51.00	0.6982	0.03823
	9000	24.6	22.63	52.95	0.7286	0.03810
	9500	25.0	23.49	54.89	0.7590	0.03797
	10000	25.5	24.31	56.82	0.7891	0.03785
	10500	25.9	25.12	58.74	0.8191	0.03772
	11000	26.3	25.90	60.65	0.8490	0.03759

								11500	26.7	26.66	62.56	0.8787	0.03747
								12000	27.1	27.40	64.45	0.9083	0.03734
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.9	17.78	52.25	0.7672	0.04734
								8500	28.3	18.57	54.49	0.8057	0.04713
								9000	28.8	19.33	56.71	0.8440	0.04692
								9500	29.3	20.07	58.93	0.8821	0.04672
								10000	29.8	20.78	61.13	0.9201	0.04651
								10500	30.3	21.47	63.33	0.9580	0.04631
								11000	30.7	22.14	65.53	0.9958	0.04611
								11500	31.2	22.80	67.71	1.0334	0.04590
								12000	31.7	23.43	69.89	1.0710	0.04570
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.8	17.85	51.61	0.7440	0.04776
								8500	28.2	18.65	53.72	0.7790	0.04760
								9000	28.7	19.43	55.82	0.8139	0.04744
								9500	29.1	20.18	57.91	0.8486	0.04729
								10000	29.6	20.92	59.98	0.8831	0.04713

								10500	30.0	21.63	62.04	0.9174	0.04698
								11000	30.5	22.33	64.10	0.9516	0.04682
								11500	30.9	23.00	66.14	0.9856	0.04667
								12000	31.4	23.66	68.18	1.0194	0.04651
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.9	17.78	52.25	0.7672	0.04734
								8500	28.3	18.57	54.49	0.8057	0.04713
								9000	28.8	19.33	56.71	0.8440	0.04692
								9500	29.3	20.07	58.93	0.8821	0.04672
								10000	29.8	20.78	61.13	0.9201	0.04651
								10500	30.3	21.47	63.33	0.9580	0.04631
								11000	30.7	22.14	65.53	0.9958	0.04611

	11500	31.2	22.80	67.71	1.0334	0.04590
	12000	31.7	23.43	69.89	1.0710	0.04570
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.8	17.85	51.61	0.7440	0.04776
	8500	28.2	18.65	53.72	0.7790	0.04760
	9000	28.7	19.43	55.82	0.8139	0.04744
	9500	29.1	20.18	57.91	0.8486	0.04729
	10000	29.6	20.92	59.98	0.8831	0.04713
	10500	30.0	21.63	62.04	0.9174	0.04698
	11000	30.5	22.33	64.10	0.9516	0.04682

								11500	30.9	23.00	66.14	0.9856	0.04667
								12000	31.4	23.66	68.18	1.0194	0.04651
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.6	18.62	49.40	0.8756	0.04253
								8500	27.1	19.44	51.48	0.9182	0.04228
								9000	27.6	20.22	53.55	0.9607	0.04204
								9500	28.0	20.98	55.62	1.0031	0.04180
								10000	28.5	21.71	57.68	1.0452	0.04156
								10500	29.0	22.42	59.73	1.0873	0.04132
								11000	29.5	23.11	61.78	1.1292	0.04109
								11500	29.9	23.77	63.82	1.1709	0.04085
								12000	30.4	24.42	65.85	1.2126	0.04061
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.5	18.70	48.89	0.8483	0.04295
								8500	26.9	19.53	50.86	0.8872	0.04276
								9000	27.4	20.33	52.82	0.9259	0.04257
								9500	27.9	21.11	54.77	0.9644	0.04238
								10000	28.3	21.86	56.70	1.0027	0.04220

								10500	28.8	22.60	58.63	1.0408	0.04201
								11000	29.2	23.31	60.55	1.0787	0.04183
								11500	29.7	24.00	62.46	1.1165	0.04164
								12000	30.1	24.67	64.36	1.1540	0.04146
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.5	18.68	49.69	0.8282	0.04314
								8500	27.0	19.48	51.79	0.8704	0.04291
								9000	27.5	20.27	53.89	0.9124	0.04267
								9500	28.0	21.02	55.98	0.9542	0.04244
								10000	28.4	21.76	58.07	0.9959	0.04220
								10500	28.9	22.47	60.14	1.0374	0.04197
								11000	29.4	23.15	62.21	1.0788	0.04174

	11500	29.9	23.82	64.27	1.1201	0.04151
	12000	30.3	24.47	66.33	1.1612	0.04128
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.4	18.76	49.15	0.8013	0.04356
	8500	26.9	19.58	51.14	0.8397	0.04338
	9000	27.3	20.38	53.12	0.8780	0.04320
	9500	27.8	21.16	55.09	0.9160	0.04301
	10000	28.2	21.92	57.05	0.9538	0.04283
	10500	28.7	22.65	59.00	0.9915	0.04265
	11000	29.1	23.36	60.94	1.0289	0.04247

								11500	29.6	24.05	62.87	1.0662	0.04229
								12000	30.0	24.72	64.80	1.1033	0.04212
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.92	58.12	0.7764	0.04414
								8500	28.2	18.67	60.58	0.8176	0.04397
								9000	28.7	19.39	63.02	0.8585	0.04381
								9500	29.3	20.09	65.45	0.8991	0.04364
								10000	29.8	20.76	67.86	0.9395	0.04348
								10500	30.3	21.42	70.26	0.9797	0.04331
								11000	30.9	22.05	72.65	1.0197	0.04315
								11500	31.4	22.66	75.03	1.0595	0.04298
								12000	31.9	23.26	77.39	1.0991	0.04282
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.96	57.86	0.7720	0.04416
								8500	28.1	18.71	60.30	0.8128	0.04399

								9000	28.7	19.43	62.72	0.8535	0.04383
								9500	29.2	20.14	65.14	0.8939	0.04366
								10000	29.7	20.81	67.54	0.9340	0.04350
								10500	30.3	21.47	69.92	0.9740	0.04333
								11000	30.8	22.11	72.30	1.0137	0.04317
								11500	31.3	22.72	74.66	1.0533	0.04301
								12000	31.8	23.32	77.01	1.0927	0.04285
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.2	18.88	54.63	0.8595	0.03965
								8500	26.8	19.65	56.92	0.9054	0.03945
								9000	27.3	20.39	59.19	0.9510	0.03925
								9500	27.9	21.11	61.45	0.9963	0.03905

								10000	28.4	21.80	63.70	1.0414	0.03885
								10500	28.9	22.47	65.94	1.0862	0.03865
								11000	29.4	23.11	68.16	1.1308	0.03845
								11500	30.0	23.74	70.38	1.1752	0.03825
								12000	30.5	24.34	72.58	1.2194	0.03805
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.92	54.38	0.8545	0.03967
								8500	26.7	19.69	56.66	0.9001	0.03947
								9000	27.2	20.44	58.92	0.9455	0.03927
								9500	27.8	21.16	61.16	0.9905	0.03907
								10000	28.3	21.85	63.40	1.0353	0.03887
								10500	28.8	22.53	65.62	1.0798	0.03867

								11000	29.4	23.17	67.83	1.1242	0.03848
								11500	29.9	23.80	70.03	1.1683	0.03828
								12000	30.4	24.41	72.22	1.2122	0.03809
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.70	55.39	0.8398	0.04047
								8500	27.0	19.47	57.71	0.8846	0.04027
								9000	27.6	20.21	60.02	0.9290	0.04008
								9500	28.1	20.92	62.32	0.9733	0.03989
								10000	28.6	21.62	64.60	1.0172	0.03969
								10500	29.2	22.28	66.87	1.0610	0.03950
								11000	29.7	22.93	69.13	1.1045	0.03931
								11500	30.2	23.55	71.38	1.1478	0.03912
								12000	30.7	24.15	73.62	1.1909	0.03893
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.4	18.75	55.13	0.8349	0.04049

								8500	27.0	19.52	57.44	0.8794	0.04029
								9000	27.5	20.26	59.74	0.9236	0.04010
								9500	28.0	20.98	62.02	0.9676	0.03991
								10000	28.6	21.67	64.29	1.0113	0.03972
								10500	29.1	22.34	66.55	1.0548	0.03953
								11000	29.6	22.99	68.80	1.0980	0.03934
								11500	30.1	23.61	71.03	1.1411	0.03915
								12000	30.7	24.22	73.26	1.1839	0.03897
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.21	56.88	0.8067	0.04272
								8500	27.7	18.96	59.28	0.8496	0.04254

								9000	28.3	19.69	61.66	0.8922	0.04236
								9500	28.8	20.39	64.03	0.9346	0.04218
								10000	29.4	21.07	66.39	0.9768	0.04200
								10500	29.9	21.73	68.73	1.0187	0.04182
								11000	30.4	22.37	71.06	1.0604	0.04165
								11500	31.0	22.98	73.38	1.1019	0.04147
								12000	31.5	23.58	75.69	1.1432	0.04129
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.25	56.62	0.8020	0.04274
								8500	27.7	19.00	59.01	0.8446	0.04256
								9000	28.2	19.74	61.37	0.8870	0.04238
								9500	28.8	20.44	63.73	0.9292	0.04220
								10000	29.3	21.13	66.07	0.9711	0.04202

								10500	29.8	21.79	68.40	1.0127	0.04185
								11000	30.3	22.43	70.71	1.0542	0.04167
								11500	30.9	23.04	73.02	1.0955	0.04150
								12000	31.4	23.65	75.31	1.1365	0.04132
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.24	56.91	0.8048	0.04258
								8500	27.7	19.00	59.31	0.8476	0.04240
								9000	28.2	19.73	61.69	0.8901	0.04222
								9500	28.8	20.43	64.06	0.9324	0.04204
								10000	29.3	21.11	66.41	0.9744	0.04187
								10500	29.8	21.77	68.76	1.0162	0.04169
								11000	30.4	22.41	71.09	1.0578	0.04151
								11500	30.9	23.03	73.41	1.0992	0.04134
								12000	31.4	23.62	75.72	1.1404	0.04117

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.8" (300 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.28	56.65	0.8001	0.04260
								8500	27.6	19.04	59.03	0.8427	0.04242
								9000	28.2	19.77	61.40	0.8849	0.04225
								9500	28.7	20.48	63.75	0.9269	0.04207
								10000	29.2	21.17	66.09	0.9687	0.04189
								10500	29.8	21.83	68.42	1.0103	0.04172
								11000	30.3	22.47	70.74	1.0516	0.04154
								11500	30.8	23.09	73.05	1.0928	0.04137
								12000	31.3	23.69	75.34	1.1337	0.04119

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.3	18.85	56.22	0.5628	0.04508
								8500	26.7	19.74	58.24	0.5834	0.04501
								9000	27.0	20.60	60.23	0.6038	0.04495
								9500	27.4	21.45	62.20	0.6240	0.04488
								10000	27.8	22.27	64.15	0.6440	0.04482
								10500	28.2	23.08	66.08	0.6638	0.04475
								11000	28.5	23.87	67.99	0.6834	0.04469
								11500	28.9	24.64	69.89	0.7028	0.04463
								12000	29.2	25.39	71.77	0.7221	0.04457
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.27	53.35	0.5523	0.04475
								8500	26.1	20.15	55.41	0.5754	0.04467
								9000	26.5	21.01	57.47	0.5984	0.04459
								9500	26.9	21.86	59.50	0.6211	0.04450
								10000	27.3	22.67	61.52	0.6437	0.04442
								10500	27.7	23.47	63.53	0.6661	0.04434
								11000	28.1	24.24	65.53	0.6884	0.04426
								11500	28.5	25.00	67.52	0.7106	0.04418
								12000	28.8	25.74	69.49	0.7326	0.04410

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.23	50.88	0.6789	0.03953
	8500	24.9	21.10	53.03	0.7119	0.03936
	9000	25.4	21.95	55.16	0.7448	0.03919
	9500	25.8	22.76	57.29	0.7776	0.03903
	10000	26.3	23.55	59.42	0.8102	0.03886
	10500	26.7	24.32	61.53	0.8428	0.03869
	11000	27.2	25.06	63.64	0.8752	0.03853
	11500	27.6	25.78	65.74	0.9076	0.03836
	12000	28.0	26.47	67.83	0.9398	0.03820
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.34	50.07	0.6547	0.03994
	8500	24.8	21.23	52.08	0.6846	0.03982
	9000	25.2	22.10	54.08	0.7143	0.03970
	9500	25.6	22.94	56.08	0.7439	0.03957
	10000	26.0	23.76	58.06	0.7733	0.03945
	10500	26.5	24.55	60.03	0.8026	0.03933
	11000	26.9	25.32	61.99	0.8317	0.03921
	11500	27.3	26.07	63.94	0.8607	0.03909
	12000	27.7	26.80	65.89	0.8895	0.03897

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.93	55.64	0.5568	0.04510
								8500	26.5	19.83	57.62	0.5771	0.04503
								9000	26.9	20.70	59.58	0.5972	0.04497
								9500	27.3	21.55	61.52	0.6171	0.04490
								10000	27.7	22.38	63.45	0.6368	0.04484
								10500	28.0	23.20	65.35	0.6563	0.04478
								11000	28.4	23.99	67.23	0.6756	0.04472
								11500	28.7	24.77	69.10	0.6948	0.04466
								12000	29.1	25.53	70.95	0.7138	0.04459

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.27	53.35	0.5523	0.04475
	8500	26.1	20.15	55.41	0.5754	0.04467
	9000	26.5	21.01	57.47	0.5984	0.04459
	9500	26.9	21.86	59.50	0.6211	0.04450
	10000	27.3	22.67	61.52	0.6437	0.04442
	10500	27.7	23.47	63.53	0.6661	0.04434
	11000	28.1	24.24	65.53	0.6884	0.04426
	11500	28.5	25.00	67.52	0.7106	0.04418
	12000	28.8	25.74	69.49	0.7326	0.04410

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.4	20.28	50.56	0.6739	0.03955
	8500	24.9	21.16	52.69	0.7066	0.03939
	9000	25.3	22.01	54.80	0.7392	0.03922
	9500	25.8	22.83	56.91	0.7717	0.03906
	10000	26.2	23.63	59.02	0.8041	0.03889
	10500	26.6	24.39	61.11	0.8364	0.03873
	11000	27.1	25.14	63.20	0.8685	0.03856
	11500	27.5	25.86	65.29	0.9006	0.03840
	12000	27.9	26.57	67.36	0.9325	0.03824

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.38	49.84	0.6514	0.03996
	8500	24.7	21.28	51.84	0.6811	0.03983
	9000	25.2	22.15	53.83	0.7106	0.03971
	9500	25.6	22.99	55.81	0.7400	0.03959
	10000	26.0	23.81	57.78	0.7692	0.03947
	10500	26.4	24.61	59.74	0.7983	0.03935
	11000	26.8	25.38	61.69	0.8272	0.03923
	11500	27.2	26.13	63.63	0.8560	0.03911
	12000	27.6	26.86	65.56	0.8847	0.03899

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.49	52.66	0.6355	0.03873
								8500	24.6	21.43	54.53	0.6603	0.03864
								9000	24.9	22.34	56.37	0.6848	0.03854
								9500	25.3	23.23	58.20	0.7091	0.03845
								10000	25.7	24.11	60.00	0.7331	0.03835
								10500	26.0	24.95	61.79	0.7569	0.03826
								11000	26.4	25.78	63.57	0.7805	0.03817
								11500	26.8	26.58	65.33	0.8039	0.03808
								12000	27.1	27.38	67.07	0.8270	0.03798
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.7	20.93	49.77	0.6267	0.03855
								8500	24.1	21.86	51.68	0.6544	0.03844
								9000	24.5	22.77	53.57	0.6818	0.03832
								9500	24.9	23.66	55.45	0.7091	0.03820
								10000	25.2	24.51	57.31	0.7362	0.03809
								10500	25.6	25.34	59.17	0.7631	0.03798
								11000	26.0	26.16	61.01	0.7898	0.03786
								11500	26.4	26.95	62.84	0.8164	0.03775
								12000	26.8	27.71	64.66	0.8429	0.03764

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
	8500	24.3	21.64	51.74	0.6388	0.03949
	9000	24.7	22.54	53.64	0.6663	0.03938
	9500	25.1	23.41	55.52	0.6936	0.03927
	10000	25.5	24.26	57.39	0.7208	0.03916
	10500	25.9	25.08	59.25	0.7478	0.03906
	11000	26.3	25.89	61.10	0.7746	0.03895
	11500	26.7	26.67	62.93	0.8012	0.03884
	12000	27.1	27.43	64.76	0.8277	0.03873
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.6	21.96	46.73	0.7806	0.03335
	8500	23.0	22.87	48.67	0.8195	0.03314
	9000	23.4	23.75	50.61	0.8582	0.03293
	9500	23.9	24.61	52.54	0.8968	0.03272
	10000	24.3	25.43	54.46	0.9353	0.03251
	10500	24.8	26.22	56.38	0.9736	0.03230
	11000	25.2	26.99	58.29	1.0118	0.03209
	11500	25.7	27.73	60.19	1.0498	0.03188
	12000	26.1	28.45	62.09	1.0878	0.03167

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.4	22.10	46.09	0.7501	0.03378
								8500	22.8	23.05	47.92	0.7853	0.03361
								9000	23.3	23.96	49.74	0.8203	0.03345
								9500	23.7	24.83	51.55	0.8552	0.03329
								10000	24.1	25.69	53.35	0.8898	0.03312
								10500	24.5	26.52	55.14	0.9243	0.03296
								11000	24.9	27.32	56.92	0.9586	0.03280
								11500	25.3	28.09	58.70	0.9927	0.03265
								12000	25.7	28.84	60.46	1.0267	0.03249
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.58	52.12	0.6282	0.03876
								8500	24.4	21.53	53.96	0.6527	0.03867
								9000	24.8	22.46	55.77	0.6769	0.03857
								9500	25.2	23.35	57.57	0.7008	0.03848

	10000	25.5	24.23	59.35	0.7245	0.03839
	10500	25.9	25.09	61.12	0.7479	0.03829
	11000	26.3	25.92	62.86	0.7711	0.03820
	11500	26.6	26.74	64.60	0.7942	0.03811
	12000	27.0	27.53	66.31	0.8170	0.03802
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.7	20.93	49.77	0.6267	0.03855
	8500	24.1	21.86	51.68	0.6544	0.03844
	9000	24.5	22.77	53.57	0.6818	0.03832
	9500	24.9	23.66	55.45	0.7091	0.03820

	10000	25.2	24.51	57.31	0.7362	0.03809
	10500	25.6	25.34	59.17	0.7631	0.03798
	11000	26.0	26.16	61.01	0.7898	0.03786
	11500	26.4	26.95	62.84	0.8164	0.03775
	12000	26.8	27.71	64.66	0.8429	0.03764
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
	8500	24.3	21.64	51.74	0.6388	0.03949
	9000	24.7	22.54	53.64	0.6663	0.03938
	9500	25.1	23.41	55.52	0.6936	0.03927

	10000	25.5	24.26	57.39	0.7208	0.03916
	10500	25.9	25.08	59.25	0.7478	0.03906
	11000	26.3	25.89	61.10	0.7746	0.03895
	11500	26.7	26.67	62.93	0.8012	0.03884
	12000	27.1	27.43	64.76	0.8277	0.03873
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.5	22.02	46.44	0.7748	0.03338
	8500	22.9	22.95	48.36	0.8133	0.03317
	9000	23.4	23.83	50.28	0.8517	0.03296
	9500	23.8	24.69	52.20	0.8899	0.03275

	10000	24.3	25.51	54.10	0.9281	0.03255
	10500	24.7	26.31	56.00	0.9660	0.03234
	11000	25.1	27.09	57.89	1.0039	0.03213
	11500	25.6	27.83	59.78	1.0416	0.03193
	12000	26.0	28.56	61.66	1.0793	0.03172
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.4	22.15	45.89	0.7461	0.03379
	8500	22.8	23.10	47.71	0.7812	0.03363
	9000	23.2	24.01	49.52	0.8160	0.03347
	9500	23.6	24.89	51.31	0.8506	0.03331

								10000	24.0	25.75	53.10	0.8850	0.03315
								10500	24.4	26.58	54.88	0.9193	0.03299
								11000	24.9	27.38	56.65	0.9534	0.03283
								11500	25.3	28.16	58.41	0.9873	0.03267
								12000	25.7	28.92	60.17	1.0211	0.03251
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.66	54.15	0.6447	0.04103
								8500	25.6	20.57	56.06	0.6681	0.04095
								9000	26.0	21.46	57.96	0.6912	0.04086
								9500	26.3	22.33	59.83	0.7140	0.04077
								10000	26.7	23.18	61.68	0.7367	0.04068
								10500	27.1	24.01	63.51	0.7591	0.04060
								11000	27.4	24.82	65.33	0.7813	0.04052
								11500	27.8	25.61	67.13	0.8033	0.04043

	12000	28.1	26.38	68.92	0.8251	0.04035
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.09	51.23	0.6333	0.04081
	8500	25.1	21.00	53.19	0.6594	0.04070
	9000	25.5	21.89	55.14	0.6853	0.04059
	9500	25.8	22.75	57.07	0.7110	0.04049
	10000	26.2	23.59	58.98	0.7365	0.04038
	10500	26.6	24.41	60.89	0.7619	0.04028
	11000	27.0	25.20	62.78	0.7871	0.04017
	11500	27.4	25.98	64.66	0.8121	0.04007
	12000	27.8	26.73	66.53	0.8370	0.03997
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.89	51.29	0.6166	0.04187
	8500	25.3	20.79	53.25	0.6427	0.04177
	9000	25.7	21.67	55.20	0.6687	0.04166
	9500	26.1	22.53	57.14	0.6945	0.04156
	10000	26.5	23.36	59.06	0.7201	0.04146
	10500	26.9	24.17	60.97	0.7455	0.04136
	11000	27.3	24.96	62.87	0.7707	0.04127
	11500	27.7	25.72	64.76	0.7958	0.04117

	12000	28.0	26.47	66.63	0.8208	0.04107
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.09	48.27	0.7803	0.03554
	8500	23.9	21.98	50.28	0.8172	0.03534
	9000	24.4	22.85	52.28	0.8539	0.03514
	9500	24.8	23.68	54.27	0.8905	0.03495
	10000	25.3	24.49	56.26	0.9270	0.03475
	10500	25.7	25.27	58.24	0.9633	0.03455
	11000	26.1	26.03	60.21	0.9995	0.03435
	11500	26.6	26.76	62.17	1.0356	0.03416
	12000	27.0	27.48	64.13	1.0716	0.03396
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.21	47.59	0.7521	0.03597
	8500	23.8	22.13	49.48	0.7856	0.03582
	9000	24.2	23.03	51.35	0.8188	0.03566
	9500	24.6	23.89	53.22	0.8518	0.03551
	10000	25.0	24.72	55.08	0.8847	0.03536
	10500	25.4	25.54	56.92	0.9173	0.03521
	11000	25.9	26.32	58.76	0.9499	0.03506
	11500	26.3	27.09	60.59	0.9823	0.03491

								12000	26.7	27.83	62.42	1.0145	0.03477
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.0	19.82	53.64	0.5966	0.04158
								8500	25.4	20.74	55.54	0.6193	0.04150
								9000	25.7	21.64	57.42	0.6417	0.04142
								9500	26.1	22.52	59.28	0.6639	0.04134
								10000	26.5	23.38	61.12	0.6859	0.04126
								10500	26.8	24.21	62.95	0.7077	0.04118
								11000	27.2	25.03	64.75	0.7293	0.04110
								11500	27.5	25.83	66.54	0.7506	0.04102

	12000	27.9	26.61	68.32	0.7718	0.04094
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	51.32	0.5938	0.04132
	8500	25.0	21.07	53.29	0.6195	0.04121
	9000	25.4	21.96	55.25	0.6450	0.04111
	9500	25.8	22.82	57.20	0.6704	0.04101
	10000	26.2	23.66	59.13	0.6956	0.04091
	10500	26.5	24.48	61.05	0.7206	0.04081
	11000	26.9	25.27	62.96	0.7454	0.04071
	11500	27.3	26.05	64.86	0.7701	0.04061

	12000	27.7	26.80	66.75	0.7947	0.04051
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	51.36	0.5787	0.04236
	8500	25.2	20.86	53.34	0.6045	0.04226
	9000	25.6	21.74	55.31	0.6301	0.04217
	9500	26.0	22.59	57.26	0.6555	0.04207
	10000	26.4	23.43	59.20	0.6808	0.04197
	10500	26.8	24.23	61.13	0.7059	0.04188
	11000	27.2	25.02	63.04	0.7308	0.04179
	11500	27.6	25.79	64.95	0.7556	0.04169

	12000	28.0	26.54	66.84	0.7802	0.04160
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.3	21.22	48.22	0.7304	0.03613
	8500	23.8	22.12	50.23	0.7665	0.03594
	9000	24.2	22.99	52.24	0.8024	0.03574
	9500	24.7	23.83	54.24	0.8382	0.03555
	10000	25.1	24.64	56.23	0.8738	0.03536
	10500	25.5	25.43	58.21	0.9094	0.03517
	11000	26.0	26.19	60.19	0.9448	0.03499
	11500	26.4	26.93	62.16	0.9801	0.03480

	12000	26.9	27.64	64.13	1.0153	0.03461
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.33	47.60	0.7044	0.03653
	8500	23.6	22.25	49.50	0.7371	0.03639
	9000	24.1	23.15	51.38	0.7697	0.03624
	9500	24.5	24.02	53.26	0.8021	0.03610
	10000	24.9	24.85	55.12	0.8343	0.03596
	10500	25.3	25.67	56.98	0.8663	0.03581
	11000	25.7	26.46	58.83	0.8982	0.03567
	11500	26.1	27.23	60.67	0.9300	0.03553

								12000	26.5	27.97	62.50	0.9616	0.03539
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.17	55.30	0.5827	0.04374
								8500	26.2	20.07	57.28	0.6045	0.04367
								9000	26.6	20.94	59.23	0.6261	0.04359
								9500	27.0	21.80	61.16	0.6474	0.04352
								10000	27.4	22.63	63.08	0.6686	0.04345
								10500	27.7	23.44	64.97	0.6895	0.04338
								11000	28.1	24.24	66.85	0.7102	0.04331
								11500	28.4	25.02	68.71	0.7307	0.04323
								12000	28.8	25.78	70.55	0.7511	0.04316
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.59	52.42	0.5726	0.04345
								8500	25.7	20.48	54.45	0.5970	0.04336
								9000	26.1	21.35	56.46	0.6212	0.04327
								9500	26.5	22.20	58.46	0.6452	0.04318
								10000	26.9	23.03	60.44	0.6690	0.04309
								10500	27.3	23.83	62.41	0.6927	0.04300
								11000	27.7	24.61	64.36	0.7163	0.04291

	11500	28.0	25.37	66.31	0.7397	0.04282
	12000	28.4	26.12	68.24	0.7630	0.04273
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	52.46	0.5579	0.04450
	8500	26.0	20.28	54.50	0.5824	0.04441
	9000	26.4	21.14	56.51	0.6067	0.04432
	9500	26.8	21.99	58.51	0.6308	0.04423
	10000	27.1	22.80	60.50	0.6547	0.04415
	10500	27.5	23.60	62.48	0.6785	0.04406
	11000	27.9	24.37	64.44	0.7021	0.04398
	11500	28.3	25.13	66.39	0.7256	0.04390
	12000	28.7	25.87	68.33	0.7489	0.04381
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.56	49.81	0.7061	0.03821
	8500	24.5	21.44	51.91	0.7408	0.03803
	9000	25.0	22.30	53.99	0.7753	0.03785
	9500	25.4	23.12	56.07	0.8097	0.03767
	10000	25.9	23.92	58.14	0.8440	0.03749
	10500	26.3	24.68	60.20	0.8781	0.03732
	11000	26.8	25.43	62.26	0.9122	0.03714

								11500	27.2	26.15	64.31	0.9461	0.03696
								12000	27.6	26.85	66.35	0.9800	0.03679
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.68	49.04	0.6803	0.03863
								8500	24.4	21.59	51.01	0.7117	0.03849
								9000	24.8	22.46	52.97	0.7429	0.03836
								9500	25.2	23.31	54.91	0.7739	0.03823
								10000	25.6	24.14	56.84	0.8048	0.03809
								10500	26.1	24.93	58.77	0.8355	0.03796
								11000	26.5	25.71	60.68	0.8661	0.03783
								11500	26.9	26.46	62.59	0.8965	0.03770
								12000	27.3	27.19	64.49	0.9268	0.03757
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.8	19.18	54.69	0.6177	0.04323
								8500	26.2	20.09	56.62	0.6395	0.04315
								9000	26.6	20.97	58.53	0.6611	0.04307

		9500	26.9	21.83	60.42	0.6825	0.04300
		10000	27.3	22.67	62.29	0.7036	0.04292
		10500	27.7	23.49	64.14	0.7245	0.04284
		11000	28.0	24.29	65.97	0.7452	0.04277
		11500	28.4	25.08	67.79	0.7658	0.04270
		12000	28.7	25.84	69.60	0.7862	0.04262
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	52.35	0.6122	0.04293
		8500	25.8	20.42	54.36	0.6369	0.04284
		9000	26.2	21.29	56.35	0.6615	0.04274

		9500	26.6	22.14	58.33	0.6859	0.04264
		10000	27.0	22.96	60.30	0.7101	0.04255
		10500	27.3	23.77	62.25	0.7341	0.04245
		11000	27.7	24.55	64.19	0.7580	0.04236
		11500	28.1	25.31	66.12	0.7818	0.04226
		12000	28.5	26.06	68.03	0.8054	0.04217
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.33	52.40	0.5958	0.04399
		8500	26.0	20.22	54.41	0.6207	0.04390
		9000	26.4	21.08	56.41	0.6453	0.04381

	9500	26.8	21.92	58.40	0.6697	0.04372
	10000	27.2	22.74	60.37	0.6940	0.04363
	10500	27.6	23.54	62.33	0.7181	0.04354
	11000	28.0	24.31	64.28	0.7421	0.04345
	11500	28.4	25.07	66.21	0.7659	0.04336
	12000	28.8	25.81	68.13	0.7896	0.04327
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.56	49.26	0.7453	0.03767
	8500	24.5	21.44	51.31	0.7801	0.03749
	9000	25.0	22.30	53.35	0.8148	0.03730

	9500	25.4	23.13	55.39	0.8494	0.03712
	10000	25.9	23.93	57.42	0.8839	0.03694
	10500	26.3	24.71	59.44	0.9182	0.03675
	11000	26.7	25.46	61.46	0.9524	0.03657
	11500	27.2	26.19	63.47	0.9865	0.03639
	12000	27.6	26.89	65.47	1.0206	0.03621
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.65	48.61	0.7208	0.03808
	8500	24.4	21.56	50.55	0.7525	0.03794
	9000	24.8	22.44	52.47	0.7839	0.03780

								9500	25.2	23.30	54.38	0.8152	0.03766
								10000	25.7	24.12	56.28	0.8463	0.03753
								10500	26.1	24.93	58.17	0.8773	0.03739
								11000	26.5	25.71	60.05	0.9081	0.03725
								11500	26.9	26.46	61.93	0.9388	0.03712
								12000	27.3	27.20	63.79	0.9693	0.03698
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.21	55.32	0.5811	0.04361
								8500	26.2	20.11	57.30	0.6029	0.04353
								9000	26.5	20.98	59.25	0.6244	0.04346
								9500	26.9	21.84	61.19	0.6456	0.04339
								10000	27.3	22.67	63.10	0.6667	0.04332
								10500	27.7	23.49	64.99	0.6875	0.04324

	11000	28.0	24.29	66.87	0.7082	0.04317
	11500	28.4	25.07	68.73	0.7286	0.04310
	12000	28.7	25.83	70.58	0.7489	0.04303
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.44	0.5710	0.04332
	8500	25.6	20.52	54.47	0.5953	0.04323
	9000	26.0	21.40	56.48	0.6195	0.04313
	9500	26.4	22.25	58.48	0.6434	0.04304
	10000	26.8	23.07	60.46	0.6672	0.04295
	10500	27.2	23.88	62.43	0.6908	0.04286
	11000	27.6	24.66	64.39	0.7143	0.04277
	11500	28.0	25.42	66.33	0.7376	0.04269
	12000	28.4	26.17	68.27	0.7608	0.04260
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	52.48	0.5564	0.04436
	8500	25.9	20.32	54.51	0.5808	0.04427
	9000	26.3	21.19	56.53	0.6050	0.04418
	9500	26.7	22.03	58.53	0.6290	0.04410
	10000	27.1	22.85	60.52	0.6529	0.04401
	10500	27.5	23.64	62.50	0.6766	0.04393

	11000	27.9	24.42	64.46	0.7001	0.04385
	11500	28.3	25.18	66.41	0.7235	0.04376
	12000	28.7	25.92	68.35	0.7468	0.04368
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.60	49.83	0.7045	0.03809
	8500	24.5	21.49	51.93	0.7390	0.03791
	9000	24.9	22.34	54.01	0.7735	0.03773
	9500	25.4	23.16	56.09	0.8078	0.03755
	10000	25.8	23.96	58.16	0.8420	0.03738
	10500	26.3	24.73	60.23	0.8760	0.03720
	11000	26.7	25.48	62.28	0.9100	0.03702
	11500	27.2	26.20	64.34	0.9438	0.03684
	12000	27.6	26.90	66.38	0.9776	0.03667
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.72	49.06	0.6787	0.03851
	8500	24.3	21.63	51.03	0.7100	0.03837
	9000	24.8	22.51	52.99	0.7411	0.03824
	9500	25.2	23.36	54.93	0.7721	0.03811
	10000	25.6	24.18	56.87	0.8028	0.03797
	10500	26.0	24.98	58.79	0.8335	0.03784

								11000	26.4	25.76	60.71	0.8640	0.03771
								11500	26.8	26.51	62.61	0.8943	0.03758
								12000	27.2	27.25	64.51	0.9245	0.03745
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.29	54.75	0.5748	0.04363
								8500	26.1	20.20	56.69	0.5962	0.04356
								9000	26.4	21.08	58.62	0.6174	0.04348
								9500	26.8	21.95	60.52	0.6383	0.04341
								10000	27.2	22.79	62.41	0.6591	0.04334
								10500	27.5	23.61	64.28	0.6796	0.04327
								11000	27.9	24.41	66.13	0.7000	0.04320

	11500	28.2	25.20	67.96	0.7202	0.04313
	12000	28.6	25.97	69.78	0.7402	0.04306
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.63	52.44	0.5710	0.04332
	8500	25.6	20.52	54.47	0.5953	0.04323
	9000	26.0	21.40	56.48	0.6195	0.04313
	9500	26.4	22.25	58.48	0.6434	0.04304
	10000	26.8	23.07	60.46	0.6672	0.04295
	10500	27.2	23.88	62.43	0.6908	0.04286
	11000	27.6	24.66	64.39	0.7143	0.04277

	11500	28.0	25.42	66.33	0.7376	0.04269
	12000	28.4	26.17	68.27	0.7608	0.04260
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	52.48	0.5564	0.04436
	8500	25.9	20.32	54.51	0.5808	0.04427
	9000	26.3	21.19	56.53	0.6050	0.04418
	9500	26.7	22.03	58.53	0.6290	0.04410
	10000	27.1	22.85	60.52	0.6529	0.04401
	10500	27.5	23.64	62.50	0.6766	0.04393
	11000	27.9	24.42	64.46	0.7001	0.04385

	11500	28.3	25.18	66.41	0.7235	0.04376
	12000	28.7	25.92	68.35	0.7468	0.04368
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.66	49.52	0.6993	0.03812
	8500	24.4	21.55	51.59	0.7335	0.03794
	9000	24.9	22.41	53.66	0.7677	0.03776
	9500	25.3	23.24	55.72	0.8017	0.03758
	10000	25.7	24.04	57.77	0.8355	0.03741
	10500	26.2	24.82	59.82	0.8693	0.03723
	11000	26.6	25.57	61.86	0.9030	0.03706

	11500	27.1	26.30	63.89	0.9365	0.03688
	12000	27.5	27.00	65.92	0.9700	0.03671
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.76	48.84	0.6752	0.03852
	8500	24.3	21.67	50.80	0.7063	0.03839
	9000	24.7	22.55	52.74	0.7372	0.03826
	9500	25.1	23.41	54.68	0.7680	0.03812
	10000	25.5	24.24	56.60	0.7986	0.03799
	10500	25.9	25.04	58.51	0.8290	0.03786
	11000	26.4	25.82	60.41	0.8593	0.03773

								11500	26.8	26.58	62.31	0.8894	0.03760
								12000	27.2	27.31	64.20	0.9195	0.03747
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | TREMOR VARIANT	6.7L DIESEL	10R100/140-TREMOR	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/75R18MT GOODYEAR (WD) / D3HFW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	28.0	17.69	58.91	0.8067	0.04427
								8500	28.6	18.42	61.48	0.8530	0.04405
								9000	29.1	19.11	64.03	0.8990	0.04383
								9500	29.7	19.79	66.57	0.9447	0.04361
								10000	30.3	20.44	69.10	0.9902	0.04339
								10500	30.8	21.06	71.62	1.0356	0.04317
								11000	31.4	21.67	74.12	1.0807	0.04295
								11500	32.0	22.26	76.61	1.1256	0.04274
								12000	32.5	22.82	79.10	1.1703	0.04252
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | TREMOR VARIANT	6.7L DIESEL	10R100/140-TREMOR	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/75R18MT GOODYEAR (WD) / D3HFW AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	27.9	17.72	58.58	0.7937	0.04453
								8500	28.5	18.45	61.13	0.8392	0.04431
								9000	29.1	19.15	63.67	0.8845	0.04409
								9500	29.6	19.83	66.19	0.9295	0.04388
								10000	30.2	20.48	68.69	0.9743	0.04366
								10500	30.8	21.12	71.19	1.0189	0.04345
								11000	31.3	21.73	73.67	1.0632	0.04324

								11500	31.9	22.32	76.15	1.1074	0.04302
								12000	32.4	22.89	78.61	1.1514	0.04281
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.7	17.85	57.61	0.8273	0.04362
								8500	28.3	18.60	60.03	0.8694	0.04344
								9000	28.8	19.33	62.43	0.9113	0.04326
								9500	29.4	20.02	64.83	0.9529	0.04309
								10000	29.9	20.70	67.20	0.9943	0.04291
								10500	30.4	21.36	69.57	1.0354	0.04273
								11000	31.0	21.99	71.92	1.0764	0.04256
								11500	31.5	22.60	74.26	1.1171	0.04239
								12000	32.0	23.20	76.60	1.1577	0.04221
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.7	17.89	57.34	0.8227	0.04364
								8500	28.2	18.65	59.75	0.8645	0.04346
								9000	28.8	19.37	62.14	0.9062	0.04328

								9500	29.3	20.07	64.52	0.9475	0.04311
								10000	29.8	20.75	66.88	0.9887	0.04293
								10500	30.3	21.41	69.23	1.0296	0.04276
								11000	30.9	22.04	71.57	1.0703	0.04259
								11500	31.4	22.66	73.90	1.1108	0.04241
								12000	31.9	23.26	76.22	1.1511	0.04224
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	25.7	19.29	53.06	0.8999	0.03777
								8500	26.2	20.07	55.27	0.9480	0.03755
								9000	26.7	20.82	57.47	0.9958	0.03733
								9500	27.3	21.55	59.66	1.0433	0.03711
								10000	27.8	22.24	61.83	1.0906	0.03690
								10500	28.3	22.92	63.99	1.1376	0.03668

								11000	28.9	23.57	66.15	1.1843	0.03647
								11500	29.4	24.20	68.29	1.2308	0.03625
								12000	29.9	24.81	70.42	1.2772	0.03604
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.34	52.82	0.8947	0.03779
								8500	26.1	20.12	55.02	0.9425	0.03757
								9000	26.7	20.88	57.20	0.9900	0.03736
								9500	27.2	21.60	59.38	1.0372	0.03714
								10000	27.7	22.30	61.54	1.0842	0.03693
								10500	28.3	22.98	63.69	1.1309	0.03671
								11000	28.8	23.63	65.83	1.1774	0.03650

								11500	29.3	24.27	67.95	1.2236	0.03629
								12000	29.8	24.88	70.07	1.2696	0.03608
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.6	18.60	55.13	0.8513	0.04078
								8500	27.2	19.37	57.44	0.8967	0.04058
								9000	27.7	20.10	59.74	0.9419	0.04038
								9500	28.2	20.82	62.03	0.9868	0.04018
								10000	28.8	21.50	64.30	1.0315	0.03998
								10500	29.3	22.17	66.56	1.0759	0.03978
								11000	29.8	22.81	68.81	1.1201	0.03959
								11500	30.4	23.43	71.05	1.1641	0.03940
								12000	30.9	24.03	73.27	1.2079	0.03920
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.6	18.65	54.88	0.8463	0.04080
								8500	27.1	19.41	57.18	0.8915	0.04060

								9000	27.6	20.15	59.46	0.9364	0.04040
								9500	28.2	20.87	61.73	0.9810	0.04020
								10000	28.7	21.56	63.99	1.0254	0.04001
								10500	29.2	22.22	66.24	1.0696	0.03981
								11000	29.8	22.87	68.47	1.1135	0.03962
								11500	30.3	23.49	70.70	1.1572	0.03943
								12000	30.8	24.10	72.91	1.2008	0.03923
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.3	18.14	56.65	0.8162	0.04292
								8500	27.8	18.89	59.04	0.8596	0.04273
								9000	28.4	19.62	61.41	0.9029	0.04255
								9500	28.9	20.32	63.77	0.9458	0.04236

								10000	29.5	21.00	66.11	0.9885	0.04218
								10500	30.0	21.66	68.44	1.0310	0.04200
								11000	30.5	22.29	70.76	1.0733	0.04182
								11500	31.1	22.91	73.07	1.1154	0.04164
								12000	31.6	23.50	75.37	1.1573	0.04146
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.18	56.39	0.8114	0.04294
								8500	27.8	18.94	58.76	0.8546	0.04275
								9000	28.3	19.67	61.12	0.8976	0.04257
								9500	28.9	20.37	63.46	0.9403	0.04239
								10000	29.4	21.05	65.79	0.9828	0.04220
								10500	29.9	21.71	68.11	1.0250	0.04202

								11000	30.4	22.35	70.42	1.0670	0.04184
								11500	31.0	22.97	72.71	1.1088	0.04166
								12000	31.5	23.57	74.99	1.1505	0.04149
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.18	56.68	0.8143	0.04278
								8500	27.8	18.93	59.06	0.8576	0.04260
								9000	28.3	19.66	61.43	0.9007	0.04241
								9500	28.9	20.36	63.79	0.9436	0.04223
								10000	29.4	21.04	66.14	0.9862	0.04205
								10500	29.9	21.70	68.47	1.0286	0.04187
								11000	30.5	22.33	70.79	1.0707	0.04169
								11500	31.0	22.95	73.10	1.1127	0.04151
								12000	31.5	23.55	75.40	1.1544	0.04133
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -] | OFF ROAD VARIANT	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.18	56.10	0.8528	0.04222

								8500	27.8	18.94	58.45	0.8965	0.04202
								9000	28.3	19.67	60.78	0.9398	0.04183
								9500	28.8	20.38	63.10	0.9829	0.04164
								10000	29.4	21.06	65.40	1.0258	0.04146
								10500	29.9	21.72	67.70	1.0685	0.04127
								11000	30.4	22.36	69.98	1.1109	0.04108
								11500	31.0	22.98	72.25	1.1531	0.04090
								12000	31.5	23.59	74.51	1.1951	0.04071
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.1	17.65	51.37	0.9158	0.04533
								8500	28.5	18.44	53.53	0.9558	0.04510

								9000	29.0	19.20	55.68	0.9956	0.04487
								9500	29.5	19.94	57.83	1.0353	0.04465
								10000	30.0	20.66	59.96	1.0748	0.04442
								10500	30.4	21.35	62.09	1.1142	0.04420
								11000	30.9	22.03	64.21	1.1535	0.04397
								11500	31.4	22.68	66.32	1.1926	0.04375
								12000	31.8	23.32	68.43	1.2316	0.04353
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.0	17.71	50.83	0.8915	0.04576
								8500	28.4	18.51	52.87	0.9280	0.04559
								9000	28.9	19.29	54.90	0.9643	0.04541
								9500	29.3	20.05	56.91	1.0004	0.04523
								10000	29.8	20.78	58.92	1.0363	0.04506
								10500	30.2	21.50	60.92	1.0720	0.04488
								11000	30.7	22.20	62.90	1.1075	0.04471
								11500	31.1	22.87	64.88	1.1429	0.04454
								12000	31.6	23.53	66.85	1.1781	0.04437
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.1	17.65	51.37	0.9158	0.04533

	8500	28.5	18.44	53.53	0.9558	0.04510
	9000	29.0	19.20	55.68	0.9956	0.04487
	9500	29.5	19.94	57.83	1.0353	0.04465
	10000	30.0	20.66	59.96	1.0748	0.04442
	10500	30.4	21.35	62.09	1.1142	0.04420
	11000	30.9	22.03	64.21	1.1535	0.04397
	11500	31.4	22.68	66.32	1.1926	0.04375
	12000	31.8	23.32	68.43	1.2316	0.04353
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.0	17.71	50.83	0.8915	0.04576

								8500	28.4	18.51	52.87	0.9280	0.04559
								9000	28.9	19.29	54.90	0.9643	0.04541
								9500	29.3	20.05	56.91	1.0004	0.04523
								10000	29.8	20.78	58.92	1.0363	0.04506
								10500	30.2	21.50	60.92	1.0720	0.04488
								11000	30.7	22.20	62.90	1.1075	0.04471
								11500	31.1	22.87	64.88	1.1429	0.04454
								12000	31.6	23.53	66.85	1.1781	0.04437
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.7	18.52	48.74	0.9767	0.04121
								8500	27.2	19.33	50.78	1.0204	0.04095

								9000	27.7	20.11	52.80	1.0639	0.04070
								9500	28.2	20.87	54.82	1.1072	0.04044
								10000	28.6	21.61	56.83	1.1504	0.04019
								10500	29.1	22.32	58.83	1.1935	0.03994
								11000	29.6	23.01	60.82	1.2364	0.03969
								11500	30.0	23.68	62.81	1.2792	0.03944
								12000	30.5	24.33	64.80	1.3218	0.03919
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.6	18.59	48.30	0.9487	0.04164
								8500	27.1	19.42	50.22	0.9886	0.04144
								9000	27.6	20.22	52.13	1.0283	0.04124
								9500	28.0	21.00	54.03	1.0677	0.04104
								10000	28.4	21.76	55.93	1.1069	0.04084
								10500	28.9	22.49	57.81	1.1460	0.04064
								11000	29.3	23.21	59.68	1.1848	0.04044
								11500	29.8	23.90	61.55	1.2235	0.04024
								12000	30.2	24.57	63.40	1.2620	0.04005
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.1	12.4" (315 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	26.7	18.52	48.74	0.9767	0.04121

	8500	27.2	19.33	50.78	1.0204	0.04095
	9000	27.7	20.11	52.80	1.0639	0.04070
	9500	28.2	20.87	54.82	1.1072	0.04044
	10000	28.6	21.61	56.83	1.1504	0.04019
	10500	29.1	22.32	58.83	1.1935	0.03994
	11000	29.6	23.01	60.82	1.2364	0.03969
	11500	30.0	23.68	62.81	1.2792	0.03944
	12000	30.5	24.33	64.80	1.3218	0.03919
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	26.6	18.59	48.30	0.9487	0.04164

								8500	27.1	19.42	50.22	0.9886	0.04144
								9000	27.6	20.22	52.13	1.0283	0.04124
								9500	28.0	21.00	54.03	1.0677	0.04104
								10000	28.4	21.76	55.93	1.1069	0.04084
								10500	28.9	22.49	57.81	1.1460	0.04064
								11000	29.3	23.21	59.68	1.1848	0.04044
								11500	29.8	23.90	61.55	1.2235	0.04024
								12000	30.2	24.57	63.40	1.2620	0.04005
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	29.3	16.92	55.85	0.7790	0.04994
								8500	29.8	17.68	58.12	0.8090	0.04987

								9000	30.2	18.43	60.39	0.8389	0.04980
								9500	30.7	19.14	62.64	0.8687	0.04974
								10000	31.2	19.84	64.90	0.8985	0.04967
								10500	31.7	20.52	67.14	0.9281	0.04961
								11000	32.1	21.18	69.38	0.9577	0.04954
								11500	32.6	21.82	71.61	0.9872	0.04947
								12000	33.1	22.44	73.84	1.0166	0.04941
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	29.3	16.92	55.85	0.7790	0.04994
								8500	29.8	17.68	58.12	0.8090	0.04987
								9000	30.2	18.43	60.39	0.8389	0.04980
								9500	30.7	19.14	62.64	0.8687	0.04974
								10000	31.2	19.84	64.90	0.8985	0.04967

								10500	31.7	20.52	67.14	0.9281	0.04961
								11000	32.1	21.18	69.38	0.9577	0.04954
								11500	32.6	21.82	71.61	0.9872	0.04947
								12000	33.1	22.44	73.84	1.0166	0.04941
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.1	17.65	54.34	0.8011	0.04646
								8500	28.6	18.43	56.53	0.8329	0.04638
								9000	29.0	19.20	58.72	0.8646	0.04630
								9500	29.5	19.93	60.91	0.8961	0.04622
								10000	30.0	20.65	63.09	0.9276	0.04614
								10500	30.5	21.34	65.26	0.9591	0.04607
								11000	30.9	22.02	67.43	0.9904	0.04599
								11500	31.4	22.67	69.59	1.0216	0.04591
								12000	31.9	23.31	71.74	1.0528	0.04583

USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 450 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	4.3	12.4" (315 MM) AXLE SIZE	F450-550-600_POWR 4 - WHEEL DISC HYDRO BOOST	NONDRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 90 PSI. || DRIVEN: LT225/70R19AT CONTINENTAL (COMM_F450) / D3IGL AT 80 PSI.	8000	28.1	17.65	54.34	0.8011	0.04646
								8500	28.6	18.43	56.53	0.8329	0.04638
								9000	29.0	19.20	58.72	0.8646	0.04630
								9500	29.5	19.93	60.91	0.8961	0.04622
								10000	30.0	20.65	63.09	0.9276	0.04614
								10500	30.5	21.34	65.26	0.9591	0.04607
								11000	30.9	22.02	67.43	0.9904	0.04599
								11500	31.4	22.67	69.59	1.0216	0.04591
								12000	31.9	23.31	71.74	1.0528	0.04583

MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.5	21.08	50.43	0.4145	0.04203
								8500	23.9	22.01	52.41	0.4412	0.04194
								9000	24.3	22.91	54.38	0.4677	0.04184
								9500	24.7	23.79	56.33	0.4941	0.04175
								10000	25.1	24.64	58.27	0.5202	0.04166
								10500	25.5	25.46	60.19	0.5462	0.04156
								11000	25.9	26.27	62.10	0.5720	0.04147
								11500	26.3	27.05	64.00	0.5977	0.04138
								12000	26.7	27.81	65.89	0.6232	0.04129
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.5	21.08	50.43	0.4145	0.04203
								8500	23.9	22.01	52.41	0.4412	0.04194
								9000	24.3	22.91	54.38	0.4677	0.04184
								9500	24.7	23.79	56.33	0.4941	0.04175

								10000	25.1	24.64	58.27	0.5202	0.04166
								10500	25.5	25.46	60.19	0.5462	0.04156
								11000	25.9	26.27	62.10	0.5720	0.04147
								11500	26.3	27.05	64.00	0.5977	0.04138
								12000	26.7	27.81	65.89	0.6232	0.04129
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.80	49.92	0.5622	0.04022
								8500	24.2	21.73	51.86	0.5895	0.04012
								9000	24.6	22.63	53.78	0.6166	0.04001
								9500	25.0	23.50	55.68	0.6435	0.03991
								10000	25.4	24.36	57.58	0.6702	0.03980
								10500	25.8	25.18	59.46	0.6967	0.03970
								11000	26.2	25.98	61.32	0.7230	0.03960
								11500	26.6	26.77	63.18	0.7492	0.03950

								12000	27.0	27.53	65.03	0.7753	0.03940
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.80	49.92	0.5622	0.04022
								8500	24.2	21.73	51.86	0.5895	0.04012
								9000	24.6	22.63	53.78	0.6166	0.04001
								9500	25.0	23.50	55.68	0.6435	0.03991
								10000	25.4	24.36	57.58	0.6702	0.03980
								10500	25.8	25.18	59.46	0.6967	0.03970
								11000	26.2	25.98	61.32	0.7230	0.03960
								11500	26.6	26.77	63.18	0.7492	0.03950
								12000	27.0	27.53	65.03	0.7753	0.03940
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
								8500	24.3	21.64	51.74	0.6388	0.03949
								9000	24.7	22.54	53.64	0.6663	0.03938
								9500	25.1	23.41	55.52	0.6936	0.03927
								10000	25.5	24.26	57.39	0.7208	0.03916
								10500	25.9	25.08	59.25	0.7478	0.03906
								11000	26.3	25.89	61.10	0.7746	0.03895
								11500	26.7	26.67	62.93	0.8012	0.03884

								12000	27.1	27.43	64.76	0.8277	0.03873
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L 4V HPCR V8 T/C DSL 400HP	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
								8500	24.3	21.64	51.74	0.6388	0.03949
								9000	24.7	22.54	53.64	0.6663	0.03938
								9500	25.1	23.41	55.52	0.6936	0.03927
								10000	25.5	24.26	57.39	0.7208	0.03916
								10500	25.9	25.08	59.25	0.7478	0.03906
								11000	26.3	25.89	61.10	0.7746	0.03895
								11500	26.7	26.67	62.93	0.8012	0.03884
								12000	27.1	27.43	64.76	0.8277	0.03873
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.80	49.92	0.5622	0.04022
								8500	24.2	21.73	51.86	0.5895	0.04012
								9000	24.6	22.63	53.78	0.6166	0.04001
								9500	25.0	23.50	55.68	0.6435	0.03991
								10000	25.4	24.36	57.58	0.6702	0.03980
								10500	25.8	25.18	59.46	0.6967	0.03970
								11000	26.2	25.98	61.32	0.7230	0.03960
								11500	26.6	26.77	63.18	0.7492	0.03950

								12000	27.0	27.53	65.03	0.7753	0.03940
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.31	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.8	20.80	49.92	0.5622	0.04022
								8500	24.2	21.73	51.86	0.5895	0.04012
								9000	24.6	22.63	53.78	0.6166	0.04001
								9500	25.0	23.50	55.68	0.6435	0.03991
								10000	25.4	24.36	57.58	0.6702	0.03980
								10500	25.8	25.18	59.46	0.6967	0.03970
								11000	26.2	25.98	61.32	0.7230	0.03960
								11500	26.6	26.77	63.18	0.7492	0.03950

								12000	27.0	27.53	65.03	0.7753	0.03940
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
								8500	24.3	21.64	51.74	0.6388	0.03949
								9000	24.7	22.54	53.64	0.6663	0.03938
								9500	25.1	23.41	55.52	0.6936	0.03927
								10000	25.5	24.26	57.39	0.7208	0.03916
								10500	25.9	25.08	59.25	0.7478	0.03906
								11000	26.3	25.89	61.10	0.7746	0.03895
								11500	26.7	26.67	62.93	0.8012	0.03884
								12000	27.1	27.43	64.76	0.8277	0.03873
MEXICO | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | [Frontal Area -]	6.7L DIESEL	11.6/DANA-4X4 DFH	4X4	3.55	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.71	49.82	0.6110	0.03961
								8500	24.3	21.64	51.74	0.6388	0.03949
								9000	24.7	22.54	53.64	0.6663	0.03938

9500	25.1	23.41	55.52	0.6936	0.03927
10000	25.5	24.26	57.39	0.7208	0.03916
10500	25.9	25.08	59.25	0.7478	0.03906
11000	26.3	25.89	61.10	0.7746	0.03895
11500	26.7	26.67	62.93	0.8012	0.03884
12000	27.1	27.43	64.76	0.8277	0.03873

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P708GAS

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P708GAS TRLHP Chart	2026	P708GAS	01/07/2026	EROMER31	26P708GAS-3.1	10R100/140 Transmissions Require Coastdown Mode.

Vehicle Description								TRLHP Specification					
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.55	56.39	0.2674	0.04441
								8500	24.5	21.48	58.45	0.2867	0.04437
								9000	24.9	22.39	60.49	0.3057	0.04433
								9500	25.3	23.28	62.51	0.3245	0.04429
								10000	25.6	24.14	64.51	0.3431	0.04425

	10500	26.0	24.98	66.49	0.3615	0.04421
	11000	26.4	25.80	68.45	0.3798	0.04417
	11500	26.7	26.60	70.40	0.3979	0.04413
	12000	27.1	27.38	72.33	0.4159	0.04409
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.6	21.89	52.22	0.3886	0.03920
	8500	23.1	22.79	54.46	0.4200	0.03907
	9000	23.5	23.66	56.70	0.4512	0.03893
	9500	24.0	24.49	58.92	0.4824	0.03879
	10000	24.5	25.30	61.13	0.5134	0.03866

		10500	24.9	26.08	63.34	0.5443	0.03852
		11000	25.4	26.82	65.54	0.5751	0.03839
		11500	25.8	27.55	67.73	0.6058	0.03826
		12000	26.3	28.25	69.92	0.6364	0.03812
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.4	22.06	51.19	0.3623	0.03962
		8500	22.9	23.00	53.29	0.3905	0.03952
		9000	23.3	23.89	55.37	0.4186	0.03943
		9500	23.7	24.76	57.44	0.4466	0.03934
		10000	24.2	25.59	59.50	0.4743	0.03925

								10500	24.6	26.40	61.55	0.5020	0.03916
								11000	25.0	27.19	63.60	0.5295	0.03906
								11500	25.5	27.95	65.63	0.5569	0.03897
								12000	25.9	28.69	67.65	0.5842	0.03888
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.55	56.39	0.2674	0.04441
								8500	24.5	21.48	58.45	0.2867	0.04437
								9000	24.9	22.39	60.49	0.3057	0.04433
								9500	25.3	23.28	62.51	0.3245	0.04429
								10000	25.6	24.14	64.51	0.3431	0.04425
								10500	26.0	24.98	66.49	0.3615	0.04421
								11000	26.4	25.80	68.45	0.3798	0.04417
								11500	26.7	26.60	70.40	0.3979	0.04413
								12000	27.1	27.38	72.33	0.4159	0.04409
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.6	21.89	52.22	0.3886	0.03920

	8500	23.1	22.79	54.46	0.4200	0.03907
	9000	23.5	23.66	56.70	0.4512	0.03893
	9500	24.0	24.49	58.92	0.4824	0.03879
	10000	24.5	25.30	61.13	0.5134	0.03866
	10500	24.9	26.08	63.34	0.5443	0.03852
	11000	25.4	26.82	65.54	0.5751	0.03839
	11500	25.8	27.55	67.73	0.6058	0.03826
	12000	26.3	28.25	69.92	0.6364	0.03812
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.4	22.06	51.19	0.3623	0.03962
	8500	22.9	23.00	53.29	0.3905	0.03952
	9000	23.3	23.89	55.37	0.4186	0.03943
	9500	23.7	24.76	57.44	0.4466	0.03934
	10000	24.2	25.59	59.50	0.4743	0.03925
	10500	24.6	26.40	61.55	0.5020	0.03916
	11000	25.0	27.19	63.60	0.5295	0.03906
	11500	25.5	27.95	65.63	0.5569	0.03897
	12000	25.9	28.69	67.65	0.5842	0.03888

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	55.83	0.2859	0.04679
								8500	25.3	20.77	57.87	0.3062	0.04674
								9000	25.7	21.66	59.89	0.3264	0.04669
								9500	26.1	22.53	61.88	0.3463	0.04664
								10000	26.5	23.37	63.86	0.3660	0.04659
								10500	26.9	24.20	65.81	0.3856	0.04654
								11000	27.2	25.00	67.75	0.4049	0.04649
								11500	27.6	25.79	69.67	0.4241	0.04644
								12000	28.0	26.55	71.57	0.4431	0.04640

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	55.83	0.2859	0.04679
								8500	25.3	20.77	57.87	0.3062	0.04674
								9000	25.7	21.66	59.89	0.3264	0.04669
								9500	26.1	22.53	61.88	0.3463	0.04664
								10000	26.5	23.37	63.86	0.3660	0.04659
								10500	26.9	24.20	65.81	0.3856	0.04654
								11000	27.2	25.00	67.75	0.4049	0.04649
								11500	27.6	25.79	69.67	0.4241	0.04644
								12000	28.0	26.55	71.57	0.4431	0.04640
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.88	55.60	0.3035	0.04644
								8500	25.3	20.79	57.63	0.3249	0.04638
								9000	25.7	21.68	59.64	0.3460	0.04632
								9500	26.1	22.54	61.63	0.3669	0.04627

	10000	26.5	23.39	63.59	0.3876	0.04621
	10500	26.8	24.21	65.54	0.4081	0.04616
	11000	27.2	25.01	67.47	0.4284	0.04610
	11500	27.6	25.79	69.38	0.4485	0.04605
	12000	28.0	26.56	71.28	0.4684	0.04599
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.19	51.33	0.4296	0.04099
	8500	23.8	22.07	53.53	0.4639	0.04083
	9000	24.3	22.92	55.71	0.4980	0.04068
	9500	24.8	23.74	57.89	0.5320	0.04052

	10000	25.2	24.53	60.06	0.5659	0.04036
	10500	25.7	25.29	62.22	0.5996	0.04020
	11000	26.2	26.02	64.37	0.6333	0.04005
	11500	26.6	26.74	66.52	0.6668	0.03989
	12000	27.1	27.42	68.67	0.7003	0.03974
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.36	50.34	0.4012	0.04141
	8500	23.6	22.27	52.39	0.4321	0.04129
	9000	24.1	23.15	54.43	0.4628	0.04118
	9500	24.5	23.99	56.46	0.4934	0.04107

								10000	24.9	24.81	58.48	0.5238	0.04096
								10500	25.4	25.61	60.49	0.5540	0.04085
								11000	25.8	26.38	62.49	0.5841	0.04074
								11500	26.2	27.12	64.48	0.6141	0.04063
								12000	26.7	27.85	66.46	0.6439	0.04052
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.88	55.60	0.3035	0.04644
								8500	25.3	20.79	57.63	0.3249	0.04638
								9000	25.7	21.68	59.64	0.3460	0.04632
								9500	26.1	22.54	61.63	0.3669	0.04627
								10000	26.5	23.39	63.59	0.3876	0.04621
								10500	26.8	24.21	65.54	0.4081	0.04616
								11000	27.2	25.01	67.47	0.4284	0.04610
								11500	27.6	25.79	69.38	0.4485	0.04605

	12000	28.0	26.56	71.28	0.4684	0.04599
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.19	51.33	0.4296	0.04099
	8500	23.8	22.07	53.53	0.4639	0.04083
	9000	24.3	22.92	55.71	0.4980	0.04068
	9500	24.8	23.74	57.89	0.5320	0.04052
	10000	25.2	24.53	60.06	0.5659	0.04036
	10500	25.7	25.29	62.22	0.5996	0.04020
	11000	26.2	26.02	64.37	0.6333	0.04005
	11500	26.6	26.74	66.52	0.6668	0.03989
	12000	27.1	27.42	68.67	0.7003	0.03974
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.36	50.34	0.4012	0.04141
	8500	23.6	22.27	52.39	0.4321	0.04129
	9000	24.1	23.15	54.43	0.4628	0.04118
	9500	24.5	23.99	56.46	0.4934	0.04107
	10000	24.9	24.81	58.48	0.5238	0.04096
	10500	25.4	25.61	60.49	0.5540	0.04085
	11000	25.8	26.38	62.49	0.5841	0.04074
	11500	26.2	27.12	64.48	0.6141	0.04063

								12000	26.7	27.85	66.46	0.6439	0.04052
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.69	56.07	0.2924	0.04720
								8500	25.6	20.60	58.12	0.3132	0.04715
								9000	25.9	21.48	60.15	0.3337	0.04710
								9500	26.3	22.34	62.16	0.3539	0.04705
								10000	26.7	23.17	64.14	0.3740	0.04700
								10500	27.1	23.99	66.11	0.3939	0.04695
								11000	27.5	24.79	68.06	0.4136	0.04690
								11500	27.8	25.57	69.99	0.4332	0.04685

	12000	28.2	26.33	71.91	0.4525	0.04680
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.99	51.88	0.4145	0.04175
	8500	24.1	21.86	54.11	0.4479	0.04160
	9000	24.5	22.71	56.32	0.4811	0.04144
	9500	25.0	23.53	58.52	0.5142	0.04129
	10000	25.5	24.31	60.72	0.5472	0.04114
	10500	25.9	25.07	62.91	0.5801	0.04099
	11000	26.4	25.80	65.09	0.6129	0.04084
	11500	26.8	26.51	67.27	0.6456	0.04069

	12000	27.3	27.20	69.44	0.6782	0.04055
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.16	50.86	0.3870	0.04216
	8500	23.9	22.06	52.94	0.4171	0.04205
	9000	24.3	22.93	55.01	0.4470	0.04195
	9500	24.7	23.78	57.06	0.4768	0.04184
	10000	25.2	24.59	59.11	0.5064	0.04173
	10500	25.6	25.38	61.14	0.5359	0.04163
	11000	26.0	26.15	63.17	0.5652	0.04153
	11500	26.5	26.89	65.18	0.5943	0.04142

								12000	26.9	27.61	67.19	0.6234	0.04132
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.69	56.07	0.2924	0.04720
								8500	25.6	20.60	58.12	0.3132	0.04715
								9000	25.9	21.48	60.15	0.3337	0.04710
								9500	26.3	22.34	62.16	0.3539	0.04705
								10000	26.7	23.17	64.14	0.3740	0.04700
								10500	27.1	23.99	66.11	0.3939	0.04695
								11000	27.5	24.79	68.06	0.4136	0.04690
								11500	27.8	25.57	69.99	0.4332	0.04685
								12000	28.2	26.33	71.91	0.4525	0.04680
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.99	51.88	0.4145	0.04175
								8500	24.1	21.86	54.11	0.4479	0.04160
								9000	24.5	22.71	56.32	0.4811	0.04144
								9500	25.0	23.53	58.52	0.5142	0.04129
								10000	25.5	24.31	60.72	0.5472	0.04114
								10500	25.9	25.07	62.91	0.5801	0.04099
								11000	26.4	25.80	65.09	0.6129	0.04084

								11500	26.8	26.51	67.27	0.6456	0.04069
								12000	27.3	27.20	69.44	0.6782	0.04055
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.16	50.86	0.3870	0.04216
								8500	23.9	22.06	52.94	0.4171	0.04205
								9000	24.3	22.93	55.01	0.4470	0.04195
								9500	24.7	23.78	57.06	0.4768	0.04184
								10000	25.2	24.59	59.11	0.5064	0.04173
								10500	25.6	25.38	61.14	0.5359	0.04163
								11000	26.0	26.15	63.17	0.5652	0.04153
								11500	26.5	26.89	65.18	0.5943	0.04142
								12000	26.9	27.61	67.19	0.6234	0.04132
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.05	55.37	0.2969	0.04603
								8500	25.1	20.97	57.39	0.3179	0.04598
								9000	25.5	21.87	59.38	0.3386	0.04592

	9500	25.9	22.74	61.36	0.3591	0.04587
	10000	26.2	23.59	63.31	0.3795	0.04581
	10500	26.6	24.42	65.25	0.3996	0.04576
	11000	27.0	25.22	67.17	0.4195	0.04571
	11500	27.4	26.02	69.07	0.4393	0.04565
	12000	27.7	26.79	70.95	0.4589	0.04560
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.33	51.38	0.4258	0.04061
	8500	23.7	22.21	53.58	0.4598	0.04046
	9000	24.2	23.06	55.77	0.4936	0.04030

	9500	24.6	23.88	57.95	0.5273	0.04015
	10000	25.1	24.67	60.12	0.5608	0.03999
	10500	25.5	25.43	62.28	0.5943	0.03984
	11000	26.0	26.17	64.44	0.6277	0.03968
	11500	26.5	26.89	66.59	0.6609	0.03953
	12000	26.9	27.58	68.74	0.6941	0.03938
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.49	50.39	0.3976	0.04103
	8500	23.5	22.41	52.44	0.4282	0.04092
	9000	23.9	23.29	54.49	0.4586	0.04081

								9500	24.4	24.14	56.52	0.4889	0.04070
								10000	24.8	24.96	58.54	0.5190	0.04059
								10500	25.2	25.76	60.55	0.5490	0.04048
								11000	25.7	26.53	62.56	0.5788	0.04037
								11500	26.1	27.28	64.55	0.6085	0.04026
								12000	26.5	28.01	66.53	0.6380	0.04015
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.05	55.37	0.2969	0.04603
								8500	25.1	20.97	57.39	0.3179	0.04598
								9000	25.5	21.87	59.38	0.3386	0.04592
								9500	25.9	22.74	61.36	0.3591	0.04587
								10000	26.2	23.59	63.31	0.3795	0.04581
								10500	26.6	24.42	65.25	0.3996	0.04576

	11000	27.0	25.22	67.17	0.4195	0.04571
	11500	27.4	26.02	69.07	0.4393	0.04565
	12000	27.7	26.79	70.95	0.4589	0.04560
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.2	21.33	51.38	0.4258	0.04061
	8500	23.7	22.21	53.58	0.4598	0.04046
	9000	24.2	23.06	55.77	0.4936	0.04030
	9500	24.6	23.88	57.95	0.5273	0.04015
	10000	25.1	24.67	60.12	0.5608	0.03999
	10500	25.5	25.43	62.28	0.5943	0.03984
	11000	26.0	26.17	64.44	0.6277	0.03968
	11500	26.5	26.89	66.59	0.6609	0.03953
	12000	26.9	27.58	68.74	0.6941	0.03938
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.49	50.39	0.3976	0.04103
	8500	23.5	22.41	52.44	0.4282	0.04092
	9000	23.9	23.29	54.49	0.4586	0.04081
	9500	24.4	24.14	56.52	0.4889	0.04070
	10000	24.8	24.96	58.54	0.5190	0.04059
	10500	25.2	25.76	60.55	0.5490	0.04048

								11000	25.7	26.53	62.56	0.5788	0.04037
								11500	26.1	27.28	64.55	0.6085	0.04026
								12000	26.5	28.01	66.53	0.6380	0.04015
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	55.83	0.2859	0.04679
								8500	25.3	20.77	57.87	0.3062	0.04674
								9000	25.7	21.66	59.89	0.3264	0.04669
								9500	26.1	22.53	61.88	0.3463	0.04664
								10000	26.5	23.37	63.86	0.3660	0.04659
								10500	26.9	24.20	65.81	0.3856	0.04654
								11000	27.2	25.00	67.75	0.4049	0.04649

	11500	27.6	25.79	69.67	0.4241	0.04644
	12000	28.0	26.55	71.57	0.4431	0.04640
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.12	51.93	0.4106	0.04136
	8500	23.9	22.00	54.16	0.4437	0.04121
	9000	24.4	22.85	56.38	0.4767	0.04106
	9500	24.8	23.67	58.58	0.5095	0.04091
	10000	25.3	24.45	60.78	0.5422	0.04077
	10500	25.8	25.22	62.97	0.5748	0.04062
	11000	26.2	25.95	65.16	0.6073	0.04047

	11500	26.7	26.66	67.34	0.6397	0.04032
	12000	27.1	27.35	69.51	0.6720	0.04018
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.29	50.91	0.3833	0.04177
	8500	23.7	22.20	52.99	0.4132	0.04167
	9000	24.2	23.07	55.06	0.4428	0.04157
	9500	24.6	23.92	57.12	0.4723	0.04146
	10000	25.0	24.74	59.17	0.5016	0.04136
	10500	25.4	25.53	61.21	0.5308	0.04125
	11000	25.9	26.30	63.23	0.5599	0.04115

								11500	26.3	27.05	65.25	0.5888	0.04105
								12000	26.7	27.77	67.26	0.6175	0.04095
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	55.83	0.2859	0.04679
								8500	25.3	20.77	57.87	0.3062	0.04674
								9000	25.7	21.66	59.89	0.3264	0.04669
								9500	26.1	22.53	61.88	0.3463	0.04664
								10000	26.5	23.37	63.86	0.3660	0.04659
								10500	26.9	24.20	65.81	0.3856	0.04654
								11000	27.2	25.00	67.75	0.4049	0.04649
								11500	27.6	25.79	69.67	0.4241	0.04644
								12000	28.0	26.55	71.57	0.4431	0.04640
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.12	51.93	0.4106	0.04136
								8500	23.9	22.00	54.16	0.4437	0.04121
								9000	24.4	22.85	56.38	0.4767	0.04106
								9500	24.8	23.67	58.58	0.5095	0.04091
								10000	25.3	24.45	60.78	0.5422	0.04077

								10500	25.8	25.22	62.97	0.5748	0.04062
								11000	26.2	25.95	65.16	0.6073	0.04047
								11500	26.7	26.66	67.34	0.6397	0.04032
								12000	27.1	27.35	69.51	0.6720	0.04018
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.29	50.91	0.3833	0.04177
								8500	23.7	22.20	52.99	0.4132	0.04167
								9000	24.2	23.07	55.06	0.4428	0.04157
								9500	24.6	23.92	57.12	0.4723	0.04146
								10000	25.0	24.74	59.17	0.5016	0.04136
								10500	25.4	25.53	61.21	0.5308	0.04125
								11000	25.9	26.30	63.23	0.5599	0.04115
								11500	26.3	27.05	65.25	0.5888	0.04105
								12000	26.7	27.77	67.26	0.6175	0.04095
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.03	57.30	0.2676	0.04983
								8500	26.4	19.92	59.40	0.2869	0.04979

	9000	26.8	20.78	61.48	0.3060	0.04974
	9500	27.2	21.62	63.54	0.3249	0.04970
	10000	27.6	22.44	65.58	0.3436	0.04966
	10500	28.0	23.24	67.60	0.3621	0.04962
	11000	28.3	24.02	69.59	0.3804	0.04958
	11500	28.7	24.79	71.58	0.3986	0.04954
	12000	29.1	25.53	73.54	0.4167	0.04950
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.30	53.33	0.3786	0.04430
	8500	24.9	21.16	55.63	0.4099	0.04416

	9000	25.3	21.99	57.92	0.4412	0.04403
	9500	25.8	22.79	60.19	0.4723	0.04389
	10000	26.3	23.56	62.46	0.5033	0.04375
	10500	26.7	24.31	64.72	0.5342	0.04362
	11000	27.2	25.03	66.98	0.5650	0.04348
	11500	27.7	25.73	69.23	0.5957	0.04335
	12000	28.1	26.41	71.47	0.6263	0.04322
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.45	52.24	0.3535	0.04471
	8500	24.7	21.34	54.39	0.3818	0.04461

								9000	25.1	22.19	56.52	0.4099	0.04452
								9500	25.5	23.02	58.65	0.4378	0.04443
								10000	26.0	23.82	60.76	0.4656	0.04434
								10500	26.4	24.60	62.86	0.4933	0.04424
								11000	26.8	25.36	64.95	0.5208	0.04415
								11500	27.3	26.09	67.03	0.5482	0.04406
								12000	27.7	26.80	69.10	0.5754	0.04397
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.03	57.30	0.2676	0.04983
								8500	26.4	19.92	59.40	0.2869	0.04979
								9000	26.8	20.78	61.48	0.3060	0.04974
								9500	27.2	21.62	63.54	0.3249	0.04970

	10000	27.6	22.44	65.58	0.3436	0.04966
	10500	28.0	23.24	67.60	0.3621	0.04962
	11000	28.3	24.02	69.59	0.3804	0.04958
	11500	28.7	24.79	71.58	0.3986	0.04954
	12000	29.1	25.53	73.54	0.4167	0.04950
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.30	53.33	0.3786	0.04430
	8500	24.9	21.16	55.63	0.4099	0.04416
	9000	25.3	21.99	57.92	0.4412	0.04403
	9500	25.8	22.79	60.19	0.4723	0.04389
	10000	26.3	23.56	62.46	0.5033	0.04375
	10500	26.7	24.31	64.72	0.5342	0.04362
	11000	27.2	25.03	66.98	0.5650	0.04348
	11500	27.7	25.73	69.23	0.5957	0.04335
	12000	28.1	26.41	71.47	0.6263	0.04322
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.45	52.24	0.3535	0.04471
	8500	24.7	21.34	54.39	0.3818	0.04461
	9000	25.1	22.19	56.52	0.4099	0.04452
	9500	25.5	23.02	58.65	0.4378	0.04443

								10000	26.0	23.82	60.76	0.4656	0.04434
								10500	26.4	24.60	62.86	0.4933	0.04424
								11000	26.8	25.36	64.95	0.5208	0.04415
								11500	27.3	26.09	67.03	0.5482	0.04406
								12000	27.7	26.80	69.10	0.5754	0.04397
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.07	57.31	0.2663	0.04968
								8500	26.4	19.96	59.42	0.2856	0.04964
								9000	26.8	20.82	61.50	0.3046	0.04960
								9500	27.2	21.66	63.56	0.3234	0.04956
								10000	27.5	22.48	65.60	0.3420	0.04952
								10500	27.9	23.29	67.61	0.3605	0.04948

	11000	28.3	24.07	69.61	0.3787	0.04944
	11500	28.7	24.83	71.60	0.3969	0.04940
	12000	29.0	25.58	73.56	0.4148	0.04936
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.35	53.35	0.3773	0.04416
	8500	24.8	21.20	55.65	0.4086	0.04403
	9000	25.3	22.03	57.93	0.4397	0.04389
	9500	25.8	22.83	60.21	0.4707	0.04376
	10000	26.2	23.61	62.48	0.5016	0.04362
	10500	26.7	24.36	64.75	0.5324	0.04349

	11000	27.1	25.08	67.00	0.5631	0.04335
	11500	27.6	25.78	69.25	0.5937	0.04322
	12000	28.1	26.46	71.49	0.6242	0.04309
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.49	52.26	0.3523	0.04457
	8500	24.6	21.38	54.41	0.3805	0.04448
	9000	25.1	22.24	56.54	0.4085	0.04439
	9500	25.5	23.07	58.67	0.4363	0.04429
	10000	25.9	23.87	60.78	0.4640	0.04420
	10500	26.4	24.65	62.88	0.4916	0.04411

								11000	26.8	25.41	64.97	0.5190	0.04402
								11500	27.2	26.14	67.05	0.5463	0.04393
								12000	27.7	26.85	69.12	0.5735	0.04384
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.07	57.31	0.2663	0.04968
								8500	26.4	19.96	59.42	0.2856	0.04964
								9000	26.8	20.82	61.50	0.3046	0.04960
								9500	27.2	21.66	63.56	0.3234	0.04956
								10000	27.5	22.48	65.60	0.3420	0.04952
								10500	27.9	23.29	67.61	0.3605	0.04948
								11000	28.3	24.07	69.61	0.3787	0.04944
								11500	28.7	24.83	71.60	0.3969	0.04940
								12000	29.0	25.58	73.56	0.4148	0.04936
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.35	53.35	0.3773	0.04416
								8500	24.8	21.20	55.65	0.4086	0.04403
								9000	25.3	22.03	57.93	0.4397	0.04389

								9500	25.8	22.83	60.21	0.4707	0.04376
								10000	26.2	23.61	62.48	0.5016	0.04362
								10500	26.7	24.36	64.75	0.5324	0.04349
								11000	27.1	25.08	67.00	0.5631	0.04335
								11500	27.6	25.78	69.25	0.5937	0.04322
								12000	28.1	26.46	71.49	0.6242	0.04309
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.49	52.26	0.3523	0.04457
								8500	24.6	21.38	54.41	0.3805	0.04448
								9000	25.1	22.24	56.54	0.4085	0.04439
								9500	25.5	23.07	58.67	0.4363	0.04429
								10000	25.9	23.87	60.78	0.4640	0.04420
								10500	26.4	24.65	62.88	0.4916	0.04411
								11000	26.8	25.41	64.97	0.5190	0.04402
								11500	27.2	26.14	67.05	0.5463	0.04393
								12000	27.7	26.85	69.12	0.5735	0.04384
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.20	57.05	0.2612	0.04939

	8500	26.2	20.09	59.15	0.2801	0.04935
	9000	26.6	20.96	61.21	0.2989	0.04931
	9500	27.0	21.81	63.26	0.3174	0.04927
	10000	27.4	22.63	65.28	0.3358	0.04923
	10500	27.7	23.44	67.29	0.3539	0.04919
	11000	28.1	24.23	69.28	0.3719	0.04915
	11500	28.5	25.00	71.25	0.3898	0.04911
	12000	28.8	25.75	73.20	0.4075	0.04908
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.43	53.38	0.3747	0.04389

	8500	24.7	21.29	55.68	0.4058	0.04376
	9000	25.2	22.13	57.97	0.4367	0.04362
	9500	25.6	22.93	60.25	0.4675	0.04349
	10000	26.1	23.70	62.53	0.4982	0.04336
	10500	26.6	24.46	64.79	0.5288	0.04322
	11000	27.0	25.18	67.05	0.5593	0.04309
	11500	27.5	25.88	69.30	0.5897	0.04296
	12000	27.9	26.56	71.54	0.6201	0.04283
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.1	20.58	52.29	0.3498	0.04430

								8500	24.5	21.47	54.44	0.3778	0.04421
								9000	25.0	22.33	56.58	0.4056	0.04412
								9500	25.4	23.16	58.70	0.4333	0.04403
								10000	25.8	23.97	60.82	0.4608	0.04394
								10500	26.3	24.75	62.92	0.4882	0.04385
								11000	26.7	25.50	65.01	0.5155	0.04376
								11500	27.1	26.24	67.09	0.5426	0.04367
								12000	27.5	26.95	69.17	0.5696	0.04358
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.20	57.05	0.2612	0.04939
								8500	26.2	20.09	59.15	0.2801	0.04935

	9000	26.6	20.96	61.21	0.2989	0.04931
	9500	27.0	21.81	63.26	0.3174	0.04927
	10000	27.4	22.63	65.28	0.3358	0.04923
	10500	27.7	23.44	67.29	0.3539	0.04919
	11000	28.1	24.23	69.28	0.3719	0.04915
	11500	28.5	25.00	71.25	0.3898	0.04911
	12000	28.8	25.75	73.20	0.4075	0.04908
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.43	53.38	0.3747	0.04389
	8500	24.7	21.29	55.68	0.4058	0.04376
	9000	25.2	22.13	57.97	0.4367	0.04362
	9500	25.6	22.93	60.25	0.4675	0.04349
	10000	26.1	23.70	62.53	0.4982	0.04336
	10500	26.6	24.46	64.79	0.5288	0.04322
	11000	27.0	25.18	67.05	0.5593	0.04309
	11500	27.5	25.88	69.30	0.5897	0.04296
	12000	27.9	26.56	71.54	0.6201	0.04283
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.1	20.58	52.29	0.3498	0.04430
	8500	24.5	21.47	54.44	0.3778	0.04421

								9000	25.0	22.33	56.58	0.4056	0.04412
								9500	25.4	23.16	58.70	0.4333	0.04403
								10000	25.8	23.97	60.82	0.4608	0.04394
								10500	26.3	24.75	62.92	0.4882	0.04385
								11000	26.7	25.50	65.01	0.5155	0.04376
								11500	27.1	26.24	67.09	0.5426	0.04367
								12000	27.5	26.95	69.17	0.5696	0.04358
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.24	57.07	0.2599	0.04924
								8500	26.1	20.13	59.16	0.2788	0.04920
								9000	26.5	21.00	61.23	0.2975	0.04916
								9500	26.9	21.85	63.28	0.3159	0.04912
								10000	27.3	22.68	65.30	0.3342	0.04908

	10500	27.7	23.49	67.31	0.3523	0.04905
	11000	28.0	24.28	69.30	0.3703	0.04901
	11500	28.4	25.05	71.27	0.3880	0.04897
	12000	28.8	25.81	73.22	0.4057	0.04893
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.47	53.40	0.3735	0.04376
	8500	24.7	21.34	55.70	0.4044	0.04362
	9000	25.1	22.17	57.99	0.4352	0.04349
	9500	25.6	22.97	60.27	0.4660	0.04336
	10000	26.1	23.75	62.55	0.4966	0.04322

	10500	26.5	24.50	64.81	0.5271	0.04309
	11000	27.0	25.23	67.07	0.5575	0.04296
	11500	27.4	25.93	69.32	0.5878	0.04283
	12000	27.9	26.61	71.57	0.6180	0.04270
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.0	20.63	52.31	0.3486	0.04416
	8500	24.5	21.52	54.46	0.3765	0.04407
	9000	24.9	22.38	56.60	0.4042	0.04398
	9500	25.3	23.21	58.72	0.4318	0.04389
	10000	25.8	24.02	60.84	0.4592	0.04380

								10500	26.2	24.80	62.94	0.4865	0.04372
								11000	26.6	25.55	65.03	0.5137	0.04363
								11500	27.1	26.29	67.12	0.5407	0.04354
								12000	27.5	27.01	69.19	0.5676	0.04345
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.24	57.07	0.2599	0.04924
								8500	26.1	20.13	59.16	0.2788	0.04920
								9000	26.5	21.00	61.23	0.2975	0.04916
								9500	26.9	21.85	63.28	0.3159	0.04912
								10000	27.3	22.68	65.30	0.3342	0.04908
								10500	27.7	23.49	67.31	0.3523	0.04905
								11000	28.0	24.28	69.30	0.3703	0.04901
								11500	28.4	25.05	71.27	0.3880	0.04897
								12000	28.8	25.81	73.22	0.4057	0.04893
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.47	53.40	0.3735	0.04376

	8500	24.7	21.34	55.70	0.4044	0.04362
	9000	25.1	22.17	57.99	0.4352	0.04349
	9500	25.6	22.97	60.27	0.4660	0.04336
	10000	26.1	23.75	62.55	0.4966	0.04322
	10500	26.5	24.50	64.81	0.5271	0.04309
	11000	27.0	25.23	67.07	0.5575	0.04296
	11500	27.4	25.93	69.32	0.5878	0.04283
	12000	27.9	26.61	71.57	0.6180	0.04270
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.0	20.63	52.31	0.3486	0.04416
	8500	24.5	21.52	54.46	0.3765	0.04407
	9000	24.9	22.38	56.60	0.4042	0.04398
	9500	25.3	23.21	58.72	0.4318	0.04389
	10000	25.8	24.02	60.84	0.4592	0.04380
	10500	26.2	24.80	62.94	0.4865	0.04372
	11000	26.6	25.55	65.03	0.5137	0.04363
	11500	27.1	26.29	67.12	0.5407	0.04354
	12000	27.5	27.01	69.19	0.5676	0.04345

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.47	56.60	0.2941	0.04407
								8500	24.6	21.40	58.65	0.3140	0.04402
								9000	25.0	22.31	60.66	0.3337	0.04397
								9500	25.3	23.20	62.66	0.3532	0.04392
								10000	25.7	24.06	64.64	0.3725	0.04387
								10500	26.1	24.90	66.60	0.3916	0.04382
								11000	26.5	25.71	68.54	0.4106	0.04378
								11500	26.8	26.52	70.46	0.4293	0.04373
								12000	27.2	27.30	72.36	0.4479	0.04368

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.7	21.82	52.15	0.4229	0.03878
	8500	23.2	22.72	54.36	0.4553	0.03863
	9000	23.6	23.58	56.56	0.4875	0.03849
	9500	24.1	24.42	58.75	0.5196	0.03834
	10000	24.5	25.22	60.93	0.5516	0.03819
	10500	25.0	26.00	63.11	0.5835	0.03805
	11000	25.4	26.75	65.28	0.6153	0.03790
	11500	25.9	27.48	67.44	0.6470	0.03775
	12000	26.3	28.18	69.59	0.6786	0.03761

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.5	21.98	51.17	0.3954	0.03921
	8500	23.0	22.91	53.23	0.4246	0.03911
	9000	23.4	23.81	55.29	0.4536	0.03900
	9500	23.8	24.68	57.33	0.4824	0.03890
	10000	24.3	25.51	59.36	0.5111	0.03880
	10500	24.7	26.33	61.38	0.5396	0.03869
	11000	25.1	27.11	63.39	0.5681	0.03859
	11500	25.5	27.87	65.40	0.5963	0.03849
	12000	25.9	28.61	67.39	0.6245	0.03839

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.47	56.60	0.2941	0.04407
								8500	24.6	21.40	58.65	0.3140	0.04402
								9000	25.0	22.31	60.66	0.3337	0.04397
								9500	25.3	23.20	62.66	0.3532	0.04392
								10000	25.7	24.06	64.64	0.3725	0.04387
								10500	26.1	24.90	66.60	0.3916	0.04382
								11000	26.5	25.71	68.54	0.4106	0.04378
								11500	26.8	26.52	70.46	0.4293	0.04373
								12000	27.2	27.30	72.36	0.4479	0.04368
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.7	21.82	52.15	0.4229	0.03878
								8500	23.2	22.72	54.36	0.4553	0.03863
								9000	23.6	23.58	56.56	0.4875	0.03849
								9500	24.1	24.42	58.75	0.5196	0.03834
								10000	24.5	25.22	60.93	0.5516	0.03819
								10500	25.0	26.00	63.11	0.5835	0.03805
								11000	25.4	26.75	65.28	0.6153	0.03790
								11500	25.9	27.48	67.44	0.6470	0.03775
								12000	26.3	28.18	69.59	0.6786	0.03761

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.5	21.98	51.17	0.3954	0.03921
								8500	23.0	22.91	53.23	0.4246	0.03911
								9000	23.4	23.81	55.29	0.4536	0.03900
								9500	23.8	24.68	57.33	0.4824	0.03890
								10000	24.3	25.51	59.36	0.5111	0.03880
								10500	24.7	26.33	61.38	0.5396	0.03869
								11000	25.1	27.11	63.39	0.5681	0.03859
								11500	25.5	27.87	65.40	0.5963	0.03849
								12000	25.9	28.61	67.39	0.6245	0.03839
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.81	55.80	0.3314	0.04608
								8500	25.4	20.72	57.81	0.3535	0.04602
								9000	25.8	21.60	59.80	0.3753	0.04595
								9500	26.2	22.47	61.76	0.3969	0.04588

	10000	26.6	23.31	63.70	0.4182	0.04582
	10500	26.9	24.13	65.63	0.4394	0.04576
	11000	27.3	24.93	67.54	0.4603	0.04569
	11500	27.7	25.71	69.43	0.4811	0.04563
	12000	28.0	26.48	71.30	0.5017	0.04557
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.12	51.24	0.4652	0.04056
	8500	23.9	22.00	53.40	0.5004	0.04039
	9000	24.4	22.85	55.56	0.5355	0.04021
	9500	24.8	23.67	57.70	0.5705	0.04004

		10000	25.3	24.45	59.84	0.6054	0.03988
		10500	25.8	25.22	61.97	0.6401	0.03971
		11000	26.2	25.95	64.09	0.6747	0.03954
		11500	26.7	26.67	66.21	0.7092	0.03937
		12000	27.1	27.36	68.32	0.7437	0.03920
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.29	50.29	0.4356	0.04098
		8500	23.7	22.19	52.32	0.4674	0.04086
		9000	24.2	23.07	54.33	0.4990	0.04074
		9500	24.6	23.92	56.33	0.5305	0.04061

								10000	25.0	24.74	58.32	0.5618	0.04049
								10500	25.4	25.53	60.30	0.5929	0.04037
								11000	25.9	26.30	62.27	0.6239	0.04025
								11500	26.3	27.05	64.23	0.6547	0.04013
								12000	26.7	27.78	66.19	0.6854	0.04000
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.81	55.80	0.3314	0.04608
								8500	25.4	20.72	57.81	0.3535	0.04602
								9000	25.8	21.60	59.80	0.3753	0.04595
								9500	26.2	22.47	61.76	0.3969	0.04588
								10000	26.6	23.31	63.70	0.4182	0.04582
								10500	26.9	24.13	65.63	0.4394	0.04576
								11000	27.3	24.93	67.54	0.4603	0.04569
								11500	27.7	25.71	69.43	0.4811	0.04563

	12000	28.0	26.48	71.30	0.5017	0.04557
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.12	51.24	0.4652	0.04056
	8500	23.9	22.00	53.40	0.5004	0.04039
	9000	24.4	22.85	55.56	0.5355	0.04021
	9500	24.8	23.67	57.70	0.5705	0.04004
	10000	25.3	24.45	59.84	0.6054	0.03988
	10500	25.8	25.22	61.97	0.6401	0.03971
	11000	26.2	25.95	64.09	0.6747	0.03954
	11500	26.7	26.67	66.21	0.7092	0.03937
	12000	27.1	27.36	68.32	0.7437	0.03920
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.3	21.29	50.29	0.4356	0.04098
	8500	23.7	22.19	52.32	0.4674	0.04086
	9000	24.2	23.07	54.33	0.4990	0.04074
	9500	24.6	23.92	56.33	0.5305	0.04061
	10000	25.0	24.74	58.32	0.5618	0.04049
	10500	25.4	25.53	60.30	0.5929	0.04037
	11000	25.9	26.30	62.27	0.6239	0.04025
	11500	26.3	27.05	64.23	0.6547	0.04013

								12000	26.7	27.78	66.19	0.6854	0.04000
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.62	56.28	0.3203	0.04684
								8500	25.6	20.52	58.31	0.3417	0.04678
								9000	26.0	21.40	60.31	0.3629	0.04672
								9500	26.4	22.26	62.29	0.3839	0.04666
								10000	26.8	23.10	64.26	0.4046	0.04660
								10500	27.2	23.92	66.20	0.4252	0.04654
								11000	27.5	24.71	68.13	0.4456	0.04648
								11500	27.9	25.49	70.04	0.4658	0.04642

	12000	28.3	26.25	71.93	0.4858	0.04637
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.92	51.80	0.4500	0.04131
	8500	24.1	21.80	53.99	0.4843	0.04114
	9000	24.6	22.64	56.17	0.5186	0.04098
	9500	25.1	23.45	58.34	0.5527	0.04082
	10000	25.5	24.24	60.51	0.5867	0.04065
	10500	26.0	25.00	62.67	0.6206	0.04049
	11000	26.4	25.73	64.82	0.6543	0.04033
	11500	26.9	26.45	66.96	0.6880	0.04017

	12000	27.4	27.13	69.10	0.7216	0.04001
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.08	50.82	0.4213	0.04173
	8500	23.9	21.99	52.87	0.4523	0.04161
	9000	24.4	22.86	54.91	0.4832	0.04150
	9500	24.8	23.70	56.94	0.5139	0.04138
	10000	25.2	24.52	58.95	0.5444	0.04126
	10500	25.7	25.31	60.96	0.5747	0.04115
	11000	26.1	26.08	62.95	0.6049	0.04103
	11500	26.5	26.82	64.94	0.6350	0.04092

								12000	27.0	27.54	66.92	0.6649	0.04080
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.62	56.28	0.3203	0.04684
								8500	25.6	20.52	58.31	0.3417	0.04678
								9000	26.0	21.40	60.31	0.3629	0.04672
								9500	26.4	22.26	62.29	0.3839	0.04666
								10000	26.8	23.10	64.26	0.4046	0.04660
								10500	27.2	23.92	66.20	0.4252	0.04654
								11000	27.5	24.71	68.13	0.4456	0.04648
								11500	27.9	25.49	70.04	0.4658	0.04642
								12000	28.3	26.25	71.93	0.4858	0.04637
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.92	51.80	0.4500	0.04131
								8500	24.1	21.80	53.99	0.4843	0.04114
								9000	24.6	22.64	56.17	0.5186	0.04098
								9500	25.1	23.45	58.34	0.5527	0.04082
								10000	25.5	24.24	60.51	0.5867	0.04065
								10500	26.0	25.00	62.67	0.6206	0.04049
								11000	26.4	25.73	64.82	0.6543	0.04033

								11500	26.9	26.45	66.96	0.6880	0.04017
								12000	27.4	27.13	69.10	0.7216	0.04001
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.5	21.08	50.82	0.4213	0.04173
								8500	23.9	21.99	52.87	0.4523	0.04161
								9000	24.4	22.86	54.91	0.4832	0.04150
								9500	24.8	23.70	56.94	0.5139	0.04138
								10000	25.2	24.52	58.95	0.5444	0.04126
								10500	25.7	25.31	60.96	0.5747	0.04115
								11000	26.1	26.08	62.95	0.6049	0.04103
								11500	26.5	26.82	64.94	0.6350	0.04092
								12000	27.0	27.54	66.92	0.6649	0.04080
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.97	57.52	0.2956	0.04945
								8500	26.5	19.85	59.60	0.3156	0.04940
								9000	26.9	20.71	61.66	0.3354	0.04935

	9500	27.3	21.55	63.69	0.3549	0.04930
	10000	27.7	22.37	65.71	0.3743	0.04925
	10500	28.0	23.17	67.70	0.3935	0.04920
	11000	28.4	23.95	69.68	0.4125	0.04915
	11500	28.8	24.72	71.64	0.4314	0.04910
	12000	29.2	25.47	73.58	0.4500	0.04905
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.24	53.26	0.4142	0.04384
	8500	24.9	21.10	55.53	0.4466	0.04369
	9000	25.4	21.93	57.78	0.4788	0.04354

	9500	25.9	22.73	60.03	0.5109	0.04339
	10000	26.3	23.50	62.26	0.5429	0.04325
	10500	26.8	24.25	64.49	0.5748	0.04310
	11000	27.3	24.97	66.72	0.6066	0.04295
	11500	27.7	25.67	68.93	0.6382	0.04281
	12000	28.2	26.35	71.14	0.6698	0.04266
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.39	52.22	0.3880	0.04426
	8500	24.7	21.27	54.34	0.4172	0.04416
	9000	25.2	22.13	56.44	0.4462	0.04405

								9500	25.6	22.95	58.53	0.4750	0.04395
								10000	26.1	23.76	60.61	0.5037	0.04385
								10500	26.5	24.54	62.69	0.5323	0.04374
								11000	26.9	25.29	64.75	0.5607	0.04364
								11500	27.3	26.02	66.80	0.5890	0.04354
								12000	27.8	26.74	68.84	0.6171	0.04344
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.97	57.52	0.2956	0.04945
								8500	26.5	19.85	59.60	0.3156	0.04940
								9000	26.9	20.71	61.66	0.3354	0.04935
								9500	27.3	21.55	63.69	0.3549	0.04930
								10000	27.7	22.37	65.71	0.3743	0.04925
								10500	28.0	23.17	67.70	0.3935	0.04920

	11000	28.4	23.95	69.68	0.4125	0.04915
	11500	28.8	24.72	71.64	0.4314	0.04910
	12000	29.2	25.47	73.58	0.4500	0.04905
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.5	20.24	53.26	0.4142	0.04384
	8500	24.9	21.10	55.53	0.4466	0.04369
	9000	25.4	21.93	57.78	0.4788	0.04354
	9500	25.9	22.73	60.03	0.5109	0.04339
	10000	26.3	23.50	62.26	0.5429	0.04325
	10500	26.8	24.25	64.49	0.5748	0.04310
	11000	27.3	24.97	66.72	0.6066	0.04295
	11500	27.7	25.67	68.93	0.6382	0.04281
	12000	28.2	26.35	71.14	0.6698	0.04266
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.39	52.22	0.3880	0.04426
	8500	24.7	21.27	54.34	0.4172	0.04416
	9000	25.2	22.13	56.44	0.4462	0.04405
	9500	25.6	22.95	58.53	0.4750	0.04395
	10000	26.1	23.76	60.61	0.5037	0.04385
	10500	26.5	24.54	62.69	0.5323	0.04374

								11000	26.9	25.29	64.75	0.5607	0.04364
								11500	27.3	26.02	66.80	0.5890	0.04354
								12000	27.8	26.74	68.84	0.6171	0.04344
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	19.01	57.53	0.2943	0.04930
								8500	26.5	19.89	59.62	0.3142	0.04925
								9000	26.8	20.76	61.67	0.3339	0.04920
								9500	27.2	21.60	63.71	0.3534	0.04915
								10000	27.6	22.42	65.73	0.3727	0.04910
								10500	28.0	23.22	67.72	0.3918	0.04905
								11000	28.4	24.00	69.70	0.4108	0.04901

	11500	28.7	24.77	71.66	0.4295	0.04896
	12000	29.1	25.52	73.60	0.4482	0.04891
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.28	53.28	0.4129	0.04371
	8500	24.9	21.14	55.55	0.4452	0.04356
	9000	25.4	21.97	57.80	0.4773	0.04341
	9500	25.8	22.77	60.05	0.5093	0.04326
	10000	26.3	23.55	62.28	0.5412	0.04312
	10500	26.7	24.30	64.52	0.5729	0.04297
	11000	27.2	25.02	66.74	0.6046	0.04282

	11500	27.7	25.72	68.96	0.6362	0.04268
	12000	28.1	26.40	71.17	0.6677	0.04253
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.43	52.24	0.3867	0.04413
	8500	24.7	21.31	54.35	0.4158	0.04402
	9000	25.1	22.17	56.46	0.4447	0.04392
	9500	25.6	23.00	58.55	0.4735	0.04382
	10000	26.0	23.80	60.64	0.5021	0.04371
	10500	26.4	24.58	62.71	0.5305	0.04361
	11000	26.9	25.34	64.77	0.5589	0.04351

								11500	27.3	26.07	66.82	0.5870	0.04341
								12000	27.7	26.79	68.86	0.6151	0.04331
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	19.01	57.53	0.2943	0.04930
								8500	26.5	19.89	59.62	0.3142	0.04925
								9000	26.8	20.76	61.67	0.3339	0.04920
								9500	27.2	21.60	63.71	0.3534	0.04915
								10000	27.6	22.42	65.73	0.3727	0.04910
								10500	28.0	23.22	67.72	0.3918	0.04905
								11000	28.4	24.00	69.70	0.4108	0.04901
								11500	28.7	24.77	71.66	0.4295	0.04896
								12000	29.1	25.52	73.60	0.4482	0.04891
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.28	53.28	0.4129	0.04371
								8500	24.9	21.14	55.55	0.4452	0.04356
								9000	25.4	21.97	57.80	0.4773	0.04341
								9500	25.8	22.77	60.05	0.5093	0.04326
								10000	26.3	23.55	62.28	0.5412	0.04312

								10500	26.7	24.30	64.52	0.5729	0.04297
								11000	27.2	25.02	66.74	0.6046	0.04282
								11500	27.7	25.72	68.96	0.6362	0.04268
								12000	28.1	26.40	71.17	0.6677	0.04253
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.3	20.43	52.24	0.3867	0.04413
								8500	24.7	21.31	54.35	0.4158	0.04402
								9000	25.1	22.17	56.46	0.4447	0.04392
								9500	25.6	23.00	58.55	0.4735	0.04382
								10000	26.0	23.80	60.64	0.5021	0.04371
								10500	26.4	24.58	62.71	0.5305	0.04361
								11000	26.9	25.34	64.77	0.5589	0.04351
								11500	27.3	26.07	66.82	0.5870	0.04341
								12000	27.7	26.79	68.86	0.6151	0.04331
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	6.8L	10R100/140	4X2	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.6	17.93	52.28	0.7576	0.04682
								8500	28.1	18.72	54.48	0.7973	0.04662

	9000	28.6	19.48	56.68	0.8368	0.04641
	9500	29.1	20.22	58.87	0.8763	0.04620
	10000	29.6	20.93	61.05	0.9155	0.04600
	10500	30.1	21.62	63.22	0.9547	0.04579
	11000	30.5	22.29	65.39	0.9937	0.04559
	11500	31.0	22.94	67.55	1.0326	0.04539
	12000	31.5	23.58	69.70	1.0714	0.04518
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.5	18.01	51.61	0.7318	0.04724
	8500	28.0	18.82	53.69	0.7679	0.04709

								9000	28.4	19.60	55.76	0.8039	0.04693
								9500	28.9	20.36	57.81	0.8396	0.04677
								10000	29.4	21.09	59.86	0.8751	0.04662
								10500	29.8	21.81	61.89	0.9105	0.04646
								11000	30.3	22.50	63.92	0.9457	0.04631
								11500	30.7	23.17	65.93	0.9807	0.04616
								12000	31.2	23.83	67.94	1.0156	0.04601
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	6.8L	10R100/140	4X2	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.6	17.93	52.28	0.7576	0.04682
								8500	28.1	18.72	54.48	0.7973	0.04662
								9000	28.6	19.48	56.68	0.8368	0.04641
								9500	29.1	20.22	58.87	0.8763	0.04620

								10000	29.6	20.93	61.05	0.9155	0.04600
								10500	30.1	21.62	63.22	0.9547	0.04579
								11000	30.5	22.29	65.39	0.9937	0.04559
								11500	31.0	22.94	67.55	1.0326	0.04539
								12000	31.5	23.58	69.70	1.0714	0.04518
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.5	18.01	51.61	0.7318	0.04724
								8500	28.0	18.82	53.69	0.7679	0.04709
								9000	28.4	19.60	55.76	0.8039	0.04693
								9500	28.9	20.36	57.81	0.8396	0.04677
								10000	29.4	21.09	59.86	0.8751	0.04662
								10500	29.8	21.81	61.89	0.9105	0.04646
								11000	30.3	22.50	63.92	0.9457	0.04631
								11500	30.7	23.17	65.93	0.9807	0.04616
								12000	31.2	23.83	67.94	1.0156	0.04601
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337
								8500	25.9	20.29	57.42	0.5752	0.04331

								9000	26.3	21.18	59.35	0.5965	0.04324
								9500	26.7	22.04	61.26	0.6176	0.04318
								10000	27.0	22.88	63.15	0.6385	0.04311
								10500	27.4	23.70	65.02	0.6591	0.04305
								11000	27.8	24.51	66.88	0.6796	0.04298
								11500	28.1	25.29	68.72	0.6999	0.04292
								12000	28.5	26.06	70.54	0.7201	0.04286
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337
								8500	25.9	20.29	57.42	0.5752	0.04331
								9000	26.3	21.18	59.35	0.5965	0.04324
								9500	26.7	22.04	61.26	0.6176	0.04318

								10000	27.0	22.88	63.15	0.6385	0.04311
								10500	27.4	23.70	65.02	0.6591	0.04305
								11000	27.8	24.51	66.88	0.6796	0.04298
								11500	28.1	25.29	68.72	0.6999	0.04292
								12000	28.5	26.06	70.54	0.7201	0.04286
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	54.97	0.5653	0.04263
								8500	25.7	20.48	56.90	0.5874	0.04256
								9000	26.1	21.37	58.81	0.6094	0.04249
								9500	26.4	22.24	60.70	0.6311	0.04242
								10000	26.8	23.08	62.57	0.6525	0.04235
								10500	27.2	23.91	64.43	0.6738	0.04228

	11000	27.5	24.72	66.26	0.6949	0.04221
	11500	27.9	25.50	68.08	0.7158	0.04215
	12000	28.3	26.28	69.89	0.7365	0.04208
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	49.88	0.7038	0.03716
	8500	24.2	21.75	51.95	0.7396	0.03698
	9000	24.6	22.61	54.02	0.7752	0.03680
	9500	25.1	23.43	56.08	0.8108	0.03662
	10000	25.5	24.23	58.12	0.8462	0.03644
	10500	26.0	25.00	60.17	0.8814	0.03627

	11000	26.4	25.74	62.20	0.9166	0.03609
	11500	26.9	26.47	64.23	0.9516	0.03591
	12000	27.3	27.16	66.26	0.9866	0.03574
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.05	0.6749	0.03758
	8500	24.0	21.93	51.00	0.7072	0.03744
	9000	24.4	22.81	52.93	0.7393	0.03731
	9500	24.8	23.66	54.85	0.7712	0.03718
	10000	25.3	24.49	56.76	0.8030	0.03705
	10500	25.7	25.29	58.66	0.8346	0.03692

								11000	26.1	26.07	60.55	0.8660	0.03679
								11500	26.5	26.82	62.44	0.8973	0.03666
								12000	26.9	27.55	64.31	0.9285	0.03653
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	54.97	0.5653	0.04263
								8500	25.7	20.48	56.90	0.5874	0.04256
								9000	26.1	21.37	58.81	0.6094	0.04249
								9500	26.4	22.24	60.70	0.6311	0.04242
								10000	26.8	23.08	62.57	0.6525	0.04235
								10500	27.2	23.91	64.43	0.6738	0.04228
								11000	27.5	24.72	66.26	0.6949	0.04221
								11500	27.9	25.50	68.08	0.7158	0.04215
								12000	28.3	26.28	69.89	0.7365	0.04208
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	49.88	0.7038	0.03716
								8500	24.2	21.75	51.95	0.7396	0.03698
								9000	24.6	22.61	54.02	0.7752	0.03680

								9500	25.1	23.43	56.08	0.8108	0.03662
								10000	25.5	24.23	58.12	0.8462	0.03644
								10500	26.0	25.00	60.17	0.8814	0.03627
								11000	26.4	25.74	62.20	0.9166	0.03609
								11500	26.9	26.47	64.23	0.9516	0.03591
								12000	27.3	27.16	66.26	0.9866	0.03574
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.05	0.6749	0.03758
								8500	24.0	21.93	51.00	0.7072	0.03744
								9000	24.4	22.81	52.93	0.7393	0.03731
								9500	24.8	23.66	54.85	0.7712	0.03718
								10000	25.3	24.49	56.76	0.8030	0.03705
								10500	25.7	25.29	58.66	0.8346	0.03692
								11000	26.1	26.07	60.55	0.8660	0.03679
								11500	26.5	26.82	62.44	0.8973	0.03666
								12000	26.9	27.55	64.31	0.9285	0.03653
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337

	8500	25.9	20.29	57.42	0.5752	0.04331
	9000	26.3	21.18	59.35	0.5965	0.04324
	9500	26.7	22.04	61.26	0.6176	0.04318
	10000	27.0	22.88	63.15	0.6385	0.04311
	10500	27.4	23.70	65.02	0.6591	0.04305
	11000	27.8	24.51	66.88	0.6796	0.04298
	11500	28.1	25.29	68.72	0.6999	0.04292
	12000	28.5	26.06	70.54	0.7201	0.04286
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.68	50.47	0.6880	0.03789

	8500	24.4	21.56	52.57	0.7229	0.03772
	9000	24.9	22.41	54.66	0.7577	0.03754
	9500	25.3	23.23	56.74	0.7923	0.03737
	10000	25.8	24.03	58.82	0.8268	0.03720
	10500	26.2	24.79	60.89	0.8613	0.03703
	11000	26.7	25.54	62.95	0.8956	0.03686
	11500	27.1	26.25	65.01	0.9298	0.03669
	12000	27.5	26.95	67.06	0.9638	0.03652
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	49.61	0.6600	0.03831

								8500	24.2	21.73	51.58	0.6915	0.03818
								9000	24.6	22.61	53.54	0.7228	0.03805
								9500	25.1	23.45	55.48	0.7540	0.03793
								10000	25.5	24.28	57.42	0.7850	0.03780
								10500	25.9	25.07	59.35	0.8158	0.03768
								11000	26.3	25.85	61.26	0.8465	0.03756
								11500	26.7	26.60	63.17	0.8770	0.03743
								12000	27.2	27.33	65.07	0.9074	0.03731
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337
								8500	25.9	20.29	57.42	0.5752	0.04331

	9000	26.3	21.18	59.35	0.5965	0.04324
	9500	26.7	22.04	61.26	0.6176	0.04318
	10000	27.0	22.88	63.15	0.6385	0.04311
	10500	27.4	23.70	65.02	0.6591	0.04305
	11000	27.8	24.51	66.88	0.6796	0.04298
	11500	28.1	25.29	68.72	0.6999	0.04292
	12000	28.5	26.06	70.54	0.7201	0.04286
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.68	50.47	0.6880	0.03789
	8500	24.4	21.56	52.57	0.7229	0.03772
	9000	24.9	22.41	54.66	0.7577	0.03754
	9500	25.3	23.23	56.74	0.7923	0.03737
	10000	25.8	24.03	58.82	0.8268	0.03720
	10500	26.2	24.79	60.89	0.8613	0.03703
	11000	26.7	25.54	62.95	0.8956	0.03686
	11500	27.1	26.25	65.01	0.9298	0.03669
	12000	27.5	26.95	67.06	0.9638	0.03652
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	49.61	0.6600	0.03831
	8500	24.2	21.73	51.58	0.6915	0.03818

								9000	24.6	22.61	53.54	0.7228	0.03805
								9500	25.1	23.45	55.48	0.7540	0.03793
								10000	25.5	24.28	57.42	0.7850	0.03780
								10500	25.9	25.07	59.35	0.8158	0.03768
								11000	26.3	25.85	61.26	0.8465	0.03756
								11500	26.7	26.60	63.17	0.8770	0.03743
								12000	27.2	27.33	65.07	0.9074	0.03731
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.17	56.38	0.4156	0.04666
								8500	26.2	20.06	58.41	0.4365	0.04660
								9000	26.6	20.94	60.43	0.4571	0.04653
								9500	27.0	21.78	62.42	0.4776	0.04647
								10000	27.4	22.61	64.39	0.4978	0.04640
								10500	27.7	23.42	66.34	0.5178	0.04634
								11000	28.1	24.21	68.28	0.5376	0.04628
								11500	28.5	24.99	70.20	0.5573	0.04622
								12000	28.8	25.74	72.10	0.5768	0.04616
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	53.56	0.4144	0.04624
								8500	25.7	20.46	55.65	0.4377	0.04616

	9000	26.1	21.33	57.72	0.4609	0.04608
	9500	26.5	22.17	59.78	0.4838	0.04600
	10000	26.9	22.99	61.83	0.5067	0.04592
	10500	27.3	23.79	63.86	0.5293	0.04584
	11000	27.7	24.56	65.88	0.5518	0.04576
	11500	28.1	25.32	67.89	0.5742	0.04568
	12000	28.5	26.06	69.88	0.5965	0.04560
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.54	51.42	0.5349	0.04109
	8500	24.6	21.41	53.60	0.5682	0.04092
	9000	25.0	22.26	55.77	0.6013	0.04076
	9500	25.5	23.07	57.94	0.6343	0.04059
	10000	25.9	23.86	60.09	0.6672	0.04043
	10500	26.4	24.63	62.24	0.7000	0.04026
	11000	26.8	25.36	64.38	0.7326	0.04010
	11500	27.3	26.08	66.51	0.7652	0.03993
	12000	27.7	26.77	68.64	0.7977	0.03977
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.66	50.56	0.5095	0.04151
	8500	24.4	21.56	52.60	0.5397	0.04139

								9000	24.8	22.43	54.64	0.5696	0.04127
								9500	25.3	23.27	56.66	0.5994	0.04115
								10000	25.7	24.09	58.67	0.6290	0.04103
								10500	26.1	24.88	60.67	0.6585	0.04091
								11000	26.5	25.65	62.66	0.6878	0.04079
								11500	27.0	26.40	64.65	0.7170	0.04067
								12000	27.4	27.12	66.62	0.7461	0.04055
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.26	55.78	0.4096	0.04668
								8500	26.1	20.15	57.79	0.4301	0.04662
								9000	26.5	21.03	59.78	0.4505	0.04655
								9500	26.9	21.89	61.74	0.4706	0.04649
								10000	27.2	22.73	63.68	0.4905	0.04643

	10500	27.6	23.54	65.61	0.5102	0.04637
	11000	28.0	24.34	67.51	0.5297	0.04630
	11500	28.3	25.12	69.40	0.5491	0.04624
	12000	28.7	25.89	71.28	0.5683	0.04618
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	53.56	0.4144	0.04624
	8500	25.7	20.46	55.65	0.4377	0.04616
	9000	26.1	21.33	57.72	0.4609	0.04608
	9500	26.5	22.17	59.78	0.4838	0.04600
	10000	26.9	22.99	61.83	0.5067	0.04592

	10500	27.3	23.79	63.86	0.5293	0.04584
	11000	27.7	24.56	65.88	0.5518	0.04576
	11500	28.1	25.32	67.89	0.5742	0.04568
	12000	28.5	26.06	69.88	0.5965	0.04560
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.60	51.10	0.5299	0.04111
	8500	24.5	21.47	53.26	0.5629	0.04095
	9000	25.0	22.33	55.41	0.5957	0.04078
	9500	25.4	23.15	57.55	0.6284	0.04062
	10000	25.9	23.94	59.69	0.6610	0.04046

		10500	26.3	24.71	61.82	0.6935	0.04029
		11000	26.7	25.45	63.94	0.7259	0.04013
		11500	27.2	26.17	66.05	0.7582	0.03997
		12000	27.6	26.87	68.16	0.7904	0.03981
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.70	50.33	0.5062	0.04152
		8500	24.4	21.61	52.36	0.5361	0.04140
		9000	24.8	22.48	54.38	0.5659	0.04128
		9500	25.2	23.33	56.39	0.5955	0.04116
		10000	25.6	24.15	58.39	0.6249	0.04104

								10500	26.1	24.94	60.38	0.6542	0.04092
								11000	26.5	25.72	62.36	0.6833	0.04080
								11500	26.9	26.46	64.33	0.7123	0.04069
								12000	27.3	27.19	66.29	0.7412	0.04057
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.24	56.24	0.4077	0.04660
								8500	26.1	20.14	58.27	0.4281	0.04654
								9000	26.5	21.01	60.28	0.4483	0.04648
								9500	26.9	21.86	62.26	0.4683	0.04642
								10000	27.3	22.70	64.23	0.4881	0.04636
								10500	27.6	23.51	66.17	0.5077	0.04630
								11000	28.0	24.31	68.10	0.5271	0.04624
								11500	28.4	25.08	70.01	0.5464	0.04618
								12000	28.7	25.85	71.90	0.5655	0.04612
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.71	52.94	0.4009	0.04620

	8500	25.5	20.62	54.99	0.4234	0.04612
	9000	25.9	21.49	57.03	0.4458	0.04605
	9500	26.3	22.35	59.06	0.4680	0.04597
	10000	26.7	23.18	61.07	0.4900	0.04589
	10500	27.1	23.99	63.07	0.5120	0.04582
	11000	27.5	24.78	65.05	0.5337	0.04574
	11500	27.9	25.54	67.03	0.5554	0.04567
	12000	28.2	26.30	68.99	0.5769	0.04559
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.56	51.60	0.5288	0.04104
	8500	24.5	21.44	53.78	0.5616	0.04088
	9000	25.0	22.29	55.96	0.5944	0.04072
	9500	25.4	23.11	58.13	0.6270	0.04055
	10000	25.9	23.89	60.30	0.6595	0.04039
	10500	26.3	24.66	62.45	0.6919	0.04023
	11000	26.8	25.40	64.60	0.7242	0.04007
	11500	27.2	26.12	66.74	0.7564	0.03991
	12000	27.7	26.81	68.88	0.7885	0.03975
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.69	50.72	0.5037	0.04147

								8500	24.4	21.59	52.78	0.5335	0.04135
								9000	24.8	22.46	54.82	0.5631	0.04123
								9500	25.2	23.30	56.85	0.5925	0.04111
								10000	25.7	24.12	58.87	0.6218	0.04099
								10500	26.1	24.92	60.87	0.6509	0.04087
								11000	26.5	25.68	62.87	0.6799	0.04076
								11500	26.9	26.43	64.86	0.7087	0.04064
								12000	27.3	27.16	66.84	0.7375	0.04053
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.32	55.65	0.4017	0.04662
								8500	26.0	20.23	57.65	0.4218	0.04656
								9000	26.4	21.11	59.62	0.4417	0.04650
								9500	26.8	21.97	61.58	0.4614	0.04644
								10000	27.1	22.81	63.51	0.4809	0.04638

	10500	27.5	23.63	65.43	0.5002	0.04632
	11000	27.9	24.44	67.33	0.5194	0.04626
	11500	28.2	25.22	69.21	0.5383	0.04620
	12000	28.6	25.99	71.08	0.5571	0.04615
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.71	52.94	0.4009	0.04620
	8500	25.5	20.62	54.99	0.4234	0.04612
	9000	25.9	21.49	57.03	0.4458	0.04605
	9500	26.3	22.35	59.06	0.4680	0.04597
	10000	26.7	23.18	61.07	0.4900	0.04589

	10500	27.1	23.99	63.07	0.5120	0.04582
	11000	27.5	24.78	65.05	0.5337	0.04574
	11500	27.9	25.54	67.03	0.5554	0.04567
	12000	28.2	26.30	68.99	0.5769	0.04559
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.62	51.27	0.5238	0.04107
	8500	24.5	21.50	53.43	0.5564	0.04091
	9000	24.9	22.36	55.59	0.5889	0.04074
	9500	25.4	23.18	57.75	0.6212	0.04058
	10000	25.8	23.97	59.89	0.6534	0.04042

	10500	26.3	24.74	62.03	0.6855	0.04026
	11000	26.7	25.49	64.16	0.7175	0.04010
	11500	27.1	26.21	66.28	0.7494	0.03994
	12000	27.6	26.91	68.40	0.7813	0.03979
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.73	50.49	0.5004	0.04148
	8500	24.3	21.64	52.53	0.5300	0.04136
	9000	24.8	22.51	54.56	0.5594	0.04124
	9500	25.2	23.36	56.58	0.5886	0.04112
	10000	25.6	24.18	58.59	0.6177	0.04101

								10500	26.0	24.98	60.58	0.6466	0.04089
								11000	26.4	25.75	62.57	0.6754	0.04077
								11500	26.9	26.50	64.55	0.7041	0.04066
								12000	27.3	27.23	66.51	0.7327	0.04054
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.29	53.93	0.4672	0.04232
								8500	24.8	21.22	55.87	0.4911	0.04223
								9000	25.2	22.12	57.78	0.5147	0.04214
								9500	25.6	23.00	59.67	0.5381	0.04206
								10000	25.9	23.86	61.54	0.5612	0.04197
								10500	26.3	24.70	63.39	0.5841	0.04189
								11000	26.7	25.51	65.23	0.6068	0.04181
								11500	27.0	26.31	67.05	0.6293	0.04172
								12000	27.4	27.09	68.85	0.6516	0.04164
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	51.10	0.4673	0.04200

	8500	24.3	21.62	53.08	0.4939	0.04190
	9000	24.7	22.52	55.04	0.5204	0.04179
	9500	25.1	23.39	56.99	0.5466	0.04169
	10000	25.5	24.24	58.92	0.5727	0.04158
	10500	25.9	25.06	60.85	0.5986	0.04148
	11000	26.3	25.86	62.75	0.6243	0.04138
	11500	26.7	26.64	64.65	0.6499	0.04127
	12000	27.1	27.40	66.54	0.6753	0.04117
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.47	51.12	0.4580	0.04299
	8500	24.6	21.39	53.10	0.4847	0.04289
	9000	25.0	22.28	55.07	0.5112	0.04279
	9500	25.4	23.14	57.02	0.5375	0.04269
	10000	25.8	23.97	58.96	0.5637	0.04260
	10500	26.2	24.79	60.89	0.5896	0.04250
	11000	26.6	25.58	62.80	0.6154	0.04240
	11500	27.0	26.36	64.70	0.6411	0.04230
	12000	27.4	27.11	66.60	0.6666	0.04221
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.72	48.57	0.6067	0.03685

	8500	23.3	22.62	50.61	0.6442	0.03665
	9000	23.7	23.49	52.64	0.6816	0.03645
	9500	24.2	24.33	54.66	0.7188	0.03626
	10000	24.6	25.14	56.67	0.7559	0.03606
	10500	25.1	25.92	58.68	0.7928	0.03586
	11000	25.5	26.68	60.68	0.8296	0.03567
	11500	26.0	27.41	62.68	0.8663	0.03547
	12000	26.4	28.12	64.66	0.9029	0.03528
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.6	21.87	47.83	0.5769	0.03728
	8500	23.1	22.80	49.75	0.6108	0.03713
	9000	23.5	23.69	51.65	0.6446	0.03698
	9500	23.9	24.56	53.54	0.6782	0.03683
	10000	24.4	25.40	55.43	0.7116	0.03668
	10500	24.8	26.22	57.30	0.7448	0.03653
	11000	25.2	27.01	59.16	0.7779	0.03638
	11500	25.6	27.77	61.02	0.8108	0.03624
	12000	26.0	28.51	62.87	0.8436	0.03609

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.39	53.37	0.4602	0.04234
								8500	24.7	21.32	55.27	0.4838	0.04226
								9000	25.1	22.23	57.16	0.5071	0.04217
								9500	25.4	23.12	59.02	0.5301	0.04209
								10000	25.8	23.99	60.86	0.5529	0.04200
								10500	26.2	24.83	62.69	0.5755	0.04192
								11000	26.5	25.66	64.50	0.5978	0.04184
								11500	26.9	26.46	66.29	0.6200	0.04176
								12000	27.2	27.25	68.07	0.6420	0.04168

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	51.10	0.4673	0.04200
	8500	24.3	21.62	53.08	0.4939	0.04190
	9000	24.7	22.52	55.04	0.5204	0.04179
	9500	25.1	23.39	56.99	0.5466	0.04169
	10000	25.5	24.24	58.92	0.5727	0.04158
	10500	25.9	25.06	60.85	0.5986	0.04148
	11000	26.3	25.86	62.75	0.6243	0.04138
	11500	26.7	26.64	64.65	0.6499	0.04127
	12000	27.1	27.40	66.54	0.6753	0.04117

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.47	51.12	0.4580	0.04299
	8500	24.6	21.39	53.10	0.4847	0.04289
	9000	25.0	22.28	55.07	0.5112	0.04279
	9500	25.4	23.14	57.02	0.5375	0.04269
	10000	25.8	23.97	58.96	0.5637	0.04260
	10500	26.2	24.79	60.89	0.5896	0.04250
	11000	26.6	25.58	62.80	0.6154	0.04240
	11500	27.0	26.36	64.70	0.6411	0.04230
	12000	27.4	27.11	66.60	0.6666	0.04221

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.7	21.78	48.26	0.6011	0.03688
	8500	23.2	22.69	50.28	0.6383	0.03668
	9000	23.6	23.57	52.29	0.6753	0.03649
	9500	24.1	24.41	54.30	0.7122	0.03629
	10000	24.5	25.22	56.29	0.7489	0.03610
	10500	25.0	26.01	58.28	0.7855	0.03590
	11000	25.4	26.77	60.27	0.8220	0.03571
	11500	25.9	27.51	62.24	0.8584	0.03552
	12000	26.3	28.22	64.22	0.8947	0.03532

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.6	21.92	47.62	0.5731	0.03729
	8500	23.0	22.85	49.52	0.6068	0.03714
	9000	23.5	23.75	51.41	0.6404	0.03699
	9500	23.9	24.62	53.29	0.6737	0.03685
	10000	24.3	25.47	55.16	0.7069	0.03670
	10500	24.7	26.28	57.03	0.7400	0.03655
	11000	25.1	27.08	58.88	0.7728	0.03640
	11500	25.6	27.84	60.72	0.8056	0.03626
	12000	26.0	28.59	62.56	0.8381	0.03611

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.09	54.41	0.4561	0.04307
								8500	25.0	21.01	56.36	0.4793	0.04299
								9000	25.4	21.91	58.29	0.5024	0.04291
								9500	25.8	22.79	60.20	0.5251	0.04283
								10000	26.2	23.64	62.10	0.5476	0.04275
								10500	26.6	24.47	63.97	0.5700	0.04267
								11000	26.9	25.29	65.82	0.5921	0.04259
								11500	27.3	26.08	67.66	0.6140	0.04251
								12000	27.6	26.86	69.49	0.6357	0.04243
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.50	51.58	0.4559	0.04274
								8500	24.6	21.42	53.58	0.4819	0.04264
								9000	25.0	22.31	55.57	0.5077	0.04254
								9500	25.4	23.18	57.53	0.5332	0.04244
								10000	25.8	24.02	59.49	0.5586	0.04234
								10500	26.2	24.84	61.43	0.5839	0.04224
								11000	26.6	25.63	63.37	0.6089	0.04214
								11500	26.9	26.41	65.28	0.6338	0.04204
								12000	27.3	27.17	67.19	0.6586	0.04195

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.28	51.60	0.4468	0.04372
	8500	24.8	21.19	53.60	0.4729	0.04363
	9000	25.2	22.07	55.59	0.4987	0.04353
	9500	25.7	22.93	57.57	0.5243	0.04344
	10000	26.1	23.76	59.53	0.5498	0.04335
	10500	26.4	24.57	61.47	0.5751	0.04325
	11000	26.8	25.36	63.41	0.6002	0.04316
	11500	27.2	26.13	65.33	0.6252	0.04307
	12000	27.6	26.88	67.25	0.6501	0.04298
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.51	49.13	0.5917	0.03759
	8500	23.5	22.41	51.19	0.6284	0.03740
	9000	23.9	23.27	53.25	0.6648	0.03721
	9500	24.4	24.11	55.30	0.7012	0.03702
	10000	24.8	24.91	57.34	0.7374	0.03683
	10500	25.3	25.69	59.37	0.7735	0.03664
	11000	25.7	26.45	61.40	0.8095	0.03645
	11500	26.2	27.18	63.42	0.8453	0.03626
	12000	26.6	27.88	65.44	0.8811	0.03607

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.9	21.65	48.36	0.5627	0.03802
								8500	23.3	22.58	50.30	0.5959	0.03787
								9000	23.7	23.47	52.23	0.6289	0.03773
								9500	24.2	24.34	54.15	0.6617	0.03759
								10000	24.6	25.17	56.06	0.6943	0.03744
								10500	25.0	25.98	57.96	0.7268	0.03730
								11000	25.4	26.77	59.85	0.7591	0.03716
								11500	25.8	27.53	61.73	0.7913	0.03702
								12000	26.3	28.27	63.60	0.8233	0.03688
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.18	53.84	0.4493	0.04310
								8500	24.9	21.11	55.77	0.4722	0.04302
								9000	25.3	22.02	57.67	0.4949	0.04294
								9500	25.7	22.90	59.55	0.5173	0.04286

	10000	26.0	23.76	61.41	0.5395	0.04278
	10500	26.4	24.60	63.26	0.5615	0.04270
	11000	26.8	25.42	65.09	0.5833	0.04262
	11500	27.1	26.23	66.90	0.6049	0.04254
	12000	27.5	27.01	68.70	0.6263	0.04247
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.50	51.58	0.4559	0.04274
	8500	24.6	21.42	53.58	0.4819	0.04264
	9000	25.0	22.31	55.57	0.5077	0.04254
	9500	25.4	23.18	57.53	0.5332	0.04244

	10000	25.8	24.02	59.49	0.5586	0.04234
	10500	26.2	24.84	61.43	0.5839	0.04224
	11000	26.6	25.63	63.37	0.6089	0.04214
	11500	26.9	26.41	65.28	0.6338	0.04204
	12000	27.3	27.17	67.19	0.6586	0.04195
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.28	51.60	0.4468	0.04372
	8500	24.8	21.19	53.60	0.4729	0.04363
	9000	25.2	22.07	55.59	0.4987	0.04353
	9500	25.7	22.93	57.57	0.5243	0.04344

	10000	26.1	23.76	59.53	0.5498	0.04335
	10500	26.4	24.57	61.47	0.5751	0.04325
	11000	26.8	25.36	63.41	0.6002	0.04316
	11500	27.2	26.13	65.33	0.6252	0.04307
	12000	27.6	26.88	67.25	0.6501	0.04298
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.57	48.82	0.5862	0.03762
	8500	23.4	22.48	50.86	0.6225	0.03743
	9000	23.9	23.35	52.90	0.6587	0.03724
	9500	24.3	24.19	54.93	0.6947	0.03705

	10000	24.8	25.00	56.96	0.7306	0.03686
	10500	25.2	25.78	58.97	0.7664	0.03668
	11000	25.6	26.54	60.98	0.8020	0.03649
	11500	26.1	27.28	62.99	0.8376	0.03630
	12000	26.5	27.99	64.99	0.8730	0.03612
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.70	48.15	0.5590	0.03804
	8500	23.3	22.63	50.07	0.5920	0.03789
	9000	23.7	23.53	51.99	0.6248	0.03775
	9500	24.1	24.39	53.90	0.6574	0.03761

								10000	24.5	25.24	55.79	0.6898	0.03746
								10500	24.9	26.05	57.68	0.7221	0.03732
								11000	25.4	26.84	59.56	0.7542	0.03718
								11500	25.8	27.60	61.43	0.7861	0.03704
								12000	26.2	28.35	63.29	0.8179	0.03690
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.52	53.88	0.4529	0.04179
								8500	24.5	21.46	55.81	0.4761	0.04170
								9000	24.9	22.38	57.72	0.4989	0.04162
								9500	25.3	23.27	59.60	0.5216	0.04154
								10000	25.6	24.13	61.47	0.5440	0.04146
								10500	26.0	24.98	63.32	0.5662	0.04138
								11000	26.4	25.81	65.15	0.5882	0.04130
								11500	26.7	26.61	66.97	0.6100	0.04123

	12000	27.1	27.40	68.77	0.6316	0.04115
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.6	21.03	50.59	0.4469	0.04149
	8500	24.0	21.97	52.54	0.4724	0.04139
	9000	24.3	22.89	54.47	0.4977	0.04129
	9500	24.7	23.78	56.39	0.5228	0.04119
	10000	25.1	24.64	58.29	0.5477	0.04110
	10500	25.5	25.47	60.19	0.5725	0.04100
	11000	25.9	26.29	62.07	0.5971	0.04090
	11500	26.3	27.09	63.94	0.6216	0.04081
	12000	26.6	27.86	65.80	0.6459	0.04071
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.77	50.79	0.4402	0.04245
	8500	24.3	21.70	52.75	0.4659	0.04235
	9000	24.7	22.60	54.70	0.4913	0.04226
	9500	25.1	23.47	56.63	0.5167	0.04217
	10000	25.4	24.33	58.55	0.5418	0.04208
	10500	25.8	25.16	60.46	0.5667	0.04198
	11000	26.2	25.96	62.35	0.5915	0.04189
	11500	26.6	26.75	64.24	0.6162	0.04180

	12000	27.0	27.51	66.11	0.6407	0.04171
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.6	21.92	48.82	0.5945	0.03637
	8500	23.1	22.82	50.87	0.6312	0.03618
	9000	23.5	23.70	52.91	0.6677	0.03599
	9500	24.0	24.54	54.94	0.7041	0.03580
	10000	24.4	25.36	56.97	0.7404	0.03561
	10500	24.8	26.14	58.99	0.7766	0.03542
	11000	25.3	26.90	61.00	0.8126	0.03523
	11500	25.7	27.64	63.01	0.8486	0.03504
	12000	26.2	28.35	65.01	0.8844	0.03485
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.4	22.07	48.07	0.5651	0.03680
	8500	22.9	23.00	49.99	0.5983	0.03666
	9000	23.3	23.91	51.91	0.6314	0.03651
	9500	23.7	24.78	53.81	0.6643	0.03637
	10000	24.1	25.63	55.71	0.6970	0.03622
	10500	24.6	26.44	57.59	0.7295	0.03608
	11000	25.0	27.24	59.47	0.7619	0.03594
	11500	25.4	28.01	61.33	0.7941	0.03580

								12000	25.8	28.75	63.19	0.8262	0.03566
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.62	53.32	0.4461	0.04181
								8500	24.4	21.57	55.22	0.4689	0.04173
								9000	24.8	22.49	57.10	0.4915	0.04165
								9500	25.1	23.39	58.96	0.5138	0.04157
								10000	25.5	24.26	60.79	0.5359	0.04149
								10500	25.9	25.12	62.62	0.5577	0.04141
								11000	26.2	25.95	64.42	0.5794	0.04134
								11500	26.6	26.76	66.21	0.6009	0.04126

	12000	26.9	27.56	67.98	0.6221	0.04118
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.6	21.03	50.59	0.4469	0.04149
	8500	24.0	21.97	52.54	0.4724	0.04139
	9000	24.3	22.89	54.47	0.4977	0.04129
	9500	24.7	23.78	56.39	0.5228	0.04119
	10000	25.1	24.64	58.29	0.5477	0.04110
	10500	25.5	25.47	60.19	0.5725	0.04100
	11000	25.9	26.29	62.07	0.5971	0.04090
	11500	26.3	27.09	63.94	0.6216	0.04081

	12000	26.6	27.86	65.80	0.6459	0.04071
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.77	50.79	0.4402	0.04245
	8500	24.3	21.70	52.75	0.4659	0.04235
	9000	24.7	22.60	54.70	0.4913	0.04226
	9500	25.1	23.47	56.63	0.5167	0.04217
	10000	25.4	24.33	58.55	0.5418	0.04208
	10500	25.8	25.16	60.46	0.5667	0.04198
	11000	26.2	25.96	62.35	0.5915	0.04189
	11500	26.6	26.75	64.24	0.6162	0.04180

	12000	27.0	27.51	66.11	0.6407	0.04171
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.5	21.98	48.51	0.5889	0.03640
	8500	23.0	22.90	50.54	0.6253	0.03621
	9000	23.4	23.78	52.56	0.6615	0.03602
	9500	23.9	24.63	54.58	0.6976	0.03583
	10000	24.3	25.45	56.59	0.7336	0.03564
	10500	24.8	26.24	58.59	0.7695	0.03545
	11000	25.2	27.00	60.58	0.8052	0.03527
	11500	25.6	27.74	62.57	0.8408	0.03508

	12000	26.1	28.46	64.56	0.8763	0.03489
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.4	22.11	47.85	0.5614	0.03682
	8500	22.8	23.05	49.77	0.5944	0.03667
	9000	23.2	23.96	51.67	0.6273	0.03653
	9500	23.7	24.84	53.56	0.6599	0.03639
	10000	24.1	25.69	55.44	0.6924	0.03624
	10500	24.5	26.51	57.32	0.7247	0.03610
	11000	24.9	27.31	59.18	0.7569	0.03596
	11500	25.3	28.08	61.04	0.7889	0.03582

								12000	25.7	28.83	62.88	0.8208	0.03568
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.20	54.31	0.4462	0.04292
								8500	24.9	21.13	56.25	0.4689	0.04284
								9000	25.3	22.03	58.18	0.4914	0.04276
								9500	25.7	22.91	60.08	0.5137	0.04268
								10000	26.0	23.77	61.97	0.5357	0.04260
								10500	26.4	24.61	63.83	0.5575	0.04253
								11000	26.8	25.43	65.68	0.5791	0.04245
								11500	27.1	26.23	67.51	0.6006	0.04237
								12000	27.5	27.01	69.33	0.6218	0.04230
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	51.01	0.4399	0.04260
								8500	24.3	21.63	52.98	0.4650	0.04250
								9000	24.7	22.53	54.93	0.4898	0.04241
								9500	25.1	23.41	56.87	0.5145	0.04231
								10000	25.5	24.27	58.79	0.5390	0.04222
								10500	25.9	25.10	60.70	0.5634	0.04212
								11000	26.3	25.91	62.60	0.5876	0.04203

	11500	26.7	26.70	64.49	0.6116	0.04194
	12000	27.0	27.46	66.37	0.6355	0.04185
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.44	51.21	0.4332	0.04356
	8500	24.6	21.36	53.19	0.4585	0.04347
	9000	25.0	22.25	55.16	0.4836	0.04338
	9500	25.4	23.12	57.11	0.5084	0.04329
	10000	25.8	23.97	59.05	0.5332	0.04320
	10500	26.2	24.79	60.98	0.5577	0.04311
	11000	26.6	25.59	62.89	0.5821	0.04302
	11500	27.0	26.36	64.79	0.6063	0.04294
	12000	27.4	27.12	66.68	0.6304	0.04285
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.58	49.32	0.5839	0.03745
	8500	23.4	22.48	51.39	0.6201	0.03727
	9000	23.9	23.34	53.46	0.6561	0.03708
	9500	24.3	24.18	55.52	0.6919	0.03689
	10000	24.8	24.99	57.57	0.7276	0.03670
	10500	25.2	25.77	59.61	0.7632	0.03652
	11000	25.7	26.53	61.65	0.7987	0.03633

								11500	26.1	27.26	63.68	0.8341	0.03615
								12000	26.5	27.96	65.70	0.8694	0.03597
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.72	48.55	0.5553	0.03788
								8500	23.2	22.65	50.50	0.5880	0.03774
								9000	23.7	23.54	52.43	0.6206	0.03760
								9500	24.1	24.41	54.36	0.6529	0.03746
								10000	24.5	25.25	56.28	0.6851	0.03732
								10500	24.9	26.06	58.18	0.7171	0.03718
								11000	25.4	26.85	60.08	0.7490	0.03704
								11500	25.8	27.61	61.97	0.7807	0.03690
								12000	26.2	28.35	63.85	0.8123	0.03677
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.29	53.74	0.4395	0.04294
								8500	24.8	21.23	55.65	0.4619	0.04286
								9000	25.2	22.14	57.55	0.4841	0.04278

	9500	25.5	23.03	59.43	0.5060	0.04271
	10000	25.9	23.90	61.28	0.5277	0.04263
	10500	26.3	24.74	63.12	0.5492	0.04255
	11000	26.6	25.57	64.94	0.5705	0.04248
	11500	27.0	26.37	66.75	0.5916	0.04241
	12000	27.3	27.17	68.54	0.6125	0.04233
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	51.01	0.4399	0.04260
	8500	24.3	21.63	52.98	0.4650	0.04250
	9000	24.7	22.53	54.93	0.4898	0.04241

		9500	25.1	23.41	56.87	0.5145	0.04231
		10000	25.5	24.27	58.79	0.5390	0.04222
		10500	25.9	25.10	60.70	0.5634	0.04212
		11000	26.3	25.91	62.60	0.5876	0.04203
		11500	26.7	26.70	64.49	0.6116	0.04194
		12000	27.0	27.46	66.37	0.6355	0.04185
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.44	51.21	0.4332	0.04356
		8500	24.6	21.36	53.19	0.4585	0.04347
		9000	25.0	22.25	55.16	0.4836	0.04338

	9500	25.4	23.12	57.11	0.5084	0.04329
	10000	25.8	23.97	59.05	0.5332	0.04320
	10500	26.2	24.79	60.98	0.5577	0.04311
	11000	26.6	25.59	62.89	0.5821	0.04302
	11500	27.0	26.36	64.79	0.6063	0.04294
	12000	27.4	27.12	66.68	0.6304	0.04285
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.64	49.00	0.5785	0.03748
	8500	23.3	22.55	51.06	0.6143	0.03730
	9000	23.8	23.42	53.11	0.6500	0.03711

	9500	24.2	24.26	55.15	0.6855	0.03692
	10000	24.7	25.08	57.18	0.7209	0.03674
	10500	25.1	25.86	59.21	0.7562	0.03656
	11000	25.6	26.62	61.23	0.7914	0.03637
	11500	26.0	27.36	63.24	0.8265	0.03619
	12000	26.4	28.07	65.25	0.8615	0.03601
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.77	48.33	0.5516	0.03790
	8500	23.2	22.70	50.27	0.5842	0.03776
	9000	23.6	23.60	52.19	0.6165	0.03761

								9500	24.0	24.47	54.11	0.6487	0.03748
								10000	24.5	25.31	56.01	0.6806	0.03734
								10500	24.9	26.13	57.90	0.7125	0.03720
								11000	25.3	26.92	59.79	0.7441	0.03706
								11500	25.7	27.68	61.67	0.7757	0.03692
								12000	26.1	28.43	63.54	0.8071	0.03679
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.50	55.48	0.4353	0.04530
								8500	25.8	20.41	57.48	0.4574	0.04522
								9000	26.2	21.29	59.46	0.4791	0.04515
								9500	26.6	22.15	61.41	0.5007	0.04508
								10000	26.9	22.98	63.35	0.5221	0.04501
								10500	27.3	23.80	65.26	0.5432	0.04494

	11000	27.7	24.60	67.16	0.5641	0.04487
	11500	28.0	25.38	69.05	0.5849	0.04480
	12000	28.4	26.14	70.91	0.6055	0.04473
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	52.66	0.4345	0.04492
	8500	25.3	20.80	54.71	0.4591	0.04483
	9000	25.7	21.68	56.74	0.4835	0.04474
	9500	26.1	22.53	58.76	0.5077	0.04465
	10000	26.5	23.36	60.77	0.5318	0.04456
	10500	26.9	24.16	62.76	0.5557	0.04447
	11000	27.3	24.95	64.74	0.5795	0.04438
	11500	27.7	25.71	66.71	0.6031	0.04429
	12000	28.1	26.46	68.66	0.6266	0.04420
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.69	52.67	0.4257	0.04590
	8500	25.6	20.58	54.73	0.4504	0.04581
	9000	26.0	21.45	56.77	0.4749	0.04573
	9500	26.4	22.30	58.79	0.4992	0.04564
	10000	26.8	23.11	60.80	0.5234	0.04556
	10500	27.2	23.91	62.80	0.5474	0.04548

	11000	27.6	24.69	64.78	0.5712	0.04539
	11500	28.0	25.45	66.75	0.5949	0.04531
	12000	28.4	26.18	68.71	0.6185	0.04523
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.89	50.38	0.5618	0.03975
	8500	24.2	21.77	52.51	0.5967	0.03957
	9000	24.6	22.62	54.63	0.6315	0.03939
	9500	25.1	23.45	56.74	0.6661	0.03921
	10000	25.5	24.24	58.84	0.7007	0.03903
	10500	26.0	25.01	60.94	0.7350	0.03886
	11000	26.4	25.76	63.03	0.7693	0.03868
	11500	26.9	26.47	65.11	0.8035	0.03851
	12000	27.3	27.17	67.19	0.8376	0.03833
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	21.02	49.56	0.5348	0.04017
	8500	24.0	21.93	51.56	0.5664	0.04004
	9000	24.4	22.81	53.55	0.5978	0.03990
	9500	24.9	23.66	55.52	0.6291	0.03977
	10000	25.3	24.48	57.49	0.6602	0.03964
	10500	25.7	25.28	59.44	0.6911	0.03951

								11000	26.1	26.06	61.39	0.7219	0.03938
								11500	26.5	26.81	63.32	0.7525	0.03925
								12000	27.0	27.54	65.25	0.7831	0.03912
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.3	19.59	54.90	0.4289	0.04532
								8500	25.7	20.50	56.87	0.4506	0.04525
								9000	26.0	21.39	58.82	0.4721	0.04517
								9500	26.4	22.26	60.74	0.4933	0.04510
								10000	26.8	23.10	62.65	0.5144	0.04503
								10500	27.2	23.93	64.54	0.5352	0.04496
								11000	27.5	24.73	66.41	0.5558	0.04489

	11500	27.9	25.52	68.27	0.5763	0.04483
	12000	28.2	26.29	70.10	0.5966	0.04476
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	52.66	0.4345	0.04492
	8500	25.3	20.80	54.71	0.4591	0.04483
	9000	25.7	21.68	56.74	0.4835	0.04474
	9500	26.1	22.53	58.76	0.5077	0.04465
	10000	26.5	23.36	60.77	0.5318	0.04456
	10500	26.9	24.16	62.76	0.5557	0.04447
	11000	27.3	24.95	64.74	0.5795	0.04438

	11500	27.7	25.71	66.71	0.6031	0.04429
	12000	28.1	26.46	68.66	0.6266	0.04420
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.69	52.67	0.4257	0.04590
	8500	25.6	20.58	54.73	0.4504	0.04581
	9000	26.0	21.45	56.77	0.4749	0.04573
	9500	26.4	22.30	58.79	0.4992	0.04564
	10000	26.8	23.11	60.80	0.5234	0.04556
	10500	27.2	23.91	62.80	0.5474	0.04548
	11000	27.6	24.69	64.78	0.5712	0.04539

	11500	28.0	25.45	66.75	0.5949	0.04531
	12000	28.4	26.18	68.71	0.6185	0.04523
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	20.95	50.06	0.5566	0.03977
	8500	24.1	21.84	52.17	0.5912	0.03960
	9000	24.5	22.70	54.27	0.6256	0.03942
	9500	25.0	23.52	56.36	0.6600	0.03924
	10000	25.4	24.32	58.45	0.6942	0.03907
	10500	25.9	25.10	60.53	0.7283	0.03889
	11000	26.3	25.84	62.60	0.7623	0.03872

	11500	26.8	26.57	64.66	0.7961	0.03854
	12000	27.2	27.27	66.72	0.8299	0.03837
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.06	49.34	0.5313	0.04019
	8500	23.9	21.98	51.32	0.5627	0.04005
	9000	24.4	22.86	53.30	0.5939	0.03992
	9500	24.8	23.71	55.26	0.6250	0.03979
	10000	25.2	24.54	57.21	0.6559	0.03966
	10500	25.6	25.34	59.15	0.6866	0.03953
	11000	26.1	26.12	61.09	0.7172	0.03940

								11500	26.5	26.88	63.01	0.7476	0.03927
								12000	26.9	27.61	64.93	0.7780	0.03914
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.54	55.50	0.4339	0.04516
								8500	25.7	20.45	57.50	0.4558	0.04509
								9000	26.1	21.33	59.48	0.4776	0.04502
								9500	26.5	22.19	61.43	0.4990	0.04494
								10000	26.9	23.03	63.37	0.5203	0.04487
								10500	27.2	23.85	65.29	0.5414	0.04480
								11000	27.6	24.65	67.19	0.5623	0.04473
								11500	28.0	25.43	69.07	0.5829	0.04466
								12000	28.3	26.19	70.93	0.6035	0.04460
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	52.68	0.4331	0.04478
								8500	25.2	20.85	54.73	0.4576	0.04469
								9000	25.6	21.73	56.76	0.4820	0.04460
								9500	26.0	22.58	58.78	0.5061	0.04451
								10000	26.4	23.41	60.79	0.5301	0.04442

	10500	26.8	24.21	62.78	0.5539	0.04433
	11000	27.2	25.00	64.76	0.5776	0.04425
	11500	27.6	25.76	66.73	0.6012	0.04416
	12000	28.0	26.51	68.69	0.6246	0.04407
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.73	52.69	0.4243	0.04576
	8500	25.5	20.63	54.75	0.4489	0.04567
	9000	25.9	21.49	56.79	0.4734	0.04559
	9500	26.3	22.34	58.81	0.4976	0.04551
	10000	26.7	23.16	60.82	0.5217	0.04542
	10500	27.1	23.96	62.82	0.5456	0.04534
	11000	27.5	24.74	64.80	0.5694	0.04526
	11500	27.9	25.49	66.77	0.5930	0.04518
	12000	28.3	26.24	68.73	0.6165	0.04509
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.93	50.40	0.5604	0.03962
	8500	24.1	21.81	52.53	0.5952	0.03945
	9000	24.6	22.67	54.65	0.6298	0.03927
	9500	25.0	23.49	56.76	0.6644	0.03909
	10000	25.5	24.29	58.87	0.6988	0.03891

								10500	25.9	25.06	60.96	0.7331	0.03874
								11000	26.4	25.80	63.05	0.7673	0.03856
								11500	26.8	26.52	65.14	0.8013	0.03839
								12000	27.3	27.22	67.22	0.8353	0.03821
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.06	49.58	0.5334	0.04005
								8500	23.9	21.97	51.58	0.5649	0.03991
								9000	24.4	22.85	53.57	0.5962	0.03978
								9500	24.8	23.71	55.54	0.6274	0.03965
								10000	25.2	24.53	57.51	0.6584	0.03952
								10500	25.7	25.33	59.46	0.6892	0.03939
								11000	26.1	26.11	61.41	0.7199	0.03926
								11500	26.5	26.86	63.35	0.7505	0.03913
								12000	26.9	27.59	65.27	0.7809	0.03900
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.2	19.63	54.92	0.4275	0.04518
								8500	25.6	20.54	56.89	0.4491	0.04511

	9000	26.0	21.43	58.84	0.4705	0.04504
	9500	26.4	22.30	60.76	0.4917	0.04497
	10000	26.7	23.15	62.67	0.5127	0.04490
	10500	27.1	23.97	64.56	0.5334	0.04483
	11000	27.5	24.78	66.43	0.5540	0.04476
	11500	27.8	25.57	68.29	0.5744	0.04469
	12000	28.2	26.34	70.13	0.5946	0.04463
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	52.68	0.4331	0.04478
	8500	25.2	20.85	54.73	0.4576	0.04469

	9000	25.6	21.73	56.76	0.4820	0.04460
	9500	26.0	22.58	58.78	0.5061	0.04451
	10000	26.4	23.41	60.79	0.5301	0.04442
	10500	26.8	24.21	62.78	0.5539	0.04433
	11000	27.2	25.00	64.76	0.5776	0.04425
	11500	27.6	25.76	66.73	0.6012	0.04416
	12000	28.0	26.51	68.69	0.6246	0.04407
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.73	52.69	0.4243	0.04576
	8500	25.5	20.63	54.75	0.4489	0.04567

	9000	25.9	21.49	56.79	0.4734	0.04559
	9500	26.3	22.34	58.81	0.4976	0.04551
	10000	26.7	23.16	60.82	0.5217	0.04542
	10500	27.1	23.96	62.82	0.5456	0.04534
	11000	27.5	24.74	64.80	0.5694	0.04526
	11500	27.9	25.49	66.77	0.5930	0.04518
	12000	28.3	26.24	68.73	0.6165	0.04509
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	20.99	50.08	0.5551	0.03965
	8500	24.0	21.88	52.19	0.5896	0.03947

	9000	24.5	22.74	54.29	0.6240	0.03930
	9500	24.9	23.57	56.39	0.6582	0.03912
	10000	25.4	24.37	58.47	0.6923	0.03895
	10500	25.8	25.15	60.55	0.7263	0.03877
	11000	26.3	25.89	62.62	0.7602	0.03860
	11500	26.7	26.62	64.69	0.7940	0.03843
	12000	27.2	27.33	66.75	0.8277	0.03825
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.11	49.36	0.5298	0.04006
	8500	23.9	22.02	51.34	0.5612	0.03993

								9000	24.3	22.90	53.32	0.5923	0.03980
								9500	24.7	23.76	55.28	0.6233	0.03967
								10000	25.2	24.59	57.23	0.6541	0.03954
								10500	25.6	25.39	59.18	0.6847	0.03941
								11000	26.0	26.17	61.11	0.7152	0.03928
								11500	26.4	26.93	63.04	0.7456	0.03915
								12000	26.8	27.66	64.95	0.7758	0.03902
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.61	55.37	0.4257	0.04512
								8500	25.6	20.52	57.37	0.4472	0.04505
								9000	26.0	21.41	59.33	0.4685	0.04498
								9500	26.4	22.27	61.28	0.4896	0.04491

	10000	26.8	23.11	63.21	0.5104	0.04484
	10500	27.1	23.94	65.12	0.5311	0.04477
	11000	27.5	24.74	67.01	0.5515	0.04470
	11500	27.9	25.53	68.89	0.5718	0.04464
	12000	28.2	26.30	70.75	0.5919	0.04457
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.10	52.07	0.4190	0.04475
	8500	25.1	21.01	54.09	0.4428	0.04467
	9000	25.4	21.90	56.09	0.4663	0.04458
	9500	25.8	22.76	58.07	0.4897	0.04450
	10000	26.2	23.60	60.04	0.5129	0.04441
	10500	26.6	24.42	62.00	0.5360	0.04433
	11000	27.0	25.22	63.95	0.5589	0.04424
	11500	27.4	25.99	65.89	0.5817	0.04416
	12000	27.8	26.75	67.81	0.6043	0.04408
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.85	52.27	0.4126	0.04572
	8500	25.4	20.76	54.30	0.4365	0.04563
	9000	25.8	21.63	56.32	0.4603	0.04555
	9500	26.2	22.48	58.32	0.4838	0.04547

	10000	26.6	23.31	60.31	0.5073	0.04539
	10500	26.9	24.12	62.28	0.5305	0.04531
	11000	27.3	24.91	64.24	0.5536	0.04524
	11500	27.7	25.67	66.19	0.5766	0.04516
	12000	28.1	26.42	68.13	0.5994	0.04508
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	20.96	50.57	0.5541	0.03959
	8500	24.1	21.84	52.71	0.5886	0.03941
	9000	24.5	22.70	54.84	0.6228	0.03924
	9500	25.0	23.52	56.96	0.6570	0.03906
	10000	25.4	24.32	59.07	0.6910	0.03889
	10500	25.9	25.09	61.18	0.7249	0.03872
	11000	26.3	25.83	63.28	0.7587	0.03855
	11500	26.8	26.56	65.37	0.7924	0.03837
	12000	27.2	27.26	67.45	0.8260	0.03820
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.09	49.75	0.5275	0.04001
	8500	23.9	22.00	51.75	0.5586	0.03988
	9000	24.3	22.88	53.75	0.5896	0.03975
	9500	24.8	23.74	55.73	0.6204	0.03962

								10000	25.2	24.56	57.70	0.6511	0.03950
								10500	25.6	25.36	59.67	0.6816	0.03937
								11000	26.0	26.14	61.62	0.7119	0.03924
								11500	26.5	26.89	63.56	0.7421	0.03912
								12000	26.9	27.62	65.50	0.7722	0.03899
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.1	19.70	54.79	0.4194	0.04514
								8500	25.5	20.62	56.75	0.4406	0.04507
								9000	25.9	21.51	58.69	0.4616	0.04500
								9500	26.3	22.38	60.61	0.4823	0.04493
								10000	26.6	23.23	62.51	0.5028	0.04486
								10500	27.0	24.06	64.39	0.5232	0.04480

		11000	27.4	24.88	66.26	0.5433	0.04473
		11500	27.7	25.67	68.10	0.5633	0.04467
		12000	28.1	26.44	69.94	0.5831	0.04460
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.10	52.07	0.4190	0.04475
		8500	25.1	21.01	54.09	0.4428	0.04467
		9000	25.4	21.90	56.09	0.4663	0.04458
		9500	25.8	22.76	58.07	0.4897	0.04450
		10000	26.2	23.60	60.04	0.5129	0.04441
		10500	26.6	24.42	62.00	0.5360	0.04433

	11000	27.0	25.22	63.95	0.5589	0.04424
	11500	27.4	25.99	65.89	0.5817	0.04416
	12000	27.8	26.75	67.81	0.6043	0.04408
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.85	52.27	0.4126	0.04572
	8500	25.4	20.76	54.30	0.4365	0.04563
	9000	25.8	21.63	56.32	0.4603	0.04555
	9500	26.2	22.48	58.32	0.4838	0.04547
	10000	26.6	23.31	60.31	0.5073	0.04539
	10500	26.9	24.12	62.28	0.5305	0.04531

	11000	27.3	24.91	64.24	0.5536	0.04524
	11500	27.7	25.67	66.19	0.5766	0.04516
	12000	28.1	26.42	68.13	0.5994	0.04508
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	21.02	50.25	0.5490	0.03962
	8500	24.0	21.91	52.37	0.5831	0.03944
	9000	24.5	22.77	54.48	0.6171	0.03927
	9500	24.9	23.60	56.58	0.6509	0.03910
	10000	25.4	24.40	58.68	0.6846	0.03892
	10500	25.8	25.18	60.76	0.7182	0.03875

	11000	26.3	25.93	62.84	0.7517	0.03858
	11500	26.7	26.65	64.92	0.7851	0.03841
	12000	27.1	27.36	66.98	0.8185	0.03824
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.4	21.13	49.52	0.5240	0.04003
	8500	23.9	22.05	51.52	0.5550	0.03990
	9000	24.3	22.93	53.50	0.5858	0.03977
	9500	24.7	23.79	55.47	0.6164	0.03964
	10000	25.1	24.62	57.43	0.6468	0.03951
	10500	25.6	25.42	59.38	0.6771	0.03939

								11000	26.0	26.20	61.32	0.7073	0.03926
								11500	26.4	26.96	63.25	0.7373	0.03914
								12000	26.8	27.69	65.18	0.7672	0.03901
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.65	55.39	0.4242	0.04498
								8500	25.6	20.56	57.38	0.4457	0.04491
								9000	26.0	21.45	59.35	0.4669	0.04484
								9500	26.3	22.32	61.30	0.4879	0.04477
								10000	26.7	23.16	63.23	0.5087	0.04471
								10500	27.1	23.99	65.14	0.5292	0.04464
								11000	27.5	24.79	67.03	0.5496	0.04457
								11500	27.8	25.58	68.91	0.5698	0.04451
								12000	28.2	26.35	70.77	0.5899	0.04444
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.14	52.09	0.4177	0.04462
								8500	25.0	21.05	54.10	0.4413	0.04453
								9000	25.4	21.94	56.11	0.4648	0.04445

	9500	25.8	22.81	58.09	0.4881	0.04436
	10000	26.2	23.65	60.06	0.5112	0.04428
	10500	26.6	24.47	62.02	0.5342	0.04419
	11000	26.9	25.27	63.97	0.5570	0.04411
	11500	27.3	26.04	65.91	0.5797	0.04403
	12000	27.7	26.80	67.83	0.6023	0.04395
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.89	52.29	0.4112	0.04558
	8500	25.3	20.80	54.32	0.4351	0.04549
	9000	25.7	21.68	56.34	0.4587	0.04541
	9500	26.1	22.53	58.34	0.4822	0.04534
	10000	26.5	23.36	60.33	0.5056	0.04526
	10500	26.9	24.17	62.30	0.5288	0.04518
	11000	27.3	24.96	64.26	0.5518	0.04510
	11500	27.7	25.73	66.21	0.5747	0.04502
	12000	28.0	26.47	68.15	0.5974	0.04494
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	21.00	50.59	0.5527	0.03947
	8500	24.0	21.89	52.73	0.5870	0.03929
	9000	24.5	22.74	54.86	0.6212	0.03912

								9500	24.9	23.57	56.98	0.6552	0.03894
								10000	25.4	24.37	59.09	0.6891	0.03877
								10500	25.8	25.14	61.20	0.7229	0.03860
								11000	26.3	25.88	63.30	0.7566	0.03843
								11500	26.7	26.61	65.39	0.7902	0.03826
								12000	27.2	27.31	67.48	0.8237	0.03808
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.13	49.76	0.5260	0.03989
								8500	23.9	22.05	51.77	0.5571	0.03976
								9000	24.3	22.93	53.77	0.5880	0.03963
								9500	24.7	23.78	55.75	0.6187	0.03950
								10000	25.1	24.61	57.72	0.6493	0.03937
								10500	25.6	25.41	59.69	0.6797	0.03925
								11000	26.0	26.19	61.64	0.7099	0.03912
								11500	26.4	26.94	63.59	0.7401	0.03900
								12000	26.8	27.67	65.52	0.7701	0.03887
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.1	19.74	54.81	0.4179	0.04500

	8500	25.5	20.66	56.77	0.4391	0.04493
	9000	25.9	21.55	58.71	0.4600	0.04487
	9500	26.2	22.43	60.63	0.4807	0.04480
	10000	26.6	23.28	62.53	0.5011	0.04473
	10500	27.0	24.11	64.41	0.5214	0.04466
	11000	27.3	24.92	66.28	0.5415	0.04460
	11500	27.7	25.72	68.13	0.5614	0.04453
	12000	28.0	26.50	69.96	0.5811	0.04447
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.14	52.09	0.4177	0.04462

	8500	25.0	21.05	54.10	0.4413	0.04453
	9000	25.4	21.94	56.11	0.4648	0.04445
	9500	25.8	22.81	58.09	0.4881	0.04436
	10000	26.2	23.65	60.06	0.5112	0.04428
	10500	26.6	24.47	62.02	0.5342	0.04419
	11000	26.9	25.27	63.97	0.5570	0.04411
	11500	27.3	26.04	65.91	0.5797	0.04403
	12000	27.7	26.80	67.83	0.6023	0.04395
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.89	52.29	0.4112	0.04558

	8500	25.3	20.80	54.32	0.4351	0.04549
	9000	25.7	21.68	56.34	0.4587	0.04541
	9500	26.1	22.53	58.34	0.4822	0.04534
	10000	26.5	23.36	60.33	0.5056	0.04526
	10500	26.9	24.17	62.30	0.5288	0.04518
	11000	27.3	24.96	64.26	0.5518	0.04510
	11500	27.7	25.73	66.21	0.5747	0.04502
	12000	28.0	26.47	68.15	0.5974	0.04494
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.06	50.27	0.5475	0.03949

	8500	24.0	21.95	52.39	0.5815	0.03932
	9000	24.4	22.81	54.50	0.6154	0.03915
	9500	24.9	23.65	56.60	0.6491	0.03897
	10000	25.3	24.45	58.70	0.6828	0.03880
	10500	25.8	25.22	60.79	0.7163	0.03863
	11000	26.2	25.98	62.87	0.7497	0.03846
	11500	26.6	26.71	64.94	0.7830	0.03829
	12000	27.1	27.41	67.01	0.8162	0.03812
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.4	21.18	49.54	0.5226	0.03990

								8500	23.8	22.09	51.53	0.5534	0.03977
								9000	24.2	22.98	53.52	0.5841	0.03965
								9500	24.7	23.84	55.49	0.6147	0.03952
								10000	25.1	24.67	57.45	0.6450	0.03939
								10500	25.5	25.47	59.40	0.6752	0.03927
								11000	25.9	26.25	61.34	0.7053	0.03914
								11500	26.3	27.01	63.28	0.7352	0.03902
								12000	26.8	27.75	65.20	0.7650	0.03889
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.4	18.08	58.51	0.6528	0.04574
								8500	28.0	18.82	61.00	0.6947	0.04558

								9000	28.5	19.54	63.46	0.7364	0.04541
								9500	29.1	20.24	65.91	0.7778	0.04524
								10000	29.6	20.91	68.35	0.8190	0.04507
								10500	30.1	21.56	70.78	0.8600	0.04491
								11000	30.7	22.19	73.19	0.9007	0.04474
								11500	31.2	22.79	75.59	0.9413	0.04458
								12000	31.7	23.38	77.98	0.9817	0.04441
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.3	18.12	58.24	0.6483	0.04576
								8500	27.9	18.87	60.71	0.6899	0.04559
								9000	28.4	19.59	63.16	0.7313	0.04543
								9500	29.0	20.29	65.60	0.7725	0.04526
								10000	29.5	20.96	68.02	0.8134	0.04510

								10500	30.1	21.61	70.43	0.8541	0.04493
								11000	30.6	22.24	72.83	0.8947	0.04477
								11500	31.1	22.86	75.22	0.9350	0.04460
								12000	31.7	23.45	77.60	0.9751	0.04444
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.4	18.10	58.72	0.6456	0.04567
								8500	27.9	18.85	61.21	0.6870	0.04551
								9000	28.5	19.57	63.69	0.7282	0.04534
								9500	29.0	20.27	66.15	0.7692	0.04518
								10000	29.6	20.94	68.60	0.8099	0.04502
								10500	30.1	21.59	71.03	0.8504	0.04485
								11000	30.6	22.22	73.45	0.8907	0.04469
								11500	31.2	22.83	75.87	0.9309	0.04453
								12000	31.7	23.42	78.27	0.9708	0.04437

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.3	18.15	58.44	0.6410	0.04569
								8500	27.8	18.89	60.92	0.6823	0.04553
								9000	28.4	19.62	63.38	0.7232	0.04536
								9500	28.9	20.32	65.83	0.7639	0.04520
								10000	29.5	20.99	68.26	0.8044	0.04504
								10500	30.0	21.65	70.68	0.8447	0.04488
								11000	30.6	22.28	73.09	0.8847	0.04472
								11500	31.1	22.89	75.49	0.9246	0.04456
								12000	31.6	23.48	77.88	0.9643	0.04440

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.1	18.97	55.12	0.7379	0.04150
								8500	26.7	19.74	57.44	0.7847	0.04130
								9000	27.2	20.48	59.74	0.8312	0.04109
								9500	27.8	21.19	62.03	0.8774	0.04089
								10000	28.3	21.87	64.30	0.9234	0.04069
								10500	28.8	22.53	66.57	0.9691	0.04049
								11000	29.4	23.17	68.82	1.0146	0.04029
								11500	29.9	23.79	71.06	1.0599	0.04009
								12000	30.4	24.39	73.29	1.1049	0.03989
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.01	54.87	0.7328	0.04153
								8500	26.6	19.79	57.17	0.7793	0.04132
								9000	27.1	20.53	59.46	0.8255	0.04112
								9500	27.7	21.24	61.73	0.8715	0.04092

								10000	28.2	21.93	63.99	0.9171	0.04072
								10500	28.8	22.59	66.24	0.9626	0.04052
								11000	29.3	23.24	68.48	1.0078	0.04032
								11500	29.8	23.86	70.71	1.0528	0.04012
								12000	30.3	24.46	72.93	1.0976	0.03992
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.3	18.82	55.78	0.7202	0.04224
								8500	26.9	19.58	58.13	0.7660	0.04204
								9000	27.4	20.31	60.47	0.8115	0.04184
								9500	28.0	21.02	62.79	0.8567	0.04165
								10000	28.5	21.71	65.09	0.9017	0.04145
								10500	29.0	22.37	67.39	0.9464	0.04126
								11000	29.6	23.00	69.67	0.9910	0.04107
								11500	30.1	23.62	71.94	1.0353	0.04087

								12000	30.6	24.22	74.20	1.0794	0.04068
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.86	55.53	0.7152	0.04226
								8500	26.8	19.63	57.86	0.7607	0.04206
								9000	27.4	20.36	60.18	0.8059	0.04187
								9500	27.9	21.08	62.49	0.8509	0.04167
								10000	28.4	21.76	64.78	0.8956	0.04148
								10500	29.0	22.42	67.06	0.9401	0.04129
								11000	29.5	23.07	69.33	0.9843	0.04110
								11500	30.0	23.69	71.59	1.0284	0.04090

								12000	30.6	24.29	73.84	1.0722	0.04071
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	25.9	19.15	55.41	0.7234	0.04095
								8500	26.4	19.92	57.74	0.7693	0.04075
								9000	27.0	20.66	60.06	0.8148	0.04055
								9500	27.5	21.38	62.36	0.8601	0.04036
								10000	28.0	22.07	64.65	0.9052	0.04016
								10500	28.6	22.73	66.93	0.9500	0.03997
								11000	29.1	23.38	69.19	0.9946	0.03977
								11500	29.6	24.00	71.45	1.0389	0.03958
								12000	30.2	24.60	73.69	1.0831	0.03939
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.8	19.19	55.16	0.7184	0.04097
								8500	26.3	19.97	57.48	0.7640	0.04077
								9000	26.9	20.71	59.78	0.8093	0.04058

								9500	27.4	21.43	62.07	0.8543	0.04038
								10000	28.0	22.12	64.34	0.8991	0.04019
								10500	28.5	22.79	66.60	0.9436	0.03999
								11000	29.0	23.44	68.86	0.9879	0.03980
								11500	29.6	24.06	71.10	1.0320	0.03961
								12000	30.1	24.67	73.33	1.0759	0.03942
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.2	18.88	56.01	0.7110	0.04206
								8500	26.8	19.65	58.37	0.7562	0.04187
								9000	27.3	20.38	60.71	0.8011	0.04167
								9500	27.9	21.09	63.04	0.8458	0.04148
								10000	28.4	21.78	65.36	0.8902	0.04129
								10500	29.0	22.44	67.67	0.9344	0.04110

								11000	29.5	23.08	69.96	0.9783	0.04091
								11500	30.0	23.70	72.24	1.0221	0.04073
								12000	30.6	24.30	74.51	1.0656	0.04054
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.93	55.75	0.7061	0.04208
								8500	26.7	19.69	58.10	0.7510	0.04189
								9000	27.3	20.43	60.43	0.7957	0.04170
								9500	27.8	21.15	62.74	0.8400	0.04151
								10000	28.3	21.83	65.05	0.8842	0.04132
								10500	28.9	22.50	67.34	0.9281	0.04113
								11000	29.4	23.14	69.62	0.9718	0.04094

								11500	29.9	23.76	71.89	1.0153	0.04076
								12000	30.5	24.36	74.15	1.0585	0.04057
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.0	18.34	57.28	0.6848	0.04442
								8500	27.6	19.09	59.70	0.7286	0.04424
								9000	28.1	19.82	62.10	0.7722	0.04405
								9500	28.7	20.51	64.50	0.8155	0.04387
								10000	29.2	21.19	66.87	0.8585	0.04369
								10500	29.7	21.84	69.24	0.9013	0.04351
								11000	30.3	22.47	71.60	0.9439	0.04333
								11500	30.8	23.08	73.94	0.9863	0.04316
								12000	31.4	23.68	76.27	1.0285	0.04298
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.9	18.38	57.01	0.6801	0.04444
								8500	27.5	19.13	59.42	0.7236	0.04426

								9000	28.0	19.86	61.81	0.7669	0.04408
								9500	28.6	20.57	64.19	0.8099	0.04389
								10000	29.1	21.24	66.55	0.8527	0.04372
								10500	29.7	21.90	68.90	0.8952	0.04354
								11000	30.2	22.53	71.24	0.9376	0.04336
								11500	30.7	23.15	73.57	0.9797	0.04318
								12000	31.3	23.74	75.89	1.0216	0.04301
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.0	18.37	57.30	0.6831	0.04428
								8500	27.5	19.13	59.72	0.7268	0.04410
								9000	28.1	19.85	62.13	0.7702	0.04392
								9500	28.6	20.55	64.52	0.8134	0.04374

								10000	29.1	21.23	66.90	0.8563	0.04356
								10500	29.7	21.88	69.27	0.8990	0.04338
								11000	30.2	22.52	71.62	0.9415	0.04320
								11500	30.8	23.13	73.97	0.9837	0.04302
								12000	31.3	23.72	76.30	1.0258	0.04285
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.9	18.42	57.03	0.6783	0.04430
								8500	27.4	19.17	59.44	0.7218	0.04412
								9000	28.0	19.90	61.83	0.7649	0.04394
								9500	28.5	20.61	64.21	0.8078	0.04376
								10000	29.1	21.28	66.58	0.8505	0.04358
								10500	29.6	21.94	68.93	0.8929	0.04340

								11000	30.1	22.58	71.27	0.9351	0.04323
								11500	30.7	23.19	73.60	0.9772	0.04305
								12000	31.2	23.79	75.92	1.0190	0.04288
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.9	18.40	57.50	0.6757	0.04422
								8500	27.5	19.16	59.93	0.7190	0.04404
								9000	28.0	19.89	62.35	0.7619	0.04386
								9500	28.6	20.58	64.75	0.8047	0.04369
								10000	29.1	21.26	67.14	0.8471	0.04351
								10500	29.6	21.92	69.52	0.8894	0.04334
								11000	30.2	22.55	71.89	0.9314	0.04316
								11500	30.7	23.16	74.24	0.9732	0.04299
								12000	31.2	23.75	76.58	1.0149	0.04282
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.9	18.44	57.24	0.6710	0.04424

								8500	27.4	19.20	59.65	0.7140	0.04406
								9000	27.9	19.93	62.06	0.7567	0.04389
								9500	28.5	20.64	64.45	0.7992	0.04371
								10000	29.0	21.32	66.82	0.8414	0.04353
								10500	29.6	21.97	69.18	0.8834	0.04336
								11000	30.1	22.61	71.53	0.9251	0.04319
								11500	30.6	23.23	73.87	0.9667	0.04301
								12000	31.2	23.82	76.20	1.0081	0.04284
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.9	18.44	57.52	0.6740	0.04408
								8500	27.4	19.19	59.96	0.7171	0.04391

								9000	28.0	19.92	62.38	0.7600	0.04373
								9500	28.5	20.63	64.78	0.8025	0.04355
								10000	29.0	21.30	67.17	0.8449	0.04338
								10500	29.6	21.96	69.55	0.8870	0.04320
								11000	30.1	22.59	71.91	0.9289	0.04303
								11500	30.7	23.20	74.27	0.9707	0.04286
								12000	31.2	23.80	76.61	1.0122	0.04269
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.8	18.48	57.26	0.6693	0.04410
								8500	27.3	19.24	59.68	0.7121	0.04393
								9000	27.9	19.97	62.08	0.7547	0.04375
								9500	28.4	20.68	64.47	0.7971	0.04358
								10000	29.0	21.36	66.85	0.8392	0.04340

								10500	29.5	22.02	69.21	0.8810	0.04323
								11000	30.0	22.65	71.56	0.9227	0.04306
								11500	30.6	23.27	73.90	0.9642	0.04288
								12000	31.1	23.87	76.23	1.0054	0.04271
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	19.00	56.35	0.5121	0.04543
								8500	26.5	19.89	58.34	0.5341	0.04535
								9000	26.8	20.76	60.31	0.5558	0.04527
								9500	27.2	21.61	62.26	0.5772	0.04519
								10000	27.6	22.44	64.19	0.5984	0.04511
								10500	28.0	23.25	66.11	0.6195	0.04503
								11000	28.3	24.04	68.00	0.6403	0.04496
								11500	28.7	24.81	69.88	0.6609	0.04488
								12000	29.0	25.56	71.74	0.6814	0.04481
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	53.44	0.5068	0.04504

	8500	25.9	20.30	55.49	0.5312	0.04494
	9000	26.3	21.17	57.52	0.5555	0.04485
	9500	26.7	22.01	59.54	0.5796	0.04475
	10000	27.1	22.83	61.54	0.6035	0.04465
	10500	27.5	23.63	63.53	0.6272	0.04456
	11000	27.9	24.41	65.51	0.6508	0.04446
	11500	28.3	25.16	67.47	0.6743	0.04437
	12000	28.7	25.90	69.42	0.6976	0.04428
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.38	50.87	0.6418	0.03974
	8500	24.8	21.25	52.99	0.6766	0.03955
	9000	25.2	22.10	55.11	0.7112	0.03936
	9500	25.7	22.92	57.21	0.7457	0.03917
	10000	26.1	23.71	59.31	0.7801	0.03899
	10500	26.5	24.47	61.40	0.8144	0.03880
	11000	27.0	25.21	63.48	0.8485	0.03862
	11500	27.4	25.93	65.56	0.8825	0.03843
	12000	27.9	26.63	67.63	0.9165	0.03825
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.49	50.09	0.6151	0.04018

								8500	24.6	21.39	52.08	0.6466	0.04004
								9000	25.0	22.26	54.06	0.6779	0.03989
								9500	25.4	23.11	56.03	0.7091	0.03975
								10000	25.9	23.92	57.99	0.7401	0.03961
								10500	26.3	24.72	59.93	0.7709	0.03947
								11000	26.7	25.49	61.87	0.8016	0.03933
								11500	27.1	26.24	63.80	0.8322	0.03920
								12000	27.5	26.96	65.72	0.8626	0.03906
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.08	55.76	0.5058	0.04545
								8500	26.3	19.98	57.73	0.5274	0.04537
								9000	26.7	20.86	59.67	0.5487	0.04530
								9500	27.1	21.71	61.60	0.5699	0.04522
								10000	27.5	22.55	63.50	0.5908	0.04514

	10500	27.8	23.36	65.38	0.6115	0.04506
	11000	28.2	24.16	67.25	0.6320	0.04499
	11500	28.5	24.94	69.10	0.6524	0.04491
	12000	28.9	25.70	70.94	0.6726	0.04484
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	53.44	0.5068	0.04504
	8500	25.9	20.30	55.49	0.5312	0.04494
	9000	26.3	21.17	57.52	0.5555	0.04485
	9500	26.7	22.01	59.54	0.5796	0.04475
	10000	27.1	22.83	61.54	0.6035	0.04465

	10500	27.5	23.63	63.53	0.6272	0.04456
	11000	27.9	24.41	65.51	0.6508	0.04446
	11500	28.3	25.16	67.47	0.6743	0.04437
	12000	28.7	25.90	69.42	0.6976	0.04428
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.43	50.55	0.6366	0.03977
	8500	24.7	21.31	52.66	0.6710	0.03958
	9000	25.1	22.17	54.75	0.7054	0.03939
	9500	25.6	22.99	56.84	0.7396	0.03921
	10000	26.0	23.78	58.91	0.7736	0.03902

	10500	26.5	24.55	60.99	0.8076	0.03884
	11000	26.9	25.30	63.05	0.8415	0.03865
	11500	27.3	26.02	65.11	0.8752	0.03847
	12000	27.8	26.73	67.16	0.9088	0.03829
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.53	49.87	0.6116	0.04020
	8500	24.5	21.44	51.84	0.6429	0.04005
	9000	25.0	22.31	53.81	0.6740	0.03991
	9500	25.4	23.16	55.77	0.7050	0.03977
	10000	25.8	23.98	57.71	0.7358	0.03963

								10500	26.2	24.78	59.65	0.7664	0.03949
								11000	26.6	25.55	61.58	0.7969	0.03935
								11500	27.1	26.30	63.49	0.8273	0.03922
								12000	27.5	27.03	65.40	0.8575	0.03908
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.09	53.85	0.5625	0.04117
								8500	25.0	21.01	55.74	0.5875	0.04107
								9000	25.4	21.92	57.61	0.6121	0.04097
								9500	25.8	22.80	59.46	0.6365	0.04086
								10000	26.2	23.65	61.29	0.6607	0.04076
								10500	26.5	24.49	63.11	0.6846	0.04067
								11000	26.9	25.30	64.90	0.7083	0.04057
								11500	27.3	26.10	66.68	0.7318	0.04047
								12000	27.6	26.88	68.45	0.7551	0.04037
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.52	50.94	0.5587	0.04088

	8500	24.5	21.44	52.87	0.5865	0.04076
	9000	24.9	22.33	54.79	0.6140	0.04064
	9500	25.3	23.21	56.69	0.6414	0.04051
	10000	25.7	24.05	58.59	0.6685	0.04039
	10500	26.1	24.87	60.46	0.6955	0.04028
	11000	26.5	25.67	62.33	0.7223	0.04016
	11500	26.9	26.45	64.19	0.7490	0.04004
	12000	27.3	27.22	66.03	0.7755	0.03992
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.30	50.98	0.5452	0.04190
	8500	24.8	21.21	52.92	0.5730	0.04179
	9000	25.2	22.10	54.85	0.6006	0.04167
	9500	25.6	22.96	56.76	0.6280	0.04156
	10000	26.0	23.80	58.65	0.6552	0.04144
	10500	26.4	24.62	60.54	0.6822	0.04133
	11000	26.8	25.41	62.41	0.7091	0.04122
	11500	27.2	26.18	64.27	0.7358	0.04111
	12000	27.6	26.94	66.12	0.7623	0.04100
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.53	47.97	0.7124	0.03558

	8500	23.5	22.43	49.95	0.7514	0.03536
	9000	23.9	23.30	51.92	0.7902	0.03514
	9500	24.4	24.14	53.88	0.8289	0.03493
	10000	24.8	24.95	55.84	0.8675	0.03471
	10500	25.2	25.74	57.79	0.9059	0.03449
	11000	25.7	26.50	59.73	0.9442	0.03427
	11500	26.1	27.23	61.67	0.9824	0.03406
	12000	26.6	27.94	63.60	1.0204	0.03384
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.9	21.67	47.31	0.6811	0.03603
	8500	23.3	22.59	49.17	0.7165	0.03586
	9000	23.7	23.49	51.02	0.7516	0.03569
	9500	24.1	24.36	52.86	0.7866	0.03552
	10000	24.6	25.20	54.69	0.8214	0.03535
	10500	25.0	26.02	56.51	0.8560	0.03518
	11000	25.4	26.81	58.32	0.8904	0.03502
	11500	25.8	27.58	60.13	0.9247	0.03485
	12000	26.2	28.33	61.92	0.9588	0.03468

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.18	53.30	0.5552	0.04120
								8500	24.9	21.11	55.16	0.5798	0.04110
								9000	25.3	22.02	57.01	0.6041	0.04100
								9500	25.7	22.91	58.83	0.6282	0.04090
								10000	26.0	23.77	60.63	0.6520	0.04080
								10500	26.4	24.62	62.42	0.6756	0.04070
								11000	26.8	25.44	64.19	0.6989	0.04061
								11500	27.1	26.25	65.94	0.7221	0.04051
								12000	27.5	27.03	67.68	0.7451	0.04042

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.1	20.52	50.94	0.5587	0.04088
	8500	24.5	21.44	52.87	0.5865	0.04076
	9000	24.9	22.33	54.79	0.6140	0.04064
	9500	25.3	23.21	56.69	0.6414	0.04051
	10000	25.7	24.05	58.59	0.6685	0.04039
	10500	26.1	24.87	60.46	0.6955	0.04028
	11000	26.5	25.67	62.33	0.7223	0.04016
	11500	26.9	26.45	64.19	0.7490	0.04004
	12000	27.3	27.22	66.03	0.7755	0.03992

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.30	50.98	0.5452	0.04190
	8500	24.8	21.21	52.92	0.5730	0.04179
	9000	25.2	22.10	54.85	0.6006	0.04167
	9500	25.6	22.96	56.76	0.6280	0.04156
	10000	26.0	23.80	58.65	0.6552	0.04144
	10500	26.4	24.62	60.54	0.6822	0.04133
	11000	26.8	25.41	62.41	0.7091	0.04122
	11500	27.2	26.18	64.27	0.7358	0.04111
	12000	27.6	26.94	66.12	0.7623	0.04100

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.59	47.67	0.7065	0.03562
	8500	23.4	22.50	49.63	0.7451	0.03540
	9000	23.8	23.37	51.59	0.7837	0.03518
	9500	24.3	24.22	53.53	0.8220	0.03496
	10000	24.7	25.04	55.47	0.8602	0.03475
	10500	25.2	25.83	57.41	0.8983	0.03453
	11000	25.6	26.59	59.33	0.9363	0.03432
	11500	26.0	27.33	61.25	0.9741	0.03411
	12000	26.5	28.05	63.17	1.0119	0.03389

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.71	47.10	0.6771	0.03605
	8500	23.2	22.64	48.95	0.7123	0.03588
	9000	23.7	23.55	50.79	0.7472	0.03571
	9500	24.1	24.42	52.62	0.7820	0.03554
	10000	24.5	25.26	54.44	0.8165	0.03538
	10500	24.9	26.08	56.25	0.8509	0.03521
	11000	25.3	26.88	58.05	0.8851	0.03504
	11500	25.7	27.65	59.84	0.9192	0.03488
	12000	26.1	28.40	61.62	0.9531	0.03471

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	54.34	0.5515	0.04191
								8500	25.3	20.82	56.25	0.5759	0.04181
								9000	25.7	21.71	58.14	0.5999	0.04172
								9500	26.0	22.59	60.01	0.6237	0.04162
								10000	26.4	23.44	61.86	0.6473	0.04152
								10500	26.8	24.27	63.69	0.6706	0.04143
								11000	27.1	25.08	65.51	0.6937	0.04134
								11500	27.5	25.88	67.31	0.7166	0.04124
								12000	27.9	26.65	69.09	0.7394	0.04115
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.32	51.43	0.5475	0.04160
								8500	24.8	21.24	53.38	0.5745	0.04149
								9000	25.2	22.13	55.32	0.6014	0.04137
								9500	25.6	23.00	57.25	0.6281	0.04125
								10000	26.0	23.84	59.16	0.6546	0.04114
								10500	26.4	24.66	61.06	0.6809	0.04102
								11000	26.7	25.45	62.95	0.7071	0.04091
								11500	27.1	26.23	64.83	0.7331	0.04080
								12000	27.5	26.99	66.70	0.7589	0.04068

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.11	51.47	0.5341	0.04262
	8500	25.0	21.02	53.43	0.5612	0.04251
	9000	25.4	21.90	55.38	0.5881	0.04240
	9500	25.8	22.76	57.31	0.6149	0.04229
	10000	26.2	23.59	59.23	0.6414	0.04218
	10500	26.6	24.41	61.13	0.6678	0.04207
	11000	27.0	25.19	63.03	0.6940	0.04197
	11500	27.4	25.96	64.91	0.7200	0.04186
	12000	27.8	26.72	66.78	0.7459	0.04175
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.32	48.54	0.6975	0.03631
	8500	23.7	22.22	50.54	0.7356	0.03610
	9000	24.1	23.09	52.54	0.7736	0.03589
	9500	24.6	23.93	54.53	0.8114	0.03567
	10000	25.0	24.73	56.52	0.8491	0.03546
	10500	25.5	25.52	58.49	0.8867	0.03525
	11000	25.9	26.27	60.46	0.9242	0.03504
	11500	26.3	27.00	62.43	0.9615	0.03483
	12000	26.8	27.71	64.39	0.9987	0.03462

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.1	21.46	47.85	0.6671	0.03676
								8500	23.5	22.38	49.74	0.7017	0.03659
								9000	23.9	23.27	51.62	0.7361	0.03643
								9500	24.4	24.14	53.48	0.7703	0.03627
								10000	24.8	24.98	55.34	0.8043	0.03610
								10500	25.2	25.79	57.18	0.8381	0.03594
								11000	25.6	26.58	59.02	0.8718	0.03578
								11500	26.0	27.34	60.85	0.9053	0.03562
								12000	26.4	28.08	62.67	0.9387	0.03546
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.8	19.99	53.78	0.5444	0.04194
								8500	25.2	20.91	55.67	0.5684	0.04184
								9000	25.5	21.82	57.53	0.5921	0.04175
								9500	25.9	22.70	59.37	0.6156	0.04165

	10000	26.3	23.56	61.19	0.6388	0.04156
	10500	26.6	24.40	63.00	0.6618	0.04147
	11000	27.0	25.22	64.79	0.6846	0.04137
	11500	27.3	26.02	66.56	0.7071	0.04128
	12000	27.7	26.80	68.32	0.7295	0.04119
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.32	51.43	0.5475	0.04160
	8500	24.8	21.24	53.38	0.5745	0.04149
	9000	25.2	22.13	55.32	0.6014	0.04137
	9500	25.6	23.00	57.25	0.6281	0.04125

	10000	26.0	23.84	59.16	0.6546	0.04114
	10500	26.4	24.66	61.06	0.6809	0.04102
	11000	26.7	25.45	62.95	0.7071	0.04091
	11500	27.1	26.23	64.83	0.7331	0.04080
	12000	27.5	26.99	66.70	0.7589	0.04068
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.11	51.47	0.5341	0.04262
	8500	25.0	21.02	53.43	0.5612	0.04251
	9000	25.4	21.90	55.38	0.5881	0.04240
	9500	25.8	22.76	57.31	0.6149	0.04229

	10000	26.2	23.59	59.23	0.6414	0.04218
	10500	26.6	24.41	61.13	0.6678	0.04207
	11000	27.0	25.19	63.03	0.6940	0.04197
	11500	27.4	25.96	64.91	0.7200	0.04186
	12000	27.8	26.72	66.78	0.7459	0.04175
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.38	48.24	0.6918	0.03635
	8500	23.6	22.29	50.22	0.7296	0.03613
	9000	24.0	23.16	52.21	0.7672	0.03592
	9500	24.5	24.00	54.18	0.8047	0.03571

	10000	24.9	24.82	56.14	0.8421	0.03550
	10500	25.4	25.61	58.10	0.8793	0.03529
	11000	25.8	26.36	60.06	0.9164	0.03509
	11500	26.2	27.10	62.00	0.9534	0.03488
	12000	26.7	27.82	63.95	0.9903	0.03467
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.50	47.64	0.6633	0.03678
	8500	23.5	22.43	49.52	0.6976	0.03661
	9000	23.9	23.33	51.38	0.7318	0.03645
	9500	24.3	24.20	53.23	0.7658	0.03629

								10000	24.7	25.04	55.08	0.7995	0.03613
								10500	25.1	25.86	56.91	0.8332	0.03596
								11000	25.5	26.65	58.74	0.8666	0.03580
								11500	26.0	27.41	60.55	0.8999	0.03564
								12000	26.4	28.16	62.36	0.9331	0.03548
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.32	55.43	0.5316	0.04409
								8500	26.0	20.23	57.39	0.5547	0.04400
								9000	26.4	21.10	59.32	0.5775	0.04392
								9500	26.8	21.96	61.24	0.6001	0.04383
								10000	27.1	22.80	63.13	0.6225	0.04374
								10500	27.5	23.62	65.01	0.6447	0.04365
								11000	27.9	24.41	66.87	0.6666	0.04357
								11500	28.2	25.19	68.71	0.6884	0.04348

	12000	28.6	25.96	70.54	0.7100	0.04340
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	52.53	0.5267	0.04374
	8500	25.5	20.64	54.53	0.5524	0.04363
	9000	25.9	21.51	56.52	0.5780	0.04353
	9500	26.3	22.36	58.50	0.6033	0.04342
	10000	26.7	23.19	60.46	0.6285	0.04331
	10500	27.1	24.00	62.41	0.6535	0.04321
	11000	27.5	24.78	64.34	0.6783	0.04311
	11500	27.9	25.55	66.27	0.7031	0.04300
	12000	28.2	26.29	68.18	0.7276	0.04290
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.54	52.56	0.5136	0.04476
	8500	25.8	20.43	54.58	0.5394	0.04466
	9000	26.2	21.30	56.57	0.5650	0.04456
	9500	26.6	22.14	58.55	0.5904	0.04446
	10000	27.0	22.96	60.52	0.6156	0.04436
	10500	27.4	23.76	62.47	0.6407	0.04426
	11000	27.7	24.54	64.42	0.6655	0.04416
	11500	28.1	25.29	66.35	0.6903	0.04406

	12000	28.5	26.03	68.27	0.7149	0.04397
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.72	49.81	0.6685	0.03842
	8500	24.4	21.60	51.88	0.7049	0.03822
	9000	24.8	22.46	53.94	0.7412	0.03802
	9500	25.3	23.28	56.00	0.7773	0.03782
	10000	25.7	24.08	58.04	0.8133	0.03762
	10500	26.1	24.85	60.08	0.8492	0.03742
	11000	26.6	25.59	62.11	0.8849	0.03723
	11500	27.0	26.32	64.14	0.9206	0.03703
	12000	27.5	27.02	66.16	0.9561	0.03683
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.84	49.07	0.6401	0.03887
	8500	24.2	21.75	51.02	0.6731	0.03871
	9000	24.6	22.63	52.95	0.7059	0.03856
	9500	25.0	23.48	54.87	0.7385	0.03841
	10000	25.5	24.30	56.78	0.7710	0.03826
	10500	25.9	25.11	58.68	0.8033	0.03810
	11000	26.3	25.88	60.58	0.8354	0.03795
	11500	26.7	26.64	62.46	0.8674	0.03780

								12000	27.1	27.37	64.33	0.8993	0.03766
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.41	54.86	0.5248	0.04412
								8500	25.9	20.32	56.79	0.5476	0.04403
								9000	26.3	21.20	58.70	0.5701	0.04394
								9500	26.6	22.07	60.58	0.5924	0.04386
								10000	27.0	22.91	62.45	0.6144	0.04377
								10500	27.4	23.73	64.30	0.6363	0.04369
								11000	27.7	24.54	66.13	0.6579	0.04360
								11500	28.1	25.33	67.95	0.6794	0.04352

	12000	28.5	26.10	69.75	0.7006	0.04344
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.74	52.53	0.5267	0.04374
	8500	25.5	20.64	54.53	0.5524	0.04363
	9000	25.9	21.51	56.52	0.5780	0.04353
	9500	26.3	22.36	58.50	0.6033	0.04342
	10000	26.7	23.19	60.46	0.6285	0.04331
	10500	27.1	24.00	62.41	0.6535	0.04321
	11000	27.5	24.78	64.34	0.6783	0.04311
	11500	27.9	25.55	66.27	0.7031	0.04300

	12000	28.2	26.29	68.18	0.7276	0.04290
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.54	52.56	0.5136	0.04476
	8500	25.8	20.43	54.58	0.5394	0.04466
	9000	26.2	21.30	56.57	0.5650	0.04456
	9500	26.6	22.14	58.55	0.5904	0.04446
	10000	27.0	22.96	60.52	0.6156	0.04436
	10500	27.4	23.76	62.47	0.6407	0.04426
	11000	27.7	24.54	64.42	0.6655	0.04416
	11500	28.1	25.29	66.35	0.6903	0.04406

	12000	28.5	26.03	68.27	0.7149	0.04397
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.78	49.50	0.6630	0.03845
	8500	24.3	21.67	51.55	0.6991	0.03825
	9000	24.7	22.53	53.59	0.7350	0.03805
	9500	25.2	23.35	55.63	0.7709	0.03786
	10000	25.6	24.16	57.66	0.8065	0.03766
	10500	26.1	24.93	59.68	0.8421	0.03746
	11000	26.5	25.68	61.69	0.8775	0.03727
	11500	26.9	26.41	63.70	0.9129	0.03707

	12000	27.4	27.12	65.70	0.9481	0.03688
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.88	48.86	0.6364	0.03888
	8500	24.1	21.79	50.79	0.6692	0.03873
	9000	24.6	22.68	52.71	0.7018	0.03858
	9500	25.0	23.53	54.62	0.7342	0.03843
	10000	25.4	24.36	56.52	0.7665	0.03828
	10500	25.8	25.16	58.41	0.7986	0.03813
	11000	26.2	25.94	60.29	0.8305	0.03798
	11500	26.6	26.70	62.16	0.8623	0.03783

								12000	27.1	27.44	64.02	0.8940	0.03768
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.36	55.45	0.5300	0.04396
								8500	26.0	20.27	57.41	0.5530	0.04387
								9000	26.3	21.15	59.34	0.5758	0.04378
								9500	26.7	22.00	61.26	0.5983	0.04370
								10000	27.1	22.84	63.15	0.6206	0.04361
								10500	27.5	23.66	65.03	0.6427	0.04352
								11000	27.8	24.46	66.89	0.6646	0.04344
								11500	28.2	25.24	68.73	0.6863	0.04336
								12000	28.6	26.01	70.56	0.7078	0.04327
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.78	52.55	0.5252	0.04361
								8500	25.4	20.68	54.55	0.5508	0.04350
								9000	25.8	21.56	56.54	0.5763	0.04339
								9500	26.2	22.41	58.52	0.6015	0.04329
								10000	26.6	23.24	60.48	0.6266	0.04318
								10500	27.0	24.04	62.43	0.6516	0.04308
								11000	27.4	24.83	64.37	0.6763	0.04298

	11500	27.8	25.60	66.29	0.7010	0.04287
	12000	28.2	26.34	68.21	0.7254	0.04277
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.58	52.58	0.5121	0.04462
	8500	25.7	20.47	54.60	0.5378	0.04452
	9000	26.1	21.34	56.59	0.5633	0.04442
	9500	26.5	22.19	58.57	0.5886	0.04432
	10000	26.9	23.01	60.54	0.6138	0.04422
	10500	27.3	23.80	62.50	0.6387	0.04413
	11000	27.7	24.58	64.44	0.6636	0.04403
	11500	28.1	25.34	66.37	0.6882	0.04393
	12000	28.5	26.08	68.29	0.7127	0.04384
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.76	49.83	0.6669	0.03830
	8500	24.3	21.65	51.90	0.7032	0.03810
	9000	24.8	22.50	53.96	0.7393	0.03790
	9500	25.2	23.33	56.02	0.7754	0.03770
	10000	25.7	24.12	58.06	0.8113	0.03751
	10500	26.1	24.90	60.10	0.8470	0.03731
	11000	26.5	25.64	62.14	0.8827	0.03711

								11500	27.0	26.37	64.16	0.9182	0.03692
								12000	27.4	27.07	66.18	0.9537	0.03672
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.88	49.09	0.6385	0.03875
								8500	24.1	21.79	51.04	0.6714	0.03859
								9000	24.6	22.67	52.97	0.7041	0.03844
								9500	25.0	23.53	54.89	0.7367	0.03829
								10000	25.4	24.35	56.80	0.7691	0.03814
								10500	25.8	25.15	58.71	0.8013	0.03799
								11000	26.2	25.93	60.60	0.8333	0.03784
								11500	26.7	26.69	62.48	0.8652	0.03769
								12000	27.1	27.42	64.36	0.8970	0.03754
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.45	54.88	0.5233	0.04399
								8500	25.8	20.36	56.81	0.5460	0.04390
								9000	26.2	21.25	58.72	0.5684	0.04381

	9500	26.6	22.11	60.60	0.5906	0.04373
	10000	27.0	22.96	62.47	0.6126	0.04364
	10500	27.3	23.78	64.32	0.6343	0.04356
	11000	27.7	24.59	66.15	0.6559	0.04347
	11500	28.0	25.38	67.97	0.6773	0.04339
	12000	28.4	26.15	69.77	0.6985	0.04331
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.78	52.55	0.5252	0.04361
	8500	25.4	20.68	54.55	0.5508	0.04350
	9000	25.8	21.56	56.54	0.5763	0.04339

		9500	26.2	22.41	58.52	0.6015	0.04329
		10000	26.6	23.24	60.48	0.6266	0.04318
		10500	27.0	24.04	62.43	0.6516	0.04308
		11000	27.4	24.83	64.37	0.6763	0.04298
		11500	27.8	25.60	66.29	0.7010	0.04287
		12000	28.2	26.34	68.21	0.7254	0.04277
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.58	52.58	0.5121	0.04462
		8500	25.7	20.47	54.60	0.5378	0.04452
		9000	26.1	21.34	56.59	0.5633	0.04442

	9500	26.5	22.19	58.57	0.5886	0.04432
	10000	26.9	23.01	60.54	0.6138	0.04422
	10500	27.3	23.80	62.50	0.6387	0.04413
	11000	27.7	24.58	64.44	0.6636	0.04403
	11500	28.1	25.34	66.37	0.6882	0.04393
	12000	28.5	26.08	68.29	0.7127	0.04384
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.82	49.52	0.6614	0.03833
	8500	24.2	21.71	51.57	0.6974	0.03813
	9000	24.7	22.57	53.62	0.7332	0.03794

	9500	25.1	23.40	55.65	0.7689	0.03774
	10000	25.6	24.20	57.68	0.8045	0.03754
	10500	26.0	24.98	59.70	0.8400	0.03735
	11000	26.4	25.73	61.72	0.8753	0.03715
	11500	26.9	26.46	63.73	0.9106	0.03696
	12000	27.3	27.17	65.73	0.9457	0.03676
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.93	48.88	0.6348	0.03876
	8500	24.1	21.84	50.81	0.6675	0.03861
	9000	24.5	22.72	52.73	0.7001	0.03846

								9500	24.9	23.58	54.64	0.7324	0.03831
								10000	25.4	24.41	56.54	0.7646	0.03816
								10500	25.8	25.21	58.43	0.7966	0.03801
								11000	26.2	25.99	60.31	0.8284	0.03786
								11500	26.6	26.75	62.18	0.8601	0.03771
								12000	27.0	27.49	64.05	0.8917	0.03757
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.5	17.99	57.76	0.7597	0.04429
								8500	28.1	18.74	60.18	0.8033	0.04409
								9000	28.6	19.46	62.58	0.8467	0.04390
								9500	29.2	20.16	64.97	0.8897	0.04371
								10000	29.7	20.83	67.34	0.9326	0.04352
								10500	30.2	21.49	69.70	0.9752	0.04333

								11000	30.8	22.12	72.05	1.0176	0.04314
								11500	31.3	22.73	74.39	1.0598	0.04295
								12000	31.8	23.32	76.72	1.1018	0.04276
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.5	18.03	57.50	0.7550	0.04431
								8500	28.0	18.78	59.90	0.7983	0.04412
								9000	28.6	19.51	62.29	0.8414	0.04392
								9500	29.1	20.21	64.66	0.8842	0.04373
								10000	29.6	20.89	67.02	0.9268	0.04354
								10500	30.2	21.54	69.37	0.9691	0.04335
								11000	30.7	22.17	71.70	1.0113	0.04317

								11500	31.2	22.79	74.02	1.0532	0.04298
								12000	31.7	23.39	76.34	1.0949	0.04279
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.2	18.87	54.32	0.8437	0.04013
								8500	26.8	19.64	56.57	0.8922	0.03989
								9000	27.3	20.38	58.81	0.9404	0.03967
								9500	27.9	21.09	61.03	0.9883	0.03944
								10000	28.4	21.78	63.24	1.0359	0.03921
								10500	28.9	22.44	65.44	1.0833	0.03899
								11000	29.5	23.09	67.63	1.1304	0.03876
								11500	30.0	23.71	69.81	1.1773	0.03854
								12000	30.5	24.31	71.97	1.2240	0.03832
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.91	54.08	0.8385	0.04015
								8500	26.7	19.69	56.31	0.8866	0.03992

								9000	27.3	20.43	58.54	0.9345	0.03969
								9500	27.8	21.14	60.75	0.9821	0.03947
								10000	28.3	21.84	62.94	1.0295	0.03924
								10500	28.9	22.50	65.13	1.0765	0.03902
								11000	29.4	23.15	67.30	1.1234	0.03880
								11500	29.9	23.78	69.47	1.1700	0.03857
								12000	30.4	24.38	71.62	1.2164	0.03835
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.72	54.99	0.8262	0.04085
								8500	27.0	19.48	57.28	0.8736	0.04062
								9000	27.5	20.22	59.54	0.9208	0.04040
								9500	28.1	20.93	61.80	0.9677	0.04018

								10000	28.6	21.62	64.04	1.0143	0.03996
								10500	29.2	22.28	66.27	1.0607	0.03975
								11000	29.7	22.92	68.49	1.1069	0.03953
								11500	30.2	23.54	70.70	1.1528	0.03931
								12000	30.7	24.14	72.90	1.1985	0.03910
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.4	18.76	54.75	0.8210	0.04087
								8500	26.9	19.53	57.01	0.8682	0.04065
								9000	27.5	20.27	59.27	0.9151	0.04043
								9500	28.0	20.98	61.51	0.9617	0.04021
								10000	28.5	21.67	63.74	1.0080	0.03999
								10500	29.1	22.34	65.95	1.0541	0.03978

								11000	29.6	22.99	68.16	1.1000	0.03956
								11500	30.1	23.61	70.35	1.1457	0.03935
								12000	30.7	24.21	72.54	1.1911	0.03913
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.25	56.51	0.7916	0.04299
								8500	27.7	19.00	58.86	0.8371	0.04278
								9000	28.2	19.73	61.20	0.8823	0.04257
								9500	28.8	20.43	63.53	0.9272	0.04236
								10000	29.3	21.11	65.84	0.9719	0.04216
								10500	29.8	21.77	68.14	1.0164	0.04196
								11000	30.4	22.40	70.43	1.0606	0.04175
								11500	30.9	23.02	72.71	1.1046	0.04155
								12000	31.4	23.61	74.98	1.1484	0.04135
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.29	56.25	0.7866	0.04301

								8500	27.6	19.05	58.59	0.8318	0.04280
								9000	28.2	19.78	60.92	0.8768	0.04260
								9500	28.7	20.48	63.23	0.9214	0.04239
								10000	29.2	21.16	65.53	0.9659	0.04219
								10500	29.8	21.82	67.82	1.0101	0.04198
								11000	30.3	22.46	70.09	1.0540	0.04178
								11500	30.8	23.08	72.36	1.0978	0.04158
								12000	31.3	23.68	74.61	1.1413	0.04138
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.28	56.53	0.7897	0.04285
								8500	27.6	19.04	58.89	0.8350	0.04264

								9000	28.2	19.77	61.23	0.8801	0.04244
								9500	28.7	20.47	63.56	0.9250	0.04223
								10000	29.3	21.15	65.87	0.9695	0.04203
								10500	29.8	21.81	68.17	1.0139	0.04183
								11000	30.3	22.44	70.46	1.0580	0.04162
								11500	30.9	23.06	72.74	1.1019	0.04142
								12000	31.4	23.66	75.01	1.1456	0.04122
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.0	18.33	56.27	0.7847	0.04287
								8500	27.6	19.08	58.61	0.8298	0.04267
								9000	28.1	19.82	60.94	0.8746	0.04246
								9500	28.6	20.52	63.26	0.9192	0.04226
								10000	29.2	21.20	65.56	0.9635	0.04206

								10500	29.7	21.86	67.85	1.0076	0.04186
								11000	30.2	22.50	70.12	1.0514	0.04165
								11500	30.8	23.12	72.39	1.0951	0.04146
								12000	31.3	23.72	74.65	1.1385	0.04126
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.4	17.46	51.36	0.9665	0.04527
								8500	28.9	18.24	53.50	1.0066	0.04504
								9000	29.3	19.00	55.64	1.0466	0.04481
								9500	29.8	19.73	57.77	1.0864	0.04458
								10000	30.3	20.44	59.90	1.1261	0.04435
								10500	30.7	21.14	62.01	1.1656	0.04412
								11000	31.2	21.81	64.12	1.2051	0.04389
								11500	31.7	22.46	66.22	1.2444	0.04367
								12000	32.1	23.10	68.32	1.2835	0.04344
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.3	17.51	50.83	0.9423	0.04571

								8500	28.8	18.31	52.86	0.9790	0.04553
								9000	29.2	19.08	54.88	1.0154	0.04535
								9500	29.7	19.84	56.88	1.0516	0.04517
								10000	30.1	20.57	58.88	1.0877	0.04499
								10500	30.5	21.28	60.87	1.1235	0.04481
								11000	31.0	21.97	62.84	1.1592	0.04463
								11500	31.4	22.65	64.81	1.1947	0.04446
								12000	31.9	23.31	66.77	1.2301	0.04428
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.4	17.46	51.36	0.9665	0.04527
								8500	28.9	18.24	53.50	1.0066	0.04504
								9000	29.3	19.00	55.64	1.0466	0.04481
								9500	29.8	19.73	57.77	1.0864	0.04458
								10000	30.3	20.44	59.90	1.1261	0.04435

	10500	30.7	21.14	62.01	1.1656	0.04412
	11000	31.2	21.81	64.12	1.2051	0.04389
	11500	31.7	22.46	66.22	1.2444	0.04367
	12000	32.1	23.10	68.32	1.2835	0.04344
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.3	17.51	50.83	0.9423	0.04571
	8500	28.8	18.31	52.86	0.9790	0.04553
	9000	29.2	19.08	54.88	1.0154	0.04535
	9500	29.7	19.84	56.88	1.0516	0.04517
	10000	30.1	20.57	58.88	1.0877	0.04499

								10500	30.5	21.28	60.87	1.1235	0.04481
								11000	31.0	21.97	62.84	1.1592	0.04463
								11500	31.4	22.65	64.81	1.1947	0.04446
								12000	31.9	23.31	66.77	1.2301	0.04428
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.5	18.03	49.60	1.0049	0.04247
								8500	27.9	18.83	51.67	1.0474	0.04222
								9000	28.4	19.61	53.72	1.0898	0.04197
								9500	28.9	20.36	55.77	1.1320	0.04172
								10000	29.4	21.08	57.81	1.1741	0.04147
								10500	29.8	21.79	59.84	1.2160	0.04122
								11000	30.3	22.47	61.87	1.2577	0.04098
								11500	30.8	23.14	63.89	1.2994	0.04073
								12000	31.2	23.78	65.91	1.3409	0.04049
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.4	18.09	49.14	0.9783	0.04291

								8500	27.8	18.91	51.10	1.0172	0.04271
								9000	28.3	19.70	53.04	1.0558	0.04251
								9500	28.7	20.47	54.97	1.0942	0.04231
								10000	29.2	21.22	56.89	1.1324	0.04212
								10500	29.6	21.94	58.80	1.1704	0.04192
								11000	30.1	22.65	60.70	1.2082	0.04173
								11500	30.5	23.34	62.59	1.2459	0.04154
								12000	30.9	24.00	64.48	1.2833	0.04135
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.5	18.03	49.60	1.0049	0.04247
								8500	27.9	18.83	51.67	1.0474	0.04222
								9000	28.4	19.61	53.72	1.0898	0.04197
								9500	28.9	20.36	55.77	1.1320	0.04172
								10000	29.4	21.08	57.81	1.1741	0.04147

	10500	29.8	21.79	59.84	1.2160	0.04122
	11000	30.3	22.47	61.87	1.2577	0.04098
	11500	30.8	23.14	63.89	1.2994	0.04073
	12000	31.2	23.78	65.91	1.3409	0.04049
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.4	18.09	49.14	0.9783	0.04291
	8500	27.8	18.91	51.10	1.0172	0.04271
	9000	28.3	19.70	53.04	1.0558	0.04251
	9500	28.7	20.47	54.97	1.0942	0.04231
	10000	29.2	21.22	56.89	1.1324	0.04212

								10500	29.6	21.94	58.80	1.1704	0.04192
								11000	30.1	22.65	60.70	1.2082	0.04173
								11500	30.5	23.34	62.59	1.2459	0.04154
								12000	30.9	24.00	64.48	1.2833	0.04135
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.73	55.57	0.7413	0.04226
								8500	26.8	19.62	57.49	0.7633	0.04218
								9000	27.2	20.49	59.40	0.7850	0.04209
								9500	27.6	21.34	61.28	0.8065	0.04201
								10000	27.9	22.17	63.14	0.8278	0.04192
								10500	28.3	22.98	64.98	0.8489	0.04184
								11000	28.6	23.78	66.81	0.8698	0.04176
								11500	29.0	24.55	68.62	0.8905	0.04168
								12000	29.3	25.31	70.42	0.9110	0.04160
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.24	52.09	0.7168	0.04205

	8500	26.1	20.14	54.04	0.7411	0.04195
	9000	26.5	21.01	55.97	0.7651	0.04185
	9500	26.9	21.87	57.89	0.7890	0.04174
	10000	27.3	22.70	59.79	0.8127	0.04164
	10500	27.6	23.51	61.68	0.8362	0.04154
	11000	28.0	24.29	63.57	0.8596	0.04144
	11500	28.4	25.06	65.43	0.8828	0.04135
	12000	28.8	25.81	67.29	0.9060	0.04125
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.6	20.10	49.60	0.8742	0.03660
	8500	25.1	20.98	51.64	0.9094	0.03640
	9000	25.5	21.82	53.67	0.9445	0.03621
	9500	26.0	22.65	55.69	0.9794	0.03601
	10000	26.4	23.44	57.71	1.0142	0.03582
	10500	26.8	24.21	59.72	1.0489	0.03563
	11000	27.3	24.96	61.72	1.0835	0.03543
	11500	27.7	25.69	63.72	1.1180	0.03524
	12000	28.1	26.39	65.71	1.1524	0.03505
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.19	48.93	0.8483	0.03703

								8500	24.9	21.10	50.84	0.8802	0.03688
								9000	25.4	21.97	52.75	0.9120	0.03673
								9500	25.8	22.81	54.64	0.9435	0.03659
								10000	26.2	23.63	56.53	0.9749	0.03644
								10500	26.6	24.43	58.40	1.0061	0.03629
								11000	27.0	25.21	60.27	1.0372	0.03614
								11500	27.4	25.96	62.12	1.0681	0.03600
								12000	27.8	26.70	63.97	1.0989	0.03585
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.81	55.01	0.7348	0.04229
								8500	26.7	19.71	56.90	0.7565	0.04220
								9000	27.1	20.58	58.78	0.7779	0.04212
								9500	27.4	21.44	60.63	0.7991	0.04204
								10000	27.8	22.28	62.46	0.8201	0.04195

		10500	28.1	23.10	64.28	0.8408	0.04187
		11000	28.5	23.90	66.08	0.8614	0.04179
		11500	28.8	24.68	67.87	0.8818	0.04171
		12000	29.2	25.45	69.64	0.9020	0.04163
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.24	52.09	0.7168	0.04205
		8500	26.1	20.14	54.04	0.7411	0.04195
		9000	26.5	21.01	55.97	0.7651	0.04185
		9500	26.9	21.87	57.89	0.7890	0.04174
		10000	27.3	22.70	59.79	0.8127	0.04164

	10500	27.6	23.51	61.68	0.8362	0.04154
	11000	28.0	24.29	63.57	0.8596	0.04144
	11500	28.4	25.06	65.43	0.8828	0.04135
	12000	28.8	25.81	67.29	0.9060	0.04125
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.6	20.15	49.30	0.8689	0.03663
	8500	25.0	21.03	51.32	0.9038	0.03643
	9000	25.4	21.89	53.33	0.9386	0.03624
	9500	25.9	22.71	55.33	0.9732	0.03605
	10000	26.3	23.51	57.33	1.0077	0.03586

	10500	26.7	24.29	59.32	1.0421	0.03566
	11000	27.2	25.04	61.31	1.0764	0.03547
	11500	27.6	25.77	63.29	1.1106	0.03528
	12000	28.0	26.48	65.26	1.1446	0.03509
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.5	20.23	48.71	0.8448	0.03705
	8500	24.9	21.14	50.62	0.8765	0.03690
	9000	25.3	22.01	52.51	0.9080	0.03675
	9500	25.7	22.86	54.39	0.9394	0.03661
	10000	26.1	23.69	56.26	0.9705	0.03646

								10500	26.5	24.49	58.13	1.0016	0.03631
								11000	26.9	25.27	59.98	1.0325	0.03617
								11500	27.3	26.02	61.83	1.0632	0.03602
								12000	27.7	26.76	63.66	1.0938	0.03588
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.62	53.49	0.7802	0.03871
								8500	25.6	20.54	55.33	0.8045	0.03861
								9000	26.0	21.44	57.15	0.8285	0.03851
								9500	26.3	22.31	58.95	0.8523	0.03841
								10000	26.7	23.17	60.74	0.8758	0.03831
								10500	27.1	24.01	62.50	0.8991	0.03821
								11000	27.4	24.82	64.25	0.9222	0.03811
								11500	27.8	25.62	65.99	0.9451	0.03801
								12000	28.1	26.40	67.71	0.9678	0.03792
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	50.03	0.7562	0.03858

	8500	25.0	21.08	51.89	0.7829	0.03846
	9000	25.3	21.98	53.73	0.8094	0.03834
	9500	25.7	22.86	55.56	0.8357	0.03822
	10000	26.1	23.71	57.38	0.8619	0.03810
	10500	26.5	24.55	59.19	0.8879	0.03798
	11000	26.8	25.35	60.98	0.9137	0.03787
	11500	27.2	26.14	62.77	0.9393	0.03775
	12000	27.6	26.91	64.54	0.9648	0.03764
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	50.29	0.7363	0.03968
	8500	25.2	20.86	52.17	0.7632	0.03956
	9000	25.6	21.74	54.03	0.7899	0.03945
	9500	26.0	22.61	55.88	0.8164	0.03933
	10000	26.4	23.45	57.72	0.8427	0.03922
	10500	26.8	24.27	59.54	0.8689	0.03911
	11000	27.1	25.07	61.35	0.8949	0.03900
	11500	27.5	25.86	63.15	0.9207	0.03888
	12000	27.9	26.62	64.94	0.9464	0.03877
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.03	47.18	0.9299	0.03315

	8500	24.0	21.94	49.10	0.9684	0.03293
	9000	24.4	22.81	51.02	1.0067	0.03271
	9500	24.9	23.65	52.93	1.0449	0.03249
	10000	25.3	24.47	54.83	1.0829	0.03227
	10500	25.7	25.26	56.73	1.1208	0.03205
	11000	26.2	26.02	58.62	1.1586	0.03184
	11500	26.6	26.76	60.50	1.1963	0.03162
	12000	27.0	27.48	62.38	1.2338	0.03141
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.15	46.60	0.9004	0.03359
	8500	23.8	22.07	48.42	0.9353	0.03342
	9000	24.2	22.97	50.22	0.9700	0.03325
	9500	24.7	23.84	52.01	1.0045	0.03307
	10000	25.1	24.68	53.79	1.0388	0.03291
	10500	25.5	25.50	55.56	1.0729	0.03274
	11000	25.9	26.30	57.33	1.1069	0.03257
	11500	26.3	27.07	59.08	1.1407	0.03240
	12000	26.7	27.82	60.83	1.1744	0.03223

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.1	19.71	52.95	0.7731	0.03874
								8500	25.5	20.63	54.77	0.7970	0.03864
								9000	25.9	21.54	56.56	0.8207	0.03854
								9500	26.2	22.42	58.33	0.8441	0.03844
								10000	26.6	23.29	60.09	0.8673	0.03834
								10500	26.9	24.13	61.83	0.8902	0.03825
								11000	27.3	24.95	63.55	0.9130	0.03815
								11500	27.6	25.76	65.26	0.9355	0.03805
								12000	28.0	26.54	66.96	0.9579	0.03796

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	50.03	0.7562	0.03858
	8500	25.0	21.08	51.89	0.7829	0.03846
	9000	25.3	21.98	53.73	0.8094	0.03834
	9500	25.7	22.86	55.56	0.8357	0.03822
	10000	26.1	23.71	57.38	0.8619	0.03810
	10500	26.5	24.55	59.19	0.8879	0.03798
	11000	26.8	25.35	60.98	0.9137	0.03787
	11500	27.2	26.14	62.77	0.9393	0.03775
	12000	27.6	26.91	64.54	0.9648	0.03764

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	50.29	0.7363	0.03968
	8500	25.2	20.86	52.17	0.7632	0.03956
	9000	25.6	21.74	54.03	0.7899	0.03945
	9500	26.0	22.61	55.88	0.8164	0.03933
	10000	26.4	23.45	57.72	0.8427	0.03922
	10500	26.8	24.27	59.54	0.8689	0.03911
	11000	27.1	25.07	61.35	0.8949	0.03900
	11500	27.5	25.86	63.15	0.9207	0.03888
	12000	27.9	26.62	64.94	0.9464	0.03877

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.09	46.89	0.9241	0.03318
	8500	23.9	22.00	48.80	0.9622	0.03296
	9000	24.3	22.88	50.70	1.0002	0.03275
	9500	24.8	23.73	52.59	1.0381	0.03253
	10000	25.2	24.55	54.48	1.0758	0.03231
	10500	25.6	25.34	56.36	1.1133	0.03210
	11000	26.1	26.11	58.23	1.1508	0.03188
	11500	26.5	26.85	60.10	1.1881	0.03167
	12000	26.9	27.57	61.96	1.2254	0.03146

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.4	21.19	46.40	0.8965	0.03361
	8500	23.8	22.12	48.20	0.9312	0.03344
	9000	24.2	23.02	49.99	0.9657	0.03327
	9500	24.6	23.90	51.77	0.9999	0.03310
	10000	25.0	24.74	53.54	1.0340	0.03293
	10500	25.4	25.56	55.30	1.0679	0.03276
	11000	25.8	26.36	57.06	1.1017	0.03259
	11500	26.2	27.13	58.80	1.1353	0.03243
	12000	26.6	27.89	60.54	1.1688	0.03226

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.08	54.63	0.7598	0.04083
								8500	26.3	19.98	56.52	0.7829	0.04074
								9000	26.7	20.86	58.39	0.8057	0.04064
								9500	27.1	21.72	60.23	0.8283	0.04055
								10000	27.4	22.56	62.06	0.8506	0.04046
								10500	27.8	23.38	63.87	0.8728	0.04037
								11000	28.1	24.18	65.66	0.8947	0.04028
								11500	28.5	24.97	67.44	0.9164	0.04019
								12000	28.8	25.74	69.20	0.9380	0.04010
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.60	51.16	0.7355	0.04065
								8500	25.7	20.51	53.07	0.7609	0.04054
								9000	26.0	21.39	54.96	0.7861	0.04043
								9500	26.4	22.25	56.84	0.8111	0.04032
								10000	26.8	23.09	58.71	0.8360	0.04021
								10500	27.2	23.90	60.56	0.8607	0.04011
								11000	27.6	24.70	62.40	0.8852	0.04000
								11500	27.9	25.48	64.23	0.9096	0.03989
								12000	28.3	26.24	66.05	0.9338	0.03978

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	51.42	0.7159	0.04175
	8500	25.9	20.29	53.35	0.7415	0.04165
	9000	26.3	21.16	55.26	0.7669	0.04154
	9500	26.7	22.01	57.16	0.7921	0.04144
	10000	27.1	22.84	59.04	0.8171	0.04133
	10500	27.5	23.65	60.91	0.8419	0.04123
	11000	27.9	24.44	62.77	0.8666	0.04113
	11500	28.2	25.21	64.62	0.8912	0.04102
	12000	28.6	25.96	66.46	0.9156	0.04092
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.46	48.51	0.9002	0.03520
	8500	24.6	21.35	50.50	0.9369	0.03499
	9000	25.1	22.21	52.48	0.9735	0.03478
	9500	25.5	23.04	54.45	1.0100	0.03458
	10000	26.0	23.84	56.42	1.0463	0.03437
	10500	26.4	24.62	58.37	1.0825	0.03417
	11000	26.8	25.37	60.33	1.1186	0.03396
	11500	27.3	26.10	62.27	1.1546	0.03376
	12000	27.7	26.81	64.21	1.1905	0.03356

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.56	47.88	0.8727	0.03564
								8500	24.5	21.47	49.75	0.9060	0.03548
								9000	24.9	22.36	51.61	0.9391	0.03532
								9500	25.3	23.21	53.46	0.9720	0.03516
								10000	25.7	24.04	55.30	1.0048	0.03500
								10500	26.1	24.85	57.12	1.0374	0.03484
								11000	26.6	25.63	58.94	1.0698	0.03468
								11500	27.0	26.39	60.76	1.1021	0.03453
								12000	27.4	27.13	62.56	1.1343	0.03437
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.9	19.16	54.08	0.7530	0.04086
								8500	26.2	20.07	55.94	0.7758	0.04076
								9000	26.6	20.96	57.78	0.7983	0.04067
								9500	26.9	21.82	59.60	0.8205	0.04058

		10000	27.3	22.67	61.40	0.8425	0.04049
		10500	27.7	23.50	63.18	0.8643	0.04040
		11000	28.0	24.30	64.94	0.8859	0.04032
		11500	28.4	25.10	66.69	0.9073	0.04023
		12000	28.7	25.87	68.43	0.9286	0.04014
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.60	51.16	0.7355	0.04065
		8500	25.7	20.51	53.07	0.7609	0.04054
		9000	26.0	21.39	54.96	0.7861	0.04043
		9500	26.4	22.25	56.84	0.8111	0.04032

	10000	26.8	23.09	58.71	0.8360	0.04021
	10500	27.2	23.90	60.56	0.8607	0.04011
	11000	27.6	24.70	62.40	0.8852	0.04000
	11500	27.9	25.48	64.23	0.9096	0.03989
	12000	28.3	26.24	66.05	0.9338	0.03978
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	51.42	0.7159	0.04175
	8500	25.9	20.29	53.35	0.7415	0.04165
	9000	26.3	21.16	55.26	0.7669	0.04154
	9500	26.7	22.01	57.16	0.7921	0.04144

	10000	27.1	22.84	59.04	0.8171	0.04133
	10500	27.5	23.65	60.91	0.8419	0.04123
	11000	27.9	24.44	62.77	0.8666	0.04113
	11500	28.2	25.21	64.62	0.8912	0.04102
	12000	28.6	25.96	66.46	0.9156	0.04092
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.52	48.21	0.8946	0.03523
	8500	24.6	21.41	50.18	0.9311	0.03502
	9000	25.0	22.27	52.14	0.9673	0.03482
	9500	25.4	23.11	54.10	1.0035	0.03461

		10000	25.9	23.91	56.05	1.0395	0.03441
		10500	26.3	24.70	57.99	1.0754	0.03421
		11000	26.7	25.46	59.92	1.1112	0.03401
		11500	27.2	26.19	61.85	1.1469	0.03380
		12000	27.6	26.91	63.78	1.1824	0.03360
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.61	47.67	0.8689	0.03565
		8500	24.4	21.52	49.53	0.9021	0.03549
		9000	24.9	22.40	51.38	0.9350	0.03534
		9500	25.3	23.26	53.21	0.9677	0.03518

								10000	25.7	24.10	55.04	1.0003	0.03502
								10500	26.1	24.91	56.86	1.0326	0.03486
								11000	26.5	25.69	58.67	1.0649	0.03471
								11500	26.9	26.46	60.47	1.0970	0.03455
								12000	27.3	27.20	62.26	1.1289	0.03440
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.9	19.11	54.66	0.7580	0.04070
								8500	26.3	20.02	56.54	0.7810	0.04061
								9000	26.6	20.90	58.41	0.8038	0.04051
								9500	27.0	21.76	60.25	0.8263	0.04042
								10000	27.4	22.60	62.08	0.8485	0.04033
								10500	27.7	23.42	63.89	0.8706	0.04024
								11000	28.1	24.23	65.68	0.8925	0.04015
								11500	28.4	25.01	67.46	0.9141	0.04007

	12000	28.8	25.78	69.22	0.9356	0.03998
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.64	51.18	0.7337	0.04052
	8500	25.6	20.55	53.09	0.7591	0.04041
	9000	26.0	21.43	54.98	0.7842	0.04030
	9500	26.4	22.30	56.86	0.8092	0.04019
	10000	26.8	23.13	58.73	0.8339	0.04009
	10500	27.1	23.95	60.58	0.8586	0.03998
	11000	27.5	24.75	62.43	0.8830	0.03987
	11500	27.9	25.53	64.26	0.9073	0.03977
	12000	28.2	26.29	66.08	0.9315	0.03966
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	51.44	0.7142	0.04162
	8500	25.9	20.33	53.37	0.7397	0.04151
	9000	26.3	21.20	55.28	0.7650	0.04141
	9500	26.7	22.06	57.18	0.7901	0.04130
	10000	27.0	22.89	59.06	0.8151	0.04120
	10500	27.4	23.69	60.94	0.8399	0.04110
	11000	27.8	24.48	62.80	0.8645	0.04100
	11500	28.2	25.25	64.64	0.8890	0.04090

	12000	28.5	26.01	66.48	0.9133	0.04079
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.50	48.53	0.8983	0.03508
	8500	24.6	21.39	50.52	0.9350	0.03488
	9000	25.0	22.25	52.50	0.9715	0.03467
	9500	25.5	23.08	54.48	1.0079	0.03446
	10000	25.9	23.88	56.44	1.0441	0.03426
	10500	26.3	24.66	58.40	1.0802	0.03406
	11000	26.8	25.42	60.35	1.1162	0.03385
	11500	27.2	26.15	62.30	1.1521	0.03365
	12000	27.6	26.86	64.24	1.1879	0.03345
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.61	47.90	0.8709	0.03552
	8500	24.4	21.52	49.77	0.9041	0.03536
	9000	24.9	22.40	51.63	0.9371	0.03520
	9500	25.3	23.26	53.48	0.9700	0.03504
	10000	25.7	24.09	55.32	1.0027	0.03488
	10500	26.1	24.89	57.15	1.0352	0.03473
	11000	26.5	25.68	58.97	1.0675	0.03457
	11500	26.9	26.44	60.78	1.0997	0.03442

								12000	27.3	27.18	62.59	1.1318	0.03426
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.8	19.20	54.10	0.7513	0.04073
								8500	26.2	20.11	55.96	0.7739	0.04064
								9000	26.5	21.00	57.80	0.7963	0.04054
								9500	26.9	21.87	59.62	0.8185	0.04045
								10000	27.2	22.71	61.42	0.8405	0.04037
								10500	27.6	23.54	63.20	0.8622	0.04028
								11000	28.0	24.35	64.97	0.8837	0.04019
								11500	28.3	25.14	66.72	0.9051	0.04010

	12000	28.6	25.92	68.46	0.9262	0.04002
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.64	51.18	0.7337	0.04052
	8500	25.6	20.55	53.09	0.7591	0.04041
	9000	26.0	21.43	54.98	0.7842	0.04030
	9500	26.4	22.30	56.86	0.8092	0.04019
	10000	26.8	23.13	58.73	0.8339	0.04009
	10500	27.1	23.95	60.58	0.8586	0.03998
	11000	27.5	24.75	62.43	0.8830	0.03987
	11500	27.9	25.53	64.26	0.9073	0.03977

	12000	28.2	26.29	66.08	0.9315	0.03966
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	51.44	0.7142	0.04162
	8500	25.9	20.33	53.37	0.7397	0.04151
	9000	26.3	21.20	55.28	0.7650	0.04141
	9500	26.7	22.06	57.18	0.7901	0.04130
	10000	27.0	22.89	59.06	0.8151	0.04120
	10500	27.4	23.69	60.94	0.8399	0.04110
	11000	27.8	24.48	62.80	0.8645	0.04100
	11500	28.2	25.25	64.64	0.8890	0.04090

	12000	28.5	26.01	66.48	0.9133	0.04079
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.56	48.23	0.8928	0.03511
	8500	24.5	21.45	50.21	0.9291	0.03491
	9000	25.0	22.32	52.17	0.9653	0.03470
	9500	25.4	23.15	54.12	1.0014	0.03450
	10000	25.8	23.96	56.07	1.0373	0.03430
	10500	26.3	24.74	58.02	1.0731	0.03410
	11000	26.7	25.50	59.95	1.1088	0.03389
	11500	27.1	26.24	61.88	1.1443	0.03369

	12000	27.5	26.96	63.80	1.1798	0.03349
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.64	47.70	0.8672	0.03554
	8500	24.4	21.56	49.55	0.9002	0.03538
	9000	24.8	22.45	51.40	0.9330	0.03522
	9500	25.2	23.31	53.24	0.9656	0.03506
	10000	25.6	24.14	55.07	0.9981	0.03491
	10500	26.0	24.95	56.88	1.0304	0.03475
	11000	26.4	25.74	58.69	1.0626	0.03460
	11500	26.8	26.50	60.49	1.0946	0.03444

								12000	27.2	27.25	62.29	1.1264	0.03429
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.7	17.85	56.30	0.9747	0.04119
								8500	28.3	18.61	58.62	1.0187	0.04099
								9000	28.8	19.34	60.94	1.0625	0.04079
								9500	29.3	20.04	63.23	1.1060	0.04059
								10000	29.9	20.72	65.52	1.1492	0.04038
								10500	30.4	21.38	67.79	1.1922	0.04019
								11000	30.9	22.02	70.06	1.2350	0.03999
								11500	31.4	22.64	72.31	1.2776	0.03979
								12000	31.9	23.24	74.55	1.3200	0.03959
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.7	17.89	56.04	0.9699	0.04122
								8500	28.2	18.65	58.36	1.0137	0.04101
								9000	28.7	19.38	60.65	1.0571	0.04081

								9500	29.3	20.09	62.94	1.1004	0.04061
								10000	29.8	20.77	65.21	1.1433	0.04041
								10500	30.3	21.44	67.47	1.1861	0.04021
								11000	30.8	22.08	69.72	1.2286	0.04002
								11500	31.3	22.70	71.96	1.2709	0.03982
								12000	31.9	23.30	74.18	1.3131	0.03963
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.6	18.59	53.45	1.0405	0.03772
								8500	27.2	19.36	55.65	1.0882	0.03749
								9000	27.7	20.11	57.83	1.1357	0.03725
								9500	28.2	20.82	59.99	1.1829	0.03703
								10000	28.8	21.52	62.15	1.2298	0.03680
								10500	29.3	22.19	64.29	1.2765	0.03657

								11000	29.8	22.84	66.43	1.3229	0.03635
								11500	30.3	23.47	68.55	1.3691	0.03612
								12000	30.8	24.08	70.66	1.4151	0.03590
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.6	18.63	53.21	1.0353	0.03774
								8500	27.1	19.41	55.40	1.0827	0.03751
								9000	27.6	20.15	57.56	1.1299	0.03728
								9500	28.2	20.87	59.72	1.1768	0.03706
								10000	28.7	21.57	61.86	1.2234	0.03683
								10500	29.2	22.25	63.99	1.2698	0.03660
								11000	29.7	22.90	66.11	1.3160	0.03638

								11500	30.2	23.53	68.22	1.3619	0.03616
								12000	30.7	24.15	70.32	1.4076	0.03593
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.3	18.14	55.02	1.0054	0.03979
								8500	27.8	18.90	57.29	1.0512	0.03958
								9000	28.4	19.63	59.54	1.0967	0.03936
								9500	28.9	20.34	61.78	1.1419	0.03915
								10000	29.4	21.03	64.01	1.1869	0.03893
								10500	29.9	21.69	66.22	1.2316	0.03872
								11000	30.5	22.34	68.42	1.2761	0.03851
								11500	31.0	22.96	70.62	1.3204	0.03830
								12000	31.5	23.56	72.80	1.3645	0.03809
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.18	54.77	1.0004	0.03982
								8500	27.8	18.94	57.03	1.0459	0.03960

								9000	28.3	19.68	59.26	1.0911	0.03939
								9500	28.8	20.39	61.49	1.1361	0.03917
								10000	29.4	21.08	63.70	1.1808	0.03896
								10500	29.9	21.75	65.91	1.2253	0.03875
								11000	30.4	22.39	68.10	1.2695	0.03854
								11500	30.9	23.02	70.28	1.3135	0.03833
								12000	31.4	23.63	72.45	1.3574	0.03812
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.17	55.04	1.0033	0.03966
								8500	27.8	18.93	57.31	1.0490	0.03945
								9000	28.3	19.67	59.57	1.0943	0.03923
								9500	28.8	20.38	61.81	1.1395	0.03902

								10000	29.4	21.07	64.03	1.1843	0.03881
								10500	29.9	21.73	66.25	1.2289	0.03860
								11000	30.4	22.38	68.46	1.2733	0.03839
								11500	30.9	23.00	70.65	1.3175	0.03818
								12000	31.4	23.61	72.83	1.3615	0.03797
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	6.8L	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.21	54.80	0.9983	0.03969
								8500	27.7	18.98	57.05	1.0437	0.03947
								9000	28.3	19.72	59.29	1.0888	0.03926
								9500	28.8	20.43	61.52	1.1336	0.03905
								10000	29.3	21.12	63.73	1.1782	0.03884
								10500	29.8	21.79	65.94	1.2226	0.03863

								11000	30.3	22.43	68.13	1.2667	0.03842
								11500	30.8	23.06	70.31	1.3106	0.03821
								12000	31.4	23.67	72.48	1.3543	0.03800
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.03	57.30	0.2676	0.04983
								8500	26.4	19.92	59.40	0.2869	0.04979
								9000	26.8	20.78	61.48	0.3060	0.04974
								9500	27.2	21.62	63.54	0.3249	0.04970
								10000	27.6	22.44	65.58	0.3436	0.04966
								10500	28.0	23.24	67.60	0.3621	0.04962

	11000	28.3	24.02	69.59	0.3804	0.04958
	11500	28.7	24.79	71.58	0.3986	0.04954
	12000	29.1	25.53	73.54	0.4167	0.04950
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.45	52.24	0.3535	0.04471
	8500	24.7	21.34	54.39	0.3818	0.04461
	9000	25.1	22.19	56.52	0.4099	0.04452
	9500	25.5	23.02	58.65	0.4378	0.04443
	10000	26.0	23.82	60.76	0.4656	0.04434
	10500	26.4	24.60	62.86	0.4933	0.04424

								11000	26.8	25.36	64.95	0.5208	0.04415
								11500	27.3	26.09	67.03	0.5482	0.04406
								12000	27.7	26.80	69.10	0.5754	0.04397
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.03	57.30	0.2676	0.04983
								8500	26.4	19.92	59.40	0.2869	0.04979
								9000	26.8	20.78	61.48	0.3060	0.04974
								9500	27.2	21.62	63.54	0.3249	0.04970
								10000	27.6	22.44	65.58	0.3436	0.04966
								10500	28.0	23.24	67.60	0.3621	0.04962
								11000	28.3	24.02	69.59	0.3804	0.04958
								11500	28.7	24.79	71.58	0.3986	0.04954
								12000	29.1	25.53	73.54	0.4167	0.04950
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.2	20.45	52.24	0.3535	0.04471
								8500	24.7	21.34	54.39	0.3818	0.04461
								9000	25.1	22.19	56.52	0.4099	0.04452

								9500	25.5	23.02	58.65	0.4378	0.04443
								10000	26.0	23.82	60.76	0.4656	0.04434
								10500	26.4	24.60	62.86	0.4933	0.04424
								11000	26.8	25.36	64.95	0.5208	0.04415
								11500	27.3	26.09	67.03	0.5482	0.04406
								12000	27.7	26.80	69.10	0.5754	0.04397
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.18	55.97	0.4600	0.04202
								8500	24.9	21.11	57.98	0.4798	0.04197
								9000	25.3	22.02	59.97	0.4993	0.04192
								9500	25.7	22.90	61.94	0.5186	0.04187
								10000	26.0	23.76	63.88	0.5377	0.04182
								10500	26.4	24.60	65.81	0.5567	0.04177

	11000	26.8	25.42	67.73	0.5754	0.04172
	11500	27.1	26.22	69.62	0.5940	0.04168
	12000	27.5	27.00	71.50	0.6125	0.04163
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.55	51.15	0.5838	0.03680
	8500	23.4	22.45	53.32	0.6160	0.03665
	9000	23.9	23.32	55.47	0.6481	0.03651
	9500	24.3	24.15	57.62	0.6800	0.03636
	10000	24.8	24.96	59.76	0.7119	0.03621
	10500	25.2	25.75	61.89	0.7436	0.03606

	11000	25.7	26.50	64.02	0.7752	0.03592
	11500	26.1	27.23	66.14	0.8067	0.03577
	12000	26.6	27.94	68.25	0.8382	0.03563
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.8	21.70	50.22	0.5576	0.03722
	8500	23.2	22.63	52.25	0.5867	0.03711
	9000	23.7	23.53	54.26	0.6155	0.03701
	9500	24.1	24.40	56.26	0.6442	0.03690
	10000	24.5	25.24	58.26	0.6727	0.03680
	10500	24.9	26.05	60.24	0.7011	0.03670

								11000	25.4	26.84	62.22	0.7294	0.03660
								11500	25.8	27.61	64.18	0.7575	0.03649
								12000	26.2	28.35	66.14	0.7855	0.03639
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.18	55.97	0.4600	0.04202
								8500	24.9	21.11	57.98	0.4798	0.04197
								9000	25.3	22.02	59.97	0.4993	0.04192
								9500	25.7	22.90	61.94	0.5186	0.04187
								10000	26.0	23.76	63.88	0.5377	0.04182
								10500	26.4	24.60	65.81	0.5567	0.04177
								11000	26.8	25.42	67.73	0.5754	0.04172
								11500	27.1	26.22	69.62	0.5940	0.04168
								12000	27.5	27.00	71.50	0.6125	0.04163
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.55	51.15	0.5838	0.03680
								8500	23.4	22.45	53.32	0.6160	0.03665
								9000	23.9	23.32	55.47	0.6481	0.03651

								9500	24.3	24.15	57.62	0.6800	0.03636
								10000	24.8	24.96	59.76	0.7119	0.03621
								10500	25.2	25.75	61.89	0.7436	0.03606
								11000	25.7	26.50	64.02	0.7752	0.03592
								11500	26.1	27.23	66.14	0.8067	0.03577
								12000	26.6	27.94	68.25	0.8382	0.03563
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	22.8	21.70	50.22	0.5576	0.03722
								8500	23.2	22.63	52.25	0.5867	0.03711
								9000	23.7	23.53	54.26	0.6155	0.03701
								9500	24.1	24.40	56.26	0.6442	0.03690
								10000	24.5	25.24	58.26	0.6727	0.03680
								10500	24.9	26.05	60.24	0.7011	0.03670
								11000	25.4	26.84	62.22	0.7294	0.03660
								11500	25.8	27.61	64.18	0.7575	0.03649
								12000	26.2	28.35	66.14	0.7855	0.03639
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.54	55.13	0.5001	0.04399

	8500	25.7	20.45	57.11	0.5219	0.04392
	9000	26.1	21.33	59.06	0.5436	0.04386
	9500	26.5	22.19	61.00	0.5650	0.04379
	10000	26.9	23.03	62.91	0.5862	0.04373
	10500	27.2	23.85	64.81	0.6072	0.04366
	11000	27.6	24.65	66.69	0.6279	0.04360
	11500	28.0	25.44	68.55	0.6485	0.04354
	12000	28.3	26.20	70.40	0.6690	0.04348
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	50.20	0.6288	0.03853

	8500	24.2	21.75	52.32	0.6639	0.03836
	9000	24.6	22.60	54.43	0.6989	0.03819
	9500	25.1	23.42	56.53	0.7337	0.03802
	10000	25.6	24.21	58.63	0.7684	0.03785
	10500	26.0	24.98	60.72	0.8030	0.03768
	11000	26.5	25.72	62.80	0.8374	0.03752
	11500	26.9	26.44	64.87	0.8718	0.03735
	12000	27.4	27.13	66.94	0.9061	0.03718
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.31	0.6006	0.03895

								8500	24.0	21.93	51.29	0.6323	0.03882
								9000	24.4	22.81	53.27	0.6638	0.03870
								9500	24.9	23.66	55.23	0.6951	0.03857
								10000	25.3	24.48	57.18	0.7262	0.03845
								10500	25.7	25.28	59.12	0.7572	0.03833
								11000	26.1	26.05	61.06	0.7880	0.03821
								11500	26.6	26.80	62.98	0.8187	0.03809
								12000	27.0	27.53	64.90	0.8492	0.03796
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.54	55.13	0.5001	0.04399
								8500	25.7	20.45	57.11	0.5219	0.04392

		9000	26.1	21.33	59.06	0.5436	0.04386
		9500	26.5	22.19	61.00	0.5650	0.04379
		10000	26.9	23.03	62.91	0.5862	0.04373
		10500	27.2	23.85	64.81	0.6072	0.04366
		11000	27.6	24.65	66.69	0.6279	0.04360
		11500	28.0	25.44	68.55	0.6485	0.04354
		12000	28.3	26.20	70.40	0.6690	0.04348
	LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	50.20	0.6288	0.03853
		8500	24.2	21.75	52.32	0.6639	0.03836
		9000	24.6	22.60	54.43	0.6989	0.03819
		9500	25.1	23.42	56.53	0.7337	0.03802
		10000	25.6	24.21	58.63	0.7684	0.03785
		10500	26.0	24.98	60.72	0.8030	0.03768
		11000	26.5	25.72	62.80	0.8374	0.03752
		11500	26.9	26.44	64.87	0.8718	0.03735
		12000	27.4	27.13	66.94	0.9061	0.03718
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.31	0.6006	0.03895
		8500	24.0	21.93	51.29	0.6323	0.03882

								9000	24.4	22.81	53.27	0.6638	0.03870
								9500	24.9	23.66	55.23	0.6951	0.03857
								10000	25.3	24.48	57.18	0.7262	0.03845
								10500	25.7	25.28	59.12	0.7572	0.03833
								11000	26.1	26.05	61.06	0.7880	0.03821
								11500	26.6	26.80	62.98	0.8187	0.03809
								12000	27.0	27.53	64.90	0.8492	0.03796
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.36	55.62	0.4887	0.04474
								8500	26.0	20.26	57.61	0.5100	0.04468
								9000	26.4	21.14	59.59	0.5310	0.04462
								9500	26.7	21.99	61.55	0.5518	0.04456
								10000	27.1	22.83	63.48	0.5723	0.04450

	10500	27.5	23.64	65.40	0.5927	0.04444
	11000	27.9	24.44	67.30	0.6129	0.04438
	11500	28.2	25.22	69.18	0.6330	0.04432
	12000	28.6	25.98	71.05	0.6528	0.04426
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.0	20.68	50.77	0.6134	0.03928
	8500	24.4	21.56	52.92	0.6476	0.03911
	9000	24.9	22.40	55.06	0.6817	0.03895
	9500	25.3	23.22	57.19	0.7156	0.03878
	10000	25.8	24.01	59.31	0.7494	0.03862

	10500	26.2	24.77	61.43	0.7832	0.03846
	11000	26.7	25.51	63.54	0.8168	0.03830
	11500	27.1	26.22	65.64	0.8503	0.03814
	12000	27.6	26.91	67.74	0.8837	0.03798
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.83	49.85	0.5861	0.03969
	8500	24.2	21.73	51.87	0.6170	0.03957
	9000	24.6	22.60	53.86	0.6476	0.03945
	9500	25.1	23.45	55.85	0.6782	0.03933
	10000	25.5	24.26	57.83	0.7085	0.03922

								10500	25.9	25.06	59.80	0.7387	0.03910
								11000	26.4	25.83	61.75	0.7688	0.03898
								11500	26.8	26.58	63.70	0.7987	0.03887
								12000	27.2	27.30	65.64	0.8285	0.03875
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.36	55.62	0.4887	0.04474
								8500	26.0	20.26	57.61	0.5100	0.04468
								9000	26.4	21.14	59.59	0.5310	0.04462
								9500	26.7	21.99	61.55	0.5518	0.04456
								10000	27.1	22.83	63.48	0.5723	0.04450
								10500	27.5	23.64	65.40	0.5927	0.04444
								11000	27.9	24.44	67.30	0.6129	0.04438
								11500	28.2	25.22	69.18	0.6330	0.04432
								12000	28.6	25.98	71.05	0.6528	0.04426
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.0	20.68	50.77	0.6134	0.03928

	8500	24.4	21.56	52.92	0.6476	0.03911
	9000	24.9	22.40	55.06	0.6817	0.03895
	9500	25.3	23.22	57.19	0.7156	0.03878
	10000	25.8	24.01	59.31	0.7494	0.03862
	10500	26.2	24.77	61.43	0.7832	0.03846
	11000	26.7	25.51	63.54	0.8168	0.03830
	11500	27.1	26.22	65.64	0.8503	0.03814
	12000	27.6	26.91	67.74	0.8837	0.03798
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.83	49.85	0.5861	0.03969
	8500	24.2	21.73	51.87	0.6170	0.03957
	9000	24.6	22.60	53.86	0.6476	0.03945
	9500	25.1	23.45	55.85	0.6782	0.03933
	10000	25.5	24.26	57.83	0.7085	0.03922
	10500	25.9	25.06	59.80	0.7387	0.03910
	11000	26.4	25.83	61.75	0.7688	0.03898
	11500	26.8	26.58	63.70	0.7987	0.03887
	12000	27.2	27.30	65.64	0.8285	0.03875

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.73	56.89	0.4638	0.04731
								8500	26.8	19.61	58.94	0.4836	0.04726
								9000	27.2	20.47	60.97	0.5032	0.04721
								9500	27.6	21.31	62.98	0.5226	0.04716
								10000	28.0	22.13	64.96	0.5418	0.04711
								10500	28.3	22.92	66.93	0.5608	0.04706
								11000	28.7	23.71	68.88	0.5796	0.04701
								11500	29.1	24.47	70.81	0.5983	0.04697
								12000	29.4	25.21	72.73	0.6168	0.04692

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	51.29	0.5524	0.04218
	8500	25.0	21.03	53.36	0.5815	0.04208
	9000	25.4	21.89	55.43	0.6103	0.04197
	9500	25.9	22.72	57.48	0.6390	0.04187
	10000	26.3	23.52	59.53	0.6675	0.04177
	10500	26.7	24.31	61.56	0.6959	0.04166
	11000	27.2	25.06	63.58	0.7242	0.04156
	11500	27.6	25.80	65.60	0.7523	0.04146
	12000	28.0	26.52	67.60	0.7803	0.04136

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.73	56.89	0.4638	0.04731
								8500	26.8	19.61	58.94	0.4836	0.04726
								9000	27.2	20.47	60.97	0.5032	0.04721
								9500	27.6	21.31	62.98	0.5226	0.04716
								10000	28.0	22.13	64.96	0.5418	0.04711
								10500	28.3	22.92	66.93	0.5608	0.04706
								11000	28.7	23.71	68.88	0.5796	0.04701
								11500	29.1	24.47	70.81	0.5983	0.04697
								12000	29.4	25.21	72.73	0.6168	0.04692
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.15	51.29	0.5524	0.04218
								8500	25.0	21.03	53.36	0.5815	0.04208
								9000	25.4	21.89	55.43	0.6103	0.04197
								9500	25.9	22.72	57.48	0.6390	0.04187
								10000	26.3	23.52	59.53	0.6675	0.04177
								10500	26.7	24.31	61.56	0.6959	0.04166
								11000	27.2	25.06	63.58	0.7242	0.04156
								11500	27.6	25.80	65.60	0.7523	0.04146
								12000	28.0	26.52	67.60	0.7803	0.04136

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.04	56.05	0.5310	0.04108
								8500	25.1	20.97	58.03	0.5514	0.04102
								9000	25.5	21.87	59.98	0.5716	0.04097
								9500	25.8	22.75	61.92	0.5916	0.04091
								10000	26.2	23.62	63.83	0.6113	0.04085
								10500	26.6	24.45	65.73	0.6309	0.04080
								11000	26.9	25.27	67.61	0.6503	0.04074
								11500	27.3	26.07	69.47	0.6696	0.04069
								12000	27.6	26.85	71.32	0.6887	0.04063

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.1	21.42	50.80	0.6615	0.03581
	8500	23.6	22.32	52.91	0.6947	0.03566
	9000	24.0	23.18	55.02	0.7278	0.03550
	9500	24.5	24.02	57.12	0.7607	0.03534
	10000	24.9	24.84	59.21	0.7936	0.03518
	10500	25.4	25.62	61.30	0.8263	0.03502
	11000	25.8	26.37	63.38	0.8589	0.03487
	11500	26.2	27.11	65.45	0.8914	0.03471
	12000	26.7	27.82	67.51	0.9238	0.03456

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.56	49.93	0.6345	0.03624
	8500	23.4	22.49	51.92	0.6644	0.03612
	9000	23.8	23.39	53.89	0.6942	0.03601
	9500	24.2	24.26	55.85	0.7238	0.03589
	10000	24.7	25.10	57.80	0.7532	0.03578
	10500	25.1	25.91	59.74	0.7825	0.03567
	11000	25.5	26.70	61.67	0.8117	0.03556
	11500	25.9	27.47	63.59	0.8407	0.03544
	12000	26.3	28.22	65.50	0.8696	0.03533

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.59000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.04	56.05	0.5310	0.04108
								8500	25.1	20.97	58.03	0.5514	0.04102
								9000	25.5	21.87	59.98	0.5716	0.04097
								9500	25.8	22.75	61.92	0.5916	0.04091
								10000	26.2	23.62	63.83	0.6113	0.04085
								10500	26.6	24.45	65.73	0.6309	0.04080
								11000	26.9	25.27	67.61	0.6503	0.04074
								11500	27.3	26.07	69.47	0.6696	0.04069
								12000	27.6	26.85	71.32	0.6887	0.04063
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.1	21.42	50.80	0.6615	0.03581
								8500	23.6	22.32	52.91	0.6947	0.03566
								9000	24.0	23.18	55.02	0.7278	0.03550
								9500	24.5	24.02	57.12	0.7607	0.03534
								10000	24.9	24.84	59.21	0.7936	0.03518
								10500	25.4	25.62	61.30	0.8263	0.03502
								11000	25.8	26.37	63.38	0.8589	0.03487
								11500	26.2	27.11	65.45	0.8914	0.03471
								12000	26.7	27.82	67.51	0.9238	0.03456

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.0	21.56	49.93	0.6345	0.03624
								8500	23.4	22.49	51.92	0.6644	0.03612
								9000	23.8	23.39	53.89	0.6942	0.03601
								9500	24.2	24.26	55.85	0.7238	0.03589
								10000	24.7	25.10	57.80	0.7532	0.03578
								10500	25.1	25.91	59.74	0.7825	0.03567
								11000	25.5	26.70	61.67	0.8117	0.03556
								11500	25.9	27.47	63.59	0.8407	0.03544
								12000	26.3	28.22	65.50	0.8696	0.03533
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	55.18	0.5728	0.04302
								8500	25.9	20.31	57.13	0.5954	0.04295
								9000	26.3	21.19	59.05	0.6177	0.04288
								9500	26.7	22.06	60.95	0.6398	0.04280

	10000	27.0	22.90	62.83	0.6616	0.04273
	10500	27.4	23.71	64.70	0.6832	0.04266
	11000	27.8	24.51	66.55	0.7047	0.04259
	11500	28.1	25.30	68.38	0.7259	0.04252
	12000	28.5	26.06	70.19	0.7470	0.04245
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.75	49.82	0.7084	0.03752
	8500	24.3	21.63	51.89	0.7445	0.03734
	9000	24.8	22.48	53.95	0.7805	0.03716
	9500	25.2	23.30	56.01	0.8163	0.03698

	10000	25.7	24.09	58.06	0.8520	0.03680
	10500	26.1	24.86	60.10	0.8876	0.03662
	11000	26.6	25.60	62.13	0.9230	0.03644
	11500	27.0	26.32	64.16	0.9584	0.03626
	12000	27.5	27.02	66.18	0.9936	0.03608
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.89	49.00	0.6793	0.03794
	8500	24.1	21.80	50.94	0.7119	0.03781
	9000	24.6	22.67	52.87	0.7443	0.03767
	9500	25.0	23.52	54.78	0.7765	0.03754

								10000	25.4	24.35	56.69	0.8085	0.03740
								10500	25.8	25.15	58.59	0.8404	0.03727
								11000	26.3	25.92	60.48	0.8721	0.03714
								11500	26.7	26.67	62.36	0.9037	0.03701
								12000	27.1	27.40	64.23	0.9352	0.03688
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	55.18	0.5728	0.04302
								8500	25.9	20.31	57.13	0.5954	0.04295
								9000	26.3	21.19	59.05	0.6177	0.04288
								9500	26.7	22.06	60.95	0.6398	0.04280
								10000	27.0	22.90	62.83	0.6616	0.04273
								10500	27.4	23.71	64.70	0.6832	0.04266
								11000	27.8	24.51	66.55	0.7047	0.04259
								11500	28.1	25.30	68.38	0.7259	0.04252

	12000	28.5	26.06	70.19	0.7470	0.04245
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.75	49.82	0.7084	0.03752
	8500	24.3	21.63	51.89	0.7445	0.03734
	9000	24.8	22.48	53.95	0.7805	0.03716
	9500	25.2	23.30	56.01	0.8163	0.03698
	10000	25.7	24.09	58.06	0.8520	0.03680
	10500	26.1	24.86	60.10	0.8876	0.03662
	11000	26.6	25.60	62.13	0.9230	0.03644
	11500	27.0	26.32	64.16	0.9584	0.03626
	12000	27.5	27.02	66.18	0.9936	0.03608
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.89	49.00	0.6793	0.03794
	8500	24.1	21.80	50.94	0.7119	0.03781
	9000	24.6	22.67	52.87	0.7443	0.03767
	9500	25.0	23.52	54.78	0.7765	0.03754
	10000	25.4	24.35	56.69	0.8085	0.03740
	10500	25.8	25.15	58.59	0.8404	0.03727
	11000	26.3	25.92	60.48	0.8721	0.03714
	11500	26.7	26.67	62.36	0.9037	0.03701

								12000	27.1	27.40	64.23	0.9352	0.03688
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.23	55.69	0.5611	0.04377
								8500	26.1	20.13	57.65	0.5831	0.04370
								9000	26.5	21.00	59.59	0.6048	0.04364
								9500	26.9	21.86	61.51	0.6262	0.04357
								10000	27.3	22.69	63.42	0.6475	0.04350
								10500	27.6	23.51	65.30	0.6685	0.04343
								11000	28.0	24.30	67.17	0.6893	0.04337
								11500	28.4	25.08	69.02	0.7100	0.04330

	12000	28.7	25.84	70.85	0.7305	0.04324
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.1	20.56	50.41	0.6926	0.03826
	8500	24.5	21.43	52.51	0.7278	0.03808
	9000	25.0	22.28	54.60	0.7629	0.03791
	9500	25.5	23.10	56.68	0.7979	0.03773
	10000	25.9	23.89	58.75	0.8327	0.03756
	10500	26.4	24.65	60.82	0.8674	0.03739
	11000	26.8	25.39	62.88	0.9020	0.03722
	11500	27.3	26.11	64.93	0.9365	0.03705

	12000	27.7	26.80	66.98	0.9709	0.03687
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.70	49.56	0.6645	0.03868
	8500	24.4	21.60	51.52	0.6962	0.03855
	9000	24.8	22.47	53.48	0.7278	0.03842
	9500	25.2	23.32	55.42	0.7593	0.03829
	10000	25.6	24.14	57.35	0.7905	0.03817
	10500	26.1	24.93	59.28	0.8216	0.03804
	11000	26.5	25.70	61.19	0.8526	0.03791
	11500	26.9	26.45	63.10	0.8834	0.03779

								12000	27.3	27.18	64.99	0.9140	0.03767
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.23	55.69	0.5611	0.04377
								8500	26.1	20.13	57.65	0.5831	0.04370
								9000	26.5	21.00	59.59	0.6048	0.04364
								9500	26.9	21.86	61.51	0.6262	0.04357
								10000	27.3	22.69	63.42	0.6475	0.04350
								10500	27.6	23.51	65.30	0.6685	0.04343
								11000	28.0	24.30	67.17	0.6893	0.04337
								11500	28.4	25.08	69.02	0.7100	0.04330
								12000	28.7	25.84	70.85	0.7305	0.04324
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.1	20.56	50.41	0.6926	0.03826
								8500	24.5	21.43	52.51	0.7278	0.03808
								9000	25.0	22.28	54.60	0.7629	0.03791
								9500	25.5	23.10	56.68	0.7979	0.03773
								10000	25.9	23.89	58.75	0.8327	0.03756
								10500	26.4	24.65	60.82	0.8674	0.03739
								11000	26.8	25.39	62.88	0.9020	0.03722

								11500	27.3	26.11	64.93	0.9365	0.03705
								12000	27.7	26.80	66.98	0.9709	0.03687
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.70	49.56	0.6645	0.03868
								8500	24.4	21.60	51.52	0.6962	0.03855
								9000	24.8	22.47	53.48	0.7278	0.03842
								9500	25.2	23.32	55.42	0.7593	0.03829
								10000	25.6	24.14	57.35	0.7905	0.03817
								10500	26.1	24.93	59.28	0.8216	0.03804
								11000	26.5	25.70	61.19	0.8526	0.03791
								11500	26.9	26.45	63.10	0.8834	0.03779
								12000	27.3	27.18	64.99	0.9140	0.03767
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.6	18.61	56.99	0.5356	0.04633
								8500	27.0	19.49	59.01	0.5561	0.04627
								9000	27.4	20.35	61.00	0.5764	0.04622

	9500	27.8	21.18	62.98	0.5964	0.04616
	10000	28.1	22.00	64.93	0.6163	0.04610
	10500	28.5	22.80	66.86	0.6360	0.04604
	11000	28.9	23.58	68.78	0.6554	0.04599
	11500	29.2	24.34	70.68	0.6748	0.04593
	12000	29.6	25.09	72.56	0.6939	0.04588
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.03	51.02	0.6302	0.04116
	8500	25.2	20.92	53.05	0.6601	0.04104
	9000	25.6	21.77	55.07	0.6899	0.04093

								9500	26.0	22.60	57.08	0.7195	0.04082
								10000	26.4	23.41	59.08	0.7489	0.04070
								10500	26.9	24.19	61.07	0.7782	0.04059
								11000	27.3	24.95	63.05	0.8073	0.04048
								11500	27.7	25.69	65.02	0.8364	0.04037
								12000	28.1	26.40	66.98	0.8653	0.04026
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.6	18.61	56.99	0.5356	0.04633
								8500	27.0	19.49	59.01	0.5561	0.04627
								9000	27.4	20.35	61.00	0.5764	0.04622
								9500	27.8	21.18	62.98	0.5964	0.04616
								10000	28.1	22.00	64.93	0.6163	0.04610
								10500	28.5	22.80	66.86	0.6360	0.04604

								11000	28.9	23.58	68.78	0.6554	0.04599
								11500	29.2	24.34	70.68	0.6748	0.04593
								12000	29.6	25.09	72.56	0.6939	0.04588
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.03	51.02	0.6302	0.04116
								8500	25.2	20.92	53.05	0.6601	0.04104
								9000	25.6	21.77	55.07	0.6899	0.04093
								9500	26.0	22.60	57.08	0.7195	0.04082
								10000	26.4	23.41	59.08	0.7489	0.04070
								10500	26.9	24.19	61.07	0.7782	0.04059
								11000	27.3	24.95	63.05	0.8073	0.04048
								11500	27.7	25.69	65.02	0.8364	0.04037
								12000	28.1	26.40	66.98	0.8653	0.04026
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.5	18.02	52.69	0.6745	0.04793
								8500	28.0	18.80	54.94	0.7132	0.04774
								9000	28.5	19.56	57.19	0.7518	0.04754

	9500	29.0	20.30	59.43	0.7901	0.04735
	10000	29.5	21.01	61.66	0.8284	0.04715
	10500	29.9	21.70	63.88	0.8665	0.04696
	11000	30.4	22.37	66.09	0.9045	0.04677
	11500	30.9	23.02	68.30	0.9424	0.04657
	12000	31.4	23.65	70.50	0.9801	0.04638
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.4	18.10	51.95	0.6496	0.04835
	8500	27.8	18.91	54.08	0.6848	0.04820
	9000	28.3	19.69	56.19	0.7197	0.04805

								9500	28.8	20.44	58.29	0.7545	0.04791
								10000	29.2	21.18	60.38	0.7891	0.04776
								10500	29.7	21.89	62.46	0.8235	0.04762
								11000	30.1	22.58	64.53	0.8578	0.04748
								11500	30.6	23.26	66.60	0.8919	0.04733
								12000	31.1	23.91	68.65	0.9259	0.04719
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.5	18.02	52.69	0.6745	0.04793
								8500	28.0	18.80	54.94	0.7132	0.04774
								9000	28.5	19.56	57.19	0.7518	0.04754
								9500	29.0	20.30	59.43	0.7901	0.04735
								10000	29.5	21.01	61.66	0.8284	0.04715
								10500	29.9	21.70	63.88	0.8665	0.04696

								11000	30.4	22.37	66.09	0.9045	0.04677
								11500	30.9	23.02	68.30	0.9424	0.04657
								12000	31.4	23.65	70.50	0.9801	0.04638
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.4	18.10	51.95	0.6496	0.04835
								8500	27.8	18.91	54.08	0.6848	0.04820
								9000	28.3	19.69	56.19	0.7197	0.04805
								9500	28.8	20.44	58.29	0.7545	0.04791
								10000	29.2	21.18	60.38	0.7891	0.04776
								10500	29.7	21.89	62.46	0.8235	0.04762
								11000	30.1	22.58	64.53	0.8578	0.04748
								11500	30.6	23.26	66.60	0.8919	0.04733
								12000	31.1	23.91	68.65	0.9259	0.04719
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	55.39	0.4815	0.04434
								8500	25.8	20.43	57.38	0.5024	0.04428
								9000	26.1	21.31	59.34	0.5231	0.04422

								9500	26.5	22.18	61.29	0.5435	0.04416
								10000	26.9	23.02	63.21	0.5637	0.04410
								10500	27.3	23.84	65.12	0.5837	0.04404
								11000	27.6	24.65	67.00	0.6036	0.04399
								11500	28.0	25.43	68.87	0.6232	0.04393
								12000	28.3	26.20	70.73	0.6427	0.04388
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	55.39	0.4815	0.04434
								8500	25.8	20.43	57.38	0.5024	0.04428
								9000	26.1	21.31	59.34	0.5231	0.04422
								9500	26.5	22.18	61.29	0.5435	0.04416
								10000	26.9	23.02	63.21	0.5637	0.04410
								10500	27.3	23.84	65.12	0.5837	0.04404

								11000	27.6	24.65	67.00	0.6036	0.04399
								11500	28.0	25.43	68.87	0.6232	0.04393
								12000	28.3	26.20	70.73	0.6427	0.04388
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.70	54.91	0.4928	0.04359
								8500	25.5	20.62	56.87	0.5143	0.04353
								9000	25.9	21.51	58.82	0.5356	0.04346
								9500	26.3	22.38	60.74	0.5566	0.04340
								10000	26.6	23.22	62.65	0.5774	0.04334
								10500	27.0	24.05	64.53	0.5981	0.04328
								11000	27.4	24.86	66.40	0.6185	0.04322

	11500	27.7	25.65	68.25	0.6387	0.04316
	12000	28.1	26.42	70.09	0.6588	0.04310
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.00	50.26	0.6244	0.03817
	8500	24.0	21.88	52.38	0.6592	0.03800
	9000	24.5	22.73	54.49	0.6939	0.03783
	9500	25.0	23.56	56.60	0.7284	0.03766
	10000	25.4	24.35	58.70	0.7628	0.03749
	10500	25.9	25.12	60.79	0.7971	0.03733
	11000	26.3	25.87	62.87	0.8313	0.03716

	11500	26.8	26.58	64.95	0.8653	0.03700
	12000	27.2	27.28	67.02	0.8993	0.03683
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.15	49.36	0.5964	0.03858
	8500	23.9	22.06	51.35	0.6278	0.03846
	9000	24.3	22.94	53.33	0.6590	0.03833
	9500	24.7	23.80	55.29	0.6900	0.03821
	10000	25.1	24.62	57.25	0.7209	0.03809
	10500	25.6	25.42	59.19	0.7516	0.03797
	11000	26.0	26.20	61.13	0.7821	0.03785

								11500	26.4	26.95	63.05	0.8126	0.03773
								12000	26.8	27.68	64.97	0.8428	0.03761
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.70	54.91	0.4928	0.04359
								8500	25.5	20.62	56.87	0.5143	0.04353
								9000	25.9	21.51	58.82	0.5356	0.04346
								9500	26.3	22.38	60.74	0.5566	0.04340
								10000	26.6	23.22	62.65	0.5774	0.04334
								10500	27.0	24.05	64.53	0.5981	0.04328
								11000	27.4	24.86	66.40	0.6185	0.04322
								11500	27.7	25.65	68.25	0.6387	0.04316
								12000	28.1	26.42	70.09	0.6588	0.04310
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.00	50.26	0.6244	0.03817
								8500	24.0	21.88	52.38	0.6592	0.03800
								9000	24.5	22.73	54.49	0.6939	0.03783
								9500	25.0	23.56	56.60	0.7284	0.03766
								10000	25.4	24.35	58.70	0.7628	0.03749

								10500	25.9	25.12	60.79	0.7971	0.03733
								11000	26.3	25.87	62.87	0.8313	0.03716
								11500	26.8	26.58	64.95	0.8653	0.03700
								12000	27.2	27.28	67.02	0.8993	0.03683
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.4	21.15	49.36	0.5964	0.03858
								8500	23.9	22.06	51.35	0.6278	0.03846
								9000	24.3	22.94	53.33	0.6590	0.03833
								9500	24.7	23.80	55.29	0.6900	0.03821
								10000	25.1	24.62	57.25	0.7209	0.03809
								10500	25.6	25.42	59.19	0.7516	0.03797
								11000	26.0	26.20	61.13	0.7821	0.03785
								11500	26.4	26.95	63.05	0.8126	0.03773
								12000	26.8	27.68	64.97	0.8428	0.03761
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	55.39	0.4815	0.04434
								8500	25.8	20.43	57.38	0.5024	0.04428

	9000	26.1	21.31	59.34	0.5231	0.04422
	9500	26.5	22.18	61.29	0.5435	0.04416
	10000	26.9	23.02	63.21	0.5637	0.04410
	10500	27.3	23.84	65.12	0.5837	0.04404
	11000	27.6	24.65	67.00	0.6036	0.04399
	11500	28.0	25.43	68.87	0.6232	0.04393
	12000	28.3	26.20	70.73	0.6427	0.04388
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.81	50.83	0.6090	0.03890
	8500	24.3	21.68	52.98	0.6429	0.03874

	9000	24.7	22.53	55.12	0.6767	0.03858
	9500	25.2	23.35	57.25	0.7103	0.03842
	10000	25.6	24.14	59.38	0.7438	0.03826
	10500	26.1	24.91	61.50	0.7773	0.03810
	11000	26.5	25.65	63.61	0.8106	0.03794
	11500	27.0	26.37	65.71	0.8438	0.03778
	12000	27.4	27.06	67.81	0.8769	0.03762
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.95	49.91	0.5819	0.03931
	8500	24.1	21.86	51.92	0.6125	0.03920

								9000	24.5	22.74	53.92	0.6429	0.03908
								9500	24.9	23.59	55.91	0.6731	0.03896
								10000	25.4	24.41	57.89	0.7032	0.03885
								10500	25.8	25.21	59.86	0.7331	0.03873
								11000	26.2	25.98	61.82	0.7629	0.03862
								11500	26.6	26.73	63.77	0.7925	0.03851
								12000	27.0	27.46	65.72	0.8221	0.03839
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	55.39	0.4815	0.04434
								8500	25.8	20.43	57.38	0.5024	0.04428
								9000	26.1	21.31	59.34	0.5231	0.04422
								9500	26.5	22.18	61.29	0.5435	0.04416

	10000	26.9	23.02	63.21	0.5637	0.04410
	10500	27.3	23.84	65.12	0.5837	0.04404
	11000	27.6	24.65	67.00	0.6036	0.04399
	11500	28.0	25.43	68.87	0.6232	0.04393
	12000	28.3	26.20	70.73	0.6427	0.04388
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.81	50.83	0.6090	0.03890
	8500	24.3	21.68	52.98	0.6429	0.03874
	9000	24.7	22.53	55.12	0.6767	0.03858
	9500	25.2	23.35	57.25	0.7103	0.03842
	10000	25.6	24.14	59.38	0.7438	0.03826
	10500	26.1	24.91	61.50	0.7773	0.03810
	11000	26.5	25.65	63.61	0.8106	0.03794
	11500	27.0	26.37	65.71	0.8438	0.03778
	12000	27.4	27.06	67.81	0.8769	0.03762
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	20.95	49.91	0.5819	0.03931
	8500	24.1	21.86	51.92	0.6125	0.03920
	9000	24.5	22.74	53.92	0.6429	0.03908
	9500	24.9	23.59	55.91	0.6731	0.03896

								10000	25.4	24.41	57.89	0.7032	0.03885
								10500	25.8	25.21	59.86	0.7331	0.03873
								11000	26.2	25.98	61.82	0.7629	0.03862
								11500	26.6	26.73	63.77	0.7925	0.03851
								12000	27.0	27.46	65.72	0.8221	0.03839
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.89	56.66	0.4567	0.04689
								8500	26.6	19.77	58.70	0.4762	0.04684
								9000	27.0	20.64	60.71	0.4955	0.04679
								9500	27.4	21.49	62.71	0.5145	0.04674
								10000	27.7	22.31	64.68	0.5333	0.04669
								10500	28.1	23.11	66.64	0.5520	0.04665

	11000	28.5	23.90	68.58	0.5705	0.04660
	11500	28.8	24.67	70.50	0.5888	0.04655
	12000	29.2	25.43	72.40	0.6070	0.04651
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.14	52.33	0.5729	0.04138
	8500	25.0	21.01	54.55	0.6048	0.04123
	9000	25.5	21.84	56.77	0.6365	0.04109
	9500	26.0	22.65	58.97	0.6682	0.04094
	10000	26.4	23.42	61.17	0.6997	0.04080
	10500	26.9	24.18	63.36	0.7311	0.04065

	11000	27.3	24.91	65.55	0.7625	0.04051
	11500	27.8	25.62	67.72	0.7937	0.04036
	12000	28.2	26.30	69.89	0.8248	0.04022
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.28	51.34	0.5482	0.04179
	8500	24.9	21.17	53.42	0.5769	0.04168
	9000	25.3	22.03	55.49	0.6055	0.04158
	9500	25.7	22.86	57.55	0.6339	0.04148
	10000	26.2	23.66	59.59	0.6622	0.04138
	10500	26.6	24.45	61.63	0.6903	0.04128

								11000	27.0	25.21	63.65	0.7183	0.04118
								11500	27.4	25.95	65.67	0.7462	0.04108
								12000	27.8	26.67	67.68	0.7739	0.04098
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.89	56.66	0.4567	0.04689
								8500	26.6	19.77	58.70	0.4762	0.04684
								9000	27.0	20.64	60.71	0.4955	0.04679
								9500	27.4	21.49	62.71	0.5145	0.04674
								10000	27.7	22.31	64.68	0.5333	0.04669
								10500	28.1	23.11	66.64	0.5520	0.04665
								11000	28.5	23.90	68.58	0.5705	0.04660
								11500	28.8	24.67	70.50	0.5888	0.04655
								12000	29.2	25.43	72.40	0.6070	0.04651
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.14	52.33	0.5729	0.04138
								8500	25.0	21.01	54.55	0.6048	0.04123
								9000	25.5	21.84	56.77	0.6365	0.04109

								9500	26.0	22.65	58.97	0.6682	0.04094
								10000	26.4	23.42	61.17	0.6997	0.04080
								10500	26.9	24.18	63.36	0.7311	0.04065
								11000	27.3	24.91	65.55	0.7625	0.04051
								11500	27.8	25.62	67.72	0.7937	0.04036
								12000	28.2	26.30	69.89	0.8248	0.04022
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.4	20.28	51.34	0.5482	0.04179
								8500	24.9	21.17	53.42	0.5769	0.04168
								9000	25.3	22.03	55.49	0.6055	0.04158
								9500	25.7	22.86	57.55	0.6339	0.04148
								10000	26.2	23.66	59.59	0.6622	0.04138
								10500	26.6	24.45	61.63	0.6903	0.04128
								11000	27.0	25.21	63.65	0.7183	0.04118
								11500	27.4	25.95	65.67	0.7462	0.04108
								12000	27.8	26.67	67.68	0.7739	0.04098
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.6	17.93	52.28	0.7576	0.04682

	8500	28.1	18.72	54.48	0.7973	0.04662
	9000	28.6	19.48	56.68	0.8368	0.04641
	9500	29.1	20.22	58.87	0.8763	0.04620
	10000	29.6	20.93	61.05	0.9155	0.04600
	10500	30.1	21.62	63.22	0.9547	0.04579
	11000	30.5	22.29	65.39	0.9937	0.04559
	11500	31.0	22.94	67.55	1.0326	0.04539
	12000	31.5	23.58	69.70	1.0714	0.04518
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.5	18.01	51.61	0.7318	0.04724

								8500	28.0	18.82	53.69	0.7679	0.04709
								9000	28.4	19.60	55.76	0.8039	0.04693
								9500	28.9	20.36	57.81	0.8396	0.04677
								10000	29.4	21.09	59.86	0.8751	0.04662
								10500	29.8	21.81	61.89	0.9105	0.04646
								11000	30.3	22.50	63.92	0.9457	0.04631
								11500	30.7	23.17	65.93	0.9807	0.04616
								12000	31.2	23.83	67.94	1.0156	0.04601
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER VACCUM_HYDRO BOOST	4 - NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 70 PSI.	8000	27.6	17.93	52.28	0.7576	0.04682
								8500	28.1	18.72	54.48	0.7973	0.04662

								9000	28.6	19.48	56.68	0.8368	0.04641
								9500	29.1	20.22	58.87	0.8763	0.04620
								10000	29.6	20.93	61.05	0.9155	0.04600
								10500	30.1	21.62	63.22	0.9547	0.04579
								11000	30.5	22.29	65.39	0.9937	0.04559
								11500	31.0	22.94	67.55	1.0326	0.04539
								12000	31.5	23.58	69.70	1.0714	0.04518
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 70 PSI.	8000	27.5	18.01	51.61	0.7318	0.04724
								8500	28.0	18.82	53.69	0.7679	0.04709
								9000	28.4	19.60	55.76	0.8039	0.04693
								9500	28.9	20.36	57.81	0.8396	0.04677
								10000	29.4	21.09	59.86	0.8751	0.04662
								10500	29.8	21.81	61.89	0.9105	0.04646
								11000	30.3	22.50	63.92	0.9457	0.04631
								11500	30.7	23.17	65.93	0.9807	0.04616
								12000	31.2	23.83	67.94	1.0156	0.04601
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337

								8500	25.9	20.29	57.42	0.5752	0.04331
								9000	26.3	21.18	59.35	0.5965	0.04324
								9500	26.7	22.04	61.26	0.6176	0.04318
								10000	27.0	22.88	63.15	0.6385	0.04311
								10500	27.4	23.70	65.02	0.6591	0.04305
								11000	27.8	24.51	66.88	0.6796	0.04298
								11500	28.1	25.29	68.72	0.6999	0.04292
								12000	28.5	26.06	70.54	0.7201	0.04286
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337
								8500	25.9	20.29	57.42	0.5752	0.04331

								9000	26.3	21.18	59.35	0.5965	0.04324
								9500	26.7	22.04	61.26	0.6176	0.04318
								10000	27.0	22.88	63.15	0.6385	0.04311
								10500	27.4	23.70	65.02	0.6591	0.04305
								11000	27.8	24.51	66.88	0.6796	0.04298
								11500	28.1	25.29	68.72	0.6999	0.04292
								12000	28.5	26.06	70.54	0.7201	0.04286
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	54.97	0.5653	0.04263
								8500	25.7	20.48	56.90	0.5874	0.04256
								9000	26.1	21.37	58.81	0.6094	0.04249
								9500	26.4	22.24	60.70	0.6311	0.04242
								10000	26.8	23.08	62.57	0.6525	0.04235

	10500	27.2	23.91	64.43	0.6738	0.04228
	11000	27.5	24.72	66.26	0.6949	0.04221
	11500	27.9	25.50	68.08	0.7158	0.04215
	12000	28.3	26.28	69.89	0.7365	0.04208
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	49.88	0.7038	0.03716
	8500	24.2	21.75	51.95	0.7396	0.03698
	9000	24.6	22.61	54.02	0.7752	0.03680
	9500	25.1	23.43	56.08	0.8108	0.03662
	10000	25.5	24.23	58.12	0.8462	0.03644

	10500	26.0	25.00	60.17	0.8814	0.03627
	11000	26.4	25.74	62.20	0.9166	0.03609
	11500	26.9	26.47	64.23	0.9516	0.03591
	12000	27.3	27.16	66.26	0.9866	0.03574
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.05	0.6749	0.03758
	8500	24.0	21.93	51.00	0.7072	0.03744
	9000	24.4	22.81	52.93	0.7393	0.03731
	9500	24.8	23.66	54.85	0.7712	0.03718
	10000	25.3	24.49	56.76	0.8030	0.03705

								10500	25.7	25.29	58.66	0.8346	0.03692
								11000	26.1	26.07	60.55	0.8660	0.03679
								11500	26.5	26.82	62.44	0.8973	0.03666
								12000	26.9	27.55	64.31	0.9285	0.03653
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	54.97	0.5653	0.04263
								8500	25.7	20.48	56.90	0.5874	0.04256
								9000	26.1	21.37	58.81	0.6094	0.04249
								9500	26.4	22.24	60.70	0.6311	0.04242
								10000	26.8	23.08	62.57	0.6525	0.04235
								10500	27.2	23.91	64.43	0.6738	0.04228
								11000	27.5	24.72	66.26	0.6949	0.04221
								11500	27.9	25.50	68.08	0.7158	0.04215
								12000	28.3	26.28	69.89	0.7365	0.04208
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.7	20.87	49.88	0.7038	0.03716

	8500	24.2	21.75	51.95	0.7396	0.03698
	9000	24.6	22.61	54.02	0.7752	0.03680
	9500	25.1	23.43	56.08	0.8108	0.03662
	10000	25.5	24.23	58.12	0.8462	0.03644
	10500	26.0	25.00	60.17	0.8814	0.03627
	11000	26.4	25.74	62.20	0.9166	0.03609
	11500	26.9	26.47	64.23	0.9516	0.03591
	12000	27.3	27.16	66.26	0.9866	0.03574
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.6	21.02	49.05	0.6749	0.03758
	8500	24.0	21.93	51.00	0.7072	0.03744
	9000	24.4	22.81	52.93	0.7393	0.03731
	9500	24.8	23.66	54.85	0.7712	0.03718
	10000	25.3	24.49	56.76	0.8030	0.03705
	10500	25.7	25.29	58.66	0.8346	0.03692
	11000	26.1	26.07	60.55	0.8660	0.03679
	11500	26.5	26.82	62.44	0.8973	0.03666
	12000	26.9	27.55	64.31	0.9285	0.03653

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337
								8500	25.9	20.29	57.42	0.5752	0.04331
								9000	26.3	21.18	59.35	0.5965	0.04324
								9500	26.7	22.04	61.26	0.6176	0.04318
								10000	27.0	22.88	63.15	0.6385	0.04311
								10500	27.4	23.70	65.02	0.6591	0.04305
								11000	27.8	24.51	66.88	0.6796	0.04298
								11500	28.1	25.29	68.72	0.6999	0.04292
								12000	28.5	26.06	70.54	0.7201	0.04286

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.68	50.47	0.6880	0.03789
	8500	24.4	21.56	52.57	0.7229	0.03772
	9000	24.9	22.41	54.66	0.7577	0.03754
	9500	25.3	23.23	56.74	0.7923	0.03737
	10000	25.8	24.03	58.82	0.8268	0.03720
	10500	26.2	24.79	60.89	0.8613	0.03703
	11000	26.7	25.54	62.95	0.8956	0.03686
	11500	27.1	26.25	65.01	0.9298	0.03669
	12000	27.5	26.95	67.06	0.9638	0.03652

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	49.61	0.6600	0.03831
	8500	24.2	21.73	51.58	0.6915	0.03818
	9000	24.6	22.61	53.54	0.7228	0.03805
	9500	25.1	23.45	55.48	0.7540	0.03793
	10000	25.5	24.28	57.42	0.7850	0.03780
	10500	25.9	25.07	59.35	0.8158	0.03768
	11000	26.3	25.85	61.26	0.8465	0.03756
	11500	26.7	26.60	63.17	0.8770	0.03743
	12000	27.2	27.33	65.07	0.9074	0.03731

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	55.47	0.5536	0.04337
								8500	25.9	20.29	57.42	0.5752	0.04331
								9000	26.3	21.18	59.35	0.5965	0.04324
								9500	26.7	22.04	61.26	0.6176	0.04318
								10000	27.0	22.88	63.15	0.6385	0.04311
								10500	27.4	23.70	65.02	0.6591	0.04305
								11000	27.8	24.51	66.88	0.6796	0.04298
								11500	28.1	25.29	68.72	0.6999	0.04292
								12000	28.5	26.06	70.54	0.7201	0.04286
							LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.9	20.68	50.47	0.6880	0.03789
								8500	24.4	21.56	52.57	0.7229	0.03772
								9000	24.9	22.41	54.66	0.7577	0.03754
								9500	25.3	23.23	56.74	0.7923	0.03737
								10000	25.8	24.03	58.82	0.8268	0.03720
								10500	26.2	24.79	60.89	0.8613	0.03703
								11000	26.7	25.54	62.95	0.8956	0.03686
								11500	27.1	26.25	65.01	0.9298	0.03669
								12000	27.5	26.95	67.06	0.9638	0.03652

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	23.8	20.82	49.61	0.6600	0.03831
								8500	24.2	21.73	51.58	0.6915	0.03818
								9000	24.6	22.61	53.54	0.7228	0.03805
								9500	25.1	23.45	55.48	0.7540	0.03793
								10000	25.5	24.28	57.42	0.7850	0.03780
								10500	25.9	25.07	59.35	0.8158	0.03768
								11000	26.3	25.85	61.26	0.8465	0.03756
								11500	26.7	26.60	63.17	0.8770	0.03743
								12000	27.2	27.33	65.07	0.9074	0.03731
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.77	56.77	0.5282	0.04591
								8500	26.8	19.65	58.77	0.5484	0.04585
								9000	27.2	20.52	60.75	0.5683	0.04580
								9500	27.5	21.36	62.72	0.5880	0.04574

	10000	27.9	22.18	64.66	0.6075	0.04569
	10500	28.3	22.99	66.58	0.6268	0.04563
	11000	28.6	23.78	68.49	0.6460	0.04558
	11500	29.0	24.55	70.37	0.6649	0.04553
	12000	29.3	25.30	72.25	0.6837	0.04547
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.03	52.00	0.6513	0.04035
	8500	25.2	20.89	54.17	0.6842	0.04020
	9000	25.6	21.73	56.34	0.7169	0.04004
	9500	26.1	22.53	58.50	0.7496	0.03988

	10000	26.5	23.31	60.65	0.7821	0.03973
	10500	27.0	24.07	62.79	0.8145	0.03957
	11000	27.4	24.80	64.92	0.8468	0.03942
	11500	27.9	25.51	67.05	0.8790	0.03926
	12000	28.3	26.20	69.18	0.9111	0.03911
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.16	51.08	0.6257	0.04077
	8500	25.0	21.05	53.11	0.6553	0.04066
	9000	25.4	21.91	55.14	0.6848	0.04054
	9500	25.9	22.74	57.15	0.7142	0.04043

								10000	26.3	23.55	59.15	0.7433	0.04032
								10500	26.7	24.33	61.14	0.7724	0.04021
								11000	27.1	25.09	63.12	0.8012	0.04010
								11500	27.5	25.83	65.10	0.8300	0.03999
								12000	28.0	26.55	67.06	0.8586	0.03988
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140	4X2	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.77	56.77	0.5282	0.04591
								8500	26.8	19.65	58.77	0.5484	0.04585
								9000	27.2	20.52	60.75	0.5683	0.04580
								9500	27.5	21.36	62.72	0.5880	0.04574
								10000	27.9	22.18	64.66	0.6075	0.04569
								10500	28.3	22.99	66.58	0.6268	0.04563
								11000	28.6	23.78	68.49	0.6460	0.04558
								11500	29.0	24.55	70.37	0.6649	0.04553

	12000	29.3	25.30	72.25	0.6837	0.04547
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.7	20.03	52.00	0.6513	0.04035
	8500	25.2	20.89	54.17	0.6842	0.04020
	9000	25.6	21.73	56.34	0.7169	0.04004
	9500	26.1	22.53	58.50	0.7496	0.03988
	10000	26.5	23.31	60.65	0.7821	0.03973
	10500	27.0	24.07	62.79	0.8145	0.03957
	11000	27.4	24.80	64.92	0.8468	0.03942
	11500	27.9	25.51	67.05	0.8790	0.03926
	12000	28.3	26.20	69.18	0.9111	0.03911
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	24.6	20.16	51.08	0.6257	0.04077
	8500	25.0	21.05	53.11	0.6553	0.04066
	9000	25.4	21.91	55.14	0.6848	0.04054
	9500	25.9	22.74	57.15	0.7142	0.04043
	10000	26.3	23.55	59.15	0.7433	0.04032
	10500	26.7	24.33	61.14	0.7724	0.04021
	11000	27.1	25.09	63.12	0.8012	0.04010
	11500	27.5	25.83	65.10	0.8300	0.03999

								12000	28.0	26.55	67.06	0.8586	0.03988
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.17	56.38	0.4156	0.04666
								8500	26.2	20.06	58.41	0.4365	0.04660
								9000	26.6	20.94	60.43	0.4571	0.04653
								9500	27.0	21.78	62.42	0.4776	0.04647
								10000	27.4	22.61	64.39	0.4978	0.04640
								10500	27.7	23.42	66.34	0.5178	0.04634
								11000	28.1	24.21	68.28	0.5376	0.04628
								11500	28.5	24.99	70.20	0.5573	0.04622
								12000	28.8	25.74	72.10	0.5768	0.04616
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	53.56	0.4144	0.04624
								8500	25.7	20.46	55.65	0.4377	0.04616
								9000	26.1	21.33	57.72	0.4609	0.04608
								9500	26.5	22.17	59.78	0.4838	0.04600
								10000	26.9	22.99	61.83	0.5067	0.04592
								10500	27.3	23.79	63.86	0.5293	0.04584
								11000	27.7	24.56	65.88	0.5518	0.04576
								11500	28.1	25.32	67.89	0.5742	0.04568

	12000	28.5	26.06	69.88	0.5965	0.04560
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.54	51.42	0.5349	0.04109
	8500	24.6	21.41	53.60	0.5682	0.04092
	9000	25.0	22.26	55.77	0.6013	0.04076
	9500	25.5	23.07	57.94	0.6343	0.04059
	10000	25.9	23.86	60.09	0.6672	0.04043
	10500	26.4	24.63	62.24	0.7000	0.04026
	11000	26.8	25.36	64.38	0.7326	0.04010
	11500	27.3	26.08	66.51	0.7652	0.03993
	12000	27.7	26.77	68.64	0.7977	0.03977
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.66	50.56	0.5095	0.04151
	8500	24.4	21.56	52.60	0.5397	0.04139
	9000	24.8	22.43	54.64	0.5696	0.04127
	9500	25.3	23.27	56.66	0.5994	0.04115
	10000	25.7	24.09	58.67	0.6290	0.04103
	10500	26.1	24.88	60.67	0.6585	0.04091
	11000	26.5	25.65	62.66	0.6878	0.04079
	11500	27.0	26.40	64.65	0.7170	0.04067

								12000	27.4	27.12	66.62	0.7461	0.04055
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.26	55.78	0.4096	0.04668
								8500	26.1	20.15	57.79	0.4301	0.04662
								9000	26.5	21.03	59.78	0.4505	0.04655
								9500	26.9	21.89	61.74	0.4706	0.04649
								10000	27.2	22.73	63.68	0.4905	0.04643
								10500	27.6	23.54	65.61	0.5102	0.04637
								11000	28.0	24.34	67.51	0.5297	0.04630
								11500	28.3	25.12	69.40	0.5491	0.04624

	12000	28.7	25.89	71.28	0.5683	0.04618
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.57	53.56	0.4144	0.04624
	8500	25.7	20.46	55.65	0.4377	0.04616
	9000	26.1	21.33	57.72	0.4609	0.04608
	9500	26.5	22.17	59.78	0.4838	0.04600
	10000	26.9	22.99	61.83	0.5067	0.04592
	10500	27.3	23.79	63.86	0.5293	0.04584
	11000	27.7	24.56	65.88	0.5518	0.04576
	11500	28.1	25.32	67.89	0.5742	0.04568

	12000	28.5	26.06	69.88	0.5965	0.04560
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.60	51.10	0.5299	0.04111
	8500	24.5	21.47	53.26	0.5629	0.04095
	9000	25.0	22.33	55.41	0.5957	0.04078
	9500	25.4	23.15	57.55	0.6284	0.04062
	10000	25.9	23.94	59.69	0.6610	0.04046
	10500	26.3	24.71	61.82	0.6935	0.04029
	11000	26.7	25.45	63.94	0.7259	0.04013
	11500	27.2	26.17	66.05	0.7582	0.03997

	12000	27.6	26.87	68.16	0.7904	0.03981
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.70	50.33	0.5062	0.04152
	8500	24.4	21.61	52.36	0.5361	0.04140
	9000	24.8	22.48	54.38	0.5659	0.04128
	9500	25.2	23.33	56.39	0.5955	0.04116
	10000	25.6	24.15	58.39	0.6249	0.04104
	10500	26.1	24.94	60.38	0.6542	0.04092
	11000	26.5	25.72	62.36	0.6833	0.04080
	11500	26.9	26.46	64.33	0.7123	0.04069

								12000	27.3	27.19	66.29	0.7412	0.04057
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.29	53.93	0.4672	0.04232
								8500	24.8	21.22	55.87	0.4911	0.04223
								9000	25.2	22.12	57.78	0.5147	0.04214
								9500	25.6	23.00	59.67	0.5381	0.04206
								10000	25.9	23.86	61.54	0.5612	0.04197
								10500	26.3	24.70	63.39	0.5841	0.04189
								11000	26.7	25.51	65.23	0.6068	0.04181
								11500	27.0	26.31	67.05	0.6293	0.04172
								12000	27.4	27.09	68.85	0.6516	0.04164
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	51.10	0.4673	0.04200
								8500	24.3	21.62	53.08	0.4939	0.04190
								9000	24.7	22.52	55.04	0.5204	0.04179
								9500	25.1	23.39	56.99	0.5466	0.04169
								10000	25.5	24.24	58.92	0.5727	0.04158
								10500	25.9	25.06	60.85	0.5986	0.04148
								11000	26.3	25.86	62.75	0.6243	0.04138

	11500	26.7	26.64	64.65	0.6499	0.04127
	12000	27.1	27.40	66.54	0.6753	0.04117
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.47	51.12	0.4580	0.04299
	8500	24.6	21.39	53.10	0.4847	0.04289
	9000	25.0	22.28	55.07	0.5112	0.04279
	9500	25.4	23.14	57.02	0.5375	0.04269
	10000	25.8	23.97	58.96	0.5637	0.04260
	10500	26.2	24.79	60.89	0.5896	0.04250
	11000	26.6	25.58	62.80	0.6154	0.04240
	11500	27.0	26.36	64.70	0.6411	0.04230
	12000	27.4	27.11	66.60	0.6666	0.04221
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.72	48.57	0.6067	0.03685
	8500	23.3	22.62	50.61	0.6442	0.03665
	9000	23.7	23.49	52.64	0.6816	0.03645
	9500	24.2	24.33	54.66	0.7188	0.03626
	10000	24.6	25.14	56.67	0.7559	0.03606
	10500	25.1	25.92	58.68	0.7928	0.03586
	11000	25.5	26.68	60.68	0.8296	0.03567

								11500	26.0	27.41	62.68	0.8663	0.03547
								12000	26.4	28.12	64.66	0.9029	0.03528
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.6	21.87	47.83	0.5769	0.03728
								8500	23.1	22.80	49.75	0.6108	0.03713
								9000	23.5	23.69	51.65	0.6446	0.03698
								9500	23.9	24.56	53.54	0.6782	0.03683
								10000	24.4	25.40	55.43	0.7116	0.03668
								10500	24.8	26.22	57.30	0.7448	0.03653
								11000	25.2	27.01	59.16	0.7779	0.03638
								11500	25.6	27.77	61.02	0.8108	0.03624
								12000	26.0	28.51	62.87	0.8436	0.03609
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.39	53.37	0.4602	0.04234
								8500	24.7	21.32	55.27	0.4838	0.04226
								9000	25.1	22.23	57.16	0.5071	0.04217

		9500	25.4	23.12	59.02	0.5301	0.04209
		10000	25.8	23.99	60.86	0.5529	0.04200
		10500	26.2	24.83	62.69	0.5755	0.04192
		11000	26.5	25.66	64.50	0.5978	0.04184
		11500	26.9	26.46	66.29	0.6200	0.04176
		12000	27.2	27.25	68.07	0.6420	0.04168
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	51.10	0.4673	0.04200
		8500	24.3	21.62	53.08	0.4939	0.04190
		9000	24.7	22.52	55.04	0.5204	0.04179

		9500	25.1	23.39	56.99	0.5466	0.04169
		10000	25.5	24.24	58.92	0.5727	0.04158
		10500	25.9	25.06	60.85	0.5986	0.04148
		11000	26.3	25.86	62.75	0.6243	0.04138
		11500	26.7	26.64	64.65	0.6499	0.04127
		12000	27.1	27.40	66.54	0.6753	0.04117
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.47	51.12	0.4580	0.04299
		8500	24.6	21.39	53.10	0.4847	0.04289
		9000	25.0	22.28	55.07	0.5112	0.04279

	9500	25.4	23.14	57.02	0.5375	0.04269
	10000	25.8	23.97	58.96	0.5637	0.04260
	10500	26.2	24.79	60.89	0.5896	0.04250
	11000	26.6	25.58	62.80	0.6154	0.04240
	11500	27.0	26.36	64.70	0.6411	0.04230
	12000	27.4	27.11	66.60	0.6666	0.04221
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.7	21.78	48.26	0.6011	0.03688
	8500	23.2	22.69	50.28	0.6383	0.03668
	9000	23.6	23.57	52.29	0.6753	0.03649

	9500	24.1	24.41	54.30	0.7122	0.03629
	10000	24.5	25.22	56.29	0.7489	0.03610
	10500	25.0	26.01	58.28	0.7855	0.03590
	11000	25.4	26.77	60.27	0.8220	0.03571
	11500	25.9	27.51	62.24	0.8584	0.03552
	12000	26.3	28.22	64.22	0.8947	0.03532
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.6	21.92	47.62	0.5731	0.03729
	8500	23.0	22.85	49.52	0.6068	0.03714
	9000	23.5	23.75	51.41	0.6404	0.03699

								9500	23.9	24.62	53.29	0.6737	0.03685
								10000	24.3	25.47	55.16	0.7069	0.03670
								10500	24.7	26.28	57.03	0.7400	0.03655
								11000	25.1	27.08	58.88	0.7728	0.03640
								11500	25.6	27.84	60.72	0.8056	0.03626
								12000	26.0	28.59	62.56	0.8381	0.03611
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.7	20.09	54.41	0.4561	0.04307
								8500	25.0	21.01	56.36	0.4793	0.04299
								9000	25.4	21.91	58.29	0.5024	0.04291
								9500	25.8	22.79	60.20	0.5251	0.04283
								10000	26.2	23.64	62.10	0.5476	0.04275
								10500	26.6	24.47	63.97	0.5700	0.04267

	11000	26.9	25.29	65.82	0.5921	0.04259
	11500	27.3	26.08	67.66	0.6140	0.04251
	12000	27.6	26.86	69.49	0.6357	0.04243
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.50	51.58	0.4559	0.04274
	8500	24.6	21.42	53.58	0.4819	0.04264
	9000	25.0	22.31	55.57	0.5077	0.04254
	9500	25.4	23.18	57.53	0.5332	0.04244
	10000	25.8	24.02	59.49	0.5586	0.04234
	10500	26.2	24.84	61.43	0.5839	0.04224
	11000	26.6	25.63	63.37	0.6089	0.04214
	11500	26.9	26.41	65.28	0.6338	0.04204
	12000	27.3	27.17	67.19	0.6586	0.04195
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.28	51.60	0.4468	0.04372
	8500	24.8	21.19	53.60	0.4729	0.04363
	9000	25.2	22.07	55.59	0.4987	0.04353
	9500	25.7	22.93	57.57	0.5243	0.04344
	10000	26.1	23.76	59.53	0.5498	0.04335
	10500	26.4	24.57	61.47	0.5751	0.04325

	11000	26.8	25.36	63.41	0.6002	0.04316
	11500	27.2	26.13	65.33	0.6252	0.04307
	12000	27.6	26.88	67.25	0.6501	0.04298
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.51	49.13	0.5917	0.03759
	8500	23.5	22.41	51.19	0.6284	0.03740
	9000	23.9	23.27	53.25	0.6648	0.03721
	9500	24.4	24.11	55.30	0.7012	0.03702
	10000	24.8	24.91	57.34	0.7374	0.03683
	10500	25.3	25.69	59.37	0.7735	0.03664
	11000	25.7	26.45	61.40	0.8095	0.03645
	11500	26.2	27.18	63.42	0.8453	0.03626
	12000	26.6	27.88	65.44	0.8811	0.03607
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.9	21.65	48.36	0.5627	0.03802
	8500	23.3	22.58	50.30	0.5959	0.03787
	9000	23.7	23.47	52.23	0.6289	0.03773
	9500	24.2	24.34	54.15	0.6617	0.03759
	10000	24.6	25.17	56.06	0.6943	0.03744
	10500	25.0	25.98	57.96	0.7268	0.03730

								11000	25.4	26.77	59.85	0.7591	0.03716
								11500	25.8	27.53	61.73	0.7913	0.03702
								12000	26.3	28.27	63.60	0.8233	0.03688
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.18	53.84	0.4493	0.04310
								8500	24.9	21.11	55.77	0.4722	0.04302
								9000	25.3	22.02	57.67	0.4949	0.04294
								9500	25.7	22.90	59.55	0.5173	0.04286
								10000	26.0	23.76	61.41	0.5395	0.04278
								10500	26.4	24.60	63.26	0.5615	0.04270
								11000	26.8	25.42	65.09	0.5833	0.04262

	11500	27.1	26.23	66.90	0.6049	0.04254
	12000	27.5	27.01	68.70	0.6263	0.04247
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.50	51.58	0.4559	0.04274
	8500	24.6	21.42	53.58	0.4819	0.04264
	9000	25.0	22.31	55.57	0.5077	0.04254
	9500	25.4	23.18	57.53	0.5332	0.04244
	10000	25.8	24.02	59.49	0.5586	0.04234
	10500	26.2	24.84	61.43	0.5839	0.04224
	11000	26.6	25.63	63.37	0.6089	0.04214

	11500	26.9	26.41	65.28	0.6338	0.04204
	12000	27.3	27.17	67.19	0.6586	0.04195
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.4	20.28	51.60	0.4468	0.04372
	8500	24.8	21.19	53.60	0.4729	0.04363
	9000	25.2	22.07	55.59	0.4987	0.04353
	9500	25.7	22.93	57.57	0.5243	0.04344
	10000	26.1	23.76	59.53	0.5498	0.04335
	10500	26.4	24.57	61.47	0.5751	0.04325
	11000	26.8	25.36	63.41	0.6002	0.04316

	11500	27.2	26.13	65.33	0.6252	0.04307
	12000	27.6	26.88	67.25	0.6501	0.04298
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.57	48.82	0.5862	0.03762
	8500	23.4	22.48	50.86	0.6225	0.03743
	9000	23.9	23.35	52.90	0.6587	0.03724
	9500	24.3	24.19	54.93	0.6947	0.03705
	10000	24.8	25.00	56.96	0.7306	0.03686
	10500	25.2	25.78	58.97	0.7664	0.03668
	11000	25.6	26.54	60.98	0.8020	0.03649

	11500	26.1	27.28	62.99	0.8376	0.03630
	12000	26.5	27.99	64.99	0.8730	0.03612
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.70	48.15	0.5590	0.03804
	8500	23.3	22.63	50.07	0.5920	0.03789
	9000	23.7	23.53	51.99	0.6248	0.03775
	9500	24.1	24.39	53.90	0.6574	0.03761
	10000	24.5	25.24	55.79	0.6898	0.03746
	10500	24.9	26.05	57.68	0.7221	0.03732
	11000	25.4	26.84	59.56	0.7542	0.03718

								11500	25.8	27.60	61.43	0.7861	0.03704
								12000	26.2	28.35	63.29	0.8179	0.03690
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.50	55.48	0.4353	0.04530
								8500	25.8	20.41	57.48	0.4574	0.04522
								9000	26.2	21.29	59.46	0.4791	0.04515
								9500	26.6	22.15	61.41	0.5007	0.04508
								10000	26.9	22.98	63.35	0.5221	0.04501
								10500	27.3	23.80	65.26	0.5432	0.04494
								11000	27.7	24.60	67.16	0.5641	0.04487
								11500	28.0	25.38	69.05	0.5849	0.04480
								12000	28.4	26.14	70.91	0.6055	0.04473
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	52.66	0.4345	0.04492
								8500	25.3	20.80	54.71	0.4591	0.04483
								9000	25.7	21.68	56.74	0.4835	0.04474
								9500	26.1	22.53	58.76	0.5077	0.04465
								10000	26.5	23.36	60.77	0.5318	0.04456

	10500	26.9	24.16	62.76	0.5557	0.04447
	11000	27.3	24.95	64.74	0.5795	0.04438
	11500	27.7	25.71	66.71	0.6031	0.04429
	12000	28.1	26.46	68.66	0.6266	0.04420
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.69	52.67	0.4257	0.04590
	8500	25.6	20.58	54.73	0.4504	0.04581
	9000	26.0	21.45	56.77	0.4749	0.04573
	9500	26.4	22.30	58.79	0.4992	0.04564
	10000	26.8	23.11	60.80	0.5234	0.04556
	10500	27.2	23.91	62.80	0.5474	0.04548
	11000	27.6	24.69	64.78	0.5712	0.04539
	11500	28.0	25.45	66.75	0.5949	0.04531
	12000	28.4	26.18	68.71	0.6185	0.04523
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.89	50.38	0.5618	0.03975
	8500	24.2	21.77	52.51	0.5967	0.03957
	9000	24.6	22.62	54.63	0.6315	0.03939
	9500	25.1	23.45	56.74	0.6661	0.03921
	10000	25.5	24.24	58.84	0.7007	0.03903

								10500	26.0	25.01	60.94	0.7350	0.03886
								11000	26.4	25.76	63.03	0.7693	0.03868
								11500	26.9	26.47	65.11	0.8035	0.03851
								12000	27.3	27.17	67.19	0.8376	0.03833
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	21.02	49.56	0.5348	0.04017
								8500	24.0	21.93	51.56	0.5664	0.04004
								9000	24.4	22.81	53.55	0.5978	0.03990
								9500	24.9	23.66	55.52	0.6291	0.03977
								10000	25.3	24.48	57.49	0.6602	0.03964
								10500	25.7	25.28	59.44	0.6911	0.03951
								11000	26.1	26.06	61.39	0.7219	0.03938
								11500	26.5	26.81	63.32	0.7525	0.03925
								12000	27.0	27.54	65.25	0.7831	0.03912
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.3	19.59	54.90	0.4289	0.04532
								8500	25.7	20.50	56.87	0.4506	0.04525

	9000	26.0	21.39	58.82	0.4721	0.04517
	9500	26.4	22.26	60.74	0.4933	0.04510
	10000	26.8	23.10	62.65	0.5144	0.04503
	10500	27.2	23.93	64.54	0.5352	0.04496
	11000	27.5	24.73	66.41	0.5558	0.04489
	11500	27.9	25.52	68.27	0.5763	0.04483
	12000	28.2	26.29	70.10	0.5966	0.04476
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.90	52.66	0.4345	0.04492
	8500	25.3	20.80	54.71	0.4591	0.04483

	9000	25.7	21.68	56.74	0.4835	0.04474
	9500	26.1	22.53	58.76	0.5077	0.04465
	10000	26.5	23.36	60.77	0.5318	0.04456
	10500	26.9	24.16	62.76	0.5557	0.04447
	11000	27.3	24.95	64.74	0.5795	0.04438
	11500	27.7	25.71	66.71	0.6031	0.04429
	12000	28.1	26.46	68.66	0.6266	0.04420
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.69	52.67	0.4257	0.04590
	8500	25.6	20.58	54.73	0.4504	0.04581

	9000	26.0	21.45	56.77	0.4749	0.04573
	9500	26.4	22.30	58.79	0.4992	0.04564
	10000	26.8	23.11	60.80	0.5234	0.04556
	10500	27.2	23.91	62.80	0.5474	0.04548
	11000	27.6	24.69	64.78	0.5712	0.04539
	11500	28.0	25.45	66.75	0.5949	0.04531
	12000	28.4	26.18	68.71	0.6185	0.04523
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	20.95	50.06	0.5566	0.03977
	8500	24.1	21.84	52.17	0.5912	0.03960

	9000	24.5	22.70	54.27	0.6256	0.03942
	9500	25.0	23.52	56.36	0.6600	0.03924
	10000	25.4	24.32	58.45	0.6942	0.03907
	10500	25.9	25.10	60.53	0.7283	0.03889
	11000	26.3	25.84	62.60	0.7623	0.03872
	11500	26.8	26.57	64.66	0.7961	0.03854
	12000	27.2	27.27	66.72	0.8299	0.03837
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.06	49.34	0.5313	0.04019
	8500	23.9	21.98	51.32	0.5627	0.04005

								9000	24.4	22.86	53.30	0.5939	0.03992
								9500	24.8	23.71	55.26	0.6250	0.03979
								10000	25.2	24.54	57.21	0.6559	0.03966
								10500	25.6	25.34	59.15	0.6866	0.03953
								11000	26.1	26.12	61.09	0.7172	0.03940
								11500	26.5	26.88	63.01	0.7476	0.03927
								12000	26.9	27.61	64.93	0.7780	0.03914
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.54	55.50	0.4339	0.04516
								8500	25.7	20.45	57.50	0.4558	0.04509
								9000	26.1	21.33	59.48	0.4776	0.04502
								9500	26.5	22.19	61.43	0.4990	0.04494

	10000	26.9	23.03	63.37	0.5203	0.04487
	10500	27.2	23.85	65.29	0.5414	0.04480
	11000	27.6	24.65	67.19	0.5623	0.04473
	11500	28.0	25.43	69.07	0.5829	0.04466
	12000	28.3	26.19	70.93	0.6035	0.04460
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	52.68	0.4331	0.04478
	8500	25.2	20.85	54.73	0.4576	0.04469
	9000	25.6	21.73	56.76	0.4820	0.04460
	9500	26.0	22.58	58.78	0.5061	0.04451
	10000	26.4	23.41	60.79	0.5301	0.04442
	10500	26.8	24.21	62.78	0.5539	0.04433
	11000	27.2	25.00	64.76	0.5776	0.04425
	11500	27.6	25.76	66.73	0.6012	0.04416
	12000	28.0	26.51	68.69	0.6246	0.04407
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.73	52.69	0.4243	0.04576
	8500	25.5	20.63	54.75	0.4489	0.04567
	9000	25.9	21.49	56.79	0.4734	0.04559
	9500	26.3	22.34	58.81	0.4976	0.04551

	10000	26.7	23.16	60.82	0.5217	0.04542
	10500	27.1	23.96	62.82	0.5456	0.04534
	11000	27.5	24.74	64.80	0.5694	0.04526
	11500	27.9	25.49	66.77	0.5930	0.04518
	12000	28.3	26.24	68.73	0.6165	0.04509
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.7	20.93	50.40	0.5604	0.03962
	8500	24.1	21.81	52.53	0.5952	0.03945
	9000	24.6	22.67	54.65	0.6298	0.03927
	9500	25.0	23.49	56.76	0.6644	0.03909
	10000	25.5	24.29	58.87	0.6988	0.03891
	10500	25.9	25.06	60.96	0.7331	0.03874
	11000	26.4	25.80	63.05	0.7673	0.03856
	11500	26.8	26.52	65.14	0.8013	0.03839
	12000	27.3	27.22	67.22	0.8353	0.03821
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.06	49.58	0.5334	0.04005
	8500	23.9	21.97	51.58	0.5649	0.03991
	9000	24.4	22.85	53.57	0.5962	0.03978
	9500	24.8	23.71	55.54	0.6274	0.03965

								10000	25.2	24.53	57.51	0.6584	0.03952
								10500	25.7	25.33	59.46	0.6892	0.03939
								11000	26.1	26.11	61.41	0.7199	0.03926
								11500	26.5	26.86	63.35	0.7505	0.03913
								12000	26.9	27.59	65.27	0.7809	0.03900
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.2	19.63	54.92	0.4275	0.04518
								8500	25.6	20.54	56.89	0.4491	0.04511
								9000	26.0	21.43	58.84	0.4705	0.04504
								9500	26.4	22.30	60.76	0.4917	0.04497
								10000	26.7	23.15	62.67	0.5127	0.04490
								10500	27.1	23.97	64.56	0.5334	0.04483

		11000	27.5	24.78	66.43	0.5540	0.04476
		11500	27.8	25.57	68.29	0.5744	0.04469
		12000	28.2	26.34	70.13	0.5946	0.04463
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.95	52.68	0.4331	0.04478
		8500	25.2	20.85	54.73	0.4576	0.04469
		9000	25.6	21.73	56.76	0.4820	0.04460
		9500	26.0	22.58	58.78	0.5061	0.04451
		10000	26.4	23.41	60.79	0.5301	0.04442
		10500	26.8	24.21	62.78	0.5539	0.04433

		11000	27.2	25.00	64.76	0.5776	0.04425
		11500	27.6	25.76	66.73	0.6012	0.04416
		12000	28.0	26.51	68.69	0.6246	0.04407
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.73	52.69	0.4243	0.04576
		8500	25.5	20.63	54.75	0.4489	0.04567
		9000	25.9	21.49	56.79	0.4734	0.04559
		9500	26.3	22.34	58.81	0.4976	0.04551
		10000	26.7	23.16	60.82	0.5217	0.04542
		10500	27.1	23.96	62.82	0.5456	0.04534

	11000	27.5	24.74	64.80	0.5694	0.04526
	11500	27.9	25.49	66.77	0.5930	0.04518
	12000	28.3	26.24	68.73	0.6165	0.04509
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.6	20.99	50.08	0.5551	0.03965
	8500	24.0	21.88	52.19	0.5896	0.03947
	9000	24.5	22.74	54.29	0.6240	0.03930
	9500	24.9	23.57	56.39	0.6582	0.03912
	10000	25.4	24.37	58.47	0.6923	0.03895
	10500	25.8	25.15	60.55	0.7263	0.03877

	11000	26.3	25.89	62.62	0.7602	0.03860
	11500	26.7	26.62	64.69	0.7940	0.03843
	12000	27.2	27.33	66.75	0.8277	0.03825
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.11	49.36	0.5298	0.04006
	8500	23.9	22.02	51.34	0.5612	0.03993
	9000	24.3	22.90	53.32	0.5923	0.03980
	9500	24.7	23.76	55.28	0.6233	0.03967
	10000	25.2	24.59	57.23	0.6541	0.03954
	10500	25.6	25.39	59.18	0.6847	0.03941

								11000	26.0	26.17	61.11	0.7152	0.03928
								11500	26.4	26.93	63.04	0.7456	0.03915
								12000	26.8	27.66	64.95	0.7758	0.03902
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.88	55.88	0.6113	0.04414
								8500	26.6	19.77	57.86	0.6327	0.04407
								9000	27.0	20.64	59.82	0.6538	0.04399
								9500	27.4	21.48	61.76	0.6748	0.04392
								10000	27.7	22.31	63.69	0.6955	0.04385
								10500	28.1	23.11	65.59	0.7160	0.04378
								11000	28.5	23.91	67.47	0.7363	0.04371
								11500	28.8	24.68	69.34	0.7564	0.04364
								12000	29.2	25.43	71.19	0.7764	0.04357
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.30	52.97	0.5991	0.04384
								8500	26.1	20.19	55.00	0.6230	0.04375
								9000	26.5	21.05	57.02	0.6467	0.04366

	9500	26.9	21.89	59.03	0.6703	0.04357
	10000	27.3	22.71	61.02	0.6937	0.04348
	10500	27.6	23.51	63.00	0.7169	0.04339
	11000	28.0	24.29	64.96	0.7400	0.04330
	11500	28.4	25.04	66.92	0.7629	0.04322
	12000	28.8	25.78	68.86	0.7858	0.04313
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.26	50.28	0.7328	0.03856
	8500	24.9	21.14	52.39	0.7669	0.03838
	9000	25.3	21.99	54.48	0.8009	0.03820
	9500	25.8	22.80	56.57	0.8347	0.03803
	10000	26.2	23.60	58.65	0.8684	0.03785
	10500	26.7	24.36	60.73	0.9020	0.03767
	11000	27.1	25.11	62.79	0.9355	0.03750
	11500	27.5	25.83	64.86	0.9689	0.03732
	12000	28.0	26.53	66.91	1.0022	0.03715
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.37	49.51	0.7078	0.03898
	8500	24.7	21.27	51.49	0.7386	0.03885
	9000	25.2	22.14	53.46	0.7693	0.03871

								9500	25.6	22.99	55.41	0.7999	0.03858
								10000	26.0	23.80	57.35	0.8302	0.03845
								10500	26.4	24.60	59.29	0.8604	0.03832
								11000	26.8	25.37	61.21	0.8905	0.03819
								11500	27.2	26.12	63.13	0.9204	0.03806
								12000	27.6	26.85	65.04	0.9502	0.03793
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.1	18.96	55.30	0.6051	0.04416
								8500	26.5	19.85	57.26	0.6261	0.04409
								9000	26.9	20.73	59.19	0.6470	0.04402
								9500	27.2	21.58	61.10	0.6676	0.04394
								10000	27.6	22.42	62.99	0.6880	0.04387
								10500	28.0	23.23	64.87	0.7082	0.04380

		11000	28.3	24.03	66.73	0.7282	0.04374
		11500	28.7	24.81	68.57	0.7481	0.04367
		12000	29.0	25.57	70.39	0.7678	0.04360
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.30	52.97	0.5991	0.04384
		8500	26.1	20.19	55.00	0.6230	0.04375
		9000	26.5	21.05	57.02	0.6467	0.04366
		9500	26.9	21.89	59.03	0.6703	0.04357
		10000	27.3	22.71	61.02	0.6937	0.04348
		10500	27.6	23.51	63.00	0.7169	0.04339

	11000	28.0	24.29	64.96	0.7400	0.04330
	11500	28.4	25.04	66.92	0.7629	0.04322
	12000	28.8	25.78	68.86	0.7858	0.04313
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.4	20.32	49.96	0.7277	0.03859
	8500	24.8	21.20	52.05	0.7615	0.03841
	9000	25.3	22.05	54.13	0.7952	0.03823
	9500	25.7	22.87	56.20	0.8287	0.03806
	10000	26.1	23.67	58.26	0.8621	0.03788
	10500	26.6	24.44	60.32	0.8954	0.03771

	11000	27.0	25.19	62.37	0.9286	0.03753
	11500	27.5	25.92	64.41	0.9617	0.03736
	12000	27.9	26.62	66.45	0.9947	0.03719
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.41	49.29	0.7043	0.03900
	8500	24.7	21.31	51.26	0.7350	0.03886
	9000	25.1	22.19	53.21	0.7655	0.03873
	9500	25.5	23.04	55.15	0.7958	0.03860
	10000	25.9	23.86	57.08	0.8260	0.03847
	10500	26.4	24.65	59.01	0.8560	0.03834

								11000	26.8	25.43	60.92	0.8859	0.03821
								11500	27.2	26.19	62.82	0.9156	0.03808
								12000	27.6	26.92	64.72	0.9452	0.03795
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	53.34	0.6637	0.03988
								8500	25.2	20.87	55.22	0.6881	0.03978
								9000	25.6	21.77	57.07	0.7123	0.03969
								9500	26.0	22.65	58.91	0.7362	0.03959
								10000	26.3	23.50	60.73	0.7598	0.03950
								10500	26.7	24.34	62.54	0.7832	0.03941
								11000	27.1	25.15	64.32	0.8064	0.03932
								11500	27.4	25.95	66.09	0.8294	0.03923
								12000	27.8	26.73	67.85	0.8522	0.03914
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.38	50.42	0.6526	0.03969
								8500	24.7	21.30	52.34	0.6799	0.03957
								9000	25.1	22.20	54.25	0.7069	0.03945

	9500	25.5	23.07	56.14	0.7337	0.03934
	10000	25.9	23.91	58.02	0.7604	0.03923
	10500	26.3	24.74	59.89	0.7868	0.03911
	11000	26.7	25.54	61.75	0.8131	0.03900
	11500	27.0	26.32	63.59	0.8393	0.03889
	12000	27.4	27.08	65.43	0.8653	0.03878
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.17	50.48	0.6355	0.04076
	8500	25.0	21.09	52.41	0.6628	0.04065
	9000	25.4	21.97	54.32	0.6899	0.04054
	9500	25.8	22.83	56.22	0.7168	0.04043
	10000	26.1	23.67	58.11	0.7435	0.04032
	10500	26.5	24.49	59.98	0.7700	0.04021
	11000	26.9	25.28	61.84	0.7964	0.04010
	11500	27.3	26.06	63.70	0.8226	0.04000
	12000	27.7	26.81	65.54	0.8487	0.03989
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.1	21.39	47.33	0.8058	0.03440
	8500	23.6	22.30	49.29	0.8441	0.03419
	9000	24.0	23.17	51.24	0.8822	0.03398

								9500	24.5	24.01	53.19	0.9203	0.03377
								10000	24.9	24.82	55.13	0.9581	0.03357
								10500	25.4	25.61	57.07	0.9959	0.03336
								11000	25.8	26.37	58.99	1.0335	0.03315
								11500	26.2	27.11	60.92	1.0711	0.03294
								12000	26.7	27.82	62.83	1.1085	0.03274
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.0	21.52	46.68	0.7761	0.03483
								8500	23.4	22.45	48.53	0.8108	0.03467
								9000	23.9	23.35	50.37	0.8454	0.03451
								9500	24.3	24.22	52.19	0.8797	0.03434
								10000	24.7	25.07	54.01	0.9138	0.03418
								10500	25.1	25.88	55.81	0.9478	0.03402
								11000	25.5	26.67	57.61	0.9816	0.03387
								11500	25.9	27.44	59.40	1.0153	0.03371
								12000	26.3	28.19	61.18	1.0488	0.03355
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.7	20.03	52.79	0.6566	0.03991

	8500	25.1	20.97	54.64	0.6807	0.03981
	9000	25.5	21.87	56.47	0.7045	0.03972
	9500	25.8	22.76	58.28	0.7280	0.03963
	10000	26.2	23.62	60.08	0.7513	0.03953
	10500	26.6	24.47	61.86	0.7743	0.03944
	11000	26.9	25.29	63.62	0.7972	0.03935
	11500	27.3	26.09	65.36	0.8199	0.03926
	12000	27.6	26.88	67.09	0.8423	0.03917
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.38	50.42	0.6526	0.03969

	8500	24.7	21.30	52.34	0.6799	0.03957
	9000	25.1	22.20	54.25	0.7069	0.03945
	9500	25.5	23.07	56.14	0.7337	0.03934
	10000	25.9	23.91	58.02	0.7604	0.03923
	10500	26.3	24.74	59.89	0.7868	0.03911
	11000	26.7	25.54	61.75	0.8131	0.03900
	11500	27.0	26.32	63.59	0.8393	0.03889
	12000	27.4	27.08	65.43	0.8653	0.03878
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.17	50.48	0.6355	0.04076

	8500	25.0	21.09	52.41	0.6628	0.04065
	9000	25.4	21.97	54.32	0.6899	0.04054
	9500	25.8	22.83	56.22	0.7168	0.04043
	10000	26.1	23.67	58.11	0.7435	0.04032
	10500	26.5	24.49	59.98	0.7700	0.04021
	11000	26.9	25.28	61.84	0.7964	0.04010
	11500	27.3	26.06	63.70	0.8226	0.04000
	12000	27.7	26.81	65.54	0.8487	0.03989
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.45	47.03	0.8000	0.03444

	8500	23.5	22.36	48.98	0.8380	0.03423
	9000	24.0	23.24	50.91	0.8758	0.03402
	9500	24.4	24.09	52.84	0.9135	0.03381
	10000	24.8	24.91	54.77	0.9510	0.03360
	10500	25.3	25.70	56.68	0.9885	0.03340
	11000	25.7	26.46	58.60	1.0258	0.03319
	11500	26.2	27.20	60.50	1.0630	0.03299
	12000	26.6	27.93	62.40	1.1000	0.03278
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.57	46.48	0.7722	0.03485

								8500	23.4	22.50	48.31	0.8067	0.03469
								9000	23.8	23.40	50.14	0.8410	0.03453
								9500	24.2	24.28	51.95	0.8752	0.03437
								10000	24.6	25.12	53.76	0.9091	0.03421
								10500	25.0	25.94	55.55	0.9429	0.03405
								11000	25.5	26.74	57.34	0.9765	0.03389
								11500	25.9	27.51	59.12	1.0099	0.03373
								12000	26.3	28.26	60.89	1.0432	0.03358
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.76	53.83	0.6523	0.04062
								8500	25.4	20.68	55.73	0.6761	0.04053

	9000	25.8	21.57	57.61	0.6996	0.04044
	9500	26.2	22.44	59.47	0.7229	0.04035
	10000	26.6	23.29	61.31	0.7459	0.04026
	10500	26.9	24.12	63.13	0.7688	0.04017
	11000	27.3	24.93	64.94	0.7914	0.04009
	11500	27.7	25.73	66.73	0.8138	0.04000
	12000	28.0	26.50	68.50	0.8360	0.03991
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.19	50.92	0.6411	0.04041
	8500	24.9	21.11	52.86	0.6676	0.04030
	9000	25.3	21.99	54.79	0.6940	0.04019
	9500	25.7	22.86	56.71	0.7201	0.04008
	10000	26.1	23.70	58.61	0.7461	0.03997
	10500	26.5	24.52	60.50	0.7719	0.03986
	11000	26.9	25.32	62.38	0.7975	0.03975
	11500	27.3	26.09	64.24	0.8230	0.03965
	12000	27.6	26.85	66.10	0.8483	0.03954
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.99	50.97	0.6242	0.04147
	8500	25.2	20.90	52.92	0.6508	0.04137

	9000	25.6	21.78	54.86	0.6772	0.04126
	9500	26.0	22.63	56.78	0.7034	0.04116
	10000	26.4	23.47	58.69	0.7295	0.04105
	10500	26.8	24.28	60.59	0.7553	0.04095
	11000	27.2	25.07	62.47	0.7810	0.04085
	11500	27.5	25.84	64.34	0.8066	0.04075
	12000	27.9	26.59	66.21	0.8320	0.04065
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.19	47.90	0.7904	0.03513
	8500	23.8	22.09	49.89	0.8279	0.03493
	9000	24.3	22.96	51.88	0.8652	0.03473
	9500	24.7	23.80	53.85	0.9023	0.03452
	10000	25.1	24.61	55.82	0.9394	0.03432
	10500	25.6	25.39	57.78	0.9763	0.03412
	11000	26.0	26.15	59.73	1.0131	0.03392
	11500	26.5	26.88	61.68	1.0497	0.03372
	12000	26.9	27.59	63.63	1.0863	0.03352
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.32	47.24	0.7617	0.03556
	8500	23.7	22.24	49.11	0.7956	0.03540

								9000	24.1	23.14	50.97	0.8294	0.03525
								9500	24.5	24.00	52.82	0.8629	0.03509
								10000	24.9	24.84	54.66	0.8963	0.03494
								10500	25.3	25.66	56.49	0.9295	0.03478
								11000	25.7	26.44	58.32	0.9625	0.03463
								11500	26.1	27.21	60.13	0.9954	0.03448
								12000	26.6	27.95	61.94	1.0282	0.03433
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.0	19.84	53.28	0.6454	0.04065
								8500	25.3	20.77	55.15	0.6688	0.04056
								9000	25.7	21.67	57.00	0.6920	0.04047
								9500	26.1	22.55	58.84	0.7150	0.04038
								10000	26.4	23.41	60.65	0.7377	0.04029

		10500	26.8	24.25	62.44	0.7601	0.04021
		11000	27.2	25.07	64.22	0.7824	0.04012
		11500	27.5	25.87	65.99	0.8045	0.04003
		12000	27.9	26.65	67.74	0.8264	0.03995
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.19	50.92	0.6411	0.04041
		8500	24.9	21.11	52.86	0.6676	0.04030
		9000	25.3	21.99	54.79	0.6940	0.04019
		9500	25.7	22.86	56.71	0.7201	0.04008
		10000	26.1	23.70	58.61	0.7461	0.03997

		10500	26.5	24.52	60.50	0.7719	0.03986
		11000	26.9	25.32	62.38	0.7975	0.03975
		11500	27.3	26.09	64.24	0.8230	0.03965
		12000	27.6	26.85	66.10	0.8483	0.03954
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.99	50.97	0.6242	0.04147
		8500	25.2	20.90	52.92	0.6508	0.04137
		9000	25.6	21.78	54.86	0.6772	0.04126
		9500	26.0	22.63	56.78	0.7034	0.04116
		10000	26.4	23.47	58.69	0.7295	0.04105

	10500	26.8	24.28	60.59	0.7553	0.04095
	11000	27.2	25.07	62.47	0.7810	0.04085
	11500	27.5	25.84	64.34	0.8066	0.04075
	12000	27.9	26.59	66.21	0.8320	0.04065
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.3	21.25	47.60	0.7848	0.03516
	8500	23.7	22.16	49.58	0.8219	0.03496
	9000	24.2	23.03	51.54	0.8589	0.03476
	9500	24.6	23.87	53.50	0.8957	0.03456
	10000	25.1	24.69	55.45	0.9324	0.03436

	10500	25.5	25.48	57.39	0.9690	0.03416
	11000	25.9	26.24	59.33	1.0055	0.03396
	11500	26.4	26.98	61.26	1.0418	0.03376
	12000	26.8	27.70	63.19	1.0781	0.03356
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.36	47.03	0.7579	0.03558
	8500	23.6	22.29	48.89	0.7916	0.03542
	9000	24.0	23.19	50.74	0.8251	0.03527
	9500	24.4	24.06	52.58	0.8585	0.03511
	10000	24.9	24.90	54.40	0.8916	0.03496

								10500	25.3	25.72	56.22	0.9246	0.03481
								11000	25.7	26.51	58.04	0.9575	0.03465
								11500	26.1	27.28	59.84	0.9902	0.03450
								12000	26.5	28.03	61.63	1.0227	0.03435
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.19	54.95	0.6315	0.04280
								8500	26.2	20.09	56.89	0.6541	0.04272
								9000	26.6	20.97	58.82	0.6764	0.04264
								9500	26.9	21.83	60.72	0.6985	0.04256
								10000	27.3	22.66	62.61	0.7203	0.04248
								10500	27.7	23.48	64.47	0.7419	0.04240
								11000	28.0	24.28	66.32	0.7634	0.04232
								11500	28.4	25.06	68.15	0.7846	0.04224
								12000	28.8	25.82	69.97	0.8057	0.04216
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.62	52.03	0.6196	0.04254

	8500	25.6	20.52	54.03	0.6448	0.04244
	9000	26.0	21.39	56.01	0.6698	0.04234
	9500	26.4	22.24	57.97	0.6947	0.04224
	10000	26.8	23.07	59.92	0.7193	0.04214
	10500	27.2	23.87	61.86	0.7438	0.04204
	11000	27.6	24.66	63.79	0.7681	0.04195
	11500	28.0	25.42	65.70	0.7923	0.04185
	12000	28.4	26.17	67.61	0.8164	0.04175
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	52.08	0.6031	0.04360
	8500	25.9	20.32	54.08	0.6284	0.04351
	9000	26.3	21.18	56.07	0.6535	0.04341
	9500	26.7	22.02	58.04	0.6784	0.04332
	10000	27.1	22.84	60.00	0.7031	0.04323
	10500	27.5	23.64	61.94	0.7277	0.04313
	11000	27.9	24.42	63.88	0.7521	0.04304
	11500	28.3	25.18	65.80	0.7763	0.04295
	12000	28.7	25.92	67.71	0.8005	0.04286
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.60	49.20	0.7604	0.03724

	8500	24.5	21.48	51.25	0.7961	0.03705
	9000	24.9	22.34	53.30	0.8317	0.03686
	9500	25.4	23.16	55.34	0.8672	0.03667
	10000	25.8	23.96	57.37	0.9025	0.03648
	10500	26.3	24.73	59.39	0.9377	0.03629
	11000	26.7	25.48	61.41	0.9728	0.03611
	11500	27.1	26.21	63.42	1.0078	0.03592
	12000	27.6	26.91	65.42	1.0427	0.03573
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.71	48.48	0.7336	0.03767
	8500	24.3	21.62	50.41	0.7660	0.03752
	9000	24.8	22.50	52.33	0.7982	0.03738
	9500	25.2	23.35	54.23	0.8302	0.03723
	10000	25.6	24.18	56.13	0.8620	0.03709
	10500	26.0	24.98	58.02	0.8937	0.03695
	11000	26.4	25.76	59.90	0.9252	0.03681
	11500	26.8	26.51	61.77	0.9566	0.03667
	12000	27.2	27.25	63.63	0.9878	0.03652

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.7	19.28	54.38	0.6249	0.04283
								8500	26.1	20.19	56.30	0.6472	0.04274
								9000	26.4	21.07	58.19	0.6692	0.04266
								9500	26.8	21.93	60.07	0.6909	0.04258
								10000	27.2	22.78	61.93	0.7124	0.04250
								10500	27.5	23.60	63.77	0.7338	0.04243
								11000	27.9	24.40	65.59	0.7549	0.04235
								11500	28.2	25.19	67.39	0.7758	0.04227
								12000	28.6	25.96	69.18	0.7966	0.04220

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.62	52.03	0.6196	0.04254
	8500	25.6	20.52	54.03	0.6448	0.04244
	9000	26.0	21.39	56.01	0.6698	0.04234
	9500	26.4	22.24	57.97	0.6947	0.04224
	10000	26.8	23.07	59.92	0.7193	0.04214
	10500	27.2	23.87	61.86	0.7438	0.04204
	11000	27.6	24.66	63.79	0.7681	0.04195
	11500	28.0	25.42	65.70	0.7923	0.04185
	12000	28.4	26.17	67.61	0.8164	0.04175

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	52.08	0.6031	0.04360
	8500	25.9	20.32	54.08	0.6284	0.04351
	9000	26.3	21.18	56.07	0.6535	0.04341
	9500	26.7	22.02	58.04	0.6784	0.04332
	10000	27.1	22.84	60.00	0.7031	0.04323
	10500	27.5	23.64	61.94	0.7277	0.04313
	11000	27.9	24.42	63.88	0.7521	0.04304
	11500	28.3	25.18	65.80	0.7763	0.04295
	12000	28.7	25.92	67.71	0.8005	0.04286

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.66	48.89	0.7550	0.03727
	8500	24.4	21.55	50.93	0.7904	0.03708
	9000	24.9	22.41	52.95	0.8257	0.03689
	9500	25.3	23.23	54.97	0.8609	0.03671
	10000	25.7	24.04	56.99	0.8959	0.03652
	10500	26.2	24.82	58.99	0.9308	0.03633
	11000	26.6	25.57	60.99	0.9656	0.03614
	11500	27.1	26.30	62.98	1.0003	0.03596
	12000	27.5	27.01	64.97	1.0348	0.03577

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.76	48.26	0.7300	0.03768
	8500	24.3	21.67	50.18	0.7622	0.03754
	9000	24.7	22.55	52.09	0.7942	0.03739
	9500	25.1	23.41	53.98	0.8260	0.03725
	10000	25.5	24.23	55.87	0.8576	0.03711
	10500	25.9	25.04	57.74	0.8891	0.03697
	11000	26.4	25.82	59.61	0.9204	0.03683
	11500	26.8	26.58	61.47	0.9516	0.03669
	12000	27.2	27.32	63.32	0.9826	0.03655

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.8	19.23	54.97	0.6299	0.04267
								8500	26.1	20.13	56.91	0.6524	0.04259
								9000	26.5	21.01	58.84	0.6746	0.04251
								9500	26.9	21.87	60.74	0.6966	0.04243
								10000	27.3	22.71	62.63	0.7184	0.04235
								10500	27.6	23.52	64.49	0.7399	0.04227
								11000	28.0	24.32	66.34	0.7613	0.04219
								11500	28.3	25.10	68.18	0.7825	0.04211
								12000	28.7	25.87	70.00	0.8035	0.04203
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.66	52.05	0.6181	0.04241
								8500	25.6	20.56	54.05	0.6432	0.04231
								9000	26.0	21.43	56.03	0.6681	0.04221
								9500	26.4	22.28	57.99	0.6928	0.04211
								10000	26.8	23.11	59.94	0.7174	0.04201
								10500	27.2	23.92	61.88	0.7418	0.04191
								11000	27.6	24.70	63.81	0.7661	0.04182
								11500	27.9	25.47	65.73	0.7902	0.04172
								12000	28.3	26.22	67.63	0.8142	0.04162

	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.47	52.10	0.6016	0.04347
		8500	25.8	20.36	54.10	0.6268	0.04337
		9000	26.3	21.23	56.09	0.6518	0.04328
		9500	26.6	22.07	58.06	0.6766	0.04319
		10000	27.0	22.89	60.02	0.7012	0.04309
		10500	27.4	23.69	61.97	0.7257	0.04300
		11000	27.8	24.47	63.90	0.7500	0.04291
		11500	28.2	25.23	65.82	0.7742	0.04282
		12000	28.6	25.97	67.73	0.7983	0.04273
	LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.64	49.22	0.7587	0.03712
		8500	24.4	21.52	51.28	0.7944	0.03693
		9000	24.9	22.38	53.32	0.8299	0.03674
		9500	25.3	23.21	55.36	0.8652	0.03655
		10000	25.8	24.00	57.39	0.9004	0.03637
		10500	26.2	24.78	59.41	0.9356	0.03618
		11000	26.7	25.53	61.43	0.9706	0.03599
		11500	27.1	26.26	63.44	1.0054	0.03580
		12000	27.5	26.96	65.45	1.0402	0.03562

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.75	48.50	0.7320	0.03755
								8500	24.3	21.67	50.43	0.7643	0.03740
								9000	24.7	22.54	52.35	0.7964	0.03726
								9500	25.1	23.40	54.26	0.8283	0.03711
								10000	25.5	24.23	56.15	0.8600	0.03697
								10500	26.0	25.03	58.04	0.8916	0.03683
								11000	26.4	25.81	59.92	0.9230	0.03669
								11500	26.8	26.56	61.79	0.9543	0.03655
								12000	27.2	27.30	63.66	0.9855	0.03641
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.32	54.40	0.6233	0.04269
								8500	26.0	20.23	56.32	0.6455	0.04261
								9000	26.4	21.11	58.21	0.6674	0.04253
								9500	26.8	21.98	60.09	0.6891	0.04245

	10000	27.1	22.82	61.95	0.7105	0.04237
	10500	27.5	23.64	63.79	0.7318	0.04230
	11000	27.8	24.45	65.61	0.7528	0.04222
	11500	28.2	25.24	67.42	0.7737	0.04214
	12000	28.5	26.01	69.21	0.7944	0.04207
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.66	52.05	0.6181	0.04241
	8500	25.6	20.56	54.05	0.6432	0.04231
	9000	26.0	21.43	56.03	0.6681	0.04221
	9500	26.4	22.28	57.99	0.6928	0.04211

		10000	26.8	23.11	59.94	0.7174	0.04201
		10500	27.2	23.92	61.88	0.7418	0.04191
		11000	27.6	24.70	63.81	0.7661	0.04182
		11500	27.9	25.47	65.73	0.7902	0.04172
		12000	28.3	26.22	67.63	0.8142	0.04162
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.47	52.10	0.6016	0.04347
		8500	25.8	20.36	54.10	0.6268	0.04337
		9000	26.3	21.23	56.09	0.6518	0.04328
		9500	26.6	22.07	58.06	0.6766	0.04319

	10000	27.0	22.89	60.02	0.7012	0.04309
	10500	27.4	23.69	61.97	0.7257	0.04300
	11000	27.8	24.47	63.90	0.7500	0.04291
	11500	28.2	25.23	65.82	0.7742	0.04282
	12000	28.6	25.97	67.73	0.7983	0.04273
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.70	48.91	0.7534	0.03715
	8500	24.4	21.59	50.95	0.7887	0.03696
	9000	24.8	22.45	52.98	0.8239	0.03678
	9500	25.3	23.28	55.00	0.8589	0.03659

		10000	25.7	24.08	57.01	0.8938	0.03640
		10500	26.1	24.86	59.02	0.9286	0.03621
		11000	26.6	25.62	61.02	0.9633	0.03603
		11500	27.0	26.35	63.01	0.9979	0.03584
		12000	27.4	27.06	65.00	1.0324	0.03566
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.80	48.28	0.7284	0.03756
		8500	24.2	21.71	50.20	0.7605	0.03742
		9000	24.7	22.59	52.11	0.7924	0.03728
		9500	25.1	23.45	54.00	0.8241	0.03713

								10000	25.5	24.28	55.89	0.8556	0.03699
								10500	25.9	25.09	57.77	0.8870	0.03685
								11000	26.3	25.87	59.63	0.9182	0.03671
								11500	26.7	26.63	61.49	0.9493	0.03657
								12000	27.1	27.37	63.34	0.9803	0.03643
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.93	57.17	0.8386	0.04324
								8500	28.2	18.68	59.58	0.8814	0.04305
								9000	28.7	19.40	61.96	0.9239	0.04287
								9500	29.2	20.10	64.33	0.9662	0.04269
								10000	29.8	20.78	66.69	1.0083	0.04251
								10500	30.3	21.43	69.04	1.0501	0.04233
								11000	30.8	22.06	71.37	1.0917	0.04215
								11500	31.4	22.68	73.69	1.1331	0.04197

								12000	31.9	23.28	76.00	1.1743	0.04179
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.6	17.96	56.91	0.8339	0.04326
								8500	28.1	18.72	59.30	0.8765	0.04308
								9000	28.6	19.45	61.67	0.9187	0.04289
								9500	29.2	20.15	64.03	0.9608	0.04271
								10000	29.7	20.83	66.37	1.0026	0.04253
								10500	30.2	21.49	68.70	1.0441	0.04235
								11000	30.8	22.12	71.02	1.0855	0.04218
								11500	31.3	22.74	73.33	1.1266	0.04200

								12000	31.8	23.34	75.63	1.1676	0.04182
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.3	18.79	53.69	0.9244	0.03908
								8500	26.9	19.56	55.92	0.9721	0.03886
								9000	27.4	20.31	58.14	1.0194	0.03864
								9500	28.0	21.02	60.35	1.0665	0.03842
								10000	28.5	21.71	62.55	1.1134	0.03821
								10500	29.0	22.38	64.73	1.1600	0.03799
								11000	29.6	23.03	66.90	1.2063	0.03778
								11500	30.1	23.65	69.06	1.2524	0.03756
								12000	30.6	24.26	71.21	1.2983	0.03735
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.84	53.45	0.9192	0.03910
								8500	26.8	19.61	55.67	0.9666	0.03888
								9000	27.4	20.35	57.87	1.0137	0.03867

								9500	27.9	21.07	60.07	1.0605	0.03845
								10000	28.4	21.77	62.25	1.1070	0.03823
								10500	29.0	22.44	64.42	1.1533	0.03802
								11000	29.5	23.09	66.58	1.1994	0.03781
								11500	30.0	23.71	68.73	1.2452	0.03760
								12000	30.5	24.33	70.86	1.2909	0.03738
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.6	18.65	54.37	0.9064	0.03980
								8500	27.1	19.41	56.64	0.9531	0.03959
								9000	27.6	20.15	58.89	0.9995	0.03938
								9500	28.2	20.86	61.13	1.0456	0.03917
								10000	28.7	21.55	63.35	1.0915	0.03896
								10500	29.2	22.22	65.57	1.1371	0.03875

								11000	29.8	22.86	67.77	1.1824	0.03854
								11500	30.3	23.48	69.96	1.2276	0.03834
								12000	30.8	24.09	72.15	1.2725	0.03813
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.5	18.69	54.12	0.9014	0.03982
								8500	27.0	19.46	56.38	0.9478	0.03961
								9000	27.6	20.20	58.61	0.9938	0.03940
								9500	28.1	20.92	60.84	1.0397	0.03919
								10000	28.6	21.61	63.05	1.0852	0.03899
								10500	29.2	22.28	65.25	1.1306	0.03878
								11000	29.7	22.92	67.44	1.1757	0.03857

								11500	30.2	23.55	69.62	1.2205	0.03837
								12000	30.7	24.16	71.79	1.2652	0.03816
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.18	55.90	0.8711	0.04194
								8500	27.8	18.94	58.24	0.9158	0.04174
								9000	28.3	19.67	60.57	0.9602	0.04154
								9500	28.9	20.37	62.88	1.0044	0.04135
								10000	29.4	21.05	65.18	1.0483	0.04115
								10500	29.9	21.71	67.46	1.0919	0.04096
								11000	30.5	22.35	69.74	1.1354	0.04076
								11500	31.0	22.96	72.00	1.1786	0.04057
								12000	31.5	23.56	74.25	1.2217	0.04038
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.22	55.65	0.8662	0.04196
								8500	27.7	18.98	57.97	0.9107	0.04176

								9000	28.3	19.71	60.28	0.9548	0.04157
								9500	28.8	20.42	62.58	0.9987	0.04137
								10000	29.3	21.10	64.86	1.0423	0.04118
								10500	29.8	21.76	67.14	1.0857	0.04098
								11000	30.4	22.40	69.40	1.1289	0.04079
								11500	30.9	23.02	71.65	1.1719	0.04060
								12000	31.4	23.63	73.89	1.2147	0.04041
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.22	55.93	0.8692	0.04180
								8500	27.7	18.97	58.27	0.9137	0.04161
								9000	28.3	19.70	60.59	0.9580	0.04141
								9500	28.8	20.41	62.90	1.0021	0.04122

								10000	29.3	21.09	65.20	1.0459	0.04102
								10500	29.9	21.75	67.49	1.0894	0.04083
								11000	30.4	22.39	69.77	1.1328	0.04064
								11500	30.9	23.00	72.03	1.1759	0.04045
								12000	31.4	23.61	74.28	1.2188	0.04025
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.26	55.67	0.8643	0.04183
								8500	27.7	19.02	58.00	0.9086	0.04163
								9000	28.2	19.75	60.31	0.9526	0.04143
								9500	28.7	20.46	62.61	0.9964	0.04124
								10000	29.3	21.14	64.89	1.0399	0.04105
								10500	29.8	21.80	67.17	1.0832	0.04086

								11000	30.3	22.45	69.43	1.1263	0.04066
								11500	30.8	23.07	71.68	1.1692	0.04047
								12000	31.4	23.67	73.92	1.2118	0.04029
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.5	18.67	55.67	0.7502	0.04231
								8500	26.9	19.56	57.60	0.7726	0.04222
								9000	27.3	20.42	59.51	0.7948	0.04213
								9500	27.6	21.27	61.40	0.8167	0.04205
								10000	28.0	22.09	63.27	0.8384	0.04196
								10500	28.4	22.90	65.12	0.8599	0.04188
								11000	28.7	23.69	66.96	0.8812	0.04179
								11500	29.1	24.46	68.78	0.9024	0.04171
								12000	29.4	25.22	70.58	0.9233	0.04162
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.9	19.10	52.66	0.7317	0.04208
								8500	26.3	19.99	54.64	0.7568	0.04197
								9000	26.7	20.86	56.60	0.7816	0.04186

	9500	27.1	21.70	58.55	0.8062	0.04176
	10000	27.5	22.52	60.49	0.8307	0.04165
	10500	27.9	23.31	62.41	0.8551	0.04155
	11000	28.3	24.09	64.33	0.8792	0.04144
	11500	28.6	24.85	66.23	0.9033	0.04134
	12000	29.0	25.59	68.12	0.9271	0.04124
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.7	20.07	49.42	0.8811	0.03664
	8500	25.1	20.95	51.45	0.9167	0.03644
	9000	25.6	21.79	53.47	0.9521	0.03624
	9500	26.0	22.62	55.48	0.9875	0.03604
	10000	26.4	23.41	57.49	1.0227	0.03585
	10500	26.9	24.18	59.49	1.0577	0.03565
	11000	27.3	24.93	61.48	1.0927	0.03546
	11500	27.7	25.65	63.47	1.1276	0.03526
	12000	28.2	26.36	65.45	1.1623	0.03507
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.6	20.17	48.75	0.8549	0.03707
	8500	25.0	21.07	50.66	0.8872	0.03692
	9000	25.4	21.94	52.55	0.9192	0.03677

								9500	25.8	22.78	54.44	0.9511	0.03662
								10000	26.2	23.60	56.32	0.9829	0.03647
								10500	26.6	24.40	58.18	1.0145	0.03632
								11000	27.0	25.18	60.04	1.0459	0.03617
								11500	27.4	25.93	61.89	1.0772	0.03602
								12000	27.8	26.66	63.73	1.1083	0.03587
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.4	18.75	55.11	0.7437	0.04233
								8500	26.8	19.64	57.01	0.7658	0.04225
								9000	27.2	20.51	58.90	0.7876	0.04216
								9500	27.5	21.36	60.76	0.8092	0.04208
								10000	27.9	22.20	62.60	0.8306	0.04199
								10500	28.2	23.01	64.42	0.8518	0.04191

		11000	28.6	23.81	66.23	0.8728	0.04182
		11500	28.9	24.59	68.02	0.8936	0.04174
		12000	29.3	25.35	69.80	0.9143	0.04166
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.9	19.10	52.66	0.7317	0.04208
		8500	26.3	19.99	54.64	0.7568	0.04197
		9000	26.7	20.86	56.60	0.7816	0.04186
		9500	27.1	21.70	58.55	0.8062	0.04176
		10000	27.5	22.52	60.49	0.8307	0.04165
		10500	27.9	23.31	62.41	0.8551	0.04155

	11000	28.3	24.09	64.33	0.8792	0.04144
	11500	28.6	24.85	66.23	0.9033	0.04134
	12000	29.0	25.59	68.12	0.9271	0.04124
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.6	20.12	49.11	0.8757	0.03667
	8500	25.0	21.01	51.12	0.9110	0.03647
	9000	25.5	21.86	53.13	0.9461	0.03627
	9500	25.9	22.68	55.12	0.9812	0.03608
	10000	26.3	23.48	57.11	1.0161	0.03588
	10500	26.8	24.26	59.09	1.0508	0.03569

	11000	27.2	25.01	61.07	1.0855	0.03550
	11500	27.6	25.74	63.04	1.1201	0.03530
	12000	28.1	26.45	65.01	1.1545	0.03511
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.5	20.21	48.53	0.8513	0.03709
	8500	24.9	21.11	50.43	0.8834	0.03694
	9000	25.3	21.98	52.32	0.9152	0.03679
	9500	25.8	22.83	54.19	0.9469	0.03664
	10000	26.2	23.66	56.05	0.9785	0.03649
	10500	26.6	24.46	57.91	1.0099	0.03634

								11000	27.0	25.23	59.76	1.0411	0.03619
								11500	27.4	25.99	61.59	1.0722	0.03604
								12000	27.8	26.73	63.42	1.1031	0.03590
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.1	19.70	53.05	0.8029	0.03813
								8500	25.5	20.62	54.88	0.8284	0.03801
								9000	25.9	21.52	56.68	0.8535	0.03790
								9500	26.3	22.39	58.47	0.8784	0.03780
								10000	26.6	23.25	60.24	0.9031	0.03769
								10500	27.0	24.08	61.99	0.9275	0.03758
								11000	27.3	24.90	63.73	0.9517	0.03748
								11500	27.7	25.70	65.45	0.9756	0.03737
								12000	28.0	26.47	67.15	0.9994	0.03727
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	50.03	0.7856	0.03799
								8500	25.0	21.07	51.90	0.8139	0.03786
								9000	25.4	21.97	53.75	0.8420	0.03773

	9500	25.7	22.84	55.59	0.8700	0.03760
	10000	26.1	23.68	57.41	0.8977	0.03747
	10500	26.5	24.51	59.23	0.9253	0.03734
	11000	26.9	25.31	61.03	0.9526	0.03721
	11500	27.3	26.09	62.82	0.9799	0.03709
	12000	27.6	26.85	64.60	1.0069	0.03696
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.96	50.12	0.7629	0.03912
	8500	25.2	20.88	52.00	0.7912	0.03899
	9000	25.6	21.76	53.86	0.8194	0.03887
	9500	26.0	22.62	55.71	0.8474	0.03874
	10000	26.4	23.46	57.54	0.8752	0.03862
	10500	26.8	24.28	59.36	0.9027	0.03850
	11000	27.2	25.07	61.17	0.9301	0.03838
	11500	27.5	25.84	62.97	0.9574	0.03826
	12000	27.9	26.60	64.76	0.9845	0.03813
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.16	46.37	0.9543	0.03256
	8500	23.8	22.07	48.26	0.9941	0.03233
	9000	24.3	22.94	50.14	1.0338	0.03210

								9500	24.7	23.78	52.02	1.0733	0.03187
								10000	25.1	24.60	53.88	1.1127	0.03164
								10500	25.6	25.39	55.74	1.1519	0.03141
								11000	26.0	26.15	57.60	1.1911	0.03119
								11500	26.4	26.90	59.44	1.2301	0.03096
								12000	26.9	27.61	61.29	1.2689	0.03074
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.28	45.83	0.9236	0.03300
								8500	23.7	22.21	47.61	0.9597	0.03282
								9000	24.1	23.11	49.38	0.9956	0.03264
								9500	24.5	23.98	51.14	1.0313	0.03246
								10000	24.9	24.83	52.88	1.0668	0.03228
								10500	25.3	25.65	54.62	1.1022	0.03210
								11000	25.7	26.44	56.35	1.1373	0.03193
								11500	26.1	27.21	58.08	1.1723	0.03175
								12000	26.5	27.97	59.79	1.2072	0.03157
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.0	19.79	52.52	0.7955	0.03816

	8500	25.4	20.71	54.32	0.8206	0.03805
	9000	25.8	21.62	56.10	0.8454	0.03794
	9500	26.1	22.50	57.86	0.8699	0.03783
	10000	26.5	23.36	59.60	0.8942	0.03773
	10500	26.8	24.21	61.33	0.9182	0.03762
	11000	27.2	25.03	63.04	0.9421	0.03752
	11500	27.5	25.83	64.73	0.9657	0.03742
	12000	27.9	26.62	66.41	0.9891	0.03731
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	50.03	0.7856	0.03799

	8500	25.0	21.07	51.90	0.8139	0.03786
	9000	25.4	21.97	53.75	0.8420	0.03773
	9500	25.7	22.84	55.59	0.8700	0.03760
	10000	26.1	23.68	57.41	0.8977	0.03747
	10500	26.5	24.51	59.23	0.9253	0.03734
	11000	26.9	25.31	61.03	0.9526	0.03721
	11500	27.3	26.09	62.82	0.9799	0.03709
	12000	27.6	26.85	64.60	1.0069	0.03696
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.96	50.12	0.7629	0.03912

	8500	25.2	20.88	52.00	0.7912	0.03899
	9000	25.6	21.76	53.86	0.8194	0.03887
	9500	26.0	22.62	55.71	0.8474	0.03874
	10000	26.4	23.46	57.54	0.8752	0.03862
	10500	26.8	24.28	59.36	0.9027	0.03850
	11000	27.2	25.07	61.17	0.9301	0.03838
	11500	27.5	25.84	62.97	0.9574	0.03826
	12000	27.9	26.60	64.76	0.9845	0.03813
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.3	21.22	46.09	0.9483	0.03260

	8500	23.8	22.13	47.96	0.9877	0.03237
	9000	24.2	23.01	49.83	1.0271	0.03214
	9500	24.6	23.86	51.68	1.0663	0.03191
	10000	25.1	24.68	53.53	1.1053	0.03168
	10500	25.5	25.48	55.38	1.1442	0.03146
	11000	25.9	26.25	57.21	1.1830	0.03123
	11500	26.4	26.99	59.05	1.2216	0.03101
	12000	26.8	27.72	60.87	1.2602	0.03079
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.32	45.63	0.9195	0.03302

								8500	23.6	22.26	47.40	0.9554	0.03284
								9000	24.0	23.16	49.16	0.9911	0.03266
								9500	24.5	24.04	50.90	1.0266	0.03248
								10000	24.9	24.88	52.64	1.0619	0.03231
								10500	25.3	25.71	54.37	1.0970	0.03213
								11000	25.7	26.51	56.09	1.1320	0.03195
								11500	26.1	27.28	57.80	1.1667	0.03178
								12000	26.5	28.04	59.51	1.2014	0.03160
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.4	19.52	53.56	0.7914	0.03885
								8500	25.7	20.43	55.41	0.8162	0.03875

	9000	26.1	21.33	57.24	0.8407	0.03864
	9500	26.5	22.20	59.04	0.8650	0.03854
	10000	26.9	23.04	60.83	0.8891	0.03844
	10500	27.2	23.88	62.60	0.9129	0.03833
	11000	27.6	24.69	64.36	0.9365	0.03823
	11500	27.9	25.48	66.10	0.9598	0.03813
	12000	28.3	26.26	67.82	0.9830	0.03803
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.97	50.55	0.7738	0.03870
	8500	25.2	20.89	52.43	0.8015	0.03857
	9000	25.6	21.77	54.31	0.8290	0.03845
	9500	26.0	22.64	56.17	0.8562	0.03832
	10000	26.4	23.48	58.02	0.8833	0.03820
	10500	26.7	24.30	59.85	0.9102	0.03808
	11000	27.1	25.10	61.67	0.9369	0.03795
	11500	27.5	25.87	63.49	0.9635	0.03783
	12000	27.9	26.63	65.29	0.9899	0.03771
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.78	50.64	0.7513	0.03982
	8500	25.4	20.69	52.53	0.7790	0.03970

	9000	25.8	21.57	54.42	0.8065	0.03958
	9500	26.2	22.43	56.28	0.8338	0.03946
	10000	26.6	23.26	58.14	0.8609	0.03934
	10500	27.0	24.07	59.98	0.8879	0.03923
	11000	27.4	24.86	61.82	0.9146	0.03911
	11500	27.8	25.64	63.64	0.9412	0.03899
	12000	28.1	26.39	65.45	0.9676	0.03888
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.6	20.97	46.97	0.9388	0.03328
	8500	24.1	21.87	48.88	0.9777	0.03305
	9000	24.5	22.74	50.79	1.0165	0.03283
	9500	24.9	23.58	52.69	1.0552	0.03261
	10000	25.4	24.39	54.59	1.0937	0.03238
	10500	25.8	25.18	56.47	1.1321	0.03216
	11000	26.2	25.94	58.36	1.1704	0.03194
	11500	26.7	26.68	60.23	1.2086	0.03172
	12000	27.1	27.40	62.10	1.2466	0.03150
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.08	46.40	0.9090	0.03372
	8500	23.9	22.01	48.21	0.9443	0.03354

								9000	24.3	22.90	50.00	0.9794	0.03337
								9500	24.7	23.77	51.78	1.0143	0.03319
								10000	25.1	24.61	53.55	1.0491	0.03302
								10500	25.6	25.43	55.32	1.0837	0.03285
								11000	26.0	26.22	57.07	1.1181	0.03268
								11500	26.4	26.99	58.82	1.1523	0.03251
								12000	26.8	27.74	60.56	1.1864	0.03234
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.3	19.60	53.02	0.7841	0.03889
								8500	25.6	20.53	54.85	0.8086	0.03878
								9000	26.0	21.43	56.64	0.8328	0.03868
								9500	26.4	22.30	58.43	0.8567	0.03857
								10000	26.7	23.16	60.19	0.8804	0.03847

		10500	27.1	24.00	61.93	0.9039	0.03837
		11000	27.4	24.82	63.66	0.9271	0.03827
		11500	27.8	25.62	65.38	0.9502	0.03817
		12000	28.1	26.40	67.08	0.9730	0.03808
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.97	50.55	0.7738	0.03870
		8500	25.2	20.89	52.43	0.8015	0.03857
		9000	25.6	21.77	54.31	0.8290	0.03845
		9500	26.0	22.64	56.17	0.8562	0.03832
		10000	26.4	23.48	58.02	0.8833	0.03820

		10500	26.7	24.30	59.85	0.9102	0.03808
		11000	27.1	25.10	61.67	0.9369	0.03795
		11500	27.5	25.87	63.49	0.9635	0.03783
		12000	27.9	26.63	65.29	0.9899	0.03771
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.78	50.64	0.7513	0.03982
		8500	25.4	20.69	52.53	0.7790	0.03970
		9000	25.8	21.57	54.42	0.8065	0.03958
		9500	26.2	22.43	56.28	0.8338	0.03946
		10000	26.6	23.26	58.14	0.8609	0.03934

	10500	27.0	24.07	59.98	0.8879	0.03923
	11000	27.4	24.86	61.82	0.9146	0.03911
	11500	27.8	25.64	63.64	0.9412	0.03899
	12000	28.1	26.39	65.45	0.9676	0.03888
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.03	46.68	0.9329	0.03331
	8500	24.0	21.93	48.58	0.9715	0.03309
	9000	24.4	22.81	50.47	1.0100	0.03287
	9500	24.9	23.65	52.35	1.0483	0.03265
	10000	25.3	24.47	54.23	1.0865	0.03243

	10500	25.7	25.26	56.10	1.1246	0.03221
	11000	26.1	26.03	57.97	1.1625	0.03199
	11500	26.6	26.77	59.83	1.2003	0.03177
	12000	27.0	27.50	61.68	1.2380	0.03155
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.4	21.13	46.20	0.9050	0.03374
	8500	23.9	22.06	47.99	0.9401	0.03356
	9000	24.3	22.95	49.77	0.9750	0.03339
	9500	24.7	23.82	51.55	1.0097	0.03322
	10000	25.1	24.67	53.31	1.0443	0.03304

								10500	25.5	25.49	55.06	1.0786	0.03287
								11000	25.9	26.28	56.81	1.1128	0.03270
								11500	26.3	27.06	58.54	1.1468	0.03253
								12000	26.7	27.81	60.27	1.1807	0.03236
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.1	18.98	54.71	0.7707	0.04099
								8500	26.5	19.87	56.60	0.7943	0.04090
								9000	26.8	20.75	58.48	0.8177	0.04080
								9500	27.2	21.60	60.33	0.8408	0.04070
								10000	27.6	22.44	62.16	0.8636	0.04061
								10500	27.9	23.25	63.98	0.8862	0.04052
								11000	28.3	24.05	65.77	0.9087	0.04042
								11500	28.7	24.83	67.56	0.9309	0.04033
								12000	29.0	25.59	69.32	0.9529	0.04024
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	51.70	0.7526	0.04080

	8500	25.9	20.31	53.63	0.7789	0.04068
	9000	26.3	21.19	55.56	0.8050	0.04056
	9500	26.7	22.03	57.47	0.8309	0.04045
	10000	27.1	22.86	59.36	0.8567	0.04033
	10500	27.5	23.67	61.25	0.8823	0.04022
	11000	27.8	24.45	63.12	0.9077	0.04011
	11500	28.2	25.22	64.98	0.9330	0.04000
	12000	28.6	25.96	66.83	0.9581	0.03989
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.24	51.78	0.7305	0.04192
	8500	26.1	20.13	53.73	0.7568	0.04181
	9000	26.5	20.99	55.66	0.7830	0.04170
	9500	26.9	21.83	57.58	0.8090	0.04159
	10000	27.3	22.65	59.48	0.8348	0.04148
	10500	27.7	23.45	61.37	0.8604	0.04137
	11000	28.1	24.23	63.25	0.8858	0.04126
	11500	28.5	24.99	65.12	0.9111	0.04116
	12000	28.9	25.73	66.98	0.9363	0.04105
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.40	48.30	0.9089	0.03534

	8500	24.7	21.28	50.28	0.9462	0.03513
	9000	25.2	22.14	52.25	0.9833	0.03492
	9500	25.6	22.96	54.21	1.0202	0.03471
	10000	26.0	23.76	56.17	1.0571	0.03450
	10500	26.5	24.54	58.12	1.0938	0.03430
	11000	26.9	25.29	60.06	1.1303	0.03409
	11500	27.3	26.02	62.00	1.1668	0.03388
	12000	27.8	26.73	63.93	1.2032	0.03367
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.50	47.68	0.8811	0.03578
	8500	24.6	21.41	49.54	0.9149	0.03562
	9000	25.0	22.29	51.39	0.9484	0.03545
	9500	25.4	23.14	53.23	0.9818	0.03529
	10000	25.8	23.97	55.06	1.0150	0.03513
	10500	26.2	24.77	56.88	1.0480	0.03497
	11000	26.6	25.55	58.69	1.0809	0.03481
	11500	27.0	26.31	60.50	1.1136	0.03465
	12000	27.4	27.05	62.29	1.1462	0.03449

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.06	54.16	0.7638	0.04102
								8500	26.4	19.96	56.03	0.7871	0.04093
								9000	26.7	20.84	57.87	0.8101	0.04083
								9500	27.1	21.70	59.69	0.8329	0.04074
								10000	27.4	22.54	61.50	0.8554	0.04064
								10500	27.8	23.37	63.29	0.8777	0.04055
								11000	28.2	24.17	65.06	0.8998	0.04046
								11500	28.5	24.96	66.82	0.9217	0.04037
								12000	28.9	25.73	68.56	0.9434	0.04028

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.41	51.70	0.7526	0.04080
	8500	25.9	20.31	53.63	0.7789	0.04068
	9000	26.3	21.19	55.56	0.8050	0.04056
	9500	26.7	22.03	57.47	0.8309	0.04045
	10000	27.1	22.86	59.36	0.8567	0.04033
	10500	27.5	23.67	61.25	0.8823	0.04022
	11000	27.8	24.45	63.12	0.9077	0.04011
	11500	28.2	25.22	64.98	0.9330	0.04000
	12000	28.6	25.96	66.83	0.9581	0.03989

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.24	51.78	0.7305	0.04192
	8500	26.1	20.13	53.73	0.7568	0.04181
	9000	26.5	20.99	55.66	0.7830	0.04170
	9500	26.9	21.83	57.58	0.8090	0.04159
	10000	27.3	22.65	59.48	0.8348	0.04148
	10500	27.7	23.45	61.37	0.8604	0.04137
	11000	28.1	24.23	63.25	0.8858	0.04126
	11500	28.5	24.99	65.12	0.9111	0.04116
	12000	28.9	25.73	66.98	0.9363	0.04105

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.45	48.00	0.9033	0.03538
	8500	24.7	21.34	49.97	0.9403	0.03517
	9000	25.1	22.20	51.92	0.9770	0.03496
	9500	25.5	23.03	53.86	1.0137	0.03475
	10000	26.0	23.84	55.80	1.0502	0.03454
	10500	26.4	24.62	57.73	1.0865	0.03434
	11000	26.8	25.38	59.66	1.1228	0.03413
	11500	27.2	26.11	61.58	1.1589	0.03393
	12000	27.7	26.82	63.49	1.1950	0.03372

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.54	47.47	0.8773	0.03580
	8500	24.5	21.45	49.32	0.9109	0.03564
	9000	24.9	22.33	51.16	0.9442	0.03548
	9500	25.4	23.19	52.99	0.9774	0.03531
	10000	25.8	24.02	54.81	1.0104	0.03515
	10500	26.2	24.83	56.61	1.0432	0.03499
	11000	26.6	25.61	58.41	1.0759	0.03483
	11500	27.0	26.37	60.21	1.1084	0.03468
	12000	27.4	27.12	61.99	1.1408	0.03452

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.02	54.73	0.7689	0.04086
								8500	26.4	19.91	56.63	0.7925	0.04077
								9000	26.8	20.79	58.50	0.8157	0.04067
								9500	27.2	21.64	60.35	0.8387	0.04058
								10000	27.5	22.48	62.18	0.8615	0.04048
								10500	27.9	23.30	64.00	0.8841	0.04039
								11000	28.2	24.09	65.80	0.9064	0.04030
								11500	28.6	24.87	67.58	0.9286	0.04021
								12000	29.0	25.64	69.35	0.9506	0.04012
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.45	51.72	0.7508	0.04067
								8500	25.9	20.35	53.65	0.7771	0.04055
								9000	26.2	21.23	55.58	0.8031	0.04044
								9500	26.6	22.08	57.49	0.8290	0.04032
								10000	27.0	22.91	59.39	0.8546	0.04021
								10500	27.4	23.71	61.27	0.8801	0.04009
								11000	27.8	24.50	63.14	0.9055	0.03998
								11500	28.2	25.27	65.01	0.9307	0.03987
								12000	28.5	26.01	66.86	0.9557	0.03976

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.28	51.80	0.7288	0.04178
	8500	26.1	20.17	53.75	0.7551	0.04167
	9000	26.5	21.04	55.68	0.7811	0.04156
	9500	26.9	21.88	57.60	0.8070	0.04146
	10000	27.3	22.70	59.50	0.8327	0.04135
	10500	27.7	23.50	61.40	0.8583	0.04124
	11000	28.0	24.28	63.28	0.8837	0.04113
	11500	28.4	25.04	65.15	0.9089	0.04103
	12000	28.8	25.78	67.01	0.9340	0.04092
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.43	48.32	0.9071	0.03523
	8500	24.7	21.32	50.30	0.9443	0.03502
	9000	25.1	22.18	52.27	0.9812	0.03481
	9500	25.6	23.01	54.24	1.0181	0.03460
	10000	26.0	23.81	56.20	1.0548	0.03439
	10500	26.4	24.59	58.15	1.0914	0.03418
	11000	26.9	25.34	60.09	1.1279	0.03398
	11500	27.3	26.07	62.03	1.1643	0.03377
	12000	27.7	26.78	63.96	1.2005	0.03356

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.54	47.70	0.8793	0.03567
								8500	24.5	21.45	49.56	0.9130	0.03550
								9000	24.9	22.33	51.41	0.9465	0.03534
								9500	25.4	23.18	53.25	0.9797	0.03518
								10000	25.8	24.01	55.08	1.0129	0.03502
								10500	26.2	24.82	56.91	1.0458	0.03486
								11000	26.6	25.60	58.72	1.0786	0.03470
								11500	27.0	26.36	60.52	1.1112	0.03454
								12000	27.4	27.10	62.32	1.1437	0.03438
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.9	19.10	54.18	0.7621	0.04089
								8500	26.3	20.00	56.05	0.7853	0.04080
								9000	26.7	20.88	57.89	0.8082	0.04070
								9500	27.0	21.74	59.72	0.8309	0.04061

	10000	27.4	22.59	61.52	0.8533	0.04052
	10500	27.8	23.41	63.31	0.8755	0.04043
	11000	28.1	24.21	65.09	0.8976	0.04034
	11500	28.5	25.00	66.84	0.9194	0.04025
	12000	28.8	25.77	68.59	0.9411	0.04016
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.45	51.72	0.7508	0.04067
	8500	25.9	20.35	53.65	0.7771	0.04055
	9000	26.2	21.23	55.58	0.8031	0.04044
	9500	26.6	22.08	57.49	0.8290	0.04032

	10000	27.0	22.91	59.39	0.8546	0.04021
	10500	27.4	23.71	61.27	0.8801	0.04009
	11000	27.8	24.50	63.14	0.9055	0.03998
	11500	28.2	25.27	65.01	0.9307	0.03987
	12000	28.5	26.01	66.86	0.9557	0.03976
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.28	51.80	0.7288	0.04178
	8500	26.1	20.17	53.75	0.7551	0.04167
	9000	26.5	21.04	55.68	0.7811	0.04156
	9500	26.9	21.88	57.60	0.8070	0.04146

	10000	27.3	22.70	59.50	0.8327	0.04135
	10500	27.7	23.50	61.40	0.8583	0.04124
	11000	28.0	24.28	63.28	0.8837	0.04113
	11500	28.4	25.04	65.15	0.9089	0.04103
	12000	28.8	25.78	67.01	0.9340	0.04092
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.49	48.03	0.9015	0.03526
	8500	24.6	21.38	49.99	0.9383	0.03505
	9000	25.0	22.24	51.94	0.9750	0.03484
	9500	25.5	23.08	53.89	1.0115	0.03464

		10000	25.9	23.88	55.83	1.0479	0.03443
		10500	26.3	24.67	57.76	1.0842	0.03422
		11000	26.8	25.42	59.69	1.1204	0.03402
		11500	27.2	26.16	61.61	1.1564	0.03381
		12000	27.6	26.87	63.52	1.1924	0.03361
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.58	47.49	0.8755	0.03568
		8500	24.5	21.49	49.34	0.9090	0.03552
		9000	24.9	22.38	51.18	0.9423	0.03536
		9500	25.3	23.23	53.01	0.9753	0.03520

								10000	25.7	24.07	54.83	1.0083	0.03504
								10500	26.1	24.87	56.64	1.0410	0.03488
								11000	26.5	25.66	58.44	1.0736	0.03472
								11500	26.9	26.43	60.23	1.1060	0.03456
								12000	27.3	27.16	62.02	1.1383	0.03441
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.8	17.82	56.08	0.9827	0.04126
								8500	28.3	18.58	58.40	1.0272	0.04105
								9000	28.8	19.31	60.70	1.0714	0.04084
								9500	29.4	20.01	62.99	1.1153	0.04064
								10000	29.9	20.69	65.26	1.1590	0.04044
								10500	30.4	21.35	67.53	1.2025	0.04023
								11000	31.0	21.99	69.78	1.2457	0.04003
								11500	31.5	22.61	72.02	1.2887	0.03983

								12000	32.0	23.21	74.25	1.3315	0.03963
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.78000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.7	17.86	55.83	0.9779	0.04128
								8500	28.3	18.62	58.13	1.0221	0.04107
								9000	28.8	19.35	60.42	1.0660	0.04087
								9500	29.3	20.06	62.69	1.1097	0.04067
								10000	29.8	20.74	64.96	1.1531	0.04046
								10500	30.4	21.40	67.21	1.1963	0.04026
								11000	30.9	22.04	69.44	1.2393	0.04006
								11500	31.4	22.66	71.67	1.2820	0.03986

								12000	31.9	23.27	73.89	1.3246	0.03966
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.67	52.51	1.0688	0.03717
								8500	27.1	19.45	54.66	1.1182	0.03693
								9000	27.6	20.19	56.80	1.1672	0.03669
								9500	28.1	20.91	58.93	1.2160	0.03645
								10000	28.6	21.60	61.04	1.2644	0.03621
								10500	29.2	22.28	63.14	1.3126	0.03597
								11000	29.7	22.93	65.23	1.3606	0.03573
								11500	30.2	23.56	67.31	1.4084	0.03550
								12000	30.7	24.17	69.38	1.4559	0.03526
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.5	18.71	52.28	1.0634	0.03720
								8500	27.0	19.49	54.42	1.1125	0.03696
								9000	27.5	20.24	56.54	1.1612	0.03672

								9500	28.0	20.96	58.65	1.2097	0.03648
								10000	28.6	21.66	60.75	1.2579	0.03624
								10500	29.1	22.34	62.84	1.3058	0.03600
								11000	29.6	22.99	64.92	1.3535	0.03577
								11500	30.1	23.62	66.99	1.4009	0.03553
								12000	30.6	24.24	69.04	1.4481	0.03530
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.7	18.53	53.21	1.0507	0.03788
								8500	27.3	19.30	55.39	1.0991	0.03765
								9000	27.8	20.04	57.56	1.1471	0.03741
								9500	28.3	20.76	59.72	1.1949	0.03718
								10000	28.8	21.45	61.86	1.2423	0.03695
								10500	29.4	22.12	64.00	1.2896	0.03672

								11000	29.9	22.77	66.12	1.3366	0.03649
								11500	30.4	23.40	68.23	1.3833	0.03626
								12000	30.9	24.01	70.33	1.4299	0.03603
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.7	18.57	52.97	1.0454	0.03791
								8500	27.2	19.34	55.14	1.0935	0.03767
								9000	27.7	20.09	57.30	1.1412	0.03744
								9500	28.3	20.81	59.44	1.1887	0.03721
								10000	28.8	21.50	61.57	1.2359	0.03698
								10500	29.3	22.18	63.69	1.2829	0.03675
								11000	29.8	22.83	65.80	1.3296	0.03652

								11500	30.3	23.46	67.90	1.3761	0.03629
								12000	30.8	24.07	69.99	1.4223	0.03607
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.4	18.07	54.78	1.0155	0.03998
								8500	27.9	18.83	57.03	1.0619	0.03976
								9000	28.5	19.56	59.27	1.1080	0.03954
								9500	29.0	20.27	61.50	1.1538	0.03932
								10000	29.5	20.96	63.72	1.1993	0.03910
								10500	30.0	21.62	65.92	1.2446	0.03888
								11000	30.6	22.26	68.12	1.2897	0.03867
								11500	31.1	22.88	70.30	1.3346	0.03845
								12000	31.6	23.49	72.47	1.3792	0.03824
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.80000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.3	18.11	54.53	1.0105	0.04000
								8500	27.9	18.87	56.77	1.0566	0.03978

								9000	28.4	19.61	59.00	1.1024	0.03956
								9500	28.9	20.32	61.22	1.1479	0.03935
								10000	29.5	21.01	63.42	1.1932	0.03913
								10500	30.0	21.67	65.61	1.2382	0.03891
								11000	30.5	22.32	67.79	1.2830	0.03870
								11500	31.0	22.94	69.96	1.3276	0.03849
								12000	31.5	23.55	72.12	1.3720	0.03828
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.3	18.11	54.80	1.0134	0.03985
								8500	27.9	18.87	57.06	1.0597	0.03963
								9000	28.4	19.60	59.30	1.1057	0.03941
								9500	28.9	20.31	61.53	1.1513	0.03919

								10000	29.5	21.00	63.75	1.1968	0.03897
								10500	30.0	21.66	65.95	1.2420	0.03876
								11000	30.5	22.30	68.15	1.2869	0.03854
								11500	31.0	22.92	70.33	1.3317	0.03833
								12000	31.5	23.53	72.50	1.3762	0.03812
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.79000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.3	18.15	54.56	1.0084	0.03987
								8500	27.8	18.91	56.80	1.0544	0.03965
								9000	28.4	19.65	59.03	1.1001	0.03944
								9500	28.9	20.36	61.24	1.1455	0.03922
								10000	29.4	21.05	63.45	1.1906	0.03900
								10500	29.9	21.71	65.64	1.2355	0.03879

								11000	30.4	22.36	67.82	1.2802	0.03858
								11500	31.0	22.99	69.99	1.3247	0.03836
								12000	31.5	23.59	72.15	1.3690	0.03815
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.2	17.58	52.32	0.8084	0.04743
								8500	28.7	18.37	54.54	0.8470	0.04722
								9000	29.1	19.12	56.76	0.8854	0.04701
								9500	29.6	19.86	58.97	0.9237	0.04680
								10000	30.1	20.57	61.17	0.9618	0.04659
								10500	30.6	21.26	63.36	0.9998	0.04638
								11000	31.1	21.93	65.55	1.0376	0.04618
								11500	31.5	22.58	67.73	1.0754	0.04597
								12000	32.0	23.21	69.90	1.1130	0.04576
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.1	17.64	51.70	0.7853	0.04786
								8500	28.5	18.44	53.80	0.8205	0.04769
								9000	29.0	19.22	55.89	0.8555	0.04753

								9500	29.5	19.97	57.96	0.8902	0.04737
								10000	29.9	20.70	60.03	0.9248	0.04721
								10500	30.4	21.41	62.09	0.9593	0.04705
								11000	30.8	22.10	64.13	0.9935	0.04690
								11500	31.3	22.77	66.17	1.0276	0.04674
								12000	31.7	23.43	68.20	1.0616	0.04658
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.2	17.58	52.32	0.8084	0.04743
								8500	28.7	18.37	54.54	0.8470	0.04722
								9000	29.1	19.12	56.76	0.8854	0.04701
								9500	29.6	19.86	58.97	0.9237	0.04680
								10000	30.1	20.57	61.17	0.9618	0.04659
								10500	30.6	21.26	63.36	0.9998	0.04638

	11000	31.1	21.93	65.55	1.0376	0.04618
	11500	31.5	22.58	67.73	1.0754	0.04597
	12000	32.0	23.21	69.90	1.1130	0.04576
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.1	17.64	51.70	0.7853	0.04786
	8500	28.5	18.44	53.80	0.8205	0.04769
	9000	29.0	19.22	55.89	0.8555	0.04753
	9500	29.5	19.97	57.96	0.8902	0.04737
	10000	29.9	20.70	60.03	0.9248	0.04721
	10500	30.4	21.41	62.09	0.9593	0.04705

								11000	30.8	22.10	64.13	0.9935	0.04690
								11500	31.3	22.77	66.17	1.0276	0.04674
								12000	31.7	23.43	68.20	1.0616	0.04658
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.3	18.18	50.61	0.8470	0.04457
								8500	27.7	18.98	52.75	0.8880	0.04434
								9000	28.2	19.75	54.89	0.9288	0.04411
								9500	28.7	20.50	57.01	0.9694	0.04388
								10000	29.2	21.22	59.13	1.0099	0.04366
								10500	29.6	21.92	61.24	1.0503	0.04343
								11000	30.1	22.61	63.34	1.0905	0.04320
								11500	30.6	23.27	65.44	1.1306	0.04298
								12000	31.1	23.91	67.53	1.1706	0.04276
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.1	18.25	50.06	0.8215	0.04499
								8500	27.6	19.06	52.08	0.8588	0.04482
								9000	28.1	19.86	54.09	0.8960	0.04464

								9500	28.5	20.62	56.09	0.9330	0.04446
								10000	29.0	21.37	58.09	0.9697	0.04428
								10500	29.4	22.09	60.07	1.0063	0.04411
								11000	29.9	22.79	62.04	1.0427	0.04394
								11500	30.3	23.48	64.00	1.0789	0.04376
								12000	30.8	24.14	65.95	1.1150	0.04359
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.3	18.18	50.61	0.8470	0.04457
								8500	27.7	18.98	52.75	0.8880	0.04434
								9000	28.2	19.75	54.89	0.9288	0.04411
								9500	28.7	20.50	57.01	0.9694	0.04388
								10000	29.2	21.22	59.13	1.0099	0.04366
								10500	29.6	21.92	61.24	1.0503	0.04343

	11000	30.1	22.61	63.34	1.0905	0.04320
	11500	30.6	23.27	65.44	1.1306	0.04298
	12000	31.1	23.91	67.53	1.1706	0.04276
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.1	18.25	50.06	0.8215	0.04499
	8500	27.6	19.06	52.08	0.8588	0.04482
	9000	28.1	19.86	54.09	0.8960	0.04464
	9500	28.5	20.62	56.09	0.9330	0.04446
	10000	29.0	21.37	58.09	0.9697	0.04428
	10500	29.4	22.09	60.07	1.0063	0.04411

								11000	29.9	22.79	62.04	1.0427	0.04394
								11500	30.3	23.48	64.00	1.0789	0.04376
								12000	30.8	24.14	65.95	1.1150	0.04359
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.2	18.94	55.76	0.6029	0.04409
								8500	26.5	19.83	57.74	0.6238	0.04402
								9000	26.9	20.71	59.69	0.6445	0.04395
								9500	27.3	21.56	61.62	0.6650	0.04388
								10000	27.6	22.39	63.54	0.6853	0.04381
								10500	28.0	23.20	65.43	0.7054	0.04374
								11000	28.4	24.00	67.31	0.7253	0.04367
								11500	28.7	24.77	69.17	0.7451	0.04360
								12000	29.1	25.53	71.02	0.7646	0.04354
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.44	52.37	0.5850	0.04381
								8500	25.9	20.34	54.37	0.6081	0.04372
								9000	26.3	21.21	56.36	0.6310	0.04363

	9500	26.7	22.06	58.33	0.6538	0.04355
	10000	27.0	22.90	60.29	0.6764	0.04346
	10500	27.4	23.70	62.24	0.6989	0.04338
	11000	27.8	24.49	64.17	0.7212	0.04329
	11500	28.2	25.26	66.09	0.7434	0.04321
	12000	28.5	26.01	68.00	0.7655	0.04313
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.29	50.46	0.7263	0.03852
	8500	24.9	21.17	52.57	0.7600	0.03834
	9000	25.3	22.01	54.68	0.7936	0.03817
	9500	25.7	22.83	56.78	0.8270	0.03799
	10000	26.2	23.63	58.87	0.8603	0.03782
	10500	26.6	24.39	60.95	0.8936	0.03765
	11000	27.1	25.14	63.02	0.9267	0.03747
	11500	27.5	25.86	65.09	0.9597	0.03730
	12000	27.9	26.56	67.16	0.9926	0.03713
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.3	20.40	49.69	0.7015	0.03894
	8500	24.7	21.30	51.67	0.7321	0.03881
	9000	25.1	22.17	53.64	0.7624	0.03868

								9500	25.5	23.01	55.61	0.7926	0.03855
								10000	26.0	23.83	57.56	0.8226	0.03842
								10500	26.4	24.63	59.50	0.8524	0.03829
								11000	26.8	25.40	61.43	0.8822	0.03816
								11500	27.2	26.16	63.36	0.9117	0.03803
								12000	27.6	26.88	65.27	0.9412	0.03791
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.02	55.18	0.5967	0.04411
								8500	26.4	19.92	57.13	0.6174	0.04404
								9000	26.8	20.80	59.05	0.6378	0.04397
								9500	27.1	21.66	60.96	0.6580	0.04390
								10000	27.5	22.50	62.84	0.6780	0.04383
								10500	27.9	23.32	64.71	0.6978	0.04377

		11000	28.2	24.12	66.56	0.7174	0.04370
		11500	28.6	24.90	68.40	0.7368	0.04363
		12000	28.9	25.67	70.21	0.7561	0.04357
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.44	52.37	0.5850	0.04381
		8500	25.9	20.34	54.37	0.6081	0.04372
		9000	26.3	21.21	56.36	0.6310	0.04363
		9500	26.7	22.06	58.33	0.6538	0.04355
		10000	27.0	22.90	60.29	0.6764	0.04346
		10500	27.4	23.70	62.24	0.6989	0.04338

	11000	27.8	24.49	64.17	0.7212	0.04329
	11500	28.2	25.26	66.09	0.7434	0.04321
	12000	28.5	26.01	68.00	0.7655	0.04313
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.3	20.34	50.14	0.7212	0.03855
	8500	24.8	21.23	52.24	0.7546	0.03837
	9000	25.2	22.08	54.32	0.7879	0.03820
	9500	25.7	22.91	56.40	0.8211	0.03802
	10000	26.1	23.70	58.47	0.8541	0.03785
	10500	26.5	24.48	60.54	0.8870	0.03768

	11000	27.0	25.22	62.60	0.9198	0.03751
	11500	27.4	25.95	64.65	0.9525	0.03734
	12000	27.8	26.66	66.69	0.9851	0.03717
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.2	20.44	49.46	0.6981	0.03895
	8500	24.7	21.34	51.44	0.7285	0.03882
	9000	25.1	22.22	53.40	0.7586	0.03869
	9500	25.5	23.07	55.35	0.7886	0.03856
	10000	25.9	23.89	57.29	0.8184	0.03844
	10500	26.3	24.69	59.22	0.8481	0.03831

								11000	26.7	25.46	61.14	0.8776	0.03818
								11500	27.1	26.22	63.05	0.9070	0.03805
								12000	27.5	26.95	64.95	0.9363	0.03793
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.17	53.31	0.6483	0.03937
								8500	24.9	21.11	55.19	0.6719	0.03927
								9000	25.3	22.02	57.04	0.6953	0.03918
								9500	25.7	22.90	58.87	0.7185	0.03909
								10000	26.0	23.77	60.69	0.7414	0.03901
								10500	26.4	24.61	62.49	0.7640	0.03892
								11000	26.8	25.44	64.27	0.7865	0.03883
								11500	27.1	26.24	66.04	0.8088	0.03875
								12000	27.5	27.03	67.79	0.8309	0.03866
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	49.94	0.6310	0.03919
								8500	24.3	21.64	51.83	0.6570	0.03908
								9000	24.7	22.55	53.71	0.6829	0.03897

	9500	25.1	23.43	55.58	0.7086	0.03887
	10000	25.5	24.30	57.43	0.7341	0.03876
	10500	25.8	25.14	59.27	0.7594	0.03865
	11000	26.2	25.95	61.10	0.7846	0.03855
	11500	26.6	26.75	62.92	0.8096	0.03844
	12000	27.0	27.53	64.72	0.8344	0.03834
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.46	50.17	0.6165	0.04023
	8500	24.6	21.39	52.08	0.6428	0.04013
	9000	25.0	22.29	53.98	0.6688	0.04002
	9500	25.4	23.16	55.86	0.6947	0.03992
	10000	25.8	24.01	57.73	0.7204	0.03982
	10500	26.2	24.84	59.59	0.7459	0.03972
	11000	26.5	25.65	61.43	0.7713	0.03962
	11500	26.9	26.43	63.26	0.7965	0.03952
	12000	27.3	27.20	65.09	0.8215	0.03942
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.9	21.58	47.59	0.7923	0.03394
	8500	23.4	22.49	49.56	0.8299	0.03374
	9000	23.8	23.37	51.53	0.8672	0.03353

								9500	24.3	24.22	53.49	0.9045	0.03333
								10000	24.7	25.04	55.44	0.9416	0.03313
								10500	25.2	25.83	57.39	0.9786	0.03293
								11000	25.6	26.59	59.33	1.0154	0.03273
								11500	26.0	27.33	61.26	1.0522	0.03253
								12000	26.5	28.05	63.19	1.0888	0.03233
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	22.8	21.72	46.94	0.7632	0.03437
								8500	23.2	22.65	48.79	0.7972	0.03421
								9000	23.6	23.56	50.64	0.8310	0.03406
								9500	24.1	24.43	52.48	0.8646	0.03390
								10000	24.5	25.28	54.30	0.8981	0.03375
								10500	24.9	26.10	56.12	0.9313	0.03359
								11000	25.3	26.90	57.93	0.9645	0.03344
								11500	25.7	27.67	59.73	0.9974	0.03329
								12000	26.1	28.43	61.52	1.0302	0.03313
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.4	20.26	52.76	0.6413	0.03939

	8500	24.8	21.20	54.61	0.6646	0.03930
	9000	25.2	22.12	56.43	0.6877	0.03921
	9500	25.5	23.01	58.24	0.7105	0.03913
	10000	25.9	23.89	60.03	0.7331	0.03904
	10500	26.3	24.74	61.80	0.7554	0.03895
	11000	26.6	25.57	63.56	0.7776	0.03887
	11500	27.0	26.39	65.30	0.7995	0.03878
	12000	27.3	27.18	67.03	0.8213	0.03870
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	23.9	20.70	49.94	0.6310	0.03919

	8500	24.3	21.64	51.83	0.6570	0.03908
	9000	24.7	22.55	53.71	0.6829	0.03897
	9500	25.1	23.43	55.58	0.7086	0.03887
	10000	25.5	24.30	57.43	0.7341	0.03876
	10500	25.8	25.14	59.27	0.7594	0.03865
	11000	26.2	25.95	61.10	0.7846	0.03855
	11500	26.6	26.75	62.92	0.8096	0.03844
	12000	27.0	27.53	64.72	0.8344	0.03834
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.46	50.17	0.6165	0.04023

	8500	24.6	21.39	52.08	0.6428	0.04013
	9000	25.0	22.29	53.98	0.6688	0.04002
	9500	25.4	23.16	55.86	0.6947	0.03992
	10000	25.8	24.01	57.73	0.7204	0.03982
	10500	26.2	24.84	59.59	0.7459	0.03972
	11000	26.5	25.65	61.43	0.7713	0.03962
	11500	26.9	26.43	63.26	0.7965	0.03952
	12000	27.3	27.20	65.09	0.8215	0.03942
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.9	21.65	47.29	0.7867	0.03397

	8500	23.3	22.56	49.25	0.8239	0.03377
	9000	23.8	23.44	51.20	0.8609	0.03357
	9500	24.2	24.30	53.14	0.8978	0.03337
	10000	24.6	25.12	55.08	0.9346	0.03317
	10500	25.1	25.92	57.00	0.9713	0.03297
	11000	25.5	26.69	58.93	1.0078	0.03277
	11500	25.9	27.43	60.84	1.0442	0.03257
	12000	26.4	28.16	62.75	1.0806	0.03237
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	22.8	21.76	46.73	0.7594	0.03439

								8500	23.2	22.70	48.57	0.7932	0.03423
								9000	23.6	23.61	50.41	0.8268	0.03408
								9500	24.0	24.49	52.24	0.8602	0.03392
								10000	24.4	25.34	54.05	0.8934	0.03377
								10500	24.8	26.17	55.86	0.9265	0.03361
								11000	25.2	26.97	57.65	0.9594	0.03346
								11500	25.6	27.74	59.44	0.9921	0.03331
								12000	26.0	28.50	61.22	1.0248	0.03316
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.86	53.75	0.6418	0.04047
								8500	25.3	20.79	55.64	0.6651	0.04038

	9000	25.7	21.69	57.51	0.6881	0.04029
	9500	26.1	22.56	59.37	0.7108	0.04021
	10000	26.4	23.42	61.20	0.7334	0.04012
	10500	26.8	24.25	63.02	0.7557	0.04004
	11000	27.1	25.07	64.82	0.7778	0.03995
	11500	27.5	25.87	66.60	0.7997	0.03987
	12000	27.9	26.65	68.37	0.8214	0.03979
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.38	50.37	0.6243	0.04028
	8500	24.7	21.31	52.29	0.6499	0.04017
	9000	25.1	22.21	54.18	0.6753	0.04007
	9500	25.5	23.09	56.07	0.7006	0.03996
	10000	25.8	23.94	57.94	0.7257	0.03986
	10500	26.2	24.78	59.80	0.7506	0.03975
	11000	26.6	25.58	61.65	0.7753	0.03965
	11500	27.0	26.37	63.48	0.7999	0.03955
	12000	27.4	27.14	65.31	0.8244	0.03945
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.15	50.61	0.6099	0.04132
	8500	25.0	21.06	52.54	0.6357	0.04122

	9000	25.4	21.96	54.45	0.6614	0.04112
	9500	25.8	22.82	56.35	0.6868	0.04102
	10000	26.2	23.67	58.24	0.7121	0.04092
	10500	26.5	24.49	60.12	0.7372	0.04082
	11000	26.9	25.29	61.98	0.7621	0.04073
	11500	27.3	26.07	63.83	0.7869	0.04063
	12000	27.7	26.83	65.67	0.8116	0.04053
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.3	21.26	48.10	0.7820	0.03500
	8500	23.7	22.16	50.10	0.8190	0.03480
	9000	24.2	23.03	52.09	0.8558	0.03460
	9500	24.6	23.87	54.08	0.8925	0.03440
	10000	25.1	24.68	56.06	0.9290	0.03420
	10500	25.5	25.46	58.03	0.9655	0.03401
	11000	25.9	26.23	59.99	1.0018	0.03381
	11500	26.4	26.96	61.95	1.0379	0.03361
	12000	26.8	27.68	63.90	1.0740	0.03342
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.38	47.43	0.7537	0.03543
	8500	23.6	22.31	49.31	0.7872	0.03527

								9000	24.0	23.21	51.18	0.8204	0.03512
								9500	24.4	24.08	53.04	0.8536	0.03497
								10000	24.8	24.92	54.89	0.8865	0.03482
								10500	25.2	25.73	56.73	0.9192	0.03467
								11000	25.7	26.52	58.56	0.9519	0.03452
								11500	26.1	27.29	60.38	0.9843	0.03437
								12000	26.5	28.04	62.20	1.0166	0.03422
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.8	19.95	53.19	0.6350	0.04050
								8500	25.2	20.88	55.06	0.6579	0.04041
								9000	25.6	21.79	56.90	0.6806	0.04032
								9500	25.9	22.67	58.73	0.7030	0.04024
								10000	26.3	23.54	60.53	0.7252	0.04015

		10500	26.6	24.38	62.32	0.7472	0.04007
		11000	27.0	25.21	64.10	0.7689	0.03999
		11500	27.4	26.01	65.85	0.7905	0.03991
		12000	27.7	26.80	67.60	0.8119	0.03982
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.3	20.38	50.37	0.6243	0.04028
		8500	24.7	21.31	52.29	0.6499	0.04017
		9000	25.1	22.21	54.18	0.6753	0.04007
		9500	25.5	23.09	56.07	0.7006	0.03996
		10000	25.8	23.94	57.94	0.7257	0.03986

		10500	26.2	24.78	59.80	0.7506	0.03975
		11000	26.6	25.58	61.65	0.7753	0.03965
		11500	27.0	26.37	63.48	0.7999	0.03955
		12000	27.4	27.14	65.31	0.8244	0.03945
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.15	50.61	0.6099	0.04132
		8500	25.0	21.06	52.54	0.6357	0.04122
		9000	25.4	21.96	54.45	0.6614	0.04112
		9500	25.8	22.82	56.35	0.6868	0.04102
		10000	26.2	23.67	58.24	0.7121	0.04092

	10500	26.5	24.49	60.12	0.7372	0.04082
	11000	26.9	25.29	61.98	0.7621	0.04073
	11500	27.3	26.07	63.83	0.7869	0.04063
	12000	27.7	26.83	65.67	0.8116	0.04053
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.2	21.32	47.80	0.7765	0.03503
	8500	23.7	22.23	49.78	0.8131	0.03483
	9000	24.1	23.10	51.76	0.8496	0.03463
	9500	24.6	23.95	53.73	0.8860	0.03444
	10000	25.0	24.76	55.69	0.9222	0.03424

	10500	25.4	25.56	57.64	0.9583	0.03404
	11000	25.9	26.32	59.59	0.9943	0.03385
	11500	26.3	27.06	61.53	1.0301	0.03365
	12000	26.7	27.78	63.46	1.0659	0.03346
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.43	47.22	0.7499	0.03544
	8500	23.5	22.36	49.09	0.7832	0.03529
	9000	23.9	23.26	50.95	0.8163	0.03514
	9500	24.4	24.13	52.79	0.8492	0.03499
	10000	24.8	24.98	54.63	0.8819	0.03484

								10500	25.2	25.79	56.46	0.9145	0.03469
								11000	25.6	26.59	58.28	0.9469	0.03454
								11500	26.0	27.36	60.09	0.9791	0.03439
								12000	26.4	28.11	61.89	1.0112	0.03424
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.30	54.85	0.6212	0.04263
								8500	26.0	20.20	56.79	0.6433	0.04255
								9000	26.4	21.09	58.71	0.6651	0.04247
								9500	26.8	21.95	60.61	0.6866	0.04239
								10000	27.2	22.79	62.49	0.7080	0.04232
								10500	27.5	23.61	64.35	0.7291	0.04224
								11000	27.9	24.41	66.19	0.7501	0.04217
								11500	28.2	25.20	68.01	0.7708	0.04209
								12000	28.6	25.97	69.83	0.7914	0.04202
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.80	51.47	0.6034	0.04239

	8500	25.4	20.71	53.43	0.6277	0.04229
	9000	25.8	21.60	55.38	0.6518	0.04220
	9500	26.2	22.46	57.31	0.6758	0.04210
	10000	26.6	23.30	59.23	0.6996	0.04201
	10500	26.9	24.12	61.14	0.7232	0.04191
	11000	27.3	24.91	63.04	0.7467	0.04182
	11500	27.7	25.69	64.92	0.7700	0.04173
	12000	28.1	26.45	66.79	0.7932	0.04164
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.58	51.71	0.5893	0.04343
	8500	25.7	20.48	53.68	0.6138	0.04334
	9000	26.1	21.36	55.65	0.6382	0.04325
	9500	26.5	22.21	57.60	0.6623	0.04316
	10000	26.9	23.04	59.53	0.6863	0.04307
	10500	27.3	23.84	61.46	0.7101	0.04298
	11000	27.6	24.63	63.37	0.7337	0.04289
	11500	28.0	25.40	65.27	0.7573	0.04281
	12000	28.4	26.15	67.16	0.7807	0.04272
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.67	49.40	0.7521	0.03709

	8500	24.4	21.55	51.46	0.7874	0.03690
	9000	24.9	22.41	53.52	0.8225	0.03672
	9500	25.3	23.24	55.56	0.8574	0.03653
	10000	25.7	24.03	57.60	0.8923	0.03635
	10500	26.2	24.81	59.64	0.9270	0.03616
	11000	26.6	25.56	61.66	0.9616	0.03598
	11500	27.1	26.29	63.68	0.9961	0.03579
	12000	27.5	26.99	65.69	1.0305	0.03561
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.78	48.67	0.7257	0.03751
	8500	24.3	21.69	50.61	0.7576	0.03737
	9000	24.7	22.57	52.54	0.7894	0.03723
	9500	25.1	23.43	54.45	0.8209	0.03709
	10000	25.5	24.26	56.36	0.8523	0.03695
	10500	25.9	25.06	58.25	0.8835	0.03681
	11000	26.3	25.84	60.14	0.9146	0.03667
	11500	26.8	26.59	62.02	0.9456	0.03654
	12000	27.2	27.33	63.89	0.9764	0.03640

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.6	19.38	54.28	0.6148	0.04265
								8500	25.9	20.30	56.20	0.6365	0.04257
								9000	26.3	21.18	58.09	0.6580	0.04250
								9500	26.7	22.05	59.95	0.6792	0.04242
								10000	27.0	22.90	61.80	0.7002	0.04234
								10500	27.4	23.73	63.64	0.7211	0.04227
								11000	27.7	24.54	65.45	0.7417	0.04220
								11500	28.1	25.33	67.25	0.7622	0.04212
								12000	28.4	26.11	69.04	0.7825	0.04205

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.80	51.47	0.6034	0.04239
	8500	25.4	20.71	53.43	0.6277	0.04229
	9000	25.8	21.60	55.38	0.6518	0.04220
	9500	26.2	22.46	57.31	0.6758	0.04210
	10000	26.6	23.30	59.23	0.6996	0.04201
	10500	26.9	24.12	61.14	0.7232	0.04191
	11000	27.3	24.91	63.04	0.7467	0.04182
	11500	27.7	25.69	64.92	0.7700	0.04173
	12000	28.1	26.45	66.79	0.7932	0.04164

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.58	51.71	0.5893	0.04343
	8500	25.7	20.48	53.68	0.6138	0.04334
	9000	26.1	21.36	55.65	0.6382	0.04325
	9500	26.5	22.21	57.60	0.6623	0.04316
	10000	26.9	23.04	59.53	0.6863	0.04307
	10500	27.3	23.84	61.46	0.7101	0.04298
	11000	27.6	24.63	63.37	0.7337	0.04289
	11500	28.0	25.40	65.27	0.7573	0.04281
	12000	28.4	26.15	67.16	0.7807	0.04272

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.9	20.72	49.09	0.7468	0.03712
	8500	24.3	21.62	51.14	0.7818	0.03693
	9000	24.8	22.48	53.17	0.8165	0.03675
	9500	25.2	23.31	55.20	0.8512	0.03656
	10000	25.7	24.11	57.22	0.8857	0.03638
	10500	26.1	24.89	59.24	0.9202	0.03620
	11000	26.5	25.65	61.24	0.9545	0.03601
	11500	27.0	26.38	63.25	0.9887	0.03583
	12000	27.4	27.09	65.24	1.0228	0.03565

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.82	48.46	0.7221	0.03753
	8500	24.2	21.74	50.38	0.7539	0.03739
	9000	24.6	22.62	52.30	0.7854	0.03725
	9500	25.0	23.48	54.20	0.8168	0.03711
	10000	25.5	24.31	56.09	0.8480	0.03697
	10500	25.9	25.12	57.98	0.8790	0.03683
	11000	26.3	25.90	59.85	0.9099	0.03670
	11500	26.7	26.66	61.72	0.9406	0.03656
	12000	27.1	27.40	63.58	0.9712	0.03642

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.6	19.34	54.87	0.6196	0.04250
								8500	26.0	20.24	56.81	0.6416	0.04242
								9000	26.4	21.13	58.73	0.6633	0.04234
								9500	26.7	21.99	60.63	0.6848	0.04226
								10000	27.1	22.83	62.51	0.7061	0.04219
								10500	27.5	23.66	64.37	0.7271	0.04211
								11000	27.8	24.46	66.21	0.7480	0.04204
								11500	28.2	25.25	68.04	0.7687	0.04196
								12000	28.5	26.02	69.85	0.7892	0.04189
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.84	51.49	0.6019	0.04226
								8500	25.4	20.76	53.45	0.6261	0.04216
								9000	25.7	21.64	55.40	0.6501	0.04206
								9500	26.1	22.51	57.33	0.6740	0.04197
								10000	26.5	23.35	59.26	0.6977	0.04188
								10500	26.9	24.17	61.16	0.7213	0.04178
								11000	27.3	24.96	63.06	0.7447	0.04169
								11500	27.6	25.74	64.94	0.7679	0.04160
								12000	28.0	26.50	66.82	0.7910	0.04151

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.62	51.72	0.5878	0.04329
	8500	25.6	20.52	53.70	0.6122	0.04320
	9000	26.0	21.40	55.67	0.6365	0.04311
	9500	26.4	22.25	57.62	0.6605	0.04302
	10000	26.8	23.08	59.56	0.6844	0.04294
	10500	27.2	23.89	61.48	0.7082	0.04285
	11000	27.6	24.68	63.39	0.7317	0.04276
	11500	28.0	25.45	65.29	0.7552	0.04267
	12000	28.3	26.20	67.18	0.7785	0.04259
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.9	20.71	49.42	0.7505	0.03697
	8500	24.4	21.60	51.49	0.7856	0.03678
	9000	24.8	22.45	53.54	0.8206	0.03660
	9500	25.3	23.28	55.59	0.8555	0.03641
	10000	25.7	24.08	57.63	0.8902	0.03623
	10500	26.1	24.86	59.66	0.9248	0.03604
	11000	26.6	25.61	61.69	0.9594	0.03586
	11500	27.0	26.34	63.71	0.9938	0.03568
	12000	27.4	27.04	65.72	1.0281	0.03550

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.8	20.82	48.69	0.7241	0.03739
								8500	24.2	21.74	50.63	0.7559	0.03725
								9000	24.6	22.62	52.56	0.7876	0.03711
								9500	25.0	23.47	54.47	0.8190	0.03697
								10000	25.5	24.30	56.38	0.8503	0.03683
								10500	25.9	25.10	58.28	0.8815	0.03670
								11000	26.3	25.89	60.17	0.9125	0.03656
								11500	26.7	26.65	62.05	0.9433	0.03642
								12000	27.1	27.38	63.92	0.9740	0.03629
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.5	19.42	54.30	0.6132	0.04252
								8500	25.9	20.34	56.22	0.6348	0.04244
								9000	26.2	21.23	58.11	0.6562	0.04237
								9500	26.6	22.10	59.98	0.6774	0.04229

	10000	27.0	22.95	61.83	0.6984	0.04221
	10500	27.3	23.78	63.66	0.7191	0.04214
	11000	27.7	24.59	65.48	0.7397	0.04207
	11500	28.0	25.38	67.28	0.7601	0.04199
	12000	28.4	26.16	69.06	0.7803	0.04192
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.0	19.84	51.49	0.6019	0.04226
	8500	25.4	20.76	53.45	0.6261	0.04216
	9000	25.7	21.64	55.40	0.6501	0.04206
	9500	26.1	22.51	57.33	0.6740	0.04197

	10000	26.5	23.35	59.26	0.6977	0.04188
	10500	26.9	24.17	61.16	0.7213	0.04178
	11000	27.3	24.96	63.06	0.7447	0.04169
	11500	27.6	25.74	64.94	0.7679	0.04160
	12000	28.0	26.50	66.82	0.7910	0.04151
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.62	51.72	0.5878	0.04329
	8500	25.6	20.52	53.70	0.6122	0.04320
	9000	26.0	21.40	55.67	0.6365	0.04311
	9500	26.4	22.25	57.62	0.6605	0.04302

	10000	26.8	23.08	59.56	0.6844	0.04294
	10500	27.2	23.89	61.48	0.7082	0.04285
	11000	27.6	24.68	63.39	0.7317	0.04276
	11500	28.0	25.45	65.29	0.7552	0.04267
	12000	28.3	26.20	67.18	0.7785	0.04259
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.8	20.76	49.11	0.7452	0.03700
	8500	24.3	21.66	51.16	0.7800	0.03681
	9000	24.7	22.52	53.19	0.8147	0.03663
	9500	25.2	23.35	55.22	0.8493	0.03645

	10000	25.6	24.16	57.25	0.8837	0.03626
	10500	26.0	24.94	59.26	0.9180	0.03608
	11000	26.5	25.70	61.27	0.9522	0.03590
	11500	26.9	26.43	63.27	0.9863	0.03572
	12000	27.4	27.14	65.27	1.0203	0.03554
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.7	20.86	48.48	0.7205	0.03741
	8500	24.2	21.78	50.40	0.7522	0.03727
	9000	24.6	22.67	52.32	0.7836	0.03713
	9500	25.0	23.53	54.22	0.8149	0.03699

								10000	25.4	24.36	56.12	0.8460	0.03685
								10500	25.8	25.16	58.00	0.8769	0.03672
								11000	26.2	25.95	59.88	0.9077	0.03658
								11500	26.6	26.71	61.74	0.9384	0.03644
								12000	27.0	27.45	63.60	0.9689	0.03631
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.6	17.96	57.39	0.8309	0.04317
								8500	28.1	18.71	59.80	0.8733	0.04299
								9000	28.7	19.43	62.19	0.9154	0.04281
								9500	29.2	20.13	64.57	0.9572	0.04263
								10000	29.7	20.81	66.94	0.9988	0.04245
								10500	30.3	21.46	69.30	1.0402	0.04228
								11000	30.8	22.10	71.64	1.0813	0.04210
								11500	31.3	22.71	73.97	1.1223	0.04193

								12000	31.8	23.31	76.29	1.1631	0.04175
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.5	17.99	57.12	0.8263	0.04319
								8500	28.1	18.75	59.52	0.8684	0.04301
								9000	28.6	19.48	61.90	0.9102	0.04283
								9500	29.1	20.18	64.27	0.9518	0.04266
								10000	29.7	20.86	66.62	0.9932	0.04248
								10500	30.2	21.52	68.96	1.0343	0.04230
								11000	30.7	22.16	71.29	1.0752	0.04213
								11500	31.2	22.78	73.61	1.1159	0.04195

								12000	31.8	23.37	75.91	1.1564	0.04178
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.1	18.97	54.00	0.9088	0.03854
								8500	26.6	19.74	56.24	0.9556	0.03833
								9000	27.2	20.49	58.48	1.0020	0.03811
								9500	27.7	21.21	60.70	1.0482	0.03790
								10000	28.2	21.91	62.91	1.0941	0.03769
								10500	28.8	22.58	65.10	1.1397	0.03749
								11000	29.3	23.22	67.29	1.1852	0.03728
								11500	29.8	23.85	69.47	1.2304	0.03707
								12000	30.3	24.46	71.63	1.2754	0.03687
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.0	19.01	53.75	0.9037	0.03856
								8500	26.6	19.79	55.99	0.9502	0.03835
								9000	27.1	20.54	58.21	0.9963	0.03814

								9500	27.6	21.26	60.41	1.0422	0.03793
								10000	28.2	21.96	62.61	1.0879	0.03772
								10500	28.7	22.63	64.79	1.1332	0.03752
								11000	29.2	23.29	66.96	1.1784	0.03731
								11500	29.7	23.92	69.13	1.2233	0.03710
								12000	30.3	24.53	71.28	1.2681	0.03690
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.5	18.71	54.61	0.8967	0.03963
								8500	27.0	19.48	56.88	0.9428	0.03942
								9000	27.5	20.22	59.15	0.9886	0.03921
								9500	28.1	20.93	61.40	1.0341	0.03901
								10000	28.6	21.62	63.63	1.0794	0.03880
								10500	29.1	22.29	65.86	1.1244	0.03860

								11000	29.7	22.94	68.07	1.1692	0.03840
								11500	30.2	23.56	70.27	1.2138	0.03819
								12000	30.7	24.17	72.47	1.2582	0.03799
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.4	18.75	54.36	0.8917	0.03965
								8500	26.9	19.52	56.62	0.9375	0.03944
								9000	27.5	20.27	58.87	0.9830	0.03924
								9500	28.0	20.99	61.11	1.0283	0.03903
								10000	28.5	21.68	63.33	1.0733	0.03883
								10500	29.1	22.35	65.54	1.1180	0.03863
								11000	29.6	23.00	67.74	1.1626	0.03843

								11500	30.1	23.62	69.93	1.2069	0.03823
								12000	30.6	24.23	72.11	1.2510	0.03803
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.24	56.14	0.8614	0.04175
								8500	27.7	19.00	58.49	0.9056	0.04155
								9000	28.2	19.73	60.82	0.9494	0.04136
								9500	28.8	20.44	63.15	0.9930	0.04117
								10000	29.3	21.12	65.45	1.0363	0.04098
								10500	29.8	21.78	67.75	1.0794	0.04079
								11000	30.4	22.42	70.04	1.1223	0.04060
								11500	30.9	23.04	72.31	1.1650	0.04041
								12000	31.4	23.64	74.57	1.2075	0.04022
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.1	18.28	55.88	0.8566	0.04177
								8500	27.6	19.04	58.22	0.9005	0.04158

								9000	28.2	19.78	60.54	0.9441	0.04138
								9500	28.7	20.49	62.85	0.9874	0.04119
								10000	29.2	21.18	65.14	1.0305	0.04100
								10500	29.8	21.84	67.42	1.0733	0.04082
								11000	30.3	22.48	69.70	1.1159	0.04063
								11500	30.8	23.10	71.96	1.1583	0.04044
								12000	31.3	23.70	74.21	1.2006	0.04026
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.1	18.28	56.16	0.8595	0.04161
								8500	27.6	19.04	58.51	0.9035	0.04142
								9000	28.2	19.77	60.85	0.9472	0.04123
								9500	28.7	20.48	63.17	0.9907	0.04104

								10000	29.2	21.16	65.48	1.0339	0.04085
								10500	29.8	21.82	67.78	1.0769	0.04066
								11000	30.3	22.46	70.07	1.1197	0.04047
								11500	30.8	23.08	72.34	1.1622	0.04028
								12000	31.3	23.68	74.61	1.2046	0.04010
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	3.73	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.0	18.32	55.90	0.8547	0.04163
								8500	27.6	19.08	58.24	0.8984	0.04144
								9000	28.1	19.82	60.56	0.9419	0.04125
								9500	28.6	20.53	62.87	0.9851	0.04106
								10000	29.2	21.22	65.17	1.0281	0.04087
								10500	29.7	21.88	67.45	1.0708	0.04069

								11000	30.2	22.52	69.73	1.1133	0.04050
								11500	30.7	23.14	71.99	1.1556	0.04031
								12000	31.3	23.75	74.24	1.1977	0.04013
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.4	17.46	51.36	0.9665	0.04527
								8500	28.9	18.24	53.50	1.0066	0.04504
								9000	29.3	19.00	55.64	1.0466	0.04481
								9500	29.8	19.73	57.77	1.0864	0.04458
								10000	30.3	20.44	59.90	1.1261	0.04435
								10500	30.7	21.14	62.01	1.1656	0.04412
								11000	31.2	21.81	64.12	1.2051	0.04389
								11500	31.7	22.46	66.22	1.2444	0.04367
								12000	32.1	23.10	68.32	1.2835	0.04344
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.3	17.51	50.83	0.9423	0.04571
								8500	28.8	18.31	52.86	0.9790	0.04553
								9000	29.2	19.08	54.88	1.0154	0.04535

								9500	29.7	19.84	56.88	1.0516	0.04517
								10000	30.1	20.57	58.88	1.0877	0.04499
								10500	30.5	21.28	60.87	1.1235	0.04481
								11000	31.0	21.97	62.84	1.1592	0.04463
								11500	31.4	22.65	64.81	1.1947	0.04446
								12000	31.9	23.31	66.77	1.2301	0.04428
USA | CANADA | SINGLE CAB (REGULAR CAB) | DUAL REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	28.4	17.46	51.36	0.9665	0.04527
								8500	28.9	18.24	53.50	1.0066	0.04504
								9000	29.3	19.00	55.64	1.0466	0.04481
								9500	29.8	19.73	57.77	1.0864	0.04458
								10000	30.3	20.44	59.90	1.1261	0.04435
								10500	30.7	21.14	62.01	1.1656	0.04412

	11000	31.2	21.81	64.12	1.2051	0.04389
	11500	31.7	22.46	66.22	1.2444	0.04367
	12000	32.1	23.10	68.32	1.2835	0.04344
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	28.3	17.51	50.83	0.9423	0.04571
	8500	28.8	18.31	52.86	0.9790	0.04553
	9000	29.2	19.08	54.88	1.0154	0.04535
	9500	29.7	19.84	56.88	1.0516	0.04517
	10000	30.1	20.57	58.88	1.0877	0.04499
	10500	30.5	21.28	60.87	1.1235	0.04481

								11000	31.0	21.97	62.84	1.1592	0.04463
								11500	31.4	22.65	64.81	1.1947	0.04446
								12000	31.9	23.31	66.77	1.2301	0.04428
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.5	18.03	49.60	1.0049	0.04247
								8500	27.9	18.83	51.67	1.0474	0.04222
								9000	28.4	19.61	53.72	1.0898	0.04197
								9500	28.9	20.36	55.77	1.1320	0.04172
								10000	29.4	21.08	57.81	1.1741	0.04147
								10500	29.8	21.79	59.84	1.2160	0.04122
								11000	30.3	22.47	61.87	1.2577	0.04098
								11500	30.8	23.14	63.89	1.2994	0.04073
								12000	31.2	23.78	65.91	1.3409	0.04049
							NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.4	18.09	49.14	0.9783	0.04291
								8500	27.8	18.91	51.10	1.0172	0.04271
								9000	28.3	19.70	53.04	1.0558	0.04251

								9500	28.7	20.47	54.97	1.0942	0.04231
								10000	29.2	21.22	56.89	1.1324	0.04212
								10500	29.6	21.94	58.80	1.1704	0.04192
								11000	30.1	22.65	60.70	1.2082	0.04173
								11500	30.5	23.34	62.59	1.2459	0.04154
								12000	30.9	24.00	64.48	1.2833	0.04135
USA | CANADA | DOUBLE CAB (CREW CAB) | DUAL REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 4.28000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	10.8" (275 MM) AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	NONDRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 75 PSI. || DRIVEN: LT245/75R17AT MICHELIN (AT) / D3KBM AT 65 PSI.	8000	27.5	18.03	49.60	1.0049	0.04247
								8500	27.9	18.83	51.67	1.0474	0.04222
								9000	28.4	19.61	53.72	1.0898	0.04197
								9500	28.9	20.36	55.77	1.1320	0.04172
								10000	29.4	21.08	57.81	1.1741	0.04147
								10500	29.8	21.79	59.84	1.2160	0.04122

	11000	30.3	22.47	61.87	1.2577	0.04098
	11500	30.8	23.14	63.89	1.2994	0.04073
	12000	31.2	23.78	65.91	1.3409	0.04049
NONDRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 75 PSI. || DRIVEN: LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 65 PSI.	8000	27.4	18.09	49.14	0.9783	0.04291
	8500	27.8	18.91	51.10	1.0172	0.04271
	9000	28.3	19.70	53.04	1.0558	0.04251
	9500	28.7	20.47	54.97	1.0942	0.04231
	10000	29.2	21.22	56.89	1.1324	0.04212
	10500	29.6	21.94	58.80	1.1704	0.04192

								11000	30.1	22.65	60.70	1.2082	0.04173
								11500	30.5	23.34	62.59	1.2459	0.04154
								12000	30.9	24.00	64.48	1.2833	0.04135
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.4	18.73	55.57	0.7413	0.04226
								8500	26.8	19.62	57.49	0.7633	0.04218
								9000	27.2	20.49	59.40	0.7850	0.04209
								9500	27.6	21.34	61.28	0.8065	0.04201
								10000	27.9	22.17	63.14	0.8278	0.04192
								10500	28.3	22.98	64.98	0.8489	0.04184
								11000	28.6	23.78	66.81	0.8698	0.04176
								11500	29.0	24.55	68.62	0.8905	0.04168
								12000	29.3	25.31	70.42	0.9110	0.04160
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.24	52.09	0.7168	0.04205
								8500	26.1	20.14	54.04	0.7411	0.04195
								9000	26.5	21.01	55.97	0.7651	0.04185

	9500	26.9	21.87	57.89	0.7890	0.04174
	10000	27.3	22.70	59.79	0.8127	0.04164
	10500	27.6	23.51	61.68	0.8362	0.04154
	11000	28.0	24.29	63.57	0.8596	0.04144
	11500	28.4	25.06	65.43	0.8828	0.04135
	12000	28.8	25.81	67.29	0.9060	0.04125
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.6	20.10	49.60	0.8742	0.03660
	8500	25.1	20.98	51.64	0.9094	0.03640
	9000	25.5	21.82	53.67	0.9445	0.03621
	9500	26.0	22.65	55.69	0.9794	0.03601
	10000	26.4	23.44	57.71	1.0142	0.03582
	10500	26.8	24.21	59.72	1.0489	0.03563
	11000	27.3	24.96	61.72	1.0835	0.03543
	11500	27.7	25.69	63.72	1.1180	0.03524
	12000	28.1	26.39	65.71	1.1524	0.03505
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.5	20.19	48.93	0.8483	0.03703
	8500	24.9	21.10	50.84	0.8802	0.03688
	9000	25.4	21.97	52.75	0.9120	0.03673

								9500	25.8	22.81	54.64	0.9435	0.03659
								10000	26.2	23.63	56.53	0.9749	0.03644
								10500	26.6	24.43	58.40	1.0061	0.03629
								11000	27.0	25.21	60.27	1.0372	0.03614
								11500	27.4	25.96	62.12	1.0681	0.03600
								12000	27.8	26.70	63.97	1.0989	0.03585
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.3	18.81	55.01	0.7348	0.04229
								8500	26.7	19.71	56.90	0.7565	0.04220
								9000	27.1	20.58	58.78	0.7779	0.04212
								9500	27.4	21.44	60.63	0.7991	0.04204
								10000	27.8	22.28	62.46	0.8201	0.04195
								10500	28.1	23.10	64.28	0.8408	0.04187

	11000	28.5	23.90	66.08	0.8614	0.04179
	11500	28.8	24.68	67.87	0.8818	0.04171
	12000	29.2	25.45	69.64	0.9020	0.04163
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.7	19.24	52.09	0.7168	0.04205
	8500	26.1	20.14	54.04	0.7411	0.04195
	9000	26.5	21.01	55.97	0.7651	0.04185
	9500	26.9	21.87	57.89	0.7890	0.04174
	10000	27.3	22.70	59.79	0.8127	0.04164
	10500	27.6	23.51	61.68	0.8362	0.04154

	11000	28.0	24.29	63.57	0.8596	0.04144
	11500	28.4	25.06	65.43	0.8828	0.04135
	12000	28.8	25.81	67.29	0.9060	0.04125
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.6	20.15	49.30	0.8689	0.03663
	8500	25.0	21.03	51.32	0.9038	0.03643
	9000	25.4	21.89	53.33	0.9386	0.03624
	9500	25.9	22.71	55.33	0.9732	0.03605
	10000	26.3	23.51	57.33	1.0077	0.03586
	10500	26.7	24.29	59.32	1.0421	0.03566

	11000	27.2	25.04	61.31	1.0764	0.03547
	11500	27.6	25.77	63.29	1.1106	0.03528
	12000	28.0	26.48	65.26	1.1446	0.03509
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.5	20.23	48.71	0.8448	0.03705
	8500	24.9	21.14	50.62	0.8765	0.03690
	9000	25.3	22.01	52.51	0.9080	0.03675
	9500	25.7	22.86	54.39	0.9394	0.03661
	10000	26.1	23.69	56.26	0.9705	0.03646
	10500	26.5	24.49	58.13	1.0016	0.03631

								11000	26.9	25.27	59.98	1.0325	0.03617
								11500	27.3	26.02	61.83	1.0632	0.03602
								12000	27.7	26.76	63.66	1.0938	0.03588
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.9	19.92	53.04	0.7863	0.03763
								8500	25.2	20.85	54.87	0.8110	0.03752
								9000	25.6	21.76	56.67	0.8354	0.03742
								9500	26.0	22.64	58.45	0.8596	0.03731
								10000	26.3	23.51	60.22	0.8835	0.03721
								10500	26.7	24.35	61.97	0.9072	0.03711
								11000	27.0	25.17	63.70	0.9306	0.03701
								11500	27.4	25.98	65.41	0.9539	0.03691
								12000	27.7	26.77	67.12	0.9769	0.03681
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.46	49.59	0.7625	0.03752
								8500	24.6	21.40	51.42	0.7897	0.03739
								9000	25.0	22.31	53.25	0.8167	0.03727

	9500	25.3	23.20	55.06	0.8434	0.03715
	10000	25.7	24.06	56.86	0.8700	0.03703
	10500	26.1	24.90	58.65	0.8964	0.03690
	11000	26.5	25.72	60.42	0.9226	0.03678
	11500	26.8	26.51	62.19	0.9487	0.03666
	12000	27.2	27.29	63.94	0.9746	0.03655
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.24	49.85	0.7426	0.03861
	8500	24.9	21.17	51.71	0.7699	0.03849
	9000	25.2	22.07	53.55	0.7971	0.03837
	9500	25.6	22.94	55.38	0.8240	0.03826
	10000	26.0	23.79	57.19	0.8507	0.03814
	10500	26.4	24.62	59.00	0.8773	0.03802
	11000	26.8	25.43	60.79	0.9037	0.03791
	11500	27.1	26.22	62.57	0.9299	0.03779
	12000	27.5	26.98	64.35	0.9560	0.03768
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.2	21.35	46.65	0.9398	0.03211
	8500	23.6	22.26	48.55	0.9789	0.03189
	9000	24.1	23.14	50.44	1.0178	0.03167

								9500	24.5	23.99	52.33	1.0565	0.03144
								10000	24.9	24.81	54.21	1.0951	0.03122
								10500	25.4	25.61	56.08	1.1336	0.03100
								11000	25.8	26.38	57.94	1.1719	0.03078
								11500	26.2	27.12	59.80	1.2102	0.03056
								12000	26.7	27.84	61.66	1.2483	0.03034
							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.1	21.47	46.10	0.9097	0.03256
								8500	23.5	22.40	47.89	0.9451	0.03238
								9000	23.9	23.31	49.67	0.9803	0.03220
								9500	24.3	24.19	51.43	1.0153	0.03203
								10000	24.7	25.04	53.19	1.0501	0.03186
								10500	25.1	25.86	54.94	1.0847	0.03168
								11000	25.5	26.66	56.69	1.1192	0.03151
								11500	25.9	27.44	58.42	1.1535	0.03134
								12000	26.3	28.19	60.15	1.1876	0.03117
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.7	20.01	52.51	0.7791	0.03766

	8500	25.1	20.95	54.30	0.8034	0.03756
	9000	25.5	21.86	56.08	0.8275	0.03745
	9500	25.8	22.75	57.84	0.8513	0.03735
	10000	26.2	23.62	59.58	0.8748	0.03725
	10500	26.5	24.47	61.30	0.8982	0.03715
	11000	26.9	25.31	63.01	0.9213	0.03705
	11500	27.2	26.12	64.70	0.9442	0.03695
	12000	27.6	26.91	66.38	0.9669	0.03686
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.2	20.46	49.59	0.7625	0.03752

	8500	24.6	21.40	51.42	0.7897	0.03739
	9000	25.0	22.31	53.25	0.8167	0.03727
	9500	25.3	23.20	55.06	0.8434	0.03715
	10000	25.7	24.06	56.86	0.8700	0.03703
	10500	26.1	24.90	58.65	0.8964	0.03690
	11000	26.5	25.72	60.42	0.9226	0.03678
	11500	26.8	26.51	62.19	0.9487	0.03666
	12000	27.2	27.29	63.94	0.9746	0.03655
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.5	20.24	49.85	0.7426	0.03861

	8500	24.9	21.17	51.71	0.7699	0.03849
	9000	25.2	22.07	53.55	0.7971	0.03837
	9500	25.6	22.94	55.38	0.8240	0.03826
	10000	26.0	23.79	57.19	0.8507	0.03814
	10500	26.4	24.62	59.00	0.8773	0.03802
	11000	26.8	25.43	60.79	0.9037	0.03791
	11500	27.1	26.22	62.57	0.9299	0.03779
	12000	27.5	26.98	64.35	0.9560	0.03768
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.1	21.41	46.36	0.9340	0.03215

	8500	23.6	22.33	48.25	0.9727	0.03193
	9000	24.0	23.21	50.12	1.0112	0.03170
	9500	24.4	24.07	51.99	1.0496	0.03148
	10000	24.9	24.89	53.85	1.0879	0.03126
	10500	25.3	25.69	55.71	1.1260	0.03104
	11000	25.7	26.47	57.56	1.1640	0.03082
	11500	26.1	27.22	59.40	1.2019	0.03061
	12000	26.6	27.94	61.24	1.2397	0.03039
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.0	21.51	45.90	0.9057	0.03258

								8500	23.4	22.45	47.68	0.9409	0.03240
								9000	23.8	23.36	49.44	0.9759	0.03223
								9500	24.2	24.24	51.20	1.0106	0.03205
								10000	24.7	25.10	52.95	1.0452	0.03188
								10500	25.1	25.92	54.69	1.0796	0.03171
								11000	25.5	26.73	56.42	1.1139	0.03154
								11500	25.9	27.51	58.14	1.1480	0.03137
								12000	26.3	28.27	59.86	1.1819	0.03120
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.62	53.49	0.7802	0.03871
								8500	25.6	20.54	55.33	0.8045	0.03861

	9000	26.0	21.44	57.15	0.8285	0.03851
	9500	26.3	22.31	58.95	0.8523	0.03841
	10000	26.7	23.17	60.74	0.8758	0.03831
	10500	27.1	24.01	62.50	0.8991	0.03821
	11000	27.4	24.82	64.25	0.9222	0.03811
	11500	27.8	25.62	65.99	0.9451	0.03801
	12000	28.1	26.40	67.71	0.9678	0.03792
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	50.03	0.7562	0.03858
	8500	25.0	21.08	51.89	0.7829	0.03846
	9000	25.3	21.98	53.73	0.8094	0.03834
	9500	25.7	22.86	55.56	0.8357	0.03822
	10000	26.1	23.71	57.38	0.8619	0.03810
	10500	26.5	24.55	59.19	0.8879	0.03798
	11000	26.8	25.35	60.98	0.9137	0.03787
	11500	27.2	26.14	62.77	0.9393	0.03775
	12000	27.6	26.91	64.54	0.9648	0.03764
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	50.29	0.7363	0.03968
	8500	25.2	20.86	52.17	0.7632	0.03956

	9000	25.6	21.74	54.03	0.7899	0.03945
	9500	26.0	22.61	55.88	0.8164	0.03933
	10000	26.4	23.45	57.72	0.8427	0.03922
	10500	26.8	24.27	59.54	0.8689	0.03911
	11000	27.1	25.07	61.35	0.8949	0.03900
	11500	27.5	25.86	63.15	0.9207	0.03888
	12000	27.9	26.62	64.94	0.9464	0.03877
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.5	21.03	47.18	0.9299	0.03315
	8500	24.0	21.94	49.10	0.9684	0.03293
	9000	24.4	22.81	51.02	1.0067	0.03271
	9500	24.9	23.65	52.93	1.0449	0.03249
	10000	25.3	24.47	54.83	1.0829	0.03227
	10500	25.7	25.26	56.73	1.1208	0.03205
	11000	26.2	26.02	58.62	1.1586	0.03184
	11500	26.6	26.76	60.50	1.1963	0.03162
	12000	27.0	27.48	62.38	1.2338	0.03141
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	23.4	21.15	46.60	0.9004	0.03359
	8500	23.8	22.07	48.42	0.9353	0.03342

								9000	24.2	22.97	50.22	0.9700	0.03325
								9500	24.7	23.84	52.01	1.0045	0.03307
								10000	25.1	24.68	53.79	1.0388	0.03291
								10500	25.5	25.50	55.56	1.0729	0.03274
								11000	25.9	26.30	57.33	1.1069	0.03257
								11500	26.3	27.07	59.08	1.1407	0.03240
								12000	26.7	27.82	60.83	1.1744	0.03223
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.1	19.71	52.95	0.7731	0.03874
								8500	25.5	20.63	54.77	0.7970	0.03864
								9000	25.9	21.54	56.56	0.8207	0.03854
								9500	26.2	22.42	58.33	0.8441	0.03844
								10000	26.6	23.29	60.09	0.8673	0.03834

		10500	26.9	24.13	61.83	0.8902	0.03825
		11000	27.3	24.95	63.55	0.9130	0.03815
		11500	27.6	25.76	65.26	0.9355	0.03805
		12000	28.0	26.54	66.96	0.9579	0.03796
	LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.6	20.16	50.03	0.7562	0.03858
		8500	25.0	21.08	51.89	0.7829	0.03846
		9000	25.3	21.98	53.73	0.8094	0.03834
		9500	25.7	22.86	55.56	0.8357	0.03822
		10000	26.1	23.71	57.38	0.8619	0.03810

		10500	26.5	24.55	59.19	0.8879	0.03798
		11000	26.8	25.35	60.98	0.9137	0.03787
		11500	27.2	26.14	62.77	0.9393	0.03775
		12000	27.6	26.91	64.54	0.9648	0.03764
	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	24.8	19.94	50.29	0.7363	0.03968
		8500	25.2	20.86	52.17	0.7632	0.03956
		9000	25.6	21.74	54.03	0.7899	0.03945
		9500	26.0	22.61	55.88	0.8164	0.03933
		10000	26.4	23.45	57.72	0.8427	0.03922

	10500	26.8	24.27	59.54	0.8689	0.03911
	11000	27.1	25.07	61.35	0.8949	0.03900
	11500	27.5	25.86	63.15	0.9207	0.03888
	12000	27.9	26.62	64.94	0.9464	0.03877
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.5	21.09	46.89	0.9241	0.03318
	8500	23.9	22.00	48.80	0.9622	0.03296
	9000	24.3	22.88	50.70	1.0002	0.03275
	9500	24.8	23.73	52.59	1.0381	0.03253
	10000	25.2	24.55	54.48	1.0758	0.03231

	10500	25.6	25.34	56.36	1.1133	0.03210
	11000	26.1	26.11	58.23	1.1508	0.03188
	11500	26.5	26.85	60.10	1.1881	0.03167
	12000	26.9	27.57	61.96	1.2254	0.03146
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	23.4	21.19	46.40	0.8965	0.03361
	8500	23.8	22.12	48.20	0.9312	0.03344
	9000	24.2	23.02	49.99	0.9657	0.03327
	9500	24.6	23.90	51.77	0.9999	0.03310
	10000	25.0	24.74	53.54	1.0340	0.03293

								10500	25.4	25.56	55.30	1.0679	0.03276
								11000	25.8	26.36	57.06	1.1017	0.03259
								11500	26.2	27.13	58.80	1.1353	0.03243
								12000	26.6	27.89	60.54	1.1688	0.03226
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	26.0	19.08	54.63	0.7598	0.04083
								8500	26.3	19.98	56.52	0.7829	0.04074
								9000	26.7	20.86	58.39	0.8057	0.04064
								9500	27.1	21.72	60.23	0.8283	0.04055
								10000	27.4	22.56	62.06	0.8506	0.04046
								10500	27.8	23.38	63.87	0.8728	0.04037
								11000	28.1	24.18	65.66	0.8947	0.04028
								11500	28.5	24.97	67.44	0.9164	0.04019
								12000	28.8	25.74	69.20	0.9380	0.04010
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.60	51.16	0.7355	0.04065

	8500	25.7	20.51	53.07	0.7609	0.04054
	9000	26.0	21.39	54.96	0.7861	0.04043
	9500	26.4	22.25	56.84	0.8111	0.04032
	10000	26.8	23.09	58.71	0.8360	0.04021
	10500	27.2	23.90	60.56	0.8607	0.04011
	11000	27.6	24.70	62.40	0.8852	0.04000
	11500	27.9	25.48	64.23	0.9096	0.03989
	12000	28.3	26.24	66.05	0.9338	0.03978
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	51.42	0.7159	0.04175
	8500	25.9	20.29	53.35	0.7415	0.04165
	9000	26.3	21.16	55.26	0.7669	0.04154
	9500	26.7	22.01	57.16	0.7921	0.04144
	10000	27.1	22.84	59.04	0.8171	0.04133
	10500	27.5	23.65	60.91	0.8419	0.04123
	11000	27.9	24.44	62.77	0.8666	0.04113
	11500	28.2	25.21	64.62	0.8912	0.04102
	12000	28.6	25.96	66.46	0.9156	0.04092
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.46	48.51	0.9002	0.03520

	8500	24.6	21.35	50.50	0.9369	0.03499
	9000	25.1	22.21	52.48	0.9735	0.03478
	9500	25.5	23.04	54.45	1.0100	0.03458
	10000	26.0	23.84	56.42	1.0463	0.03437
	10500	26.4	24.62	58.37	1.0825	0.03417
	11000	26.8	25.37	60.33	1.1186	0.03396
	11500	27.3	26.10	62.27	1.1546	0.03376
	12000	27.7	26.81	64.21	1.1905	0.03356
LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.1	20.56	47.88	0.8727	0.03564
	8500	24.5	21.47	49.75	0.9060	0.03548
	9000	24.9	22.36	51.61	0.9391	0.03532
	9500	25.3	23.21	53.46	0.9720	0.03516
	10000	25.7	24.04	55.30	1.0048	0.03500
	10500	26.1	24.85	57.12	1.0374	0.03484
	11000	26.6	25.63	58.94	1.0698	0.03468
	11500	27.0	26.39	60.76	1.1021	0.03453
	12000	27.4	27.13	62.56	1.1343	0.03437

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.9	19.16	54.08	0.7530	0.04086
								8500	26.2	20.07	55.94	0.7758	0.04076
								9000	26.6	20.96	57.78	0.7983	0.04067
								9500	26.9	21.82	59.60	0.8205	0.04058
								10000	27.3	22.67	61.40	0.8425	0.04049
								10500	27.7	23.50	63.18	0.8643	0.04040
								11000	28.0	24.30	64.94	0.8859	0.04032
								11500	28.4	25.10	66.69	0.9073	0.04023
								12000	28.7	25.87	68.43	0.9286	0.04014

LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.3	19.60	51.16	0.7355	0.04065
	8500	25.7	20.51	53.07	0.7609	0.04054
	9000	26.0	21.39	54.96	0.7861	0.04043
	9500	26.4	22.25	56.84	0.8111	0.04032
	10000	26.8	23.09	58.71	0.8360	0.04021
	10500	27.2	23.90	60.56	0.8607	0.04011
	11000	27.6	24.70	62.40	0.8852	0.04000
	11500	27.9	25.48	64.23	0.9096	0.03989
	12000	28.3	26.24	66.05	0.9338	0.03978

LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.39	51.42	0.7159	0.04175
	8500	25.9	20.29	53.35	0.7415	0.04165
	9000	26.3	21.16	55.26	0.7669	0.04154
	9500	26.7	22.01	57.16	0.7921	0.04144
	10000	27.1	22.84	59.04	0.8171	0.04133
	10500	27.5	23.65	60.91	0.8419	0.04123
	11000	27.9	24.44	62.77	0.8666	0.04113
	11500	28.2	25.21	64.62	0.8912	0.04102
	12000	28.6	25.96	66.46	0.9156	0.04092

LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.52	48.21	0.8946	0.03523
	8500	24.6	21.41	50.18	0.9311	0.03502
	9000	25.0	22.27	52.14	0.9673	0.03482
	9500	25.4	23.11	54.10	1.0035	0.03461
	10000	25.9	23.91	56.05	1.0395	0.03441
	10500	26.3	24.70	57.99	1.0754	0.03421
	11000	26.7	25.46	59.92	1.1112	0.03401
	11500	27.2	26.19	61.85	1.1469	0.03380
	12000	27.6	26.91	63.78	1.1824	0.03360

LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.61	47.67	0.8689	0.03565
	8500	24.4	21.52	49.53	0.9021	0.03549
	9000	24.9	22.40	51.38	0.9350	0.03534
	9500	25.3	23.26	53.21	0.9677	0.03518
	10000	25.7	24.10	55.04	1.0003	0.03502
	10500	26.1	24.91	56.86	1.0326	0.03486
	11000	26.5	25.69	58.67	1.0649	0.03471
	11500	26.9	26.46	60.47	1.0970	0.03455
	12000	27.3	27.20	62.26	1.1289	0.03440

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.9	19.11	54.66	0.7580	0.04070
								8500	26.3	20.02	56.54	0.7810	0.04061
								9000	26.6	20.90	58.41	0.8038	0.04051
								9500	27.0	21.76	60.25	0.8263	0.04042
								10000	27.4	22.60	62.08	0.8485	0.04033
								10500	27.7	23.42	63.89	0.8706	0.04024
								11000	28.1	24.23	65.68	0.8925	0.04015
								11500	28.4	25.01	67.46	0.9141	0.04007
								12000	28.8	25.78	69.22	0.9356	0.03998
							LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.64	51.18	0.7337	0.04052
								8500	25.6	20.55	53.09	0.7591	0.04041
								9000	26.0	21.43	54.98	0.7842	0.04030
								9500	26.4	22.30	56.86	0.8092	0.04019
								10000	26.8	23.13	58.73	0.8339	0.04009
								10500	27.1	23.95	60.58	0.8586	0.03998
								11000	27.5	24.75	62.43	0.8830	0.03987
								11500	27.9	25.53	64.26	0.9073	0.03977
								12000	28.2	26.29	66.08	0.9315	0.03966

	LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	51.44	0.7142	0.04162
		8500	25.9	20.33	53.37	0.7397	0.04151
		9000	26.3	21.20	55.28	0.7650	0.04141
		9500	26.7	22.06	57.18	0.7901	0.04130
		10000	27.0	22.89	59.06	0.8151	0.04120
		10500	27.4	23.69	60.94	0.8399	0.04110
		11000	27.8	24.48	62.80	0.8645	0.04100
		11500	28.2	25.25	64.64	0.8890	0.04090
		12000	28.5	26.01	66.48	0.9133	0.04079
	LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.2	20.50	48.53	0.8983	0.03508
		8500	24.6	21.39	50.52	0.9350	0.03488
		9000	25.0	22.25	52.50	0.9715	0.03467
		9500	25.5	23.08	54.48	1.0079	0.03446
		10000	25.9	23.88	56.44	1.0441	0.03426
		10500	26.3	24.66	58.40	1.0802	0.03406
		11000	26.8	25.42	60.35	1.1162	0.03385
		11500	27.2	26.15	62.30	1.1521	0.03365
		12000	27.6	26.86	64.24	1.1879	0.03345

							LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	24.0	20.61	47.90	0.8709	0.03552
								8500	24.4	21.52	49.77	0.9041	0.03536
								9000	24.9	22.40	51.63	0.9371	0.03520
								9500	25.3	23.26	53.48	0.9700	0.03504
								10000	25.7	24.09	55.32	1.0027	0.03488
								10500	26.1	24.89	57.15	1.0352	0.03473
								11000	26.5	25.68	58.97	1.0675	0.03457
								11500	26.9	26.44	60.78	1.0997	0.03442
								12000	27.3	27.18	62.59	1.1318	0.03426
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R18ALS CONTINENTAL (GG) / D3HCH AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	25.8	19.20	54.10	0.7513	0.04073
								8500	26.2	20.11	55.96	0.7739	0.04064
								9000	26.5	21.00	57.80	0.7963	0.04054
								9500	26.9	21.87	59.62	0.8185	0.04045

	10000	27.2	22.71	61.42	0.8405	0.04037
	10500	27.6	23.54	63.20	0.8622	0.04028
	11000	28.0	24.35	64.97	0.8837	0.04019
	11500	28.3	25.14	66.72	0.9051	0.04010
	12000	28.6	25.92	68.46	0.9262	0.04002
LT275/70R18AT BRIDGESTONE (AT) / D3HDX AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.2	19.64	51.18	0.7337	0.04052
	8500	25.6	20.55	53.09	0.7591	0.04041
	9000	26.0	21.43	54.98	0.7842	0.04030
	9500	26.4	22.30	56.86	0.8092	0.04019

	10000	26.8	23.13	58.73	0.8339	0.04009
	10500	27.1	23.95	60.58	0.8586	0.03998
	11000	27.5	24.75	62.43	0.8830	0.03987
	11500	27.9	25.53	64.26	0.9073	0.03977
	12000	28.2	26.29	66.08	0.9315	0.03966
LT275/65R20AT BRIDGESTONE (AT) / D3IAW AT 80 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	25.5	19.43	51.44	0.7142	0.04162
	8500	25.9	20.33	53.37	0.7397	0.04151
	9000	26.3	21.20	55.28	0.7650	0.04141
	9500	26.7	22.06	57.18	0.7901	0.04130

	10000	27.0	22.89	59.06	0.8151	0.04120
	10500	27.4	23.69	60.94	0.8399	0.04110
	11000	27.8	24.48	62.80	0.8645	0.04100
	11500	28.2	25.25	64.64	0.8890	0.04090
	12000	28.5	26.01	66.48	0.9133	0.04079
LT245/75R17AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.1	20.56	48.23	0.8928	0.03511
	8500	24.5	21.45	50.21	0.9291	0.03491
	9000	25.0	22.32	52.17	0.9653	0.03470
	9500	25.4	23.15	54.12	1.0014	0.03450

		10000	25.8	23.96	56.07	1.0373	0.03430
		10500	26.3	24.74	58.02	1.0731	0.03410
		11000	26.7	25.50	59.95	1.1088	0.03389
		11500	27.1	26.24	61.88	1.1443	0.03369
		12000	27.5	26.96	63.80	1.1798	0.03349
	LT245/75R17ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	24.0	20.64	47.70	0.8672	0.03554
		8500	24.4	21.56	49.55	0.9002	0.03538
		9000	24.8	22.45	51.40	0.9330	0.03522
		9500	25.2	23.31	53.24	0.9656	0.03506

								10000	25.6	24.14	55.07	0.9981	0.03491
								10500	26.0	24.95	56.88	1.0304	0.03475
								11000	26.4	25.74	58.69	1.0626	0.03460
								11500	26.8	26.50	60.49	1.0946	0.03444
								12000	27.2	27.25	62.29	1.1264	0.03429
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 250 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.82000 | TREMOR VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140-TREMOR	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/75R18MT GOODYEAR (WD) / D3HFW AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	28.0	17.69	57.04	0.9914	0.04135
								8500	28.6	18.42	59.48	1.0405	0.04110
								9000	29.1	19.12	61.90	1.0894	0.04084
								9500	29.7	19.80	64.31	1.1380	0.04059
								10000	30.2	20.46	66.71	1.1863	0.04033
								10500	30.8	21.09	69.09	1.2344	0.04008
								11000	31.4	21.70	71.47	1.2823	0.03983
								11500	31.9	22.30	73.83	1.3300	0.03958
								12000	32.5	22.87	76.19	1.3775	0.03933

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.82000 | TREMOR VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	10R100/140-TREMOR	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/75R18MT GOODYEAR (WD) / D3HFW AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	28.0	17.71	56.74	0.9778	0.04161
								8500	28.5	18.45	59.16	1.0262	0.04136
								9000	29.1	19.16	61.56	1.0742	0.04111
								9500	29.6	19.84	63.95	1.1220	0.04086
								10000	30.2	20.50	66.33	1.1696	0.04061
								10500	30.7	21.14	68.70	1.2170	0.04036
								11000	31.3	21.76	71.06	1.2641	0.04012
								11500	31.8	22.36	73.41	1.3111	0.03987
								12000	32.4	22.94	75.75	1.3578	0.03963
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.7	17.85	56.30	0.9747	0.04119
								8500	28.3	18.61	58.62	1.0187	0.04099
								9000	28.8	19.34	60.94	1.0625	0.04079
								9500	29.3	20.04	63.23	1.1060	0.04059
								10000	29.9	20.72	65.52	1.1492	0.04038
								10500	30.4	21.38	67.79	1.1922	0.04019
								11000	30.9	22.02	70.06	1.2350	0.03999
								11500	31.4	22.64	72.31	1.2776	0.03979
								12000	31.9	23.24	74.55	1.3200	0.03959

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.7	17.89	56.04	0.9699	0.04122
								8500	28.2	18.65	58.36	1.0137	0.04101
								9000	28.7	19.38	60.65	1.0571	0.04081
								9500	29.3	20.09	62.94	1.1004	0.04061
								10000	29.8	20.77	65.21	1.1433	0.04041
								10500	30.3	21.44	67.47	1.1861	0.04021
								11000	30.8	22.08	69.72	1.2286	0.04002
								11500	31.3	22.70	71.96	1.2709	0.03982
								12000	31.9	23.30	74.18	1.3131	0.03963

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.3	18.84	52.83	1.0523	0.03665
								8500	26.8	19.62	55.00	1.1007	0.03641
								9000	27.3	20.37	57.15	1.1488	0.03618
								9500	27.9	21.10	59.29	1.1966	0.03594
								10000	28.4	21.80	61.41	1.2441	0.03571
								10500	28.9	22.47	63.53	1.2914	0.03548
								11000	29.4	23.13	65.63	1.3385	0.03525
								11500	29.9	23.76	67.73	1.3853	0.03502
								12000	30.5	24.37	69.81	1.4319	0.03479
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 160 WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.74000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.2	18.88	52.60	1.0470	0.03668
								8500	26.7	19.67	54.75	1.0951	0.03644
								9000	27.3	20.42	56.89	1.1429	0.03621
								9500	27.8	21.15	59.01	1.1904	0.03597

								10000	28.3	21.85	61.13	1.2377	0.03574
								10500	28.8	22.53	63.23	1.2847	0.03551
								11000	29.3	23.19	65.32	1.3315	0.03529
								11500	29.9	23.82	67.40	1.3780	0.03506
								12000	30.4	24.44	69.47	1.4244	0.03483
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	26.6	18.59	53.45	1.0405	0.03772
								8500	27.2	19.36	55.65	1.0882	0.03749
								9000	27.7	20.11	57.83	1.1357	0.03725
								9500	28.2	20.82	59.99	1.1829	0.03703
								10000	28.8	21.52	62.15	1.2298	0.03680
								10500	29.3	22.19	64.29	1.2765	0.03657
								11000	29.8	22.84	66.43	1.3229	0.03635
								11500	30.3	23.47	68.55	1.3691	0.03612

								12000	30.8	24.08	70.66	1.4151	0.03590
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 175.5 / 4457.7MM WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	26.6	18.63	53.21	1.0353	0.03774
								8500	27.1	19.41	55.40	1.0827	0.03751
								9000	27.6	20.15	57.56	1.1299	0.03728
								9500	28.2	20.87	59.72	1.1768	0.03706
								10000	28.7	21.57	61.86	1.2234	0.03683
								10500	29.2	22.25	63.99	1.2698	0.03660
								11000	29.7	22.90	66.11	1.3160	0.03638
								11500	30.2	23.53	68.22	1.3619	0.03616

								12000	30.7	24.15	70.32	1.4076	0.03593
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.3	18.14	55.02	1.0054	0.03979
								8500	27.8	18.90	57.29	1.0512	0.03958
								9000	28.4	19.63	59.54	1.0967	0.03936
								9500	28.9	20.34	61.78	1.1419	0.03915
								10000	29.4	21.03	64.01	1.1869	0.03893
								10500	29.9	21.69	66.22	1.2316	0.03872
								11000	30.5	22.34	68.42	1.2761	0.03851
								11500	31.0	22.96	70.62	1.3204	0.03830
								12000	31.5	23.56	72.80	1.3645	0.03809
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 148 INCH WHEELBASE | 350 SERIES | PICKUP | 6 3/4' STYLESIDE BOX-STEEL | Frontal Area - 3.77000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.18	54.77	1.0004	0.03982
								8500	27.8	18.94	57.03	1.0459	0.03960
								9000	28.3	19.68	59.26	1.0911	0.03939

								9500	28.8	20.39	61.49	1.1361	0.03917
								10000	29.4	21.08	63.70	1.1808	0.03896
								10500	29.9	21.75	65.91	1.2253	0.03875
								11000	30.4	22.39	68.10	1.2695	0.03854
								11500	30.9	23.02	70.28	1.3135	0.03833
								12000	31.4	23.63	72.45	1.3574	0.03812
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	27.2	18.17	55.04	1.0033	0.03966
								8500	27.8	18.93	57.31	1.0490	0.03945
								9000	28.3	19.67	59.57	1.0943	0.03923
								9500	28.8	20.38	61.81	1.1395	0.03902
								10000	29.4	21.07	64.03	1.1843	0.03881
								10500	29.9	21.73	66.25	1.2289	0.03860

								11000	30.4	22.38	68.46	1.2733	0.03839
								11500	30.9	23.00	70.65	1.3175	0.03818
								12000	31.4	23.61	72.83	1.3615	0.03797
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 350 SERIES | PICKUP | 8' STYLESIDE BOX-STEEL | Frontal Area - 3.76000 | OFF ROAD VARIANT	7.3L 2V DEVCT NA PFI V8 GAS	11.6/DANA-4X4 DFH	4X4	4.3	11.X AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT285/70R17MT GOODYEAR (DURATRAC) / D3KHU AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	27.2	18.21	54.80	0.9983	0.03969
								8500	27.7	18.98	57.05	1.0437	0.03947
								9000	28.3	19.72	59.29	1.0888	0.03926
								9500	28.8	20.43	61.52	1.1336	0.03905
								10000	29.3	21.12	63.73	1.1782	0.03884
								10500	29.8	21.79	65.94	1.2226	0.03863
								11000	30.3	22.43	68.13	1.2667	0.03842

11500	30.8	23.06	70.31	1.3106	0.03821
12000	31.4	23.67	72.48	1.3543	0.03800

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P708INC

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P708INC TRLHP Chart 3.0	2026	P708INC	04/07/2025	EROMER31	26P708INC-3.0	10R100/140 Tranmissions Require Coastdown Mode

Vehicle Description									TRLHP Specification				
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS I	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.20	62.20	0.3133	0.09085
								8500	41.1	12.83	64.53	0.3337	0.09080
								9000	41.5	13.44	66.84	0.3538	0.09075
								9500	41.9	14.05	69.12	0.3738	0.09070
								10000	42.4	14.64	71.37	0.3935	0.09065
								10500	42.8	15.22	73.61	0.4131	0.09060
								11000	43.2	15.79	75.82	0.4325	0.09055
								11500	43.6	16.36	78.01	0.4517	0.09050
								12000	44.0	16.91	80.19	0.4708	0.09045
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.86	60.19	0.3418	0.08480
								8500	39.1	13.49	62.84	0.3727	0.08466
								9000	39.6	14.09	65.49	0.4035	0.08452

								9500	40.1	14.68	68.12	0.4342	0.08439
								10000	40.6	15.26	70.74	0.4648	0.08425
								10500	41.1	15.83	73.36	0.4952	0.08411
								11000	41.6	16.38	75.97	0.5256	0.08398
								11500	42.1	16.92	78.57	0.5559	0.08384
								12000	42.6	17.44	81.16	0.5860	0.08371
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.84	59.03	0.3214	0.08592
								8500	39.1	13.47	61.52	0.3489	0.08583
								9000	39.6	14.09	64.00	0.3762	0.08574
								9500	40.1	14.69	66.46	0.4034	0.08565
								10000	40.6	15.28	68.90	0.4305	0.08556
								10500	41.1	15.86	71.34	0.4574	0.08547
								11000	41.5	16.42	73.76	0.4842	0.08539
								11500	42.0	16.97	76.17	0.5108	0.08530
								12000	42.5	17.51	78.58	0.5374	0.08521
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.20	62.20	0.3133	0.09085
								8500	41.1	12.83	64.53	0.3337	0.09080
								9000	41.5	13.44	66.84	0.3538	0.09075
								9500	41.9	14.05	69.12	0.3738	0.09070

	10000	42.4	14.64	71.37	0.3935	0.09065
	10500	42.8	15.22	73.61	0.4131	0.09060
	11000	43.2	15.79	75.82	0.4325	0.09055
	11500	43.6	16.36	78.01	0.4517	0.09050
	12000	44.0	16.91	80.19	0.4708	0.09045
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.86	60.19	0.3418	0.08480
	8500	39.1	13.49	62.84	0.3727	0.08466
	9000	39.6	14.09	65.49	0.4035	0.08452
	9500	40.1	14.68	68.12	0.4342	0.08439
	10000	40.6	15.26	70.74	0.4648	0.08425
	10500	41.1	15.83	73.36	0.4952	0.08411
	11000	41.6	16.38	75.97	0.5256	0.08398
	11500	42.1	16.92	78.57	0.5559	0.08384
	12000	42.6	17.44	81.16	0.5860	0.08371
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.84	59.03	0.3214	0.08592
	8500	39.1	13.47	61.52	0.3489	0.08583
	9000	39.6	14.09	64.00	0.3762	0.08574
	9500	40.1	14.69	66.46	0.4034	0.08565
	10000	40.6	15.28	68.90	0.4305	0.08556

								10500	41.1	15.86	71.34	0.4574	0.08547
								11000	41.5	16.42	73.76	0.4842	0.08539
								11500	42.0	16.97	76.17	0.5108	0.08530
								12000	42.5	17.51	78.58	0.5374	0.08521
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.20	62.20	0.3133	0.09085
								8500	41.1	12.83	64.53	0.3337	0.09080
								9000	41.5	13.44	66.84	0.3538	0.09075
								9500	41.9	14.05	69.12	0.3738	0.09070
								10000	42.4	14.64	71.37	0.3935	0.09065
								10500	42.8	15.22	73.61	0.4131	0.09060
								11000	43.2	15.79	75.82	0.4325	0.09055
								11500	43.6	16.36	78.01	0.4517	0.09050
								12000	44.0	16.91	80.19	0.4708	0.09045
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.86	60.19	0.3418	0.08480
								8500	39.1	13.49	62.84	0.3727	0.08466
								9000	39.6	14.09	65.49	0.4035	0.08452
								9500	40.1	14.68	68.12	0.4342	0.08439
								10000	40.6	15.26	70.74	0.4648	0.08425
								10500	41.1	15.83	73.36	0.4952	0.08411

								11000	41.6	16.38	75.97	0.5256	0.08398
								11500	42.1	16.92	78.57	0.5559	0.08384
								12000	42.6	17.44	81.16	0.5860	0.08371
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.84	59.03	0.3214	0.08592
								8500	39.1	13.47	61.52	0.3489	0.08583
								9000	39.6	14.09	64.00	0.3762	0.08574
								9500	40.1	14.69	66.46	0.4034	0.08565
								10000	40.6	15.28	68.90	0.4305	0.08556
								10500	41.1	15.86	71.34	0.4574	0.08547
								11000	41.5	16.42	73.76	0.4842	0.08539
								11500	42.0	16.97	76.17	0.5108	0.08530
								12000	42.5	17.51	78.58	0.5374	0.08521
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.20	62.20	0.3133	0.09085
								8500	41.1	12.83	64.53	0.3337	0.09080
								9000	41.5	13.44	66.84	0.3538	0.09075
								9500	41.9	14.05	69.12	0.3738	0.09070
								10000	42.4	14.64	71.37	0.3935	0.09065
								10500	42.8	15.22	73.61	0.4131	0.09060
								11000	43.2	15.79	75.82	0.4325	0.09055

	11500	43.6	16.36	78.01	0.4517	0.09050
	12000	44.0	16.91	80.19	0.4708	0.09045
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.86	60.19	0.3418	0.08480
	8500	39.1	13.49	62.84	0.3727	0.08466
	9000	39.6	14.09	65.49	0.4035	0.08452
	9500	40.1	14.68	68.12	0.4342	0.08439
	10000	40.6	15.26	70.74	0.4648	0.08425
	10500	41.1	15.83	73.36	0.4952	0.08411
	11000	41.6	16.38	75.97	0.5256	0.08398
	11500	42.1	16.92	78.57	0.5559	0.08384
	12000	42.6	17.44	81.16	0.5860	0.08371
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.84	59.03	0.3214	0.08592
	8500	39.1	13.47	61.52	0.3489	0.08583
	9000	39.6	14.09	64.00	0.3762	0.08574
	9500	40.1	14.69	66.46	0.4034	0.08565
	10000	40.6	15.28	68.90	0.4305	0.08556
	10500	41.1	15.86	71.34	0.4574	0.08547
	11000	41.5	16.42	73.76	0.4842	0.08539
	11500	42.0	16.97	76.17	0.5108	0.08530

								12000	42.5	17.51	78.58	0.5374	0.08521
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.20	62.20	0.3133	0.09085
								8500	41.1	12.83	64.53	0.3337	0.09080
								9000	41.5	13.44	66.84	0.3538	0.09075
								9500	41.9	14.05	69.12	0.3738	0.09070
								10000	42.4	14.64	71.37	0.3935	0.09065
								10500	42.8	15.22	73.61	0.4131	0.09060
								11000	43.2	15.79	75.82	0.4325	0.09055
								11500	43.6	16.36	78.01	0.4517	0.09050
								12000	44.0	16.91	80.19	0.4708	0.09045
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.86	60.19	0.3418	0.08480
								8500	39.1	13.49	62.84	0.3727	0.08466
								9000	39.6	14.09	65.49	0.4035	0.08452
								9500	40.1	14.68	68.12	0.4342	0.08439
								10000	40.6	15.26	70.74	0.4648	0.08425
								10500	41.1	15.83	73.36	0.4952	0.08411
								11000	41.6	16.38	75.97	0.5256	0.08398
								11500	42.1	16.92	78.57	0.5559	0.08384
								12000	42.6	17.44	81.16	0.5860	0.08371

							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.84	59.03	0.3214	0.08592
								8500	39.1	13.47	61.52	0.3489	0.08583
								9000	39.6	14.09	64.00	0.3762	0.08574
								9500	40.1	14.69	66.46	0.4034	0.08565
								10000	40.6	15.28	68.90	0.4305	0.08556
								10500	41.1	15.86	71.34	0.4574	0.08547
								11000	41.5	16.42	73.76	0.4842	0.08539
								11500	42.0	16.97	76.17	0.5108	0.08530
								12000	42.5	17.51	78.58	0.5374	0.08521
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.20	62.20	0.3133	0.09085
								8500	41.1	12.83	64.53	0.3337	0.09080
								9000	41.5	13.44	66.84	0.3538	0.09075
								9500	41.9	14.05	69.12	0.3738	0.09070
								10000	42.4	14.64	71.37	0.3935	0.09065
								10500	42.8	15.22	73.61	0.4131	0.09060
								11000	43.2	15.79	75.82	0.4325	0.09055
								11500	43.6	16.36	78.01	0.4517	0.09050
								12000	44.0	16.91	80.19	0.4708	0.09045
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.86	60.19	0.3418	0.08480

								8500	39.1	13.49	62.84	0.3727	0.08466
								9000	39.6	14.09	65.49	0.4035	0.08452
								9500	40.1	14.68	68.12	0.4342	0.08439
								10000	40.6	15.26	70.74	0.4648	0.08425
								10500	41.1	15.83	73.36	0.4952	0.08411
								11000	41.6	16.38	75.97	0.5256	0.08398
								11500	42.1	16.92	78.57	0.5559	0.08384
								12000	42.6	17.44	81.16	0.5860	0.08371
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.84	59.03	0.3214	0.08592
								8500	39.1	13.47	61.52	0.3489	0.08583
								9000	39.6	14.09	64.00	0.3762	0.08574
								9500	40.1	14.69	66.46	0.4034	0.08565
								10000	40.6	15.28	68.90	0.4305	0.08556
								10500	41.1	15.86	71.34	0.4574	0.08547
								11000	41.5	16.42	73.76	0.4842	0.08539
								11500	42.0	16.97	76.17	0.5108	0.08530
								12000	42.5	17.51	78.58	0.5374	0.08521
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.18	62.41	0.3509	0.09019
								8500	41.2	12.81	64.72	0.3720	0.09013

	9000	41.6	13.42	67.00	0.3929	0.09007
	9500	42.0	14.03	69.26	0.4135	0.09001
	10000	42.4	14.62	71.49	0.4340	0.08995
	10500	42.8	15.20	73.71	0.4542	0.08989
	11000	43.2	15.77	75.90	0.4743	0.08983
	11500	43.6	16.34	78.07	0.4941	0.08977
	12000	44.0	16.89	80.23	0.5138	0.08972
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.85	60.12	0.3879	0.08403
	8500	39.1	13.47	62.74	0.4198	0.08388
	9000	39.6	14.08	65.35	0.4516	0.08373
	9500	40.1	14.67	67.95	0.4832	0.08358
	10000	40.6	15.25	70.54	0.5148	0.08343
	10500	41.2	15.81	73.13	0.5462	0.08328
	11000	41.7	16.36	75.70	0.5776	0.08314
	11500	42.2	16.90	78.27	0.6088	0.08299
	12000	42.7	17.43	80.83	0.6399	0.08284
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.82	59.01	0.3662	0.08516
	8500	39.2	13.45	61.47	0.3947	0.08506
	9000	39.7	14.07	63.91	0.4229	0.08496

								9500	40.1	14.67	66.34	0.4510	0.08486
								10000	40.6	15.26	68.76	0.4790	0.08476
								10500	41.1	15.84	71.17	0.5068	0.08466
								11000	41.6	16.41	73.56	0.5345	0.08456
								11500	42.0	16.96	75.95	0.5620	0.08446
								12000	42.5	17.50	78.32	0.5895	0.08437
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.18	62.41	0.3509	0.09019
								8500	41.2	12.81	64.72	0.3720	0.09013
								9000	41.6	13.42	67.00	0.3929	0.09007
								9500	42.0	14.03	69.26	0.4135	0.09001
								10000	42.4	14.62	71.49	0.4340	0.08995
								10500	42.8	15.20	73.71	0.4542	0.08989
								11000	43.2	15.77	75.90	0.4743	0.08983
								11500	43.6	16.34	78.07	0.4941	0.08977
								12000	44.0	16.89	80.23	0.5138	0.08972
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.85	60.12	0.3879	0.08403
								8500	39.1	13.47	62.74	0.4198	0.08388
								9000	39.6	14.08	65.35	0.4516	0.08373
								9500	40.1	14.67	67.95	0.4832	0.08358

								10000	40.6	15.25	70.54	0.5148	0.08343
								10500	41.2	15.81	73.13	0.5462	0.08328
								11000	41.7	16.36	75.70	0.5776	0.08314
								11500	42.2	16.90	78.27	0.6088	0.08299
								12000	42.7	17.43	80.83	0.6399	0.08284
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.82	59.01	0.3662	0.08516
								8500	39.2	13.45	61.47	0.3947	0.08506
								9000	39.7	14.07	63.91	0.4229	0.08496
								9500	40.1	14.67	66.34	0.4510	0.08486
								10000	40.6	15.26	68.76	0.4790	0.08476
								10500	41.1	15.84	71.17	0.5068	0.08466
								11000	41.6	16.41	73.56	0.5345	0.08456
								11500	42.0	16.96	75.95	0.5620	0.08446
								12000	42.5	17.50	78.32	0.5895	0.08437
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.18	62.41	0.3509	0.09019
								8500	41.2	12.81	64.72	0.3720	0.09013
								9000	41.6	13.42	67.00	0.3929	0.09007
								9500	42.0	14.03	69.26	0.4135	0.09001
								10000	42.4	14.62	71.49	0.4340	0.08995

	10500	42.8	15.20	73.71	0.4542	0.08989
	11000	43.2	15.77	75.90	0.4743	0.08983
	11500	43.6	16.34	78.07	0.4941	0.08977
	12000	44.0	16.89	80.23	0.5138	0.08972
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.85	60.12	0.3879	0.08403
	8500	39.1	13.47	62.74	0.4198	0.08388
	9000	39.6	14.08	65.35	0.4516	0.08373
	9500	40.1	14.67	67.95	0.4832	0.08358
	10000	40.6	15.25	70.54	0.5148	0.08343
	10500	41.2	15.81	73.13	0.5462	0.08328
	11000	41.7	16.36	75.70	0.5776	0.08314
	11500	42.2	16.90	78.27	0.6088	0.08299
	12000	42.7	17.43	80.83	0.6399	0.08284
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.82	59.01	0.3662	0.08516
	8500	39.2	13.45	61.47	0.3947	0.08506
	9000	39.7	14.07	63.91	0.4229	0.08496
	9500	40.1	14.67	66.34	0.4510	0.08486
	10000	40.6	15.26	68.76	0.4790	0.08476
	10500	41.1	15.84	71.17	0.5068	0.08466

								11000	41.6	16.41	73.56	0.5345	0.08456
								11500	42.0	16.96	75.95	0.5620	0.08446
								12000	42.5	17.50	78.32	0.5895	0.08437
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.18	62.41	0.3509	0.09019
								8500	41.2	12.81	64.72	0.3720	0.09013
								9000	41.6	13.42	67.00	0.3929	0.09007
								9500	42.0	14.03	69.26	0.4135	0.09001
								10000	42.4	14.62	71.49	0.4340	0.08995
								10500	42.8	15.20	73.71	0.4542	0.08989
								11000	43.2	15.77	75.90	0.4743	0.08983
								11500	43.6	16.34	78.07	0.4941	0.08977
								12000	44.0	16.89	80.23	0.5138	0.08972
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.85	60.12	0.3879	0.08403
								8500	39.1	13.47	62.74	0.4198	0.08388
								9000	39.6	14.08	65.35	0.4516	0.08373
								9500	40.1	14.67	67.95	0.4832	0.08358
								10000	40.6	15.25	70.54	0.5148	0.08343
								10500	41.2	15.81	73.13	0.5462	0.08328
								11000	41.7	16.36	75.70	0.5776	0.08314

								11500	42.2	16.90	78.27	0.6088	0.08299
								12000	42.7	17.43	80.83	0.6399	0.08284
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.82	59.01	0.3662	0.08516
								8500	39.2	13.45	61.47	0.3947	0.08506
								9000	39.7	14.07	63.91	0.4229	0.08496
								9500	40.1	14.67	66.34	0.4510	0.08486
								10000	40.6	15.26	68.76	0.4790	0.08476
								10500	41.1	15.84	71.17	0.5068	0.08466
								11000	41.6	16.41	73.56	0.5345	0.08456
								11500	42.0	16.96	75.95	0.5620	0.08446
								12000	42.5	17.50	78.32	0.5895	0.08437
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.18	62.41	0.3509	0.09019
								8500	41.2	12.81	64.72	0.3720	0.09013
								9000	41.6	13.42	67.00	0.3929	0.09007
								9500	42.0	14.03	69.26	0.4135	0.09001
								10000	42.4	14.62	71.49	0.4340	0.08995
								10500	42.8	15.20	73.71	0.4542	0.08989
								11000	43.2	15.77	75.90	0.4743	0.08983
								11500	43.6	16.34	78.07	0.4941	0.08977

	12000	44.0	16.89	80.23	0.5138	0.08972
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.85	60.12	0.3879	0.08403
	8500	39.1	13.47	62.74	0.4198	0.08388
	9000	39.6	14.08	65.35	0.4516	0.08373
	9500	40.1	14.67	67.95	0.4832	0.08358
	10000	40.6	15.25	70.54	0.5148	0.08343
	10500	41.2	15.81	73.13	0.5462	0.08328
	11000	41.7	16.36	75.70	0.5776	0.08314
	11500	42.2	16.90	78.27	0.6088	0.08299
	12000	42.7	17.43	80.83	0.6399	0.08284
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.82	59.01	0.3662	0.08516
	8500	39.2	13.45	61.47	0.3947	0.08506
	9000	39.7	14.07	63.91	0.4229	0.08496
	9500	40.1	14.67	66.34	0.4510	0.08486
	10000	40.6	15.26	68.76	0.4790	0.08476
	10500	41.1	15.84	71.17	0.5068	0.08466
	11000	41.6	16.41	73.56	0.5345	0.08456
	11500	42.0	16.96	75.95	0.5620	0.08446
	12000	42.5	17.50	78.32	0.5895	0.08437

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R100/140-ST	4X2	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	40.7	12.18	62.41	0.3509	0.09019
								8500	41.2	12.81	64.72	0.3720	0.09013
								9000	41.6	13.42	67.00	0.3929	0.09007
								9500	42.0	14.03	69.26	0.4135	0.09001
								10000	42.4	14.62	71.49	0.4340	0.08995
								10500	42.8	15.20	73.71	0.4542	0.08989
								11000	43.2	15.77	75.90	0.4743	0.08983
								11500	43.6	16.34	78.07	0.4941	0.08977
								12000	44.0	16.89	80.23	0.5138	0.08972
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.6	12.85	60.12	0.3879	0.08403
								8500	39.1	13.47	62.74	0.4198	0.08388
								9000	39.6	14.08	65.35	0.4516	0.08373
								9500	40.1	14.67	67.95	0.4832	0.08358
								10000	40.6	15.25	70.54	0.5148	0.08343
								10500	41.2	15.81	73.13	0.5462	0.08328
								11000	41.7	16.36	75.70	0.5776	0.08314
								11500	42.2	16.90	78.27	0.6088	0.08299
								12000	42.7	17.43	80.83	0.6399	0.08284
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	38.7	12.82	59.01	0.3662	0.08516

								8500	39.2	13.45	61.47	0.3947	0.08506
								9000	39.7	14.07	63.91	0.4229	0.08496
								9500	40.1	14.67	66.34	0.4510	0.08486
								10000	40.6	15.26	68.76	0.4790	0.08476
								10500	41.1	15.84	71.17	0.5068	0.08466
								11000	41.6	16.41	73.56	0.5345	0.08456
								11500	42.0	16.96	75.95	0.5620	0.08446
								12000	42.5	17.50	78.32	0.5895	0.08437
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	39.3	12.64	60.02	0.5132	0.08351
								8500	39.7	13.28	62.23	0.5366	0.08343
								9000	40.1	13.91	64.42	0.5598	0.08334
								9500	40.5	14.54	66.59	0.5827	0.08326
								10000	40.9	15.15	68.73	0.6054	0.08317
								10500	41.3	15.75	70.86	0.6278	0.08309
								11000	41.7	16.34	72.96	0.6500	0.08301
								11500	42.1	16.92	75.05	0.6721	0.08293
								12000	42.5	17.49	77.12	0.6940	0.08285
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.0	13.04	56.71	0.5058	0.08135
								8500	38.5	13.69	58.97	0.5325	0.08124

	9000	38.9	14.33	61.21	0.5590	0.08113
	9500	39.4	14.96	63.44	0.5853	0.08103
	10000	39.8	15.57	65.65	0.6114	0.08092
	10500	40.2	16.18	67.84	0.6373	0.08081
	11000	40.7	16.77	70.03	0.6631	0.08071
	11500	41.1	17.35	72.20	0.6887	0.08060
	12000	41.5	17.91	74.36	0.7142	0.08050
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.1	13.36	56.76	0.5633	0.07742
	8500	37.6	14.00	59.23	0.5981	0.07724
	9000	38.1	14.63	61.69	0.6328	0.07706
	9500	38.6	15.24	64.14	0.6674	0.07688
	10000	39.1	15.84	66.58	0.7019	0.07669
	10500	39.6	16.43	69.02	0.7362	0.07651
	11000	40.1	17.00	71.44	0.7704	0.07633
	11500	40.6	17.55	73.86	0.8046	0.07615
	12000	41.1	18.10	76.27	0.8386	0.07597
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.2	13.32	55.91	0.5402	0.07854
	8500	37.7	13.98	58.24	0.5714	0.07841
	9000	38.2	14.61	60.55	0.6024	0.07828

								9500	38.7	15.24	62.85	0.6333	0.07815
								10000	39.1	15.85	65.14	0.6640	0.07802
								10500	39.6	16.44	67.41	0.6945	0.07789
								11000	40.0	17.02	69.68	0.7249	0.07776
								11500	40.5	17.59	71.93	0.7552	0.07763
								12000	41.0	18.15	74.17	0.7853	0.07750
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	39.1	12.68	59.37	0.5064	0.08354
								8500	39.6	13.33	61.56	0.5295	0.08345
								9000	40.0	13.96	63.71	0.5523	0.08337
								9500	40.4	14.59	65.85	0.5748	0.08329
								10000	40.8	15.20	67.96	0.5972	0.08320
								10500	41.2	15.81	70.05	0.6193	0.08312

	11000	41.6	16.40	72.13	0.6412	0.08304
	11500	42.0	16.98	74.18	0.6630	0.08296
	12000	42.4	17.56	76.22	0.6845	0.08288
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.0	13.04	56.71	0.5058	0.08135
	8500	38.5	13.69	58.97	0.5325	0.08124
	9000	38.9	14.33	61.21	0.5590	0.08113
	9500	39.4	14.96	63.44	0.5853	0.08103
	10000	39.8	15.57	65.65	0.6114	0.08092
	10500	40.2	16.18	67.84	0.6373	0.08081

	11000	40.7	16.77	70.03	0.6631	0.08071
	11500	41.1	17.35	72.20	0.6887	0.08060
	12000	41.5	17.91	74.36	0.7142	0.08050
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.1	13.39	56.39	0.5580	0.07745
	8500	37.6	14.03	58.84	0.5926	0.07727
	9000	38.0	14.66	61.28	0.6270	0.07709
	9500	38.5	15.28	63.71	0.6613	0.07691
	10000	39.0	15.88	66.13	0.6954	0.07673
	10500	39.5	16.47	68.54	0.7295	0.07655

	11000	40.0	17.04	70.94	0.7634	0.07637
	11500	40.5	17.60	73.34	0.7972	0.07619
	12000	41.0	18.14	75.73	0.8309	0.07601
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.2	13.34	55.65	0.5367	0.07856
	8500	37.7	14.00	57.96	0.5677	0.07843
	9000	38.1	14.64	60.26	0.5985	0.07829
	9500	38.6	15.26	62.55	0.6292	0.07816
	10000	39.1	15.87	64.82	0.6597	0.07803
	10500	39.5	16.47	67.08	0.6900	0.07790

								11000	40.0	17.05	69.33	0.7202	0.07778
								11500	40.4	17.63	71.57	0.7503	0.07765
								12000	40.9	18.19	73.80	0.7803	0.07752
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	39.3	12.64	60.02	0.5132	0.08351
								8500	39.7	13.28	62.23	0.5366	0.08343
								9000	40.1	13.91	64.42	0.5598	0.08334
								9500	40.5	14.54	66.59	0.5827	0.08326
								10000	40.9	15.15	68.73	0.6054	0.08317
								10500	41.3	15.75	70.86	0.6278	0.08309
								11000	41.7	16.34	72.96	0.6500	0.08301
								11500	42.1	16.92	75.05	0.6721	0.08293
								12000	42.5	17.49	77.12	0.6940	0.08285
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.0	13.04	56.71	0.5058	0.08135
								8500	38.5	13.69	58.97	0.5325	0.08124
								9000	38.9	14.33	61.21	0.5590	0.08113
								9500	39.4	14.96	63.44	0.5853	0.08103

	10000	39.8	15.57	65.65	0.6114	0.08092
	10500	40.2	16.18	67.84	0.6373	0.08081
	11000	40.7	16.77	70.03	0.6631	0.08071
	11500	41.1	17.35	72.20	0.6887	0.08060
	12000	41.5	17.91	74.36	0.7142	0.08050
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.1	13.36	56.76	0.5633	0.07742
	8500	37.6	14.00	59.23	0.5981	0.07724
	9000	38.1	14.63	61.69	0.6328	0.07706
	9500	38.6	15.24	64.14	0.6674	0.07688
	10000	39.1	15.84	66.58	0.7019	0.07669
	10500	39.6	16.43	69.02	0.7362	0.07651
	11000	40.1	17.00	71.44	0.7704	0.07633
	11500	40.6	17.55	73.86	0.8046	0.07615
	12000	41.1	18.10	76.27	0.8386	0.07597
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.2	13.32	55.91	0.5402	0.07854
	8500	37.7	13.98	58.24	0.5714	0.07841
	9000	38.2	14.61	60.55	0.6024	0.07828
	9500	38.7	15.24	62.85	0.6333	0.07815
	10000	39.1	15.85	65.14	0.6640	0.07802

								10500	39.6	16.44	67.41	0.6945	0.07789
								11000	40.0	17.02	69.68	0.7249	0.07776
								11500	40.5	17.59	71.93	0.7552	0.07763
								12000	41.0	18.15	74.17	0.7853	0.07750
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	39.1	12.68	59.37	0.5064	0.08354
								8500	39.6	13.33	61.56	0.5295	0.08345
								9000	40.0	13.96	63.71	0.5523	0.08337
								9500	40.4	14.59	65.85	0.5748	0.08329
								10000	40.8	15.20	67.96	0.5972	0.08320
								10500	41.2	15.81	70.05	0.6193	0.08312
								11000	41.6	16.40	72.13	0.6412	0.08304

	11500	42.0	16.98	74.18	0.6630	0.08296
	12000	42.4	17.56	76.22	0.6845	0.08288
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.0	13.04	56.71	0.5058	0.08135
	8500	38.5	13.69	58.97	0.5325	0.08124
	9000	38.9	14.33	61.21	0.5590	0.08113
	9500	39.4	14.96	63.44	0.5853	0.08103
	10000	39.8	15.57	65.65	0.6114	0.08092
	10500	40.2	16.18	67.84	0.6373	0.08081
	11000	40.7	16.77	70.03	0.6631	0.08071

	11500	41.1	17.35	72.20	0.6887	0.08060
	12000	41.5	17.91	74.36	0.7142	0.08050
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.1	13.39	56.39	0.5580	0.07745
	8500	37.6	14.03	58.84	0.5926	0.07727
	9000	38.0	14.66	61.28	0.6270	0.07709
	9500	38.5	15.28	63.71	0.6613	0.07691
	10000	39.0	15.88	66.13	0.6954	0.07673
	10500	39.5	16.47	68.54	0.7295	0.07655
	11000	40.0	17.04	70.94	0.7634	0.07637

LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	11500	40.5	17.60	73.34	0.7972	0.07619
	12000	41.0	18.14	75.73	0.8309	0.07601
	8000	37.2	13.34	55.65	0.5367	0.07856
	8500	37.7	14.00	57.96	0.5677	0.07843
	9000	38.1	14.64	60.26	0.5985	0.07829
	9500	38.6	15.26	62.55	0.6292	0.07816
	10000	39.1	15.87	64.82	0.6597	0.07803
	10500	39.5	16.47	67.08	0.6900	0.07790
	11000	40.0	17.05	69.33	0.7202	0.07778

								11500	40.4	17.63	71.57	0.7503	0.07765
								12000	40.9	18.19	73.80	0.7803	0.07752
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	39.3	12.64	60.02	0.5132	0.08351
								8500	39.7	13.28	62.23	0.5366	0.08343
								9000	40.1	13.91	64.42	0.5598	0.08334
								9500	40.5	14.54	66.59	0.5827	0.08326
								10000	40.9	15.15	68.73	0.6054	0.08317
								10500	41.3	15.75	70.86	0.6278	0.08309
								11000	41.7	16.34	72.96	0.6500	0.08301
								11500	42.1	16.92	75.05	0.6721	0.08293
								12000	42.5	17.49	77.12	0.6940	0.08285
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.0	13.04	56.71	0.5058	0.08135
								8500	38.5	13.69	58.97	0.5325	0.08124
								9000	38.9	14.33	61.21	0.5590	0.08113
								9500	39.4	14.96	63.44	0.5853	0.08103
								10000	39.8	15.57	65.65	0.6114	0.08092
								10500	40.2	16.18	67.84	0.6373	0.08081

	11000	40.7	16.77	70.03	0.6631	0.08071
	11500	41.1	17.35	72.20	0.6887	0.08060
	12000	41.5	17.91	74.36	0.7142	0.08050
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.1	13.36	56.76	0.5633	0.07742
	8500	37.6	14.00	59.23	0.5981	0.07724
	9000	38.1	14.63	61.69	0.6328	0.07706
	9500	38.6	15.24	64.14	0.6674	0.07688
	10000	39.1	15.84	66.58	0.7019	0.07669
	10500	39.6	16.43	69.02	0.7362	0.07651
	11000	40.1	17.00	71.44	0.7704	0.07633
	11500	40.6	17.55	73.86	0.8046	0.07615
	12000	41.1	18.10	76.27	0.8386	0.07597
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.2	13.32	55.91	0.5402	0.07854
	8500	37.7	13.98	58.24	0.5714	0.07841
	9000	38.2	14.61	60.55	0.6024	0.07828
	9500	38.7	15.24	62.85	0.6333	0.07815
	10000	39.1	15.85	65.14	0.6640	0.07802
	10500	39.6	16.44	67.41	0.6945	0.07789
	11000	40.0	17.02	69.68	0.7249	0.07776

								11500	40.5	17.59	71.93	0.7552	0.07763
								12000	41.0	18.15	74.17	0.7853	0.07750
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	3.73	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	39.1	12.68	59.37	0.5064	0.08354
								8500	39.6	13.33	61.56	0.5295	0.08345
								9000	40.0	13.96	63.71	0.5523	0.08337
								9500	40.4	14.59	65.85	0.5748	0.08329
								10000	40.8	15.20	67.96	0.5972	0.08320
								10500	41.2	15.81	70.05	0.6193	0.08312
								11000	41.6	16.40	72.13	0.6412	0.08304
								11500	42.0	16.98	74.18	0.6630	0.08296

	12000	42.4	17.56	76.22	0.6845	0.08288
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.0	13.04	56.71	0.5058	0.08135
	8500	38.5	13.69	58.97	0.5325	0.08124
	9000	38.9	14.33	61.21	0.5590	0.08113
	9500	39.4	14.96	63.44	0.5853	0.08103
	10000	39.8	15.57	65.65	0.6114	0.08092
	10500	40.2	16.18	67.84	0.6373	0.08081
	11000	40.7	16.77	70.03	0.6631	0.08071
	11500	41.1	17.35	72.20	0.6887	0.08060

	12000	41.5	17.91	74.36	0.7142	0.08050
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.1	13.39	56.39	0.5580	0.07745
	8500	37.6	14.03	58.84	0.5926	0.07727
	9000	38.0	14.66	61.28	0.6270	0.07709
	9500	38.5	15.28	63.71	0.6613	0.07691
	10000	39.0	15.88	66.13	0.6954	0.07673
	10500	39.5	16.47	68.54	0.7295	0.07655
	11000	40.0	17.04	70.94	0.7634	0.07637
	11500	40.5	17.60	73.34	0.7972	0.07619

	12000	41.0	18.14	75.73	0.8309	0.07601
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.2	13.34	55.65	0.5367	0.07856
	8500	37.7	14.00	57.96	0.5677	0.07843
	9000	38.1	14.64	60.26	0.5985	0.07829
	9500	38.6	15.26	62.55	0.6292	0.07816
	10000	39.1	15.87	64.82	0.6597	0.07803
	10500	39.5	16.47	67.08	0.6900	0.07790
	11000	40.0	17.05	69.33	0.7202	0.07778
	11500	40.4	17.63	71.57	0.7503	0.07765

								12000	40.9	18.19	73.80	0.7803	0.07752
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	39.4	12.58	59.89	0.6367	0.08157
								8500	39.8	13.23	62.06	0.6611	0.08146
								9000	40.2	13.86	64.21	0.6853	0.08136
								9500	40.7	14.48	66.33	0.7093	0.08126
								10000	41.1	15.09	68.44	0.7330	0.08116
								10500	41.5	15.69	70.52	0.7564	0.08106
								11000	41.9	16.28	72.58	0.7797	0.08097
								11500	42.3	16.86	74.63	0.8027	0.08087
								12000	42.7	17.43	76.66	0.8256	0.08078
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.2	12.99	56.49	0.6228	0.07950
								8500	38.6	13.65	58.71	0.6506	0.07937
								9000	39.1	14.29	60.91	0.6782	0.07925
								9500	39.5	14.91	63.09	0.7056	0.07913
								10000	39.9	15.53	65.26	0.7328	0.07900
								10500	40.3	16.13	67.41	0.7599	0.07888
								11000	40.8	16.72	69.55	0.7867	0.07876
								11500	41.2	17.30	71.68	0.8134	0.07864

	12000	41.6	17.87	73.80	0.8400	0.07852
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.2	13.32	56.12	0.6989	0.07529
	8500	37.7	13.96	58.53	0.7353	0.07509
	9000	38.2	14.59	60.93	0.7715	0.07488
	9500	38.7	15.21	63.32	0.8076	0.07468
	10000	39.2	15.81	65.70	0.8435	0.07448
	10500	39.7	16.39	68.08	0.8793	0.07428
	11000	40.2	16.96	70.45	0.9150	0.07408
	11500	40.7	17.52	72.81	0.9506	0.07387
	12000	41.2	18.06	75.16	0.9861	0.07367
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.4	13.28	55.35	0.6746	0.07642
	8500	37.8	13.93	57.62	0.7072	0.07627
	9000	38.3	14.57	59.88	0.7397	0.07612
	9500	38.8	15.19	62.13	0.7719	0.07597
	10000	39.2	15.81	64.36	0.8040	0.07581
	10500	39.7	16.40	66.58	0.8359	0.07566
	11000	40.1	16.99	68.79	0.8676	0.07552
	11500	40.6	17.56	71.00	0.8992	0.07537
	12000	41.0	18.12	73.19	0.9307	0.07522

USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	39.3	12.62	59.25	0.6295	0.08160
								8500	39.7	13.27	61.39	0.6537	0.08149
								9000	40.1	13.91	63.51	0.6775	0.08139
								9500	40.5	14.53	65.60	0.7011	0.08130
								10000	40.9	15.15	67.68	0.7244	0.08120
								10500	41.3	15.75	69.73	0.7476	0.08110
								11000	41.7	16.34	71.77	0.7705	0.08101
								11500	42.1	16.93	73.78	0.7932	0.08091
								12000	42.5	17.50	75.78	0.8157	0.08082

LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.2	12.99	56.49	0.6228	0.07950
	8500	38.6	13.65	58.71	0.6506	0.07937
	9000	39.1	14.29	60.91	0.6782	0.07925
	9500	39.5	14.91	63.09	0.7056	0.07913
	10000	39.9	15.53	65.26	0.7328	0.07900
	10500	40.3	16.13	67.41	0.7599	0.07888
	11000	40.8	16.72	69.55	0.7867	0.07876
	11500	41.2	17.30	71.68	0.8134	0.07864
	12000	41.6	17.87	73.80	0.8400	0.07852

LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.2	13.35	55.75	0.6934	0.07533
	8500	37.7	13.99	58.14	0.7295	0.07512
	9000	38.1	14.63	60.52	0.7654	0.07492
	9500	38.6	15.24	62.89	0.8011	0.07472
	10000	39.1	15.84	65.26	0.8368	0.07452
	10500	39.6	16.43	67.61	0.8723	0.07432
	11000	40.1	17.00	69.96	0.9077	0.07412
	11500	40.6	17.56	72.30	0.9429	0.07392
	12000	41.0	18.11	74.63	0.9781	0.07372

LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.3	13.30	55.10	0.6710	0.07644
	8500	37.8	13.95	57.35	0.7034	0.07629
	9000	38.2	14.59	59.60	0.7356	0.07614
	9500	38.7	15.22	61.83	0.7676	0.07599
	10000	39.2	15.83	64.05	0.7995	0.07584
	10500	39.6	16.43	66.26	0.8312	0.07569
	11000	40.1	17.02	68.46	0.8628	0.07554
	11500	40.5	17.59	70.64	0.8942	0.07539
	12000	41.0	18.15	72.82	0.9255	0.07524

USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	39.4	12.58	59.89	0.6367	0.08157
								8500	39.8	13.23	62.06	0.6611	0.08146
								9000	40.2	13.86	64.21	0.6853	0.08136
								9500	40.7	14.48	66.33	0.7093	0.08126
								10000	41.1	15.09	68.44	0.7330	0.08116
								10500	41.5	15.69	70.52	0.7564	0.08106
								11000	41.9	16.28	72.58	0.7797	0.08097
								11500	42.3	16.86	74.63	0.8027	0.08087
								12000	42.7	17.43	76.66	0.8256	0.08078
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.2	12.99	56.49	0.6228	0.07950
								8500	38.6	13.65	58.71	0.6506	0.07937
								9000	39.1	14.29	60.91	0.6782	0.07925
								9500	39.5	14.91	63.09	0.7056	0.07913
								10000	39.9	15.53	65.26	0.7328	0.07900
								10500	40.3	16.13	67.41	0.7599	0.07888
								11000	40.8	16.72	69.55	0.7867	0.07876
								11500	41.2	17.30	71.68	0.8134	0.07864
								12000	41.6	17.87	73.80	0.8400	0.07852
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.2	13.32	56.12	0.6989	0.07529

								8500	37.7	13.96	58.53	0.7353	0.07509
								9000	38.2	14.59	60.93	0.7715	0.07488
								9500	38.7	15.21	63.32	0.8076	0.07468
								10000	39.2	15.81	65.70	0.8435	0.07448
								10500	39.7	16.39	68.08	0.8793	0.07428
								11000	40.2	16.96	70.45	0.9150	0.07408
								11500	40.7	17.52	72.81	0.9506	0.07387
								12000	41.2	18.06	75.16	0.9861	0.07367
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.4	13.28	55.35	0.6746	0.07642
								8500	37.8	13.93	57.62	0.7072	0.07627
								9000	38.3	14.57	59.88	0.7397	0.07612
								9500	38.8	15.19	62.13	0.7719	0.07597
								10000	39.2	15.81	64.36	0.8040	0.07581
								10500	39.7	16.40	66.58	0.8359	0.07566
								11000	40.1	16.99	68.79	0.8676	0.07552
								11500	40.6	17.56	71.00	0.8992	0.07537
								12000	41.0	18.12	73.19	0.9307	0.07522
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	39.3	12.62	59.25	0.6295	0.08160

	8500	39.7	13.27	61.39	0.6537	0.08149
	9000	40.1	13.91	63.51	0.6775	0.08139
	9500	40.5	14.53	65.60	0.7011	0.08130
	10000	40.9	15.15	67.68	0.7244	0.08120
	10500	41.3	15.75	69.73	0.7476	0.08110
	11000	41.7	16.34	71.77	0.7705	0.08101
	11500	42.1	16.93	73.78	0.7932	0.08091
	12000	42.5	17.50	75.78	0.8157	0.08082
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.2	12.99	56.49	0.6228	0.07950

	8500	38.6	13.65	58.71	0.6506	0.07937
	9000	39.1	14.29	60.91	0.6782	0.07925
	9500	39.5	14.91	63.09	0.7056	0.07913
	10000	39.9	15.53	65.26	0.7328	0.07900
	10500	40.3	16.13	67.41	0.7599	0.07888
	11000	40.8	16.72	69.55	0.7867	0.07876
	11500	41.2	17.30	71.68	0.8134	0.07864
	12000	41.6	17.87	73.80	0.8400	0.07852
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.2	13.35	55.75	0.6934	0.07533

	8500	37.7	13.99	58.14	0.7295	0.07512
	9000	38.1	14.63	60.52	0.7654	0.07492
	9500	38.6	15.24	62.89	0.8011	0.07472
	10000	39.1	15.84	65.26	0.8368	0.07452
	10500	39.6	16.43	67.61	0.8723	0.07432
	11000	40.1	17.00	69.96	0.9077	0.07412
	11500	40.6	17.56	72.30	0.9429	0.07392
	12000	41.0	18.11	74.63	0.9781	0.07372
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.3	13.30	55.10	0.6710	0.07644

								8500	37.8	13.95	57.35	0.7034	0.07629
								9000	38.2	14.59	59.60	0.7356	0.07614
								9500	38.7	15.22	61.83	0.7676	0.07599
								10000	39.2	15.83	64.05	0.7995	0.07584
								10500	39.6	16.43	66.26	0.8312	0.07569
								11000	40.1	17.02	68.46	0.8628	0.07554
								11500	40.5	17.59	70.64	0.8942	0.07539
								12000	41.0	18.15	72.82	0.9255	0.07524
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	39.4	12.58	59.89	0.6367	0.08157
								8500	39.8	13.23	62.06	0.6611	0.08146

	9000	40.2	13.86	64.21	0.6853	0.08136
	9500	40.7	14.48	66.33	0.7093	0.08126
	10000	41.1	15.09	68.44	0.7330	0.08116
	10500	41.5	15.69	70.52	0.7564	0.08106
	11000	41.9	16.28	72.58	0.7797	0.08097
	11500	42.3	16.86	74.63	0.8027	0.08087
	12000	42.7	17.43	76.66	0.8256	0.08078
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.2	12.99	56.49	0.6228	0.07950
	8500	38.6	13.65	58.71	0.6506	0.07937
	9000	39.1	14.29	60.91	0.6782	0.07925
	9500	39.5	14.91	63.09	0.7056	0.07913
	10000	39.9	15.53	65.26	0.7328	0.07900
	10500	40.3	16.13	67.41	0.7599	0.07888
	11000	40.8	16.72	69.55	0.7867	0.07876
	11500	41.2	17.30	71.68	0.8134	0.07864
	12000	41.6	17.87	73.80	0.8400	0.07852
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.2	13.32	56.12	0.6989	0.07529
	8500	37.7	13.96	58.53	0.7353	0.07509
	9000	38.2	14.59	60.93	0.7715	0.07488

								9500	38.7	15.21	63.32	0.8076	0.07468
								10000	39.2	15.81	65.70	0.8435	0.07448
								10500	39.7	16.39	68.08	0.8793	0.07428
								11000	40.2	16.96	70.45	0.9150	0.07408
								11500	40.7	17.52	72.81	0.9506	0.07387
								12000	41.2	18.06	75.16	0.9861	0.07367
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	37.4	13.28	55.35	0.6746	0.07642
								8500	37.8	13.93	57.62	0.7072	0.07627
								9000	38.3	14.57	59.88	0.7397	0.07612
								9500	38.8	15.19	62.13	0.7719	0.07597
								10000	39.2	15.81	64.36	0.8040	0.07581
								10500	39.7	16.40	66.58	0.8359	0.07566
								11000	40.1	16.99	68.79	0.8676	0.07552
								11500	40.6	17.56	71.00	0.8992	0.07537
								12000	41.0	18.12	73.19	0.9307	0.07522
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.8L	10R140/1004X4ST	4X4	4.3	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	39.3	12.62	59.25	0.6295	0.08160
								8500	39.7	13.27	61.39	0.6537	0.08149

	9000	40.1	13.91	63.51	0.6775	0.08139
	9500	40.5	14.53	65.60	0.7011	0.08130
	10000	40.9	15.15	67.68	0.7244	0.08120
	10500	41.3	15.75	69.73	0.7476	0.08110
	11000	41.7	16.34	71.77	0.7705	0.08101
	11500	42.1	16.93	73.78	0.7932	0.08091
	12000	42.5	17.50	75.78	0.8157	0.08082
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	38.2	12.99	56.49	0.6228	0.07950
	8500	38.6	13.65	58.71	0.6506	0.07937

	9000	39.1	14.29	60.91	0.6782	0.07925
	9500	39.5	14.91	63.09	0.7056	0.07913
	10000	39.9	15.53	65.26	0.7328	0.07900
	10500	40.3	16.13	67.41	0.7599	0.07888
	11000	40.8	16.72	69.55	0.7867	0.07876
	11500	41.2	17.30	71.68	0.8134	0.07864
	12000	41.6	17.87	73.80	0.8400	0.07852
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.2	13.35	55.75	0.6934	0.07533
	8500	37.7	13.99	58.14	0.7295	0.07512

	9000	38.1	14.63	60.52	0.7654	0.07492
	9500	38.6	15.24	62.89	0.8011	0.07472
	10000	39.1	15.84	65.26	0.8368	0.07452
	10500	39.6	16.43	67.61	0.8723	0.07432
	11000	40.1	17.00	69.96	0.9077	0.07412
	11500	40.6	17.56	72.30	0.9429	0.07392
	12000	41.0	18.11	74.63	0.9781	0.07372
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	37.3	13.30	55.10	0.6710	0.07644
	8500	37.8	13.95	57.35	0.7034	0.07629

								9000	38.2	14.59	59.60	0.7356	0.07614
								9500	38.7	15.22	61.83	0.7676	0.07599
								10000	39.2	15.83	64.05	0.7995	0.07584
								10500	39.6	16.43	66.26	0.8312	0.07569
								11000	40.1	17.02	68.46	0.8628	0.07554
								11500	40.5	17.59	70.64	0.8942	0.07539
								12000	41.0	18.15	72.82	0.9255	0.07524
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.9	16.03	64.19	0.1285	0.06455
								8500	31.3	16.81	66.63	0.1386	0.06458
								9000	31.7	17.57	69.04	0.1485	0.06460
								9500	32.1	18.32	71.42	0.1584	0.06463

	10000	32.5	19.05	73.78	0.1681	0.06466
	10500	32.9	19.77	76.11	0.1777	0.06469
	11000	33.3	20.47	78.42	0.1873	0.06471
	11500	33.7	21.16	80.72	0.1968	0.06474
	12000	34.0	21.83	82.99	0.2062	0.06477
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.88	62.54	0.1540	0.05998
	8500	29.8	17.65	65.33	0.1711	0.05995
	9000	30.3	18.39	68.11	0.1881	0.05992
	9500	30.8	19.11	70.89	0.2051	0.05990
	10000	31.3	19.81	73.65	0.2220	0.05987
	10500	31.7	20.49	76.40	0.2388	0.05984
	11000	32.2	21.15	79.15	0.2556	0.05982
	11500	32.7	21.79	81.88	0.2723	0.05979
	12000	33.1	22.42	84.61	0.2890	0.05976
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.86	61.28	0.1399	0.06087
	8500	29.8	17.65	63.89	0.1548	0.06088
	9000	30.3	18.40	66.50	0.1695	0.06089
	9500	30.7	19.14	69.08	0.1842	0.06090
	10000	31.2	19.86	71.66	0.1988	0.06091

								10500	31.6	20.56	74.22	0.2134	0.06092
								11000	32.1	21.24	76.77	0.2278	0.06093
								11500	32.5	21.91	79.31	0.2422	0.06094
								12000	32.9	22.55	81.83	0.2566	0.06095
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.9	16.03	64.19	0.1285	0.06455
								8500	31.3	16.81	66.63	0.1386	0.06458
								9000	31.7	17.57	69.04	0.1485	0.06460
								9500	32.1	18.32	71.42	0.1584	0.06463
								10000	32.5	19.05	73.78	0.1681	0.06466
								10500	32.9	19.77	76.11	0.1777	0.06469
								11000	33.3	20.47	78.42	0.1873	0.06471
								11500	33.7	21.16	80.72	0.1968	0.06474
								12000	34.0	21.83	82.99	0.2062	0.06477
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.88	62.54	0.1540	0.05998
								8500	29.8	17.65	65.33	0.1711	0.05995
								9000	30.3	18.39	68.11	0.1881	0.05992
								9500	30.8	19.11	70.89	0.2051	0.05990
								10000	31.3	19.81	73.65	0.2220	0.05987
								10500	31.7	20.49	76.40	0.2388	0.05984

								11000	32.2	21.15	79.15	0.2556	0.05982
								11500	32.7	21.79	81.88	0.2723	0.05979
								12000	33.1	22.42	84.61	0.2890	0.05976
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.86	61.28	0.1399	0.06087
								8500	29.8	17.65	63.89	0.1548	0.06088
								9000	30.3	18.40	66.50	0.1695	0.06089
								9500	30.7	19.14	69.08	0.1842	0.06090
								10000	31.2	19.86	71.66	0.1988	0.06091
								10500	31.6	20.56	74.22	0.2134	0.06092
								11000	32.1	21.24	76.77	0.2278	0.06093
								11500	32.5	21.91	79.31	0.2422	0.06094
								12000	32.9	22.55	81.83	0.2566	0.06095
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.9	16.03	64.19	0.1285	0.06455
								8500	31.3	16.81	66.63	0.1386	0.06458
								9000	31.7	17.57	69.04	0.1485	0.06460
								9500	32.1	18.32	71.42	0.1584	0.06463
								10000	32.5	19.05	73.78	0.1681	0.06466
								10500	32.9	19.77	76.11	0.1777	0.06469
								11000	33.3	20.47	78.42	0.1873	0.06471

	11500	33.7	21.16	80.72	0.1968	0.06474
	12000	34.0	21.83	82.99	0.2062	0.06477
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.88	62.54	0.1540	0.05998
	8500	29.8	17.65	65.33	0.1711	0.05995
	9000	30.3	18.39	68.11	0.1881	0.05992
	9500	30.8	19.11	70.89	0.2051	0.05990
	10000	31.3	19.81	73.65	0.2220	0.05987
	10500	31.7	20.49	76.40	0.2388	0.05984
	11000	32.2	21.15	79.15	0.2556	0.05982
	11500	32.7	21.79	81.88	0.2723	0.05979
	12000	33.1	22.42	84.61	0.2890	0.05976
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.86	61.28	0.1399	0.06087
	8500	29.8	17.65	63.89	0.1548	0.06088
	9000	30.3	18.40	66.50	0.1695	0.06089
	9500	30.7	19.14	69.08	0.1842	0.06090
	10000	31.2	19.86	71.66	0.1988	0.06091
	10500	31.6	20.56	74.22	0.2134	0.06092
	11000	32.1	21.24	76.77	0.2278	0.06093
	11500	32.5	21.91	79.31	0.2422	0.06094

								12000	32.9	22.55	81.83	0.2566	0.06095
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.9	16.03	64.19	0.1285	0.06455
								8500	31.3	16.81	66.63	0.1386	0.06458
								9000	31.7	17.57	69.04	0.1485	0.06460
								9500	32.1	18.32	71.42	0.1584	0.06463
								10000	32.5	19.05	73.78	0.1681	0.06466
								10500	32.9	19.77	76.11	0.1777	0.06469
								11000	33.3	20.47	78.42	0.1873	0.06471
								11500	33.7	21.16	80.72	0.1968	0.06474
								12000	34.0	21.83	82.99	0.2062	0.06477
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.88	62.54	0.1540	0.05998
								8500	29.8	17.65	65.33	0.1711	0.05995
								9000	30.3	18.39	68.11	0.1881	0.05992
								9500	30.8	19.11	70.89	0.2051	0.05990
								10000	31.3	19.81	73.65	0.2220	0.05987
								10500	31.7	20.49	76.40	0.2388	0.05984
								11000	32.2	21.15	79.15	0.2556	0.05982
								11500	32.7	21.79	81.88	0.2723	0.05979
								12000	33.1	22.42	84.61	0.2890	0.05976

							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.86	61.28	0.1399	0.06087
								8500	29.8	17.65	63.89	0.1548	0.06088
								9000	30.3	18.40	66.50	0.1695	0.06089
								9500	30.7	19.14	69.08	0.1842	0.06090
								10000	31.2	19.86	71.66	0.1988	0.06091
								10500	31.6	20.56	74.22	0.2134	0.06092
								11000	32.1	21.24	76.77	0.2278	0.06093
								11500	32.5	21.91	79.31	0.2422	0.06094
								12000	32.9	22.55	81.83	0.2566	0.06095
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.9	16.03	64.19	0.1285	0.06455
								8500	31.3	16.81	66.63	0.1386	0.06458
								9000	31.7	17.57	69.04	0.1485	0.06460
								9500	32.1	18.32	71.42	0.1584	0.06463
								10000	32.5	19.05	73.78	0.1681	0.06466
								10500	32.9	19.77	76.11	0.1777	0.06469
								11000	33.3	20.47	78.42	0.1873	0.06471
								11500	33.7	21.16	80.72	0.1968	0.06474
								12000	34.0	21.83	82.99	0.2062	0.06477
							LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.88	62.54	0.1540	0.05998

								8500	29.8	17.65	65.33	0.1711	0.05995
								9000	30.3	18.39	68.11	0.1881	0.05992
								9500	30.8	19.11	70.89	0.2051	0.05990
								10000	31.3	19.81	73.65	0.2220	0.05987
								10500	31.7	20.49	76.40	0.2388	0.05984
								11000	32.2	21.15	79.15	0.2556	0.05982
								11500	32.7	21.79	81.88	0.2723	0.05979
								12000	33.1	22.42	84.61	0.2890	0.05976
							LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.86	61.28	0.1399	0.06087
								8500	29.8	17.65	63.89	0.1548	0.06088
								9000	30.3	18.40	66.50	0.1695	0.06089
								9500	30.7	19.14	69.08	0.1842	0.06090
								10000	31.2	19.86	71.66	0.1988	0.06091
								10500	31.6	20.56	74.22	0.2134	0.06092
								11000	32.1	21.24	76.77	0.2278	0.06093
								11500	32.5	21.91	79.31	0.2422	0.06094
								12000	32.9	22.55	81.83	0.2566	0.06095
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R100/140-ST	4X2	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.9	16.03	64.19	0.1285	0.06455
								8500	31.3	16.81	66.63	0.1386	0.06458

	9000	31.7	17.57	69.04	0.1485	0.06460
	9500	32.1	18.32	71.42	0.1584	0.06463
	10000	32.5	19.05	73.78	0.1681	0.06466
	10500	32.9	19.77	76.11	0.1777	0.06469
	11000	33.3	20.47	78.42	0.1873	0.06471
	11500	33.7	21.16	80.72	0.1968	0.06474
	12000	34.0	21.83	82.99	0.2062	0.06477
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.88	62.54	0.1540	0.05998
	8500	29.8	17.65	65.33	0.1711	0.05995
	9000	30.3	18.39	68.11	0.1881	0.05992
	9500	30.8	19.11	70.89	0.2051	0.05990
	10000	31.3	19.81	73.65	0.2220	0.05987
	10500	31.7	20.49	76.40	0.2388	0.05984
	11000	32.2	21.15	79.15	0.2556	0.05982
	11500	32.7	21.79	81.88	0.2723	0.05979
	12000	33.1	22.42	84.61	0.2890	0.05976
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 65 NONDRIVEN PSI	8000	29.4	16.86	61.28	0.1399	0.06087
	8500	29.8	17.65	63.89	0.1548	0.06088
	9000	30.3	18.40	66.50	0.1695	0.06089

								9500	30.7	19.14	69.08	0.1842	0.06090
								10000	31.2	19.86	71.66	0.1988	0.06091
								10500	31.6	20.56	74.22	0.2134	0.06092
								11000	32.1	21.24	76.77	0.2278	0.06093
								11500	32.5	21.91	79.31	0.2422	0.06094
								12000	32.9	22.55	81.83	0.2566	0.06095
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.0	16.53	62.38	0.2540	0.05989
								8500	30.4	17.34	64.71	0.2668	0.05989
								9000	30.8	18.12	67.02	0.2794	0.05989
								9500	31.2	18.89	69.30	0.2920	0.05989
								10000	31.5	19.64	71.56	0.3043	0.05989
								10500	31.9	20.37	73.80	0.3166	0.05989
								11000	32.3	21.09	76.01	0.3288	0.05989
								11500	32.7	21.80	78.21	0.3408	0.05989
								12000	33.0	22.49	80.39	0.3528	0.05989
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	29.0	17.10	59.11	0.2596	0.05813
								8500	29.4	17.91	61.49	0.2748	0.05812
								9000	29.8	18.70	63.86	0.2900	0.05810
								9500	30.2	19.47	66.21	0.3049	0.05808

	10000	30.6	20.22	68.55	0.3198	0.05807
	10500	31.0	20.95	70.87	0.3346	0.05805
	11000	31.4	21.67	73.18	0.3493	0.05804
	11500	31.8	22.37	75.47	0.3639	0.05802
	12000	32.2	23.05	77.75	0.3785	0.05800
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	28.4	17.47	59.63	0.2975	0.05529
	8500	28.8	18.26	62.26	0.3183	0.05522
	9000	29.3	19.03	64.88	0.3390	0.05515
	9500	29.8	19.77	67.48	0.3596	0.05509
	10000	30.2	20.49	70.08	0.3801	0.05502
	10500	30.7	21.19	72.67	0.4006	0.05496
	11000	31.1	21.87	75.25	0.4210	0.05489
	11500	31.6	22.53	77.82	0.4414	0.05483
	12000	32.0	23.17	80.39	0.4616	0.05476
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	28.4	17.44	58.66	0.2805	0.05619
	8500	28.9	18.24	61.13	0.2988	0.05617
	9000	29.3	19.02	63.59	0.3170	0.05614
	9500	29.7	19.78	66.03	0.3350	0.05611
	10000	30.2	20.52	68.46	0.3530	0.05608

								10500	30.6	21.24	70.88	0.3709	0.05606
								11000	31.0	21.94	73.28	0.3887	0.05603
								11500	31.5	22.62	75.68	0.4065	0.05600
								12000	31.9	23.29	78.06	0.4241	0.05598
USA | CANADA | SINGLE CAB (REGULAR CAB) | SINGLE REAR WHEELS | 142"/3607MM WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	29.9	16.60	61.70	0.2502	0.05989
								8500	30.2	17.41	64.00	0.2629	0.05989
								9000	30.6	18.20	66.27	0.2753	0.05989
								9500	31.0	18.97	68.52	0.2877	0.05989
								10000	31.4	19.73	70.74	0.2999	0.05989
								10500	31.8	20.47	72.95	0.3120	0.05989
								11000	32.1	21.19	75.13	0.3240	0.05989

	11500	32.5	21.90	77.30	0.3358	0.05989
	12000	32.9	22.60	79.45	0.3476	0.05989
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	29.0	17.10	59.11	0.2596	0.05813
	8500	29.4	17.91	61.49	0.2748	0.05812
	9000	29.8	18.70	63.86	0.2900	0.05810
	9500	30.2	19.47	66.21	0.3049	0.05808
	10000	30.6	20.22	68.55	0.3198	0.05807
	10500	31.0	20.95	70.87	0.3346	0.05805
	11000	31.4	21.67	73.18	0.3493	0.05804

	11500	31.8	22.37	75.47	0.3639	0.05802
	12000	32.2	23.05	77.75	0.3785	0.05800
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	28.3	17.51	59.24	0.2944	0.05530
	8500	28.8	18.31	61.84	0.3150	0.05523
	9000	29.2	19.08	64.44	0.3355	0.05517
	9500	29.7	19.82	67.02	0.3559	0.05510
	10000	30.1	20.55	69.59	0.3763	0.05503
	10500	30.6	21.25	72.16	0.3966	0.05497
	11000	31.0	21.93	74.72	0.4168	0.05491

	11500	31.5	22.60	77.27	0.4370	0.05484
	12000	31.9	23.25	79.81	0.4571	0.05478
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	28.4	17.47	58.38	0.2784	0.05620
	8500	28.8	18.27	60.84	0.2966	0.05617
	9000	29.2	19.06	63.28	0.3147	0.05614
	9500	29.7	19.82	65.71	0.3327	0.05611
	10000	30.1	20.56	68.12	0.3505	0.05609
	10500	30.5	21.28	70.52	0.3683	0.05606
	11000	31.0	21.99	72.91	0.3860	0.05603

								11500	31.4	22.67	75.29	0.4036	0.05601
								12000	31.8	23.34	77.66	0.4212	0.05598
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.0	16.53	62.38	0.2540	0.05989
								8500	30.4	17.34	64.71	0.2668	0.05989
								9000	30.8	18.12	67.02	0.2794	0.05989
								9500	31.2	18.89	69.30	0.2920	0.05989
								10000	31.5	19.64	71.56	0.3043	0.05989
								10500	31.9	20.37	73.80	0.3166	0.05989
								11000	32.3	21.09	76.01	0.3288	0.05989
								11500	32.7	21.80	78.21	0.3408	0.05989
								12000	33.0	22.49	80.39	0.3528	0.05989
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	29.0	17.10	59.11	0.2596	0.05813
								8500	29.4	17.91	61.49	0.2748	0.05812
								9000	29.8	18.70	63.86	0.2900	0.05810
								9500	30.2	19.47	66.21	0.3049	0.05808
								10000	30.6	20.22	68.55	0.3198	0.05807
								10500	31.0	20.95	70.87	0.3346	0.05805

	11000	31.4	21.67	73.18	0.3493	0.05804
	11500	31.8	22.37	75.47	0.3639	0.05802
	12000	32.2	23.05	77.75	0.3785	0.05800
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	28.4	17.47	59.63	0.2975	0.05529
	8500	28.8	18.26	62.26	0.3183	0.05522
	9000	29.3	19.03	64.88	0.3390	0.05515
	9500	29.8	19.77	67.48	0.3596	0.05509
	10000	30.2	20.49	70.08	0.3801	0.05502
	10500	30.7	21.19	72.67	0.4006	0.05496
	11000	31.1	21.87	75.25	0.4210	0.05489
	11500	31.6	22.53	77.82	0.4414	0.05483
	12000	32.0	23.17	80.39	0.4616	0.05476
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	28.4	17.44	58.66	0.2805	0.05619
	8500	28.9	18.24	61.13	0.2988	0.05617
	9000	29.3	19.02	63.59	0.3170	0.05614
	9500	29.7	19.78	66.03	0.3350	0.05611
	10000	30.2	20.52	68.46	0.3530	0.05608
	10500	30.6	21.24	70.88	0.3709	0.05606
	11000	31.0	21.94	73.28	0.3887	0.05603

								11500	31.5	22.62	75.68	0.4065	0.05600
								12000	31.9	23.29	78.06	0.4241	0.05598
USA | CANADA | DOUBLE CAB (CREW CAB) | SINGLE REAR WHEELS | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	29.9	16.60	61.70	0.2502	0.05989
								8500	30.2	17.41	64.00	0.2629	0.05989
								9000	30.6	18.20	66.27	0.2753	0.05989
								9500	31.0	18.97	68.52	0.2877	0.05989
								10000	31.4	19.73	70.74	0.2999	0.05989
								10500	31.8	20.47	72.95	0.3120	0.05989
								11000	32.1	21.19	75.13	0.3240	0.05989
								11500	32.5	21.90	77.30	0.3358	0.05989

	12000	32.9	22.60	79.45	0.3476	0.05989
LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	29.0	17.10	59.11	0.2596	0.05813
	8500	29.4	17.91	61.49	0.2748	0.05812
	9000	29.8	18.70	63.86	0.2900	0.05810
	9500	30.2	19.47	66.21	0.3049	0.05808
	10000	30.6	20.22	68.55	0.3198	0.05807
	10500	31.0	20.95	70.87	0.3346	0.05805
	11000	31.4	21.67	73.18	0.3493	0.05804
	11500	31.8	22.37	75.47	0.3639	0.05802

	12000	32.2	23.05	77.75	0.3785	0.05800
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	28.3	17.51	59.24	0.2944	0.05530
	8500	28.8	18.31	61.84	0.3150	0.05523
	9000	29.2	19.08	64.44	0.3355	0.05517
	9500	29.7	19.82	67.02	0.3559	0.05510
	10000	30.1	20.55	69.59	0.3763	0.05503
	10500	30.6	21.25	72.16	0.3966	0.05497
	11000	31.0	21.93	74.72	0.4168	0.05491
	11500	31.5	22.60	77.27	0.4370	0.05484

	12000	31.9	23.25	79.81	0.4571	0.05478
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	28.4	17.47	58.38	0.2784	0.05620
	8500	28.8	18.27	60.84	0.2966	0.05617
	9000	29.2	19.06	63.28	0.3147	0.05614
	9500	29.7	19.82	65.71	0.3327	0.05611
	10000	30.1	20.56	68.12	0.3505	0.05609
	10500	30.5	21.28	70.52	0.3683	0.05606
	11000	31.0	21.99	72.91	0.3860	0.05603
	11500	31.4	22.67	75.29	0.4036	0.05601

								12000	31.8	23.34	77.66	0.4212	0.05598
USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	30.0	16.53	62.38	0.2540	0.05989
								8500	30.4	17.34	64.71	0.2668	0.05989
								9000	30.8	18.12	67.02	0.2794	0.05989
								9500	31.2	18.89	69.30	0.2920	0.05989
								10000	31.5	19.64	71.56	0.3043	0.05989
								10500	31.9	20.37	73.80	0.3166	0.05989
								11000	32.3	21.09	76.01	0.3288	0.05989
								11500	32.7	21.80	78.21	0.3408	0.05989
								12000	33.0	22.49	80.39	0.3528	0.05989
							LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	29.0	17.10	59.11	0.2596	0.05813
								8500	29.4	17.91	61.49	0.2748	0.05812
								9000	29.8	18.70	63.86	0.2900	0.05810
								9500	30.2	19.47	66.21	0.3049	0.05808
								10000	30.6	20.22	68.55	0.3198	0.05807
								10500	31.0	20.95	70.87	0.3346	0.05805
								11000	31.4	21.67	73.18	0.3493	0.05804
								11500	31.8	22.37	75.47	0.3639	0.05802

	12000	32.2	23.05	77.75	0.3785	0.05800
LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	28.4	17.47	59.63	0.2975	0.05529
	8500	28.8	18.26	62.26	0.3183	0.05522
	9000	29.3	19.03	64.88	0.3390	0.05515
	9500	29.8	19.77	67.48	0.3596	0.05509
	10000	30.2	20.49	70.08	0.3801	0.05502
	10500	30.7	21.19	72.67	0.4006	0.05496
	11000	31.1	21.87	75.25	0.4210	0.05489
	11500	31.6	22.53	77.82	0.4414	0.05483
	12000	32.0	23.17	80.39	0.4616	0.05476
LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	28.4	17.44	58.66	0.2805	0.05619
	8500	28.9	18.24	61.13	0.2988	0.05617
	9000	29.3	19.02	63.59	0.3170	0.05614
	9500	29.7	19.78	66.03	0.3350	0.05611
	10000	30.2	20.52	68.46	0.3530	0.05608
	10500	30.6	21.24	70.88	0.3709	0.05606
	11000	31.0	21.94	73.28	0.3887	0.05603
	11500	31.5	22.62	75.68	0.4065	0.05600
	12000	31.9	23.29	78.06	0.4241	0.05598

USA | CANADA | SUPER SINGLE CAB (SUPER CAB) | SINGLE REAR WHEELS | 164 WHEELBASE | 250 SERIES	6.7L 4V HPCR V8 T/C DSL 400HP	10R140/1004X4ST	4X4	3.31	10.50 AXLE SIZE	F250-350_POWER 4 - VACCUM_HYDRO BOOST	LT275/65R 18 ALS CONTINENTAL (GG) / D3HCH AT 75 DRIVEN PSI AND 70 NONDRIVEN PSI	8000	29.9	16.60	61.70	0.2502	0.05989
								8500	30.2	17.41	64.00	0.2629	0.05989
								9000	30.6	18.20	66.27	0.2753	0.05989
								9500	31.0	18.97	68.52	0.2877	0.05989
								10000	31.4	19.73	70.74	0.2999	0.05989
								10500	31.8	20.47	72.95	0.3120	0.05989
								11000	32.1	21.19	75.13	0.3240	0.05989
								11500	32.5	21.90	77.30	0.3358	0.05989
								12000	32.9	22.60	79.45	0.3476	0.05989

LT275/70R 18 AT BRIDGESTONE (AT) / D3HDX AT 65 DRIVEN PSI AND 60 NONDRIVEN PSI	8000	29.0	17.10	59.11	0.2596	0.05813
	8500	29.4	17.91	61.49	0.2748	0.05812
	9000	29.8	18.70	63.86	0.2900	0.05810
	9500	30.2	19.47	66.21	0.3049	0.05808
	10000	30.6	20.22	68.55	0.3198	0.05807
	10500	31.0	20.95	70.87	0.3346	0.05805
	11000	31.4	21.67	73.18	0.3493	0.05804
	11500	31.8	22.37	75.47	0.3639	0.05802
	12000	32.2	23.05	77.75	0.3785	0.05800

LT245/75R 17 AT MICHELIN (AT) / D3KBM AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	28.3	17.51	59.24	0.2944	0.05530
	8500	28.8	18.31	61.84	0.3150	0.05523
	9000	29.2	19.08	64.44	0.3355	0.05517
	9500	29.7	19.82	67.02	0.3559	0.05510
	10000	30.1	20.55	69.59	0.3763	0.05503
	10500	30.6	21.25	72.16	0.3966	0.05497
	11000	31.0	21.93	74.72	0.4168	0.05491
	11500	31.5	22.60	77.27	0.4370	0.05484
	12000	31.9	23.25	79.81	0.4571	0.05478

LT245/75R 17 ALS MICHELIN (AS) / D3KD8 AT 80 DRIVEN PSI AND 75 NONDRIVEN PSI	8000	28.4	17.47	58.38	0.2784	0.05620
	8500	28.8	18.27	60.84	0.2966	0.05617
	9000	29.2	19.06	63.28	0.3147	0.05614
	9500	29.7	19.82	65.71	0.3327	0.05611
	10000	30.1	20.56	68.12	0.3505	0.05609
	10500	30.5	21.28	70.52	0.3683	0.05606
	11000	31.0	21.99	72.91	0.3860	0.05603
	11500	31.4	22.67	75.29	0.4036	0.05601
	12000	31.8	23.34	77.66	0.4212	0.05598

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 P758

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 P758 TRLHP Chart	2026	P758	10/08/2025	EROMER31	26P758-3.2	8F35/HD & HF55 Transmissions Require Coastdown Mode

Vehicle Description								TRLHP Specification					
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | XL VERSION	2.0L GTDI A	8F35 FWD	FWD	3.63		1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	11.4	18.96	21.04	0.0015	0.02590
								3625	11.5	19.46	21.59	0.0056	0.02590
								3750	11.7	19.95	22.14	0.0098	0.02590
								3875	11.8	20.44	22.69	0.0140	0.02590
								4000	11.9	20.92	23.25	0.0182	0.02590
								4250	12.1	21.84	24.36	0.0266	0.02590
								4500	12.3	22.74	25.47	0.0351	0.02590
								4750	12.5	23.60	26.59	0.0436	0.02590
								5000	12.7	24.43	27.72	0.0521	0.02590
USA | CANADA | MEXICO | XLT VERSION	2.0L GTDI A	8F35 FWD	FWD	3.63		1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	11.4	18.96	21.04	0.0015	0.02590
								3625	11.5	19.46	21.59	0.0056	0.02590
								3750	11.7	19.95	22.14	0.0098	0.02590
								3875	11.8	20.44	22.69	0.0140	0.02590
								4000	11.9	20.92	23.25	0.0182	0.02590
								4250	12.1	21.84	24.36	0.0266	0.02590
								4500	12.3	22.74	25.47	0.0351	0.02590
								4750	12.5	23.60	26.59	0.0436	0.02590
								5000	12.7	24.43	27.72	0.0521	0.02590
USA | CANADA | XLT VERSION	2.0L GTDI A	8F35HD AWD	AWDDISC	3.81		1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/55R 19 ALS GOODYEAR (TERRITORY) / D3IHD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	11.7	18.52	24.81	-0.0154	0.02552
								3625	11.8	19.00	25.41	-0.0097	0.02550
								3750	11.9	19.46	26.00	-0.0039	0.02549
								3875	12.0	19.93	26.59	0.0020	0.02547
								4000	12.2	20.38	27.19	0.0078	0.02545
								4250	12.4	21.25	28.39	0.0195	0.02542
								4500	12.6	22.09	29.59	0.0313	0.02539
								4750	12.8	22.90	30.80	0.0431	0.02535
								5000	13.1	23.68	32.01	0.0549	0.02532
							P225/65R 17 AT PIRELLI (SCORPIAN ATR) / D3KDJ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.0	18.05	26.52	0.0097	0.02523
								3625	12.1	18.50	27.18	0.0168	0.02521
								3750	12.3	18.94	27.84	0.0240	0.02518
								3875	12.4	19.36	28.51	0.0312	0.02516
								4000	12.5	19.78	29.17	0.0384	0.02513
								4250	12.8	20.59	30.51	0.0529	0.02509
								4500	13.0	21.36	31.85	0.0674	0.02504
								4750	13.3	22.10	33.20	0.0820	0.02499
								5000	13.6	22.82	34.55	0.0967	0.02494
							P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	11.6	18.78	23.50	-0.0301	0.02586
								3625	11.7	19.28	24.04	-0.0255	0.02585
								3750	11.8	19.77	24.57	-0.0208	0.02585
								3875	11.9	20.26	25.10	-0.0161	0.02584

							4000	12.0	20.73	25.64	-0.0114	0.02584
							4250	12.2	21.66	26.71	-0.0019	0.02583
							4500	12.4	22.55	27.79	0.0076	0.02582
							4750	12.6	23.41	28.88	0.0172	0.02581
						P225/65R 17 ALS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	12.8	24.24	29.96	0.0267	0.02580
USA | CANADA | MEXICO | LARIAT VERSION	2.0L GTDI A	8F35HD AWD	AWDDISC	3.81	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/55R 19 ALS GOODYEAR (TERRITORY) / D3IHD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	11.7	18.52	24.81	-0.0154	0.02552
							3625	11.8	19.00	25.41	-0.0097	0.02550
							3750	11.9	19.46	26.00	-0.0039	0.02549
							3875	12.0	19.93	26.59	0.0020	0.02547
							4000	12.2	20.38	27.19	0.0078	0.02545
							4250	12.4	21.25	28.39	0.0195	0.02542
							4500	12.6	22.09	29.59	0.0313	0.02539
							4750	12.8	22.90	30.80	0.0431	0.02535
							5000	13.1	23.68	32.01	0.0549	0.02532
USA | CANADA | XL VERSION	2.0L GTDI A	8F35HD AWD	AWDDISC	3.81	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	11.6	18.78	23.50	-0.0301	0.02586
							3625	11.7	19.28	24.04	-0.0255	0.02585
							3750	11.8	19.77	24.57	-0.0208	0.02585
							3875	11.9	20.26	25.10	-0.0161	0.02584
							4000	12.0	20.73	25.64	-0.0114	0.02584
							4250	12.2	21.66	26.71	-0.0019	0.02583
							4500	12.4	22.55	27.79	0.0076	0.02582
							4750	12.6	23.41	28.88	0.0172	0.02581
							5000	12.8	24.24	29.96	0.0267	0.02580
USA | CANADA | MEXICO | SPORT VERSION	2.0L GTDI A	8F35-TREMOR	AWDDISC	3.81	Street truck - 2x44 front - 1x36 302x11 9105-B1 PEC 3/2024	P225/55R 19 AS GOODYEAR (TERRITORY) / D3IHD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.1	17.93	19.33	0.2199	0.02418
							3625	12.2	18.40	19.92	0.2255	0.02416
							3750	12.3	18.86	20.52	0.2311	0.02415
							3875	12.4	19.31	21.12	0.2367	0.02413
							4000	12.6	19.75	21.72	0.2424	0.02412
							4250	12.8	20.61	22.93	0.2537	0.02409
							4500	13.0	21.43	24.14	0.2651	0.02406
							4750	13.2	22.23	25.36	0.2765	0.02403
							5000	13.5	23.00	26.58	0.2880	0.02400
USA | CANADA | MEXICO | SPORT VERSION 2	2.0L GTDI A	8F35-TREMOR	AWDDISC	3.81	Street truck - 2x44 front - 1x36 302x11 9105-B1 PEC 3/2024	P225/55R 19 AS GOODYEAR (TERRITORY) / D3IHD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.1	17.93	19.33	0.2199	0.02418
							3625	12.2	18.40	19.92	0.2255	0.02416
							3750	12.3	18.86	20.52	0.2311	0.02415
							3875	12.4	19.31	21.12	0.2367	0.02413
							4000	12.6	19.75	21.72	0.2424	0.02412
							4250	12.8	20.61	22.93	0.2537	0.02409
							4500	13.0	21.43	24.14	0.2651	0.02406
							4750	13.2	22.23	25.36	0.2765	0.02403
							5000	13.5	23.00	26.58	0.2880	0.02400
USA | CANADA | MEXICO | TREMOR VERSION	2.0L GTDI A	8F35-TREMOR	AWDDISC	3.81	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P235/65R 17 AT GOODYEAR (TERRITORY RT AT) / D3KCF AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.8	16.99	27.07	0.0512	0.02644
							3625	12.9	17.40	27.76	0.0597	0.02642
							3750	13.0	17.80	28.44	0.0681	0.02641
							3875	13.2	18.19	29.13	0.0766	0.02640
							4000	13.3	18.58	29.82	0.0851	0.02638
							4250	13.6	19.31	31.20	0.1020	0.02636
							4500	13.9	20.03	32.58	0.1190	0.02633
							4750	14.2	20.71	33.96	0.1359	0.02630
							5000	14.5	21.36	35.34	0.1529	0.02628
USA | CANADA | XL VERSION	ATK-CYC 2.5 4V PFI I4 GAS/ELEC	HF55 FWD	1EMOTOR	3.37	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	11.7	18.48	23.30	0.0723	0.02445
							3625	11.9	18.93	23.88	0.0727	0.02459
							3750	12.0	19.38	24.46	0.0731	0.02473
							3875	12.1	19.81	25.05	0.0736	0.02487
							4000	12.2	20.23	25.64	0.0742	0.02501
							4250	12.5	21.05	26.82	0.0754	0.02529
							4500	12.8	21.83	28.02	0.0767	0.02557
							4750	13.0	22.57	29.23	0.0780	0.02585
							5000	13.3	23.29	30.45	0.0793	0.02613
USA | CANADA | MEXICO | XLT VERSION	ATK-CYC 2.5 4V PFI I4 GAS/ELEC	HF55 FWD	1EMOTOR	3.37	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	11.7	18.48	23.30	0.0723	0.02445
							3625	11.9	18.93	23.88	0.0727	0.02459
							3750	12.0	19.38	24.46	0.0731	0.02473
							3875	12.1	19.81	25.05	0.0736	0.02487
							4000	12.2	20.23	25.64	0.0742	0.02501
							4250	12.5	21.05	26.82	0.0754	0.02529
							4500	12.8	21.83	28.02	0.0767	0.02557
							4750	13.0	22.57	29.23	0.0780	0.02585
							5000	13.3	23.29	30.45	0.0793	0.02613
USA | CANADA | XLT VERSION	ATK-CYC 2.5 4V PFI I4 GAS/ELEC	HF55 AWD	1EMOTOR	3.37	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/55R 19 ALS GOODYEAR (TERRITORY) / D3IHD AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	3500	12.5	17.30	28.66	0.0335	0.02547

							3625	12.7	17.71	29.31	0.0347	0.02561
							3750	12.8	18.12	29.96	0.0360	0.02574
							3875	13.0	18.52	30.62	0.0374	0.02588
							4000	13.1	18.91	31.28	0.0387	0.02602
							4250	13.4	19.65	32.62	0.0416	0.02629
							4500	13.7	20.37	33.97	0.0444	0.02656
							4750	14.0	21.05	35.34	0.0472	0.02683
							5000	14.3	21.70	36.72	0.0499	0.02711
						P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.2	17.77	26.49	0.0401	0.02521
							3625	12.3	18.21	27.05	0.0411	0.02535
							3750	12.5	18.64	27.62	0.0421	0.02549
							3875	12.6	19.07	28.19	0.0432	0.02563
							4000	12.7	19.48	28.76	0.0443	0.02577
							4250	13.0	20.28	29.92	0.0466	0.02604
							4500	13.2	21.04	31.10	0.0490	0.02632
							4750	13.5	21.77	32.28	0.0514	0.02660
						P225/65R 17 ALS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	13.8	22.46	33.48	0.0538	0.02688
USA | CANADA | MEXICO | LARIAT VERSION	ATK-CYC 2.5 4V PFI I4 GAS/ELEC	HF55 AWD	1EMOTOR	3.37	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/55R 19 AS GOODYEAR (TERRITORY) / D3IHD AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	3500	12.6	17.17	29.06	0.0366	0.02552
							3625	12.8	17.58	29.72	0.0380	0.02566
							3750	12.9	17.98	30.39	0.0394	0.02580
							3875	13.1	18.37	31.07	0.0408	0.02594
							4000	13.2	18.76	31.75	0.0423	0.02607
							4250	13.5	19.49	33.11	0.0454	0.02635
							4500	13.8	20.19	34.50	0.0484	0.02662
							4750	14.1	20.87	35.89	0.0514	0.02689
							5000	14.4	21.50	37.31	0.0543	0.02717
USA | CANADA | XL VERSION	ATK-CYC 2.5 4V PFI I4 GAS/ELEC	HF55 AWD	1EMOTOR	3.37	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.2	17.77	26.49	0.0401	0.02521
							3625	12.3	18.21	27.05	0.0411	0.02535
							3750	12.5	18.64	27.62	0.0421	0.02549
							3875	12.6	19.07	28.19	0.0432	0.02563
							4000	12.7	19.48	28.76	0.0443	0.02577
							4250	13.0	20.28	29.92	0.0466	0.02604
							4500	13.2	21.04	31.10	0.0490	0.02632
							4750	13.5	21.77	32.28	0.0514	0.02660
							5000	13.8	22.46	33.48	0.0538	0.02688
MEXICO | XLT VERSION	2.0L GTDI A	8F35HD AWD	AWDDISC	3.81	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AT PIRELLI (SCORPIAN ATR) / D3KDJ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.0	18.05	26.52	0.0097	0.02523
							3625	12.1	18.50	27.18	0.0168	0.02521
							3750	12.3	18.94	27.84	0.0240	0.02518
							3875	12.4	19.36	28.51	0.0312	0.02516
							4000	12.5	19.78	29.17	0.0384	0.02513
							4250	12.8	20.59	30.51	0.0529	0.02509
							4500	13.0	21.36	31.85	0.0674	0.02504
							4750	13.3	22.10	33.20	0.0820	0.02499
							5000	13.6	22.82	34.55	0.0967	0.02494
						P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	11.6	18.78	23.50	-0.0301	0.02586
							3625	11.7	19.28	24.04	-0.0255	0.02585
							3750	11.8	19.77	24.57	-0.0208	0.02585
							3875	11.9	20.26	25.10	-0.0161	0.02584
							4000	12.0	20.73	25.64	-0.0114	0.02584
							4250	12.2	21.66	26.71	-0.0019	0.02583
							4500	12.4	22.55	27.79	0.0076	0.02582
							4750	12.6	23.41	28.88	0.0172	0.02581
						P225/65R 17 ALS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	5000	12.8	24.24	29.96	0.0267	0.02580
MEXICO | XLT VERSION	ATK-CYC 2.5 4V PFI I4 GAS/ELEC	HF55 AWD	1EMOTOR	3.37	1x57 325x27 9223 1x36 302x11 9105-B1 PEC 3/2024	P225/65R 17 AS CONTINENTAL (PROCONTACT) / D3KFQ AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	3500	12.2	17.77	26.49	0.0401	0.02521
							3625	12.3	18.21	27.05	0.0411	0.02535
							3750	12.5	18.64	27.62	0.0421	0.02549
							3875	12.6	19.07	28.19	0.0432	0.02563
							4000	12.7	19.48	28.76	0.0443	0.02577
							4250	13.0	20.28	29.92	0.0466	0.02604
							4500	13.2	21.04	31.10	0.0490	0.02632
							4750	13.5	21.77	32.28	0.0514	0.02660
							5000	13.8	22.46	33.48	0.0538	0.02688

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 U611

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 U611 TRLHP Chart	2026	U611	06/17/2025	RGREE285	26U611N.3-0	All 10R transmissions require coastdown mode

Vehicle Description									TRLHP Specification					
												3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA	3.0L GTDI TC V6 GAS	10R60 RWD	RWD	3.58		FEDAB Premium Brakes	P255/55R 20 ALS MICHELIN (PRIMACY) / D3ICL AT 38 DRIVEN PSI AND 32 NONDRIVEN PSI	4750	13.7	21.52	28.23	0.2595	0.02453
								5000	13.9	22.25	29.59	0.2716	0.02448
								5250	14.2	22.95	30.95	0.2838	0.02444
								5500	14.4	23.62	32.32	0.2959	0.02440
								6000	14.9	24.90	35.05	0.3202	0.02431
							P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 40 DRIVEN PSI AND 33 NONDRIVEN PSI	4750	14.3	20.62	29.52	0.2983	0.02503
								5000	14.5	21.29	30.96	0.3130	0.02497
								5250	14.8	21.94	32.40	0.3278	0.02492
								5500	15.1	22.57	33.85	0.3425	0.02486
								6000	15.6	23.76	36.74	0.3721	0.02474
							P275/40R 22 ALS GOODYEAR (EAGLE TOURING) / D3IFE AT 39 DRIVEN PSI AND 36 NONDRIVEN PSI	4750	13.9	21.09	28.52	0.3019	0.02440
								5000	14.2	21.77	29.95	0.3179	0.02433
								5250	14.5	22.42	31.39	0.3340	0.02426
								5500	14.8	23.04	32.83	0.3501	0.02419
								6000	15.3	24.22	35.72	0.3824	0.02405
USA	3.0L GTDI TC V6 GAS	10R60 4X4	4X4	3.58		FEDAB Premium Brakes	P255/55R 20 ALS MICHELIN (PRIMACY) / D3ICL AT 38 DRIVEN PSI AND 32 NONDRIVEN PSI	5000	14.9	20.81	30.46	0.5001	0.02244
								5250	15.1	21.49	31.78	0.5130	0.02239
								5500	15.4	22.16	33.09	0.5258	0.02233
								6000	15.8	23.42	35.72	0.5516	0.02223
								6500	16.3	24.62	38.35	0.5774	0.02212
							P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 40 DRIVEN PSI AND 33 NONDRIVEN PSI	5000	15.5	20.02	31.73	0.5448	0.02279
								5250	15.7	20.66	33.11	0.5603	0.02273
								5500	16.0	21.29	34.49	0.5758	0.02266
								6000	16.5	22.47	37.27	0.6070	0.02252
								6500	17.1	23.58	40.05	0.6382	0.02238
							P275/40R 22 ALS GOODYEAR (EAGLE TOURING) / D3IFE AT 39 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	15.1	20.46	30.42	0.5492	0.02222
								5250	15.4	21.11	31.80	0.5661	0.02214
								5500	15.7	21.73	33.18	0.5831	0.02206
								6000	16.2	22.91	35.94	0.6170	0.02189
								6500	16.7	24.01	38.72	0.6512	0.02173
CANADA	3.0L GTDI TC V6 GAS	10R60 4X4	4X4	3.58		FEDAB Premium Brakes	P255/55R 20 ALS MICHELIN (PRIMACY) / D3ICL AT 38 DRIVEN PSI AND 32 NONDRIVEN PSI	5000	14.9	20.81	30.46	0.5001	0.02244
								5250	15.1	21.49	31.78	0.5130	0.02239
								5500	15.4	22.16	33.09	0.5258	0.02233
								6000	15.8	23.42	35.72	0.5516	0.02223
								6500	16.3	24.62	38.35	0.5774	0.02212
							P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 40 DRIVEN PSI AND 33 NONDRIVEN PSI	5000	15.5	20.02	31.73	0.5448	0.02279
								5250	15.7	20.66	33.11	0.5603	0.02273
								5500	16.0	21.29	34.49	0.5758	0.02266
								6000	16.5	22.47	37.27	0.6070	0.02252
								6500	17.1	23.58	40.05	0.6382	0.02238
							P275/40R 22 ALS GOODYEAR (EAGLE TOURING) / D3IFE AT 39 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	15.1	20.46	30.42	0.5492	0.02222
								5250	15.4	21.11	31.80	0.5661	0.02214
								5500	15.7	21.73	33.18	0.5831	0.02206
								6000	16.2	22.91	35.94	0.6170	0.02189
								6500	16.7	24.01	38.72	0.6512	0.02173
MEXICO	3.0L GTDI TC V6 GAS	10R60 RWD	RWD	3.58		FEDAB Premium Brakes	P255/55R 20 ALS MICHELIN (PRIMACY) / D3ICL AT 38 DRIVEN PSI AND 32 NONDRIVEN PSI	4750	13.7	21.52	28.23	0.2595	0.02453
								5000	13.9	22.25	29.59	0.2716	0.02448
								5250	14.2	22.95	30.95	0.2838	0.02444
								5500	14.4	23.62	32.32	0.2959	0.02440
								6000	14.9	24.90	35.05	0.3202	0.02431
							P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 40 DRIVEN PSI AND 33 NONDRIVEN PSI	4750	14.3	20.62	29.52	0.2983	0.02503
								5000	14.5	21.29	30.96	0.3130	0.02497
								5250	14.8	21.94	32.40	0.3278	0.02492
								5500	15.1	22.57	33.85	0.3425	0.02486
								6000	15.6	23.76	36.74	0.3721	0.02474
MEXICO	3.0L GTDI TC V6 GAS	10R60 4X4	4X4	3.58		FEDAB Premium Brakes	P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 40 DRIVEN PSI AND 33 NONDRIVEN PSI	5000	15.5	20.02	31.73	0.5448	0.02279
								5250	15.7	20.66	33.11	0.5603	0.02273
								5500	16.0	21.29	34.49	0.5758	0.02266
								6000	16.5	22.47	37.27	0.6070	0.02252
								6500	17.1	23.58	40.05	0.6382	0.02238
							P275/40R 22 ALS GOODYEAR (EAGLE TOURING) / D3IFE AT 39 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	15.1	20.46	30.42	0.5492	0.02222

5250	15.4	21.11	31.80	0.5661	0.02214
5500	15.7	21.73	33.18	0.5831	0.02206
6000	16.2	22.91	35.94	0.6170	0.02189
6500	16.7	24.01	38.72	0.6512	0.02173

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 U625

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 U625 TRLHP Chart	2026	U625	06/11/2025	RGREE285	26U625N.3-0	All 10R transmissions require special coastdown mode for testing

Vehicle Description								TRLHP Specification				
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO | POLICE VERSION	3.3L DOHC TIVCT DAMB NA GAS	10R804X4	4X4	3.73	FEDAF High Series Police Brakes	P255/60R 18 ALS GOODYEAR (EAGLE ENFORCER) / D3HC4 AT 38 DRIVEN PSI AND 36 NONDRIVEN PSI	4500	15.7	17.78	31.32	0.5531	0.02342
							4750	15.9	18.44	32.76	0.5703	0.02333
							5000	16.2	19.07	34.20	0.5874	0.02324
							5250	16.5	19.69	35.63	0.6045	0.02315
							5500	16.8	20.29	37.06	0.6217	0.02306
USA | CANADA | MEXICO | POLICE VERSION	3.3L D4 G DI TIVCT NA UPGRADE	10R80MHT4X4	4X4	3.73	FEDAF High Series Police Brakes	P255/60R 18 ALS GOODYEAR (EAGLE ENFORCER) / D3HC4 AT 41 DRIVEN PSI AND 41 NONDRIVEN PSI	5000	16.2	19.08	30.89	0.7306	0.02169
							5250	16.5	19.70	32.29	0.7484	0.02159
							5500	16.8	20.31	33.68	0.7661	0.02148
							6000	17.3	21.46	36.47	0.8014	0.02128
							6500	17.8	22.55	39.24	0.8367	0.02107
USA	2.3L 4V TIVCT DI TC 270 HP GAS	10R60RWD	RWD	3.58	FEDAM Standard Brakes	P255/65R 18 ALS HANKOOK (KINERGY GT) / D3HFC AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	13.7	18.09	33.08	0.0239	0.02737
							4250	13.9	18.87	34.46	0.0356	0.02735
							4500	14.2	19.62	35.84	0.0473	0.02732
							4750	14.5	20.34	37.22	0.0590	0.02729
							5000	14.7	21.05	38.59	0.0706	0.02726
						P255/55R 20 ALS MICHELIN (PRIMACY) / D3IFV AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	13.4	18.45	32.19	0.0164	0.02707
							4250	13.7	19.24	33.60	0.0285	0.02703
							4500	13.9	20.00	35.00	0.0406	0.02698
							4750	14.2	20.73	36.41	0.0528	0.02694
							5000	14.4	21.43	37.82	0.0649	0.02690
USA	2.3L 4V TIVCT DI TC 270 HP GAS	10R60RWD	RWD	3.58	FEDAD Performance Brakes	P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	13.8	17.94	26.35	0.2755	0.02538
							4250	14.1	18.68	27.86	0.2906	0.02532
							4500	14.4	19.39	29.37	0.3057	0.02526
							4750	14.7	20.07	30.89	0.3208	0.02520
							5000	14.9	20.72	32.41	0.3360	0.02514
USA | PLATINUM VERSION	2.3L 4V TIVCT DI TC 270 HP GAS	10R60RWD	RWD	3.58	FEDAM Standard Brakes	P255/55R 20 ALS MICHELIN (PRIMACY) / D3IFV AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	13.4	18.45	32.19	0.0164	0.02707
							4250	13.7	19.24	33.60	0.0285	0.02703
							4500	13.9	20.00	35.00	0.0406	0.02698
							4750	14.2	20.73	36.41	0.0528	0.02694
							5000	14.4	21.43	37.82	0.0649	0.02690
USA | CANADA	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X4	4X4	3.58	FEDAM Standard Brakes	P255/65R 18 ALS HANKOOK (KINERGY GT) / D3HFC AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	14.9	17.70	35.53	0.2641	0.02508
							4500	15.1	18.44	36.85	0.2766	0.02504
							4750	15.3	19.15	38.17	0.2890	0.02500
							5000	15.6	19.84	39.49	0.3015	0.02496
							5250	15.8	20.51	40.81	0.3139	0.02492
						P255/55R 20 ALS MICHELIN (PRIMACY) / D3IFV AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	14.6	18.06	34.51	0.2569	0.02475
							4500	14.8	18.80	35.85	0.2699	0.02470
							4750	15.1	19.52	37.20	0.2829	0.02464
							5000	15.3	20.21	38.55	0.2959	0.02459
							5250	15.6	20.88	39.89	0.3090	0.02453
USA | CANADA | TREMOR VERSION	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X4	4X4	3.58	FEDAM Standard Brakes	P265/65R 18 AT BRIDGESTONE (DUELER REVO) / D3HFN AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	15.9	16.56	36.75	0.2562	0.02784
							4500	16.2	17.23	38.18	0.2714	0.02781
							4750	16.5	17.87	39.62	0.2865	0.02778
							5000	16.7	18.49	41.06	0.3016	0.02775
							5250	17.0	19.09	42.49	0.3166	0.02772
USA | CANADA	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X4	4X4	3.58	FEDAD Performance Brakes	P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	15.0	17.58	28.67	0.5217	0.02299
							4500	15.2	18.28	30.12	0.5377	0.02292
							4750	15.5	18.95	31.57	0.5537	0.02284
							5000	15.8	19.60	33.02	0.5698	0.02277

USA | CANADA | PLATINUM VERSION	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X4	4X4	3.58	FEDAM Standard Brakes	P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	5250	16.1	20.22	34.48	0.5859	0.02270
							4250	15.2	17.32	36.10	0.3001	0.02512
							4500	15.5	18.01	37.55	0.3162	0.02505
							4750	15.7	18.67	39.00	0.3322	0.02498
							5000	16.0	19.31	40.45	0.3483	0.02491
							5250	16.3	19.94	41.90	0.3644	0.02483
						P255/55R 20 ALS MICHELIN (PRIMACY) / D3IFV AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	14.6	18.06	34.51	0.2569	0.02475
							4500	14.8	18.80	35.85	0.2699	0.02470
							4750	15.1	19.52	37.20	0.2829	0.02464
							5000	15.3	20.21	38.55	0.2959	0.02459
							5250	15.6	20.88	39.89	0.3090	0.02453
USA | CANADA | TREMOR VERSION	3.0L GTDI TC V6 GAS	10R604X4	4X4	3.58	FEDAM Standard Brakes	P265/65R 18 AT BRIDGESTONE (DUELER REVO) / D3HFN AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4500	16.2	17.23	38.18	0.2714	0.02781
							4750	16.5	17.87	39.62	0.2865	0.02778
							5000	16.7	18.49	41.06	0.3016	0.02775
							5250	17.0	19.09	42.49	0.3166	0.02772
							5500	17.3	19.68	43.92	0.3317	0.02768
USA | CANADA | POLICE VERSION	3.0L GTDI TC V6 GAS	10R804X4	4X4	3.31	FEDAF High Series Police Brakes	P255/60R 18 ALS GOODYEAR (EAGLE ENFORCER) / D3HC4 AT 38 DRIVEN PSI AND 36 NONDRIVEN PSI	4500	15.9	17.55	32.04	0.4658	0.02548
							4750	16.2	18.21	33.53	0.4819	0.02540
							5000	16.4	18.84	35.02	0.4979	0.02532
							5250	16.7	19.45	36.50	0.5140	0.02524
							5500	17.0	20.04	37.99	0.5300	0.02516
USA | ST VERSION	3.0L GTDI TC V6 GAS	10R60RWD	RWD	3.58	FEDAD Performance Brakes	P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	14.2	19.69	29.08	0.3124	0.02458
							4750	14.4	20.37	30.59	0.3280	0.02451
							5000	14.7	21.03	32.09	0.3436	0.02445
							5250	15.0	21.66	33.59	0.3592	0.02439
							5500	15.3	22.27	35.10	0.3748	0.02432
USA | CANADA | MEXICO | ST VERSION	3.0L GTDI TC V6 GAS	10R604X4	4X4	3.58	FEDAD Performance Brakes	P275/45R 21 ALS PIRELLI (SCORPION ZERO) / D3ICN AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4500	14.9	18.67	29.64	0.5487	0.02192
							4750	15.2	19.35	31.06	0.5654	0.02184
							5000	15.5	20.01	32.49	0.5821	0.02176
							5250	15.7	20.63	33.92	0.5988	0.02169
							5500	16.0	21.24	35.36	0.6156	0.02161
MEXICO	2.3L 4V TIVCT DI TC 270 HP GAS	10R60RWD	RWD	3.58	FEDAM Standard Brakes	P255/65R 18 ALS HANKOOK (KINERGY GT) / D3HFC AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4000	13.7	18.09	33.08	0.0239	0.02737
							4250	13.9	18.87	34.46	0.0356	0.02735
							4500	14.2	19.62	35.84	0.0473	0.02732
							4750	14.5	20.34	37.22	0.0590	0.02729
							5000	14.7	21.05	38.59	0.0706	0.02726
MEXICO | PLATINUM VERSION	2.3L 4V TIVCT DI TC 270 HP GAS	10R604X4	4X4	3.58	FEDAM Standard Brakes	P255/55R 20 ALS MICHELIN (PRIMACY) / D3IFV AT 33 DRIVEN PSI AND 33 NONDRIVEN PSI	4250	14.6	18.06	34.51	0.2569	0.02475
							4500	14.8	18.80	35.85	0.2699	0.02470
							4750	15.1	19.52	37.20	0.2829	0.02464
							5000	15.3	20.21	38.55	0.2959	0.02459
							5250	15.6	20.88	39.89	0.3090	0.02453
MEXICO | TREMOR VERSION	3.0L GTDI TC V6 GAS	10R604X4	4X4	3.58	FEDAM Standard Brakes	P265/65R 18 AT BRIDGESTONE (DUELER REVO) / D3HFN AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4500	16.2	17.23	38.18	0.2714	0.02781
							4750	16.5	17.87	39.62	0.2865	0.02778
							5000	16.7	18.49	41.06	0.3016	0.02775
							5250	17.0	19.09	42.49	0.3166	0.02772
							5500	17.3	19.68	43.92	0.3317	0.02768

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 U717N

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 U717N2 TRLHP Chart	2026	U717N2	08/13/2025	NREDOUTE	26U717N.3-0	Special Coastdown mode required for 10R80

Vehicle Description									TRLHP Specification				
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | 122.5/3112MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 RWD | LESS TRANSFER CASE	4X2	3.31	8.8" AXLE SIZE	FBAAD Standard Brakes Both Colors	P265/70R 18 AT PIRELLI (SCORPION ATR) / D3HGG AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	16.4	18.84	34.85	0.2589	0.03020
								5250	16.7	19.50	36.08	0.2727	0.03014
								5500	16.9	20.14	37.30	0.2864	0.03008
								6000	17.4	21.38	39.75	0.3138	0.02995
								6500	17.8	22.55	42.19	0.3412	0.02983
								7000	18.3	23.66	44.63	0.3686	0.02971
								7500	18.8	24.71	47.07	0.3959	0.02959
							P275/60R 20 ALS GOODYEAR (WRANGLER HP) / D3IHS AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	15.8	19.66	31.12	0.2030	0.03076
								5250	16.0	20.35	32.29	0.2151	0.03072
								5500	16.2	21.02	33.47	0.2273	0.03069
								6000	16.7	22.29	35.85	0.2519	0.03062
								6500	17.1	23.50	38.24	0.2766	0.03054
								7000	17.6	24.64	40.65	0.3016	0.03047
								7500	18.1	25.71	43.08	0.3267	0.03040
USA | CANADA | MEXICO | 131.6/3342MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 RWD | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P265/70R 18 AT PIRELLI (SCORPION ATR) / D3HGG AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	16.5	18.76	34.92	0.2573	0.03040
								5250	16.7	19.42	36.15	0.2710	0.03034
								5500	17.0	20.06	37.38	0.2846	0.03028
								6000	17.4	21.29	39.83	0.3119	0.03016
								6500	17.9	22.46	42.28	0.3391	0.03004
								7000	18.4	23.57	44.73	0.3663	0.02992
								7500	18.8	24.62	47.18	0.3935	0.02980
							P275/60R 20 ALS GOODYEAR (WRANGLER HP) / D3IHS AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	15.8	19.58	31.18	0.2016	0.03095
								5250	16.0	20.27	32.36	0.2137	0.03092
								5500	16.3	20.94	33.54	0.2258	0.03088
								6000	16.7	22.21	35.93	0.2502	0.03081
								6500	17.2	23.41	38.33	0.2748	0.03074
								7000	17.7	24.55	40.74	0.2995	0.03067
								7500	18.1	25.62	43.18	0.3245	0.03060
USA | CANADA | MEXICO | 131.6/3342MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 2SPD | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P265/70R 18 AT PIRELLI (SCORPION ATR) / D3HGG AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	17.7	17.52	35.94	0.5499	0.02763
								5250	17.9	18.16	37.09	0.5652	0.02754
								5500	18.1	18.78	38.24	0.5806	0.02746
								6000	18.6	19.99	40.53	0.6113	0.02729
								6500	19.0	21.14	42.82	0.6419	0.02711
								7000	19.5	22.23	45.11	0.6726	0.02694
								7500	19.9	23.28	47.40	0.7031	0.02677
							P275/60R 20 AT PIRELLI (SCORPION ATR) / D3IBA AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	17.5	17.68	33.79	0.5417	0.02817
								5250	17.7	18.32	34.95	0.5586	0.02808
								5500	18.0	18.94	36.11	0.5755	0.02799
								6000	18.5	20.12	38.44	0.6095	0.02782
								6500	18.9	21.24	40.78	0.6437	0.02763
								7000	19.4	22.30	43.14	0.6780	0.02745
								7500	19.9	23.31	45.50	0.7125	0.02727
							P275/50R 22 ALS MICHELIN (PRIMACY LTX) / D3IHR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5000	17.1	18.11	31.71	0.4979	0.02865
								5250	17.3	18.80	32.69	0.5107	0.02858
								5500	17.5	19.48	33.68	0.5236	0.02851
								6000	17.9	20.78	35.66	0.5494	0.02837
								6500	18.3	22.03	37.64	0.5753	0.02824
								7000	18.7	23.22	39.63	0.6013	0.02810
								7500	19.1	24.36	41.62	0.6274	0.02796
							P275/60R 20 ALS GOODYEAR (WRANGLER HP) / D3IHS AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	16.9	18.27	32.24	0.4871	0.02821
								5250	17.2	18.94	33.34	0.5009	0.02815
								5500	17.4	19.59	34.44	0.5148	0.02809
								6000	17.8	20.83	36.67	0.5427	0.02797

								6500	18.3	22.02	38.91	0.5708	0.02784
								7000	18.7	23.14	41.17	0.5991	0.02772
								7500	19.2	24.21	43.44	0.6276	0.02759
							P285/40R 24 ALS GOODYEAR (EAGLE TOURING) / D3IHT AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5000	17.8	17.44	34.01	0.5287	0.02909
								5250	18.0	18.08	35.16	0.5448	0.02899
								5500	18.2	18.70	36.31	0.5609	0.02889
								6000	18.7	19.89	38.62	0.5932	0.02870
								6500	19.1	21.03	40.94	0.6256	0.02850
								7000	19.6	22.11	43.27	0.6582	0.02831
								7500	20.1	23.14	45.60	0.6908	0.02811
USA | CANADA | MEXICO | 122.5/3112MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 2SPD | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P265/70R 18 AT PIRELLI (SCORPION ATR) / D3HGG AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	17.6	17.58	35.86	0.5513	0.02744
								5250	17.8	18.23	37.00	0.5668	0.02735
								5500	18.1	18.85	38.15	0.5822	0.02727
								6000	18.5	20.06	40.44	0.6131	0.02709
								6500	19.0	21.21	42.72	0.6439	0.02692
								7000	19.4	22.31	45.01	0.6747	0.02675
								7500	19.9	23.35	47.29	0.7054	0.02658
							P275/60R 20 AT PIRELLI (SCORPION ATR) / D3IBA AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	17.4	17.75	33.71	0.5431	0.02799
								5250	17.7	18.38	34.86	0.5600	0.02790
								5500	17.9	19.00	36.02	0.5771	0.02781
								6000	18.4	20.19	38.35	0.6112	0.02763
								6500	18.9	21.31	40.68	0.6456	0.02745
								7000	19.4	22.38	43.03	0.6801	0.02726
								7500	19.8	23.38	45.39	0.7148	0.02708
							P275/50R 22 ALS MICHELIN (PRIMACY LTX) / D3IHR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5000	17.0	18.18	31.64	0.4988	0.02846
								5250	17.2	18.88	32.62	0.5117	0.02839
								5500	17.4	19.55	33.61	0.5247	0.02833
								6000	17.8	20.85	35.58	0.5507	0.02819
								6500	18.2	22.10	37.56	0.5767	0.02805
								7000	18.6	23.30	39.54	0.6028	0.02791
								7500	19.0	24.45	41.53	0.6290	0.02777
							P275/60R 20 ALS GOODYEAR (WRANGLER HP) / D3IHS AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	16.9	18.34	32.16	0.4883	0.02803
								5250	17.1	19.00	33.26	0.5022	0.02797
								5500	17.3	19.65	34.36	0.5162	0.02791
								6000	17.8	20.91	36.58	0.5442	0.02778
								6500	18.2	22.09	38.82	0.5725	0.02766
								7000	18.7	23.22	41.07	0.6010	0.02753
								7500	19.1	24.29	43.34	0.6296	0.02740
							P285/40R 24 ALS GOODYEAR (EAGLE TOURING) / D3IHT AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5000	17.7	17.50	33.93	0.5301	0.02890
								5250	17.9	18.14	35.07	0.5463	0.02881
								5500	18.1	18.76	36.22	0.5624	0.02871
								6000	18.6	19.96	38.53	0.5949	0.02851
								6500	19.1	21.10	40.84	0.6275	0.02832
								7000	19.5	22.18	43.16	0.6602	0.02812
								7500	20.0	23.21	45.49	0.6931	0.02792
USA | CANADA | MEXICO | 122.5/3112MM WHEELBASE | PERFORMANCE VERSION	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 2SPD | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P275/70R 18 AT GENERAL (GRABBER AT) / D3HGM AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	19.5	15.85	40.27	0.4916	0.03265
								5250	19.8	16.42	41.61	0.5080	0.03257
								5500	20.1	16.98	42.95	0.5244	0.03249
								6000	20.6	18.05	45.62	0.5570	0.03233
								6500	21.1	19.07	48.28	0.5895	0.03217
								7000	21.6	20.04	50.93	0.6219	0.03202
								7500	22.1	20.97	53.57	0.6542	0.03186
MEXICO | 122.5/3112MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 RWD | LESS TRANSFER CASE	4X2	3.31	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P265/70R 18 AT PIRELLI (SCORPION ATR) / D3HGG AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	16.4	18.84	34.85	0.2589	0.03020
								5250	16.7	19.50	36.08	0.2727	0.03014
								5500	16.9	20.14	37.30	0.2864	0.03008
								6000	17.4	21.38	39.75	0.3138	0.02995
								6500	17.8	22.55	42.19	0.3412	0.02983
								7000	18.3	23.66	44.63	0.3686	0.02971
								7500	18.8	24.71	47.07	0.3959	0.02959
							P275/60R 20 ALS GOODYEAR (WRANGLER HP) / D3IHS AT 36 DRIVEN PSI AND 36 NONDRIVEN PSI	5000	15.8	19.66	31.12	0.2030	0.03076
								5250	16.0	20.35	32.29	0.2151	0.03072
								5500	16.2	21.02	33.47	0.2273	0.03069
								6000	16.7	22.29	35.85	0.2519	0.03062
								6500	17.1	23.50	38.24	0.2766	0.03054
								7000	17.6	24.64	40.65	0.3016	0.03047
								7500	18.1	25.71	43.08	0.3267	0.03040

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 U718N

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 U718N TRLHP Chart	2026	U718N	08/13/2025	NREDOUTE	26U718N.3-0	Special Coastdown mode required for 10R80

Vehicle Description									TRLHP Specification					
												3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO | 131.6/3342MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 2SPD | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P275/50R 22 ALS MICHELIN (PRIMACY LTX) / D3IHR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	17.8	19.14	34.62	0.4563	0.03041
								6000	18.2	20.43	36.64	0.4806	0.03028
								6500	18.6	21.67	38.67	0.5050	0.03015
								7000	19.0	22.85	40.70	0.5294	0.03003
								7500	19.4	23.98	42.74	0.5539	0.02990
							P285/40R 24 ALS GOODYEAR (EAGLE TOURING) / D3IHT AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	18.3	18.62	37.06	0.4958	0.03012
								6000	18.7	19.82	39.41	0.5268	0.02993
								6500	19.2	20.95	41.76	0.5579	0.02975
								7000	19.7	22.03	44.13	0.5891	0.02956
								7500	20.1	23.06	46.50	0.6204	0.02938
USA | CANADA | MEXICO | 122.5/3112MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 2SPD | 4X4 2 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P275/50R 22 ALS MICHELIN (PRIMACY LTX) / D3IHR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	17.8	19.18	34.58	0.4568	0.03031
								6000	18.2	20.47	36.60	0.4812	0.03019
								6500	18.5	21.70	38.63	0.5056	0.03006
								7000	18.9	22.89	40.66	0.5301	0.02993
								7500	19.3	24.02	42.70	0.5547	0.02981
							P285/40R 24 ALS GOODYEAR (EAGLE TOURING) / D3IHT AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	18.1	18.81	36.81	0.5003	0.02957
								6000	18.6	20.02	39.13	0.5318	0.02938
								6500	19.0	21.16	41.47	0.5635	0.02919
								7000	19.5	22.24	43.82	0.5952	0.02900
								7500	19.9	23.27	46.17	0.6271	0.02881
USA | CANADA | 131.6/3342MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 1SPD | 4X4 1 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P275/50R 22 ALS MICHELIN (PRIMACY LTX) / D3IHR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	17.8	19.10	35.46	0.4490	0.03034
								6000	18.2	20.39	37.45	0.4743	0.03020
								6500	18.6	21.62	39.45	0.4997	0.03007
								7000	19.0	22.80	41.45	0.5252	0.02993
								7500	19.4	23.93	43.46	0.5507	0.02980
							P285/40R 24 ALS GOODYEAR (EAGLE TOURING) / D3IHT AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	18.3	18.58	37.73	0.4936	0.03001
								6000	18.8	19.77	40.03	0.5259	0.02982
								6500	19.2	20.91	42.35	0.5583	0.02962
								7000	19.7	21.98	44.67	0.5908	0.02943
								7500	20.2	23.01	47.00	0.6234	0.02923
USA | CANADA | 122.5/3112MM WHEELBASE	3.5L CYCLON-D4- G-DI-TIVCT-UPG	10R80 AWD 1SPD | 4X4 1 SPD TRANSFER CASE W/TOD	4X4	3.73	9.75" AXLE SIZE	FBAAD Standard Brakes Both Colors	P275/50R 22 ALS MICHELIN (PRIMACY LTX) / D3IHR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	5500	17.8	19.13	35.42	0.4496	0.03025
								6000	18.2	20.42	37.41	0.4749	0.03011
								6500	18.6	21.65	39.40	0.5004	0.02998
								7000	19.0	22.84	41.40	0.5259	0.02984
								7500	19.4	23.97	43.41	0.5515	0.02971
							P285/40R 24 ALS GOODYEAR (EAGLE TOURING) / D3IHT AT 42 DRIVEN PSI AND 42 NONDRIVEN PSI	5500	18.1	18.77	37.46	0.4985	0.02946
								6000	18.6	19.97	39.75	0.5313	0.02926
								6500	19.1	21.11	42.04	0.5642	0.02906
								7000	19.5	22.20	44.35	0.5973	0.02886
								7500	20.0	23.23	46.66	0.6304	0.02866

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 U725Warthog

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 U725Warthog TRLHP Chart	2026	U725Warthog	10/08/2025	RGREE285	26U725N(3.0L).3-0	10R60 Automatic Transmission requires Coastdown Mode for testing

Vehicle Description									TRLHP Specification				
											3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO | 5 DOOR	3.0L	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES #7	4X4TOD	4.7		4 Wheel Disc- Auto	LT315/80R 17 AT BF GOODRICH (ALL-TERRAIN) / D3KHM AT 38 DRIVEN PSI AND 38 NONDRIVEN PSI	5250	25.1	12.98	43.53	0.3986	0.04982
								5500	25.3	13.46	45.11	0.4017	0.04987
								6000	25.8	14.40	48.27	0.4080	0.04996
								6500	26.3	15.31	51.43	0.4143	0.05006
								7000	26.8	16.18	54.59	0.4206	0.05016

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 U725

Coverage Chart	Model Year	Program	Date	Author	Chart Number	Comments
2026 U725 TRLHP Chart	2026	U725	10/08/2025	RGREE285	26U725N.3-0	10R60 Automatic Transmission requires Coastdown Mode for testing

Vehicle Description									TRLHP Specification					
												3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Axle Size	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | MEXICO | 5 DOOR | OUTER BANKS	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73		4 Wheel Disc- Auto	P255/70R 18 AT BRIDGESTONE (BRIDGESTONE) / D3HFV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.6	14.96	31.54	0.1786	0.03665
								4500	17.8	15.63	32.95	0.1838	0.03669
								4750	18.1	16.28	34.36	0.1891	0.03673
								5000	18.3	16.91	35.78	0.1943	0.03676
								5250	18.6	17.53	37.20	0.1996	0.03680
								5500	18.8	18.13	38.63	0.2049	0.03684
								6000	19.3	19.28	41.48	0.2154	0.03691
							LT265/70R 17 AT GENERAL (GRABBER A/TX) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.4	13.60	39.93	0.2190	0.03771
								4500	19.6	14.20	41.55	0.2263	0.03775
								4750	19.9	14.78	43.16	0.2335	0.03779
								5000	20.2	15.34	44.76	0.2407	0.03783
								5250	20.5	15.89	46.35	0.2478	0.03787
								5500	20.7	16.43	47.93	0.2549	0.03790
								6000	21.3	17.47	51.07	0.2690	0.03798
USA | CANADA | MEXICO | 3 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73		4 Wheel Disc- Auto	P255/70R 16 ALS BRIDGESTONE (DUELER H/T) / D3JDT AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.37	29.89	0.2172	0.03513
								4500	17.4	16.06	31.19	0.2233	0.03516
								4750	17.6	16.73	32.49	0.2294	0.03520
								5000	17.8	17.39	33.79	0.2355	0.03523
								5250	18.0	18.03	35.10	0.2416	0.03526
								5500	18.3	18.65	36.40	0.2477	0.03529
								6000	18.7	19.85	39.03	0.2599	0.03535
USA | CANADA | MEXICO | 5 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73		4 Wheel Disc- Auto	P255/70R 16 ALS BRIDGESTONE (DUELER H/T) / D3JDT AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.1	15.37	29.89	0.2172	0.03513
								4500	17.4	16.06	31.19	0.2233	0.03516
								4750	17.6	16.73	32.49	0.2294	0.03520
								5000	17.8	17.39	33.79	0.2355	0.03523
								5250	18.0	18.03	35.10	0.2416	0.03526
								5500	18.3	18.65	36.40	0.2477	0.03529
								6000	18.7	19.85	39.03	0.2599	0.03535
							LT265/70R 17 AT GENERAL (GRABBER A/TX) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.4	13.60	39.93	0.2190	0.03771
								4500	19.6	14.20	41.55	0.2263	0.03775
								4750	19.9	14.78	43.16	0.2335	0.03779
								5000	20.2	15.34	44.76	0.2407	0.03783
								5250	20.5	15.89	46.35	0.2478	0.03787
								5500	20.7	16.43	47.93	0.2549	0.03790
								6000	21.3	17.47	51.07	0.2690	0.03798
							P255/75R 17 AT BRIDGESTONE (DUELER H/T) / D3KGS AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.8	14.79	32.02	0.1955	0.03673
								4500	18.0	15.46	33.38	0.2010	0.03675
								4750	18.3	16.12	34.73	0.2065	0.03677
								5000	18.5	16.76	36.08	0.2121	0.03679
								5250	18.7	17.38	37.44	0.2176	0.03681
								5500	18.9	17.99	38.79	0.2231	0.03683
								6000	19.4	19.17	41.49	0.2342	0.03687
USA | CANADA | MEXICO | 3 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7		4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.5	12.83	36.90	0.2637	0.04154
								4500	20.8	13.41	38.67	0.2660	0.04160
								4750	21.1	13.97	40.45	0.2682	0.04166
								5000	21.3	14.52	42.23	0.2705	0.04172
								5250	21.6	15.05	44.03	0.2728	0.04178
								5500	21.9	15.56	45.83	0.2751	0.04184
								6000	22.4	16.55	49.45	0.2797	0.04196

USA | CANADA | 3 DOOR | BADLANDS	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.7	12.74	37.07	0.2629	0.04192
							4500	20.9	13.32	38.85	0.2649	0.04198
							4750	21.2	13.88	40.63	0.2669	0.04204
							5000	21.5	14.42	42.43	0.2690	0.04210
							5250	21.8	14.95	44.23	0.2710	0.04217
							5500	22.0	15.46	46.04	0.2731	0.04223
							6000	22.6	16.45	49.68	0.2772	0.04235
USA | CANADA | MEXICO | 5 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.5	12.83	36.90	0.2637	0.04154
							4500	20.8	13.41	38.67	0.2660	0.04160
							4750	21.1	13.97	40.45	0.2682	0.04166
							5000	21.3	14.52	42.23	0.2705	0.04172
							5250	21.6	15.05	44.03	0.2728	0.04178
							5500	21.9	15.56	45.83	0.2751	0.04184
							6000	22.4	16.55	49.45	0.2797	0.04196
USA | CANADA | MEXICO | 5 DOOR | OUTER BANKS	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.5	12.83	36.90	0.2637	0.04154
							4500	20.8	13.41	38.67	0.2660	0.04160
							4750	21.1	13.97	40.45	0.2682	0.04166
							5000	21.3	14.52	42.23	0.2705	0.04172
							5250	21.6	15.05	44.03	0.2728	0.04178
							5500	21.9	15.56	45.83	0.2751	0.04184
							6000	22.4	16.55	49.45	0.2797	0.04196
USA | 5 DOOR | BADLANDS	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.7	12.74	37.07	0.2629	0.04192
							4500	20.9	13.32	38.85	0.2649	0.04198
							4750	21.2	13.88	40.63	0.2669	0.04204
							5000	21.5	14.42	42.43	0.2690	0.04210
							5250	21.8	14.95	44.23	0.2710	0.04217
							5500	22.0	15.46	46.04	0.2731	0.04223
							6000	22.6	16.45	49.68	0.2772	0.04235
USA | CANADA | 3 DOOR | BADLANDS	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Auto	LT285/70R 17 AT BF GOODRICH (ALL TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.6	12.78	40.36	0.2964	0.03975
							4500	20.9	13.33	42.15	0.3036	0.03979
							4750	21.2	13.87	43.94	0.3107	0.03984
							5000	21.5	14.40	45.72	0.3179	0.03988
							5250	21.8	14.91	47.50	0.3250	0.03993
							5500	22.1	15.40	49.28	0.3322	0.03997
							6000	22.7	16.36	52.83	0.3464	0.04006
						LT285/70R 17 MT GOODYEAR (N/A) / D3KFR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.3	12.97	39.99	0.3190	0.03854
							4500	20.6	13.51	41.84	0.3296	0.03855
							4750	20.9	14.04	43.69	0.3402	0.03856
							5000	21.3	14.56	45.54	0.3508	0.03857
							5250	21.6	15.06	47.39	0.3613	0.03858
							5500	21.9	15.54	49.24	0.3719	0.03859
							6000	22.5	16.47	52.93	0.3930	0.03861
						LT285/70R 17 AT GOODYEAR (W TERRITORY RT) / D3KWA AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.7	13.35	34.92	0.2843	0.03954
							4500	20.0	13.94	36.63	0.2897	0.03958
							4750	20.3	14.51	38.34	0.2952	0.03962
							5000	20.6	15.06	40.06	0.3008	0.03967
							5250	20.9	15.60	41.79	0.3063	0.03971
							5500	21.1	16.12	43.53	0.3119	0.03976
							6000	21.7	17.12	47.03	0.3232	0.03985
USA | 5 DOOR | BADLANDS	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Auto	LT285/70R 17 AT BF GOODRICH (ALL TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.6	12.78	40.36	0.2964	0.03975
							4500	20.9	13.33	42.15	0.3036	0.03979
							4750	21.2	13.87	43.94	0.3107	0.03984
							5000	21.5	14.40	45.72	0.3179	0.03988
							5250	21.8	14.91	47.50	0.3250	0.03993
							5500	22.1	15.40	49.28	0.3322	0.03997
							6000	22.7	16.36	52.83	0.3464	0.04006
						LT285/70R 17 MT GOODYEAR (N/A) / D3KFR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.3	12.97	39.99	0.3190	0.03854
							4500	20.6	13.51	41.84	0.3296	0.03855
							4750	20.9	14.04	43.69	0.3402	0.03856
							5000	21.3	14.56	45.54	0.3508	0.03857
							5250	21.6	15.06	47.39	0.3613	0.03858
							5500	21.9	15.54	49.24	0.3719	0.03859
							6000	22.5	16.47	52.93	0.3930	0.03861
						LT285/70R 17 AT GOODYEAR (W TERRITORY RT) / D3KWA AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.7	13.35	34.92	0.2843	0.03954
							4500	20.0	13.94	36.63	0.2897	0.03958
							4750	20.3	14.51	38.34	0.2952	0.03962
							5000	20.6	15.06	40.06	0.3008	0.03967
							5250	20.9	15.60	41.79	0.3063	0.03971
							5500	21.1	16.12	43.53	0.3119	0.03976
							6000	21.7	17.12	47.03	0.3232	0.03985

USA | CANADA | MEXICO | 5 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Auto	LT265/70R 17 AT GENERAL (GRABBER A/TX) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.6	13.40	39.89	0.3267	0.03643
							4500	19.9	14.00	41.49	0.3342	0.03646
							4750	20.2	14.57	43.08	0.3417	0.03649
							5000	20.5	15.13	44.66	0.3491	0.03653
							5250	20.7	15.68	46.23	0.3564	0.03656
							5500	21.0	16.22	47.79	0.3637	0.03659
							6000	21.5	17.26	50.89	0.3782	0.03665
USA | CANADA | MEXICO | 3 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Manual	P255/70R 16 ALS BRIDGESTONE (DUELER H/T) / D3JDT AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	19.0	13.89	28.19	0.6992	0.03163
							4500	19.2	14.53	29.42	0.7081	0.03164
							4750	19.4	15.15	30.65	0.7171	0.03165
							5000	19.6	15.76	31.89	0.7261	0.03166
							5250	19.9	16.36	33.12	0.7350	0.03167
							5500	20.1	16.95	34.36	0.7440	0.03168
							6000	20.6	18.07	36.85	0.7621	0.03170
USA | CANADA | MEXICO | 5 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Manual	P255/70R 16 ALS BRIDGESTONE (DUELER H/T) / D3JDT AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	19.0	13.89	28.19	0.6992	0.03163
							4500	19.2	14.53	29.42	0.7081	0.03164
							4750	19.4	15.15	30.65	0.7171	0.03165
							5000	19.6	15.76	31.89	0.7261	0.03166
							5250	19.9	16.36	33.12	0.7350	0.03167
							5500	20.1	16.95	34.36	0.7440	0.03168
							6000	20.6	18.07	36.85	0.7621	0.03170
						LT265/70R 17 AT GENERAL (GRABBER A/TX) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.1	12.45	37.83	0.6886	0.03454
							4500	21.4	13.00	39.37	0.6996	0.03455
							4750	21.7	13.55	40.90	0.7104	0.03456
							5000	22.0	14.08	42.42	0.7212	0.03457
							5250	22.3	14.60	43.93	0.7319	0.03458
							5500	22.5	15.11	45.43	0.7426	0.03459
							6000	23.1	16.09	48.42	0.7637	0.03461
						P255/75R 17 AT BRIDGESTONE (DUELER H/T) / D3KGS AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	19.6	13.45	30.38	0.6423	0.03374
							4500	19.8	14.07	31.67	0.6509	0.03374
							4750	20.0	14.69	32.96	0.6594	0.03373
							5000	20.3	15.28	34.25	0.6679	0.03373
							5250	20.5	15.87	35.54	0.6765	0.03373
							5500	20.7	16.44	36.83	0.6850	0.03373
							6000	21.2	17.55	39.40	0.7020	0.03372
USA | CANADA | 3 DOOR | BADLANDS	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Manual	LT285/70R 17 AT BF GOODRICH (ALL TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.3	11.81	38.50	0.7118	0.03724
							4500	22.6	12.33	40.20	0.7232	0.03726
							4750	22.9	12.84	41.90	0.7346	0.03727
							5000	23.2	13.34	43.60	0.7460	0.03729
							5250	23.5	13.82	45.29	0.7573	0.03730
							5500	23.8	14.29	46.98	0.7686	0.03731
							6000	24.4	15.20	50.35	0.7912	0.03734
						LT285/70R 17 MT GOODYEAR (N/A) / D3KFR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.9	11.99	37.80	0.7308	0.03611
							4500	22.3	12.51	39.56	0.7461	0.03609
							4750	22.6	13.01	41.31	0.7615	0.03606
							5000	22.9	13.50	43.06	0.7769	0.03604
							5250	23.3	13.97	44.81	0.7923	0.03602
							5500	23.6	14.44	46.55	0.8076	0.03599
							6000	24.2	15.32	50.05	0.8383	0.03595
						LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.3	11.83	35.58	0.6183	0.04016
							4500	22.5	12.38	37.29	0.6240	0.04019
							4750	22.8	12.90	39.01	0.6296	0.04023
							5000	23.1	13.41	40.74	0.6353	0.04027
							5250	23.4	13.91	42.48	0.6411	0.04030
							5500	23.7	14.40	44.22	0.6468	0.04034
							6000	24.2	15.34	47.72	0.6584	0.04041
						LT285/70R 17 AT GOODYEAR (W TERRITORY RT) / D3KWA AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.4	12.30	33.44	0.6887	0.03708
							4500	21.7	12.85	35.06	0.6981	0.03709
							4750	22.0	13.39	36.69	0.7074	0.03711
							5000	22.3	13.91	38.33	0.7169	0.03713
							5250	22.6	14.42	39.98	0.7264	0.03714
							5500	22.8	14.91	41.64	0.7359	0.03716
							6000	23.4	15.86	44.97	0.7551	0.03719
USA | CANADA | MEXICO | 5 DOOR | BADLANDS	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Manual	LT285/70R 17 AT BF GOODRICH (ALL TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.3	11.81	38.50	0.7118	0.03724
							4500	22.6	12.33	40.20	0.7232	0.03726
							4750	22.9	12.84	41.90	0.7346	0.03727
							5000	23.2	13.34	43.60	0.7460	0.03729
							5250	23.5	13.82	45.29	0.7573	0.03730
							5500	23.8	14.29	46.98	0.7686	0.03731
							6000	24.4	15.20	50.35	0.7912	0.03734
						LT285/70R 17 MT GOODYEAR (N/A) / D3KFR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.9	11.99	37.80	0.7308	0.03611
							4500	22.3	12.51	39.56	0.7461	0.03609
							4750	22.6	13.01	41.31	0.7615	0.03606
							5000	22.9	13.50	43.06	0.7769	0.03604

							5250	23.3	13.97	44.81	0.7923	0.03602
							5500	23.6	14.44	46.55	0.8076	0.03599
							6000	24.2	15.32	50.05	0.8383	0.03595
						LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.3	11.83	35.58	0.6183	0.04016
							4500	22.5	12.38	37.29	0.6240	0.04019
							4750	22.8	12.90	39.01	0.6296	0.04023
							5000	23.1	13.41	40.74	0.6353	0.04027
							5250	23.4	13.91	42.48	0.6411	0.04030
							5500	23.7	14.40	44.22	0.6468	0.04034
							6000	24.2	15.34	47.72	0.6584	0.04041
						LT285/70R 17 AT GOODYEAR (W TERRITORY RT) / D3KWA AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.4	12.30	33.44	0.6887	0.03708
							4500	21.7	12.85	35.06	0.6981	0.03709
							4750	22.0	13.39	36.69	0.7074	0.03711
							5000	22.3	13.91	38.33	0.7169	0.03713
							5250	22.6	14.42	39.98	0.7264	0.03714
							5500	22.8	14.91	41.64	0.7359	0.03716
							6000	23.4	15.86	44.97	0.7551	0.03719
USA | CANADA | MEXICO | 3 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Manual	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.1	11.91	35.40	0.6195	0.03976
							4500	22.4	12.46	37.11	0.6254	0.03980
							4750	22.7	12.99	38.82	0.6313	0.03983
							5000	22.9	13.50	40.53	0.6373	0.03987
							5250	23.2	14.00	42.26	0.6433	0.03990
							5500	23.5	14.49	43.99	0.6493	0.03994
							6000	24.1	15.43	47.48	0.6614	0.04001
USA | CANADA | MEXICO | 5 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Manual	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.1	11.91	35.40	0.6195	0.03976
							4500	22.4	12.46	37.11	0.6254	0.03980
							4750	22.7	12.99	38.82	0.6313	0.03983
							5000	22.9	13.50	40.53	0.6373	0.03987
							5250	23.2	14.00	42.26	0.6433	0.03990
							5500	23.5	14.49	43.99	0.6493	0.03994
							6000	24.1	15.43	47.48	0.6614	0.04001
USA | CANADA | MEXICO | 5 DOOR	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Manual	LT265/70R 17 AT GENERAL (GRABBER A/TX) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.2	12.41	37.98	0.7114	0.03422
							4500	21.5	12.97	39.51	0.7225	0.03422
							4750	21.8	13.51	41.03	0.7335	0.03423
							5000	22.0	14.04	42.55	0.7444	0.03424
							5250	22.3	14.56	44.05	0.7552	0.03425
							5500	22.6	15.07	45.54	0.7660	0.03426
							6000	23.1	16.05	48.51	0.7875	0.03428
USA | CANADA | MEXICO | 5 DOOR | OUTER BANKS	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73	4 Wheel Disc- Auto	P255/70R 18 AT BRIDGESTONE (BRIDGESTONE) / D3HFV AT 35 DRIVEN PSI AND 35 NONDRIVEN PSI	4250	17.9	14.71	26.93	0.1783	0.03942
							4500	18.1	15.40	28.19	0.1782	0.03951
							4750	18.3	16.08	29.47	0.1782	0.03961
							5000	18.5	16.74	30.74	0.1781	0.03970
							5250	18.7	17.39	32.02	0.1780	0.03979
							5500	18.9	18.02	33.30	0.1779	0.03988
							6000	19.3	19.25	35.86	0.1777	0.04007
						LT265/70R 17 AT GENERAL (GRABBER A/TX) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.5	13.53	34.89	0.2543	0.03937
							4500	19.7	14.15	36.33	0.2557	0.03947
							4750	19.9	14.76	37.76	0.2570	0.03956
							5000	20.2	15.36	39.18	0.2584	0.03966
							5250	20.4	15.95	40.59	0.2597	0.03975
							5500	20.6	16.52	42.00	0.2610	0.03984
							6000	21.1	17.63	44.79	0.2637	0.04003
USA | CANADA | MEXICO | 5 DOOR | OUTER BANKS	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.1	12.52	29.67	0.2749	0.04582
							4500	21.3	13.11	31.14	0.2746	0.04592
							4750	21.5	13.69	32.62	0.2742	0.04602
							5000	21.7	14.26	34.11	0.2739	0.04612
							5250	22.0	14.81	35.60	0.2736	0.04622
							5500	22.2	15.35	37.09	0.2732	0.04632
							6000	22.7	16.40	40.11	0.2726	0.04652
USA | CANADA | GUAM | MEXICO | 5 DOOR | BADLANDS	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.1	12.52	29.67	0.2749	0.04582
							4500	21.3	13.11	31.14	0.2746	0.04592
							4750	21.5	13.69	32.62	0.2742	0.04602
							5000	21.7	14.26	34.11	0.2739	0.04612
							5250	22.0	14.81	35.60	0.2736	0.04622
							5500	22.2	15.35	37.09	0.2732	0.04632
							6000	22.7	16.40	40.11	0.2726	0.04652
USA | CANADA | 5 DOOR	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.1	12.52	29.67	0.2749	0.04582
							4500	21.3	13.11	31.14	0.2746	0.04592
							4750	21.5	13.69	32.62	0.2742	0.04602
							5000	21.7	14.26	34.11	0.2739	0.04612
							5250	22.0	14.81	35.60	0.2736	0.04622

							5500	22.2	15.35	37.09	0.2732	0.04632
							6000	22.7	16.40	40.11	0.2726	0.04652
USA | CANADA | MEXICO | 5 DOOR | BADLANDS	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Auto	LT285/70R 17 AT BF GOODRICH (ALL TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.6	12.22	36.10	0.3114	0.04399
							4500	21.8	12.79	37.73	0.3122	0.04410
							4750	22.1	13.34	39.36	0.3129	0.04421
							5000	22.3	13.87	40.99	0.3136	0.04433
							5250	22.6	14.40	42.61	0.3144	0.04444
							5500	22.8	14.91	44.23	0.3151	0.04455
							6000	23.4	15.91	47.46	0.3165	0.04478
						LT285/70R 17 MT GOODYEAR (N/A) / D3KFR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.0	11.97	38.86	0.2924	0.04464
							4500	22.3	12.51	40.72	0.2928	0.04476
							4750	22.6	13.03	42.58	0.2932	0.04487
							5000	22.9	13.54	44.44	0.2935	0.04499
							5250	23.2	14.04	46.29	0.2939	0.04510
							5500	23.5	14.53	48.15	0.2943	0.04522
							6000	24.0	15.46	51.86	0.2950	0.04545
						LT285/70R 17 AT GOODYEAR (W TERRITORY RT) / D3KWA AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.5	12.85	29.72	0.2825	0.04399
							4500	20.7	13.45	31.21	0.2830	0.04410
							4750	21.0	14.03	32.72	0.2835	0.04420
							5000	21.2	14.61	34.24	0.2839	0.04430
							5250	21.5	15.16	35.76	0.2844	0.04441
							5500	21.7	15.71	37.29	0.2849	0.04451
							6000	22.2	16.75	40.38	0.2859	0.04472
GUAM | MEXICO | 3 DOOR | BADLANDS	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.1	12.52	29.67	0.2749	0.04582
							4500	21.3	13.11	31.14	0.2746	0.04592
							4750	21.5	13.69	32.62	0.2742	0.04602
							5000	21.7	14.26	34.11	0.2739	0.04612
							5250	22.0	14.81	35.60	0.2736	0.04622
							5500	22.2	15.35	37.09	0.2732	0.04632
							6000	22.7	16.40	40.11	0.2726	0.04652
MEXICO | 5 DOOR	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.7	4 Wheel Disc- Auto	LT315/70R 17 MT GOODYEAR (TERRITORY RT) / D3KHY AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.1	12.52	29.67	0.2749	0.04582
							4500	21.3	13.11	31.14	0.2746	0.04592
							4750	21.5	13.69	32.62	0.2742	0.04602
							5000	21.7	14.26	34.11	0.2739	0.04612
							5250	22.0	14.81	35.60	0.2736	0.04622
							5500	22.2	15.35	37.09	0.2732	0.04632
							6000	22.7	16.40	40.11	0.2726	0.04652
MEXICO | 3 DOOR | BADLANDS	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Auto	LT285/70R 17 AT BF GOODRICH (ALL TERRAIN) / D3KEX AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	21.6	12.22	36.10	0.3114	0.04399
							4500	21.8	12.79	37.73	0.3122	0.04410
							4750	22.1	13.34	39.36	0.3129	0.04421
							5000	22.3	13.87	40.99	0.3136	0.04433
							5250	22.6	14.40	42.61	0.3144	0.04444
							5500	22.8	14.91	44.23	0.3151	0.04455
							6000	23.4	15.91	47.46	0.3165	0.04478
						LT285/70R 17 MT GOODYEAR (N/A) / D3KFR AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	22.0	11.97	38.86	0.2924	0.04464
							4500	22.3	12.51	40.72	0.2928	0.04476
							4750	22.6	13.03	42.58	0.2932	0.04487
							5000	22.9	13.54	44.44	0.2935	0.04499
							5250	23.2	14.04	46.29	0.2939	0.04510
							5500	23.5	14.53	48.15	0.2943	0.04522
							6000	24.0	15.46	51.86	0.2950	0.04545
						LT285/70R 17 AT GOODYEAR (W TERRITORY RT) / D3KWA AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.5	12.85	29.72	0.2825	0.04399
							4500	20.7	13.45	31.21	0.2830	0.04410
							4750	21.0	14.03	32.72	0.2835	0.04420
							5000	21.2	14.61	34.24	0.2839	0.04430
							5250	21.5	15.16	35.76	0.2844	0.04441
							5500	21.7	15.71	37.29	0.2849	0.04451
							6000	22.2	16.75	40.38	0.2859	0.04472
USA | CANADA | MEXICO | 5 DOOR |	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73	4 Wheel Disc- Auto	LT265/70R 17 AT FALKEN (WILD PEAK) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	18.7	14.08	35.68	0.2189	0.03748
							4500	18.9	14.71	37.11	0.2250	0.03750
							4750	19.2	15.34	38.54	0.2310	0.03753
							5000	19.4	15.94	39.96	0.2371	0.03755
							5250	19.7	16.54	41.38	0.2431	0.03758
							5500	19.9	17.12	42.80	0.2491	0.03760
							6000	20.4	18.24	45.62	0.2611	0.03765
USA | CANADA | MEXICO | 5 DOOR | OUTER BANKS |	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73	4 Wheel Disc- Auto	LT265/70R 17 AT FALKEN (WILD PEAK) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	18.7	14.08	35.68	0.2189	0.03748
							4500	18.9	14.71	37.11	0.2250	0.03750
							4750	19.2	15.34	38.54	0.2310	0.03753
							5000	19.4	15.94	39.96	0.2371	0.03755
							5250	19.7	16.54	41.38	0.2431	0.03758
							5500	19.9	17.12	42.80	0.2491	0.03760
							6000	20.4	18.24	45.62	0.2611	0.03765

USA | CANADA | MEXICO | 5 DOOR |	2.3L 4V TIVCT DI TC 270 HP GAS	10R60 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Auto	LT265/70R 17 AT FALKEN (WILD PEAK) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	19.0	13.85	35.77	0.3269	0.03620
							4500	19.3	14.48	37.19	0.3331	0.03622
							4750	19.5	15.10	38.60	0.3393	0.03624
							5000	19.7	15.70	40.00	0.3456	0.03626
							5250	20.0	16.29	41.40	0.3518	0.03628
							5500	20.2	16.87	42.80	0.3579	0.03630
							6000	20.7	17.98	45.59	0.3703	0.03634
USA | CANADA | MEXICO | 5 DOOR |	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Manual	LT265/70R 17 AT FALKEN (WILD PEAK) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.5	12.83	33.99	0.6809	0.03433
							4500	20.8	13.43	35.35	0.6900	0.03433
							4750	21.0	14.01	36.71	0.6992	0.03433
							5000	21.2	14.58	38.06	0.7083	0.03433
							5250	21.5	15.13	39.42	0.7174	0.03433
							5500	21.7	15.68	40.77	0.7265	0.03433
							6000	22.2	16.73	43.45	0.7446	0.03434
USA | CANADA | MEXICO | 5 DOOR |	2.3L 4V TIVCT DI TC 270 HP GAS	MT88 EMTC | 4X4 2 SPD TRANSFER CASE W/TOD | FUEL ECONOMY PACKAGES	4X4	4.46	4 Wheel Disc- Manual	LT265/70R 17 AT FALKEN (WILD PEAK) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	20.6	12.79	34.20	0.7030	0.03400
							4500	20.8	13.38	35.56	0.7123	0.03401
							4750	21.1	13.96	36.91	0.7216	0.03401
							5000	21.3	14.53	38.26	0.7308	0.03401
							5250	21.6	15.09	39.60	0.7400	0.03401
							5500	21.8	15.63	40.94	0.7492	0.03401
							6000	22.3	16.68	43.62	0.7675	0.03401
USA | CANADA | MEXICO | 5 DOOR | OUTER BANKS |	2.7L DOHC 4V DI GT V6 GAS/FFV	10R60 ESOF W/O CAD | ELECTC TRANS CASE & FIXED HUBS | FUEL ECONOMY PACKAGES	4X4	3.73	4 Wheel Disc- Auto	LT265/70R 17 AT FALKEN (WILD PEAK) / D3KFS AT 39 DRIVEN PSI AND 39 NONDRIVEN PSI	4250	18.6	14.16	29.55	0.2418	0.03917
							4500	18.8	14.83	30.77	0.2437	0.03924
							4750	19.0	15.50	31.97	0.2456	0.03931
							5000	19.2	16.14	33.18	0.2476	0.03937
							5250	19.4	16.78	34.38	0.2495	0.03944
							5500	19.6	17.40	35.58	0.2514	0.03951
							6000	20.0	18.61	37.97	0.2552	0.03965

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 V363BEV

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 V363BEV TRLHP Chart	2026	V363BEV	07/22/2025	MQUENON	26V363BEV.3-0	BEV Transmission Requires Coastdown Mode

Vehicle Description							TRLHP Specification					
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | 430EL SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 5.85	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	31.2	10.43	46.70	0.4293	0.06640
							5500	31.4	10.86	48.16	0.4302	0.06639
							6000	31.8	11.69	51.09	0.4320	0.06639
							6500	32.2	12.50	53.99	0.4340	0.06640
							7000	32.6	13.30	56.88	0.4359	0.06642
							7500	33.0	14.07	59.75	0.4379	0.06645
							8000	33.4	14.82	62.61	0.4400	0.06648
							8500	33.8	15.56	65.46	0.4420	0.06651
							9000	34.2	16.28	68.29	0.4441	0.06655
							9500	34.7	16.98	71.11	0.4462	0.06659
							10000	35.1	17.67	73.92	0.4483	0.06664
USA | CANADA | 1.9-430L-2T | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 5.85	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	31.2	10.43	46.70	0.4293	0.06640
							5500	31.4	10.86	48.16	0.4302	0.06639
							6000	31.8	11.69	51.09	0.4320	0.06639
							6500	32.2	12.50	53.99	0.4340	0.06640
							7000	32.6	13.30	56.88	0.4359	0.06642
							7500	33.0	14.07	59.75	0.4379	0.06645
							8000	33.4	14.82	62.61	0.4400	0.06648
							8500	33.8	15.56	65.46	0.4420	0.06651
							9000	34.2	16.28	68.29	0.4441	0.06655
							9500	34.7	16.98	71.11	0.4462	0.06659
							10000	35.1	17.67	73.92	0.4483	0.06664
USA | CANADA | MEXICO | 1.9-430L-2T | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.89	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.9	14.84	47.55	0.2737	0.04125
							5500	22.1	15.40	49.02	0.2747	0.04126
							6000	22.5	16.49	51.94	0.2767	0.04129
							6500	22.9	17.54	54.84	0.2788	0.04132
							7000	23.4	18.55	57.73	0.2809	0.04136
							7500	23.8	19.53	60.60	0.2830	0.04140
							8000	24.2	20.47	63.46	0.2851	0.04145
							8500	24.6	21.39	66.30	0.2873	0.04150
							9000	25.0	22.27	69.14	0.2895	0.04155
							9500	25.4	23.13	71.96	0.2916	0.04161
							10000	25.8	23.96	74.77	0.2938	0.04166
USA | CANADA | MEXICO | 1.9-430L-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.13	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	26.1	12.45	47.16	0.3443	0.05266
							5500	26.3	12.94	48.63	0.3452	0.05266
							6000	26.7	13.90	51.55	0.3472	0.05267
							6500	27.2	14.83	54.45	0.3492	0.05270
							7000	27.6	15.73	57.34	0.3512	0.05273
							7500	28.0	16.61	60.21	0.3533	0.05276
							8000	28.4	17.46	63.07	0.3554	0.05280
							8500	28.8	18.28	65.92	0.3575	0.05284
							9000	29.2	19.09	68.75	0.3596	0.05289
							9500	29.6	19.87	71.57	0.3617	0.05294
							10000	30.0	20.63	74.38	0.3639	0.05299

USA | CANADA | MEXICO | 1.9-430L-2T | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.66	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	24.7	13.16	47.29	0.3205	0.04881
							5500	24.9	13.68	48.76	0.3214	0.04881
							6000	25.3	14.68	51.68	0.3234	0.04883
							6500	25.7	15.64	54.58	0.3254	0.04886
							7000	26.1	16.58	57.47	0.3275	0.04889
							7500	26.6	17.49	60.34	0.3296	0.04893
							8000	27.0	18.37	63.20	0.3317	0.04897
							8500	27.4	19.22	66.05	0.3338	0.04902
							9000	27.8	20.06	68.88	0.3359	0.04906
							9500	28.2	20.86	71.70	0.3381	0.04911
							10000	28.6	21.64	74.51	0.3402	0.04917
USA | CANADA | MEXICO | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.15	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	26.5	12.30	47.13	0.3498	0.05354
							5500	26.7	12.78	48.60	0.3507	0.05354
							6000	27.1	13.73	51.52	0.3526	0.05356
							6500	27.5	14.65	54.43	0.3546	0.05358
							7000	27.9	15.55	57.31	0.3566	0.05361
							7500	28.3	16.42	60.19	0.3587	0.05364
							8000	28.7	17.26	63.04	0.3608	0.05368
							8500	29.1	18.08	65.89	0.3629	0.05372
							9000	29.5	18.88	68.72	0.3650	0.05377
							9500	29.9	19.65	71.54	0.3672	0.05382
							10000	30.3	20.41	74.35	0.3693	0.05387
MEXICO | 430EL SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 5.85	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	31.2	10.43	46.70	0.4293	0.06640
							5500	31.4	10.86	48.16	0.4302	0.06639
							6000	31.8	11.69	51.09	0.4320	0.06639
							6500	32.2	12.50	53.99	0.4340	0.06640
							7000	32.6	13.30	56.88	0.4359	0.06642
							7500	33.0	14.07	59.75	0.4379	0.06645
							8000	33.4	14.82	62.61	0.4400	0.06648
							8500	33.8	15.56	65.46	0.4420	0.06651
							9000	34.2	16.28	68.29	0.4441	0.06655
							9500	34.7	16.98	71.11	0.4462	0.06659
							10000	35.1	17.67	73.92	0.4483	0.06664
MEXICO | 1.9-430L-2T | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 5.85	ELECTRIC MOTOR #2	4X2 BEV ED21 | LESS FUEL ECONOMY PACKAGES	1EMOTOR	9.05	V363 LD/LD SRW EPB BEV (Spec i5c) including rear anti drag spring	P235/65R 16 ALS CONTINENTAL (VANCONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	31.2	10.43	46.70	0.4293	0.06640
							5500	31.4	10.86	48.16	0.4302	0.06639
							6000	31.8	11.69	51.09	0.4320	0.06639
							6500	32.2	12.50	53.99	0.4340	0.06640
							7000	32.6	13.30	56.88	0.4359	0.06642
							7500	33.0	14.07	59.75	0.4379	0.06645
							8000	33.4	14.82	62.61	0.4400	0.06648
							8500	33.8	15.56	65.46	0.4420	0.06651
							9000	34.2	16.28	68.29	0.4441	0.06655
							9500	34.7	16.98	71.11	0.4462	0.06659
							10000	35.1	17.67	73.92	0.4483	0.06664

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 V363INC

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 V363INC TRLHP Chart	2026	V363INC	07/22/2025	MQUENON	26V363INC.3-0	10R80 Transmission Requires Coastdown Mode

Vehicle Description							TRLHP Specification					
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | SINGLE REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 66.0	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	30.3	10.74	42.27	0.2948	0.06822
							5500	30.5	11.18	43.58	0.2992	0.06818
							6000	30.9	12.04	46.19	0.3079	0.06810
							6500	31.3	12.88	48.79	0.3165	0.06802
							7000	31.7	13.71	51.37	0.3252	0.06793
							7500	32.0	14.52	53.94	0.3337	0.06785
							8000	32.4	15.30	56.51	0.3423	0.06777
							8500	32.8	16.08	59.06	0.3508	0.06768
							9000	33.1	16.83	61.61	0.3593	0.06760
							9500	33.5	17.57	64.14	0.3677	0.06752
							10000	33.9	18.29	66.67	0.3762	0.06744
USA | CANADA | SINGLE REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 66.0	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	30.1	10.83	38.54	0.3139	0.06857
							5500	30.3	11.27	39.82	0.3182	0.06853
							6000	30.6	12.15	42.38	0.3267	0.06845
							6500	31.0	13.00	44.93	0.3352	0.06836
							7000	31.4	13.84	47.46	0.3437	0.06828
							7500	31.7	14.65	49.98	0.3521	0.06820
							8000	32.1	15.45	52.50	0.3604	0.06812
							8500	32.5	16.23	55.00	0.3688	0.06804
							9000	32.8	16.99	57.50	0.3771	0.06796
							9500	33.2	17.74	59.99	0.3854	0.06788
							10000	33.6	18.47	62.47	0.3937	0.06780
USA | CANADA | DUAL REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 66.0	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	29.8	10.92	35.06	0.3648	0.06818
							5500	30.0	11.38	36.21	0.3697	0.06814
							6000	30.3	12.27	38.48	0.3793	0.06807
							6500	30.7	13.14	40.73	0.3889	0.06800
							7000	31.0	14.00	42.97	0.3984	0.06792
							7500	31.4	14.83	45.19	0.4079	0.06785
							8000	31.7	15.65	47.40	0.4172	0.06778
							8500	32.0	16.46	49.59	0.4265	0.06771
							9000	32.4	17.25	51.77	0.4358	0.06764
							9500	32.7	18.02	53.94	0.4450	0.06757
							10000	33.0	18.78	56.10	0.4542	0.06750
USA | CANADA | SINGLE REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 62.0	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	29.4	11.06	49.19	0.2809	0.06303
							5500	29.6	11.51	50.54	0.2847	0.06299
							6000	30.0	12.39	53.22	0.2925	0.06292
							6500	30.4	13.25	55.90	0.3001	0.06285
							7000	30.8	14.09	58.56	0.3078	0.06278
							7500	31.2	14.91	61.20	0.3154	0.06272
							8000	31.5	15.71	63.84	0.3230	0.06265
							8500	31.9	16.49	66.47	0.3305	0.06258
							9000	32.3	17.26	69.09	0.3381	0.06251
							9500	32.7	18.00	71.70	0.3456	0.06245
							10000	33.1	18.73	74.30	0.3531	0.06238

USA | CANADA | DUAL REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 62.0	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	29.2	11.16	45.61	0.3322	0.06264
							5500	29.4	11.62	46.81	0.3367	0.06261
							6000	29.7	12.52	49.20	0.3457	0.06255
							6500	30.1	13.40	51.57	0.3545	0.06249
							7000	30.4	14.26	53.91	0.3633	0.06243
							7500	30.8	15.11	56.25	0.3721	0.06237
							8000	31.1	15.93	58.56	0.3808	0.06231
							8500	31.5	16.74	60.86	0.3894	0.06225
							9000	31.8	17.53	63.15	0.3980	0.06219
							9500	32.1	18.31	65.43	0.4066	0.06213
							10000	32.5	19.07	67.70	0.4151	0.06207
USA | CANADA | SINGLE REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 70.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	35.4	9.21	43.24	0.3051	0.08280
							5500	35.6	9.59	44.55	0.3094	0.08276
							6000	36.0	10.35	47.16	0.3181	0.08267
							6500	36.3	11.10	49.75	0.3268	0.08259
							7000	36.7	11.83	52.34	0.3354	0.08251
							7500	37.1	12.54	54.91	0.3440	0.08243
							8000	37.5	13.25	57.47	0.3525	0.08234
							8500	37.8	13.93	60.03	0.3610	0.08226
							9000	38.2	14.61	62.57	0.3695	0.08218
							9500	38.6	15.27	65.11	0.3780	0.08210
							10000	38.9	15.92	67.64	0.3864	0.08202
USA | CANADA | SINGLE REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 70.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	35.1	9.27	39.50	0.3242	0.08315
							5500	35.3	9.66	40.79	0.3284	0.08310
							6000	35.7	10.43	43.35	0.3370	0.08302
							6500	36.1	11.18	45.89	0.3455	0.08294
							7000	36.4	11.92	48.43	0.3539	0.08286
							7500	36.8	12.64	50.95	0.3623	0.08278
							8000	37.2	13.35	53.46	0.3707	0.08270
							8500	37.5	14.05	55.97	0.3790	0.08262
							9000	37.9	14.73	58.46	0.3874	0.08254
							9500	38.3	15.40	60.95	0.3957	0.08246
							10000	38.6	16.06	63.43	0.4039	0.08238
USA | DUAL REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 70.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	34.9	9.34	36.03	0.3751	0.08276
							5500	35.1	9.74	37.17	0.3799	0.08272
							6000	35.4	10.52	39.45	0.3896	0.08265
							6500	35.7	11.29	41.70	0.3992	0.08257
							7000	36.1	12.04	43.94	0.4087	0.08250
							7500	36.4	12.78	46.16	0.4181	0.08243
							8000	36.8	13.51	48.37	0.4275	0.08236
							8500	37.1	14.22	50.56	0.4368	0.08228
							9000	37.4	14.92	52.74	0.4461	0.08221
							9500	37.7	15.61	54.91	0.4553	0.08214
							10000	38.1	16.29	57.07	0.4644	0.08207
USA | CANADA | DUAL REAR WHEELS | 510EL SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 73.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	35.0	9.33	36.87	0.3243	0.08362
							5500	35.1	9.72	38.01	0.3292	0.08359
							6000	35.5	10.50	40.28	0.3388	0.08351
							6500	35.8	11.27	42.54	0.3484	0.08344
							7000	36.1	12.02	44.77	0.3579	0.08337
							7500	36.5	12.76	46.99	0.3673	0.08329
							8000	36.8	13.48	49.20	0.3767	0.08322
							8500	37.1	14.20	51.39	0.3860	0.08315
							9000	37.5	14.90	53.57	0.3953	0.08308
							9500	37.8	15.59	55.74	0.4045	0.08301
							10000	38.1	16.27	57.90	0.4137	0.08294
USA | CANADA | DUAL REAR WHEELS | 510M SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 73.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	35.0	9.33	36.87	0.3243	0.08362
							5500	35.1	9.72	38.01	0.3292	0.08359
							6000	35.5	10.50	40.28	0.3388	0.08351
							6500	35.8	11.27	42.54	0.3484	0.08344
							7000	36.1	12.02	44.77	0.3579	0.08337
							7500	36.5	12.76	46.99	0.3673	0.08329
							8000	36.8	13.48	49.20	0.3767	0.08322
							8500	37.1	14.20	51.39	0.3860	0.08315
							9000	37.5	14.90	53.57	0.3953	0.08308
							9500	37.8	15.59	55.74	0.4045	0.08301
							10000	38.1	16.27	57.90	0.4137	0.08294
USA | CANADA | DUAL REAR WHEELS | 510L SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 73.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	35.0	9.33	36.87	0.3243	0.08362
							5500	35.1	9.72	38.01	0.3292	0.08359
							6000	35.5	10.50	40.28	0.3388	0.08351
							6500	35.8	11.27	42.54	0.3484	0.08344
							7000	36.1	12.02	44.77	0.3579	0.08337
							7500	36.5	12.76	46.99	0.3673	0.08329
							8000	36.8	13.48	49.20	0.3767	0.08322

							8500	37.1	14.20	51.39	0.3860	0.08315
							9000	37.5	14.90	53.57	0.3953	0.08308
							9500	37.8	15.59	55.74	0.4045	0.08301
							10000	38.1	16.27	57.90	0.4137	0.08294
USA | CANADA | SINGLE REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 67.0	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	35.1	9.28	50.58	0.2746	0.07958
							5500	35.3	9.67	51.92	0.2784	0.07954
							6000	35.7	10.43	54.61	0.2862	0.07947
							6500	36.1	11.18	57.28	0.2938	0.07940
							7000	36.4	11.91	59.94	0.3015	0.07934
							7500	36.8	12.63	62.59	0.3091	0.07927
							8000	37.2	13.33	65.22	0.3167	0.07920
							8500	37.6	14.02	67.85	0.3242	0.07913
							9000	38.0	14.69	70.47	0.3318	0.07906
							9500	38.3	15.36	73.08	0.3393	0.07900
							10000	38.7	16.01	75.68	0.3468	0.07893
USA | DUAL REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 67.0	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	34.8	9.35	47.00	0.3259	0.07919
							5500	35.0	9.75	48.20	0.3304	0.07916
							6000	35.4	10.52	50.58	0.3394	0.07910
							6500	35.7	11.29	52.95	0.3482	0.07904
							7000	36.1	12.03	55.30	0.3571	0.07898
							7500	36.4	12.77	57.63	0.3658	0.07892
							8000	36.8	13.49	59.94	0.3745	0.07886
							8500	37.1	14.20	62.25	0.3831	0.07880
							9000	37.5	14.89	64.54	0.3917	0.07874
							9500	37.8	15.58	66.81	0.4003	0.07868
							10000	38.1	16.25	69.08	0.4088	0.07862
USA | CANADA | DUAL REAR WHEELS | 510EL SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 72.0	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	36.5	8.93	48.23	0.2726	0.08471
							5500	36.7	9.31	49.43	0.2771	0.08468
							6000	37.0	10.06	51.82	0.2860	0.08462
							6500	37.4	10.79	54.18	0.2949	0.08456
							7000	37.7	11.51	56.53	0.3037	0.08450
							7500	38.1	12.22	58.86	0.3125	0.08444
							8000	38.4	12.91	61.18	0.3212	0.08438
							8500	38.8	13.60	63.48	0.3298	0.08432
							9000	39.1	14.27	65.77	0.3384	0.08426
							9500	39.5	14.93	68.05	0.3469	0.08420
							10000	39.8	15.58	70.31	0.3554	0.08414
USA | CANADA | DUAL REAR WHEELS | 510M SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 72.0	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	36.5	8.93	48.23	0.2726	0.08471
							5500	36.7	9.31	49.43	0.2771	0.08468
							6000	37.0	10.06	51.82	0.2860	0.08462
							6500	37.4	10.79	54.18	0.2949	0.08456
							7000	37.7	11.51	56.53	0.3037	0.08450
							7500	38.1	12.22	58.86	0.3125	0.08444
							8000	38.4	12.91	61.18	0.3212	0.08438
							8500	38.8	13.60	63.48	0.3298	0.08432
							9000	39.1	14.27	65.77	0.3384	0.08426
							9500	39.5	14.93	68.05	0.3469	0.08420
							10000	39.8	15.58	70.31	0.3554	0.08414
USA | CANADA | DUAL REAR WHEELS | 510L SERIES | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 72.0	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	36.5	8.93	48.23	0.2726	0.08471
							5500	36.7	9.31	49.43	0.2771	0.08468
							6000	37.0	10.06	51.82	0.2860	0.08462
							6500	37.4	10.79	54.18	0.2949	0.08456
							7000	37.7	11.51	56.53	0.3037	0.08450
							7500	38.1	12.22	58.86	0.3125	0.08444
							8000	38.4	12.91	61.18	0.3212	0.08438
							8500	38.8	13.60	63.48	0.3298	0.08432
							9000	39.1	14.27	65.77	0.3384	0.08426
							9500	39.5	14.93	68.05	0.3469	0.08420
							10000	39.8	15.58	70.31	0.3554	0.08414
CANADA | DUAL REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 70.0	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	34.9	9.34	36.03	0.3751	0.08276
							5500	35.1	9.74	37.17	0.3799	0.08272
							6000	35.4	10.52	39.45	0.3896	0.08265
							6500	35.7	11.29	41.70	0.3992	0.08257
							7000	36.1	12.04	43.94	0.4087	0.08250
							7500	36.4	12.78	46.16	0.4181	0.08243
							8000	36.8	13.51	48.37	0.4275	0.08236
							8500	37.1	14.22	50.56	0.4368	0.08228
							9000	37.4	14.92	52.74	0.4461	0.08221
							9500	37.7	15.61	54.91	0.4553	0.08214
							10000	38.1	16.29	57.07	0.4644	0.08207
CANADA | DUAL REAR WHEELS | LOW ROOF LINE | BASE FRONTAL AREA LIMITATION | Frontal Area - 67.0	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	34.8	9.35	47.00	0.3259	0.07919
							5500	35.0	9.75	48.20	0.3304	0.07916
							6000	35.4	10.52	50.58	0.3394	0.07910

6500	35.7	11.29	52.95	0.3482	0.07904
7000	36.1	12.03	55.30	0.3571	0.07898
7500	36.4	12.77	57.63	0.3658	0.07892
8000	36.8	13.49	59.94	0.3745	0.07886
8500	37.1	14.20	62.25	0.3831	0.07880
9000	37.5	14.89	64.54	0.3917	0.07874
9500	37.8	15.58	66.81	0.4003	0.07868
10000	38.1	16.25	69.08	0.4088	0.07862

ROADLOAD CERTIFICATION SPECIFICATIONS

2026 V363N

Coverage Chart	Model Year	Program	Date	Author	TRLHP Chart Number	Comments
2026 V363N TRLHP Chart	2026	V363N	07/22/2025	MQUENON	26V363N.3-0	10R80 Transmission Requires Coastdown Mode

Vehicle Description								TRLHP Specification				
										3 Term RL Force Coefficient		
Variant	Engine	Transmission	Layout	FDR	Brakes	Tire	ETW	HP@50	55-45 CDT	f0	f1	f2
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.0	15.47	40.49	0.2759	0.04138
							5500	21.2	16.06	41.80	0.2803	0.04134
							6000	21.6	17.21	44.41	0.2890	0.04125
							6500	22.0	18.32	47.01	0.2977	0.04117
							7000	22.4	19.39	49.59	0.3063	0.04109
							7500	22.7	20.44	52.16	0.3148	0.04100
							8000	23.1	21.45	54.73	0.3234	0.04092
							8500	23.5	22.42	57.28	0.3319	0.04084
							9000	23.8	23.37	59.83	0.3404	0.04076
							9500	24.2	24.29	62.37	0.3488	0.04067
							10000	24.6	25.19	64.89	0.3573	0.04059
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.0	15.47	40.49	0.2759	0.04138
							5500	21.2	16.06	41.80	0.2803	0.04134
							6000	21.6	17.21	44.41	0.2890	0.04125
							6500	22.0	18.32	47.01	0.2977	0.04117
							7000	22.4	19.39	49.59	0.3063	0.04109
							7500	22.7	20.44	52.16	0.3148	0.04100
							8000	23.1	21.45	54.73	0.3234	0.04092
							8500	23.5	22.42	57.28	0.3319	0.04084
							9000	23.8	23.37	59.83	0.3404	0.04076
							9500	24.2	24.29	62.37	0.3488	0.04067
							10000	24.6	25.19	64.89	0.3573	0.04059
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.7	14.35	40.80	0.2793	0.04610
							5500	22.9	14.91	42.11	0.2836	0.04605
							6000	23.2	16.00	44.72	0.2923	0.04597
							6500	23.6	17.05	47.32	0.3010	0.04589
							7000	24.0	18.08	49.90	0.3096	0.04580
							7500	24.4	19.07	52.48	0.3182	0.04572
							8000	24.7	20.03	55.04	0.3267	0.04564
							8500	25.1	20.97	57.60	0.3352	0.04556
							9000	25.5	21.88	60.14	0.3437	0.04547
							9500	25.8	22.76	62.68	0.3522	0.04539
							10000	26.2	23.62	65.21	0.3606	0.04531
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.7	14.35	40.80	0.2793	0.04610
							5500	22.9	14.91	42.11	0.2836	0.04605
							6000	23.2	16.00	44.72	0.2923	0.04597
							6500	23.6	17.05	47.32	0.3010	0.04589
							7000	24.0	18.08	49.90	0.3096	0.04580
							7500	24.4	19.07	52.48	0.3182	0.04572
							8000	24.7	20.03	55.04	0.3267	0.04564
							8500	25.1	20.97	57.60	0.3352	0.04556
							9000	25.5	21.88	60.14	0.3437	0.04547
							9500	25.8	22.76	62.68	0.3522	0.04539
							10000	26.2	23.62	65.21	0.3606	0.04531
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.1	15.41	40.50	0.2761	0.04160
							5500	21.3	16.00	41.81	0.2805	0.04155
							6000	21.7	17.15	44.42	0.2892	0.04147
							6500	22.1	18.26	47.02	0.2978	0.04139

							7000	22.4	19.33	49.61	0.3064	0.04130
							7500	22.8	20.37	52.18	0.3150	0.04122
							8000	23.2	21.38	54.74	0.3235	0.04114
							8500	23.5	22.35	57.30	0.3321	0.04106
							9000	23.9	23.30	59.84	0.3405	0.04097
							9500	24.3	24.22	62.38	0.3490	0.04089
							10000	24.6	25.11	64.91	0.3574	0.04081
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.1	15.41	40.50	0.2761	0.04160
							5500	21.3	16.00	41.81	0.2805	0.04155
							6000	21.7	17.15	44.42	0.2892	0.04147
							6500	22.1	18.26	47.02	0.2978	0.04139
							7000	22.4	19.33	49.61	0.3064	0.04130
							7500	22.8	20.37	52.18	0.3150	0.04122
							8000	23.2	21.38	54.74	0.3235	0.04114
							8500	23.5	22.35	57.30	0.3321	0.04106
							9000	23.9	23.30	59.84	0.3405	0.04097
							9500	24.3	24.22	62.38	0.3490	0.04089
							10000	24.6	25.11	64.91	0.3574	0.04081
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.9	15.61	36.77	0.2952	0.04194
							5500	21.0	16.20	38.06	0.2995	0.04190
							6000	21.4	17.37	40.61	0.3080	0.04182
							6500	21.8	18.49	43.16	0.3165	0.04174
							7000	22.1	19.58	45.69	0.3249	0.04165
							7500	22.5	20.64	48.22	0.3333	0.04157
							8000	22.9	21.66	50.73	0.3417	0.04149
							8500	23.2	22.65	53.24	0.3501	0.04141
							9000	23.6	23.61	55.73	0.3584	0.04133
							9500	24.0	24.54	58.22	0.3667	0.04125
							10000	24.3	25.45	60.70	0.3749	0.04117
				4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.9	15.61	36.77	0.2952	0.04194
							5500	21.0	16.20	38.06	0.2995	0.04190
							6000	21.4	17.37	40.61	0.3080	0.04182
							6500	21.8	18.49	43.16	0.3165	0.04174
							7000	22.1	19.58	45.69	0.3249	0.04165
							7500	22.5	20.64	48.22	0.3333	0.04157
							8000	22.9	21.66	50.73	0.3417	0.04149
							8500	23.2	22.65	53.24	0.3501	0.04141
							9000	23.6	23.61	55.73	0.3584	0.04133
							9500	24.0	24.54	58.22	0.3667	0.04125
							10000	24.3	25.45	60.70	0.3749	0.04117
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.0	14.16	40.86	0.2799	0.04702
							5500	23.2	14.71	42.17	0.2843	0.04698
							6000	23.6	15.78	44.78	0.2930	0.04690
							6500	23.9	16.83	47.38	0.3016	0.04681
							7000	24.3	17.84	49.97	0.3102	0.04673
							7500	24.7	18.82	52.54	0.3188	0.04665
							8000	25.1	19.77	55.10	0.3274	0.04657
							8500	25.4	20.70	57.66	0.3359	0.04648
							9000	25.8	21.61	60.20	0.3444	0.04640
							9500	26.2	22.48	62.74	0.3528	0.04632
							10000	26.5	23.34	65.27	0.3612	0.04624
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.0	14.16	40.86	0.2799	0.04702
							5500	23.2	14.71	42.17	0.2843	0.04698
							6000	23.6	15.78	44.78	0.2930	0.04690
							6500	23.9	16.83	47.38	0.3016	0.04681
							7000	24.3	17.84	49.97	0.3102	0.04673
							7500	24.7	18.82	52.54	0.3188	0.04665
							8000	25.1	19.77	55.10	0.3274	0.04657
							8500	25.4	20.70	57.66	0.3359	0.04648
							9000	25.8	21.61	60.20	0.3444	0.04640
							9500	26.2	22.48	62.74	0.3528	0.04632
							10000	26.5	23.34	65.27	0.3612	0.04624
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.7	14.32	37.13	0.2990	0.04737
							5500	22.9	14.88	38.42	0.3033	0.04733
							6000	23.3	15.97	40.97	0.3118	0.04724
							6500	23.7	17.03	43.52	0.3203	0.04716
							7000	24.0	18.05	46.05	0.3287	0.04708
							7500	24.4	19.05	48.58	0.3372	0.04700
							8000	24.8	20.02	51.09	0.3455	0.04692
							8500	25.1	20.96	53.60	0.3539	0.04684
							9000	25.5	21.87	56.09	0.3622	0.04676
							9500	25.8	22.76	58.58	0.3705	0.04668
							10000	26.2	23.63	61.06	0.3787	0.04660
				4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.7	14.32	37.13	0.2990	0.04737
							5500	22.9	14.88	38.42	0.3033	0.04733
							6000	23.3	15.97	40.97	0.3118	0.04724
							6500	23.7	17.03	43.52	0.3203	0.04716

							7000	24.0	18.05	46.05	0.3287	0.04708
							7500	24.4	19.05	48.58	0.3372	0.04700
							8000	24.8	20.02	51.09	0.3455	0.04692
							8500	25.1	20.96	53.60	0.3539	0.04684
							9000	25.5	21.87	56.09	0.3622	0.04676
							9500	25.8	22.76	58.58	0.3705	0.04668
							10000	26.2	23.63	61.06	0.3787	0.04660
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 390M | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	20.8	15.65	41.04	0.2773	0.04037
							5500	21.0	16.25	42.38	0.2818	0.04033
							6000	21.4	17.40	45.04	0.2906	0.04024
							6500	21.7	18.51	47.70	0.2995	0.04016
							7000	22.1	19.59	50.33	0.3083	0.04007
							7500	22.5	20.63	52.96	0.3170	0.03999
							8000	22.9	21.64	55.58	0.3258	0.03991
							8500	23.3	22.62	58.19	0.3344	0.03982
							9000	23.6	23.56	60.79	0.3431	0.03974
							9500	24.0	24.48	63.38	0.3517	0.03966
							10000	24.4	25.37	65.96	0.3604	0.03957
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	20.8	15.65	41.04	0.2773	0.04037
							5500	21.0	16.25	42.38	0.2818	0.04033
							6000	21.4	17.40	45.04	0.2906	0.04024
							6500	21.7	18.51	47.70	0.2995	0.04016
							7000	22.1	19.59	50.33	0.3083	0.04007
							7500	22.5	20.63	52.96	0.3170	0.03999
							8000	22.9	21.64	55.58	0.3258	0.03991
							8500	23.3	22.62	58.19	0.3344	0.03982
							9000	23.6	23.56	60.79	0.3431	0.03974
							9500	24.0	24.48	63.38	0.3517	0.03966
							10000	24.4	25.37	65.96	0.3604	0.03957
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 390M | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.5	15.85	37.31	0.2964	0.04072
							5500	20.7	16.45	38.62	0.3008	0.04068
							6000	21.1	17.62	41.23	0.3095	0.04059
							6500	21.5	18.75	43.84	0.3181	0.04051
							7000	21.8	19.85	46.42	0.3268	0.04042
							7500	22.2	20.90	49.00	0.3354	0.04034
							8000	22.6	21.93	51.57	0.3439	0.04026
							8500	23.0	22.92	54.13	0.3524	0.04018
							9000	23.3	23.88	56.68	0.3609	0.04009
							9500	23.7	24.81	59.22	0.3694	0.04001
							10000	24.1	25.72	61.75	0.3779	0.03993
				4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.5	15.85	37.31	0.2964	0.04072
							5500	20.7	16.45	38.62	0.3008	0.04068
							6000	21.1	17.62	41.23	0.3095	0.04059
							6500	21.5	18.75	43.84	0.3181	0.04051
							7000	21.8	19.85	46.42	0.3268	0.04042
							7500	22.2	20.90	49.00	0.3354	0.04034
							8000	22.6	21.93	51.57	0.3439	0.04026
							8500	23.0	22.92	54.13	0.3524	0.04018
							9000	23.3	23.88	56.68	0.3609	0.04009
							9500	23.7	24.81	59.22	0.3694	0.04001
							10000	24.1	25.72	61.75	0.3779	0.03993
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.2	14.03	40.90	0.2803	0.04760
							5500	23.4	14.58	42.21	0.2847	0.04756
							6000	23.8	15.65	44.82	0.2934	0.04748
							6500	24.1	16.69	47.42	0.3020	0.04739
							7000	24.5	17.69	50.00	0.3107	0.04731
							7500	24.9	18.67	52.58	0.3192	0.04723
							8000	25.3	19.62	55.14	0.3278	0.04714
							8500	25.6	20.54	57.70	0.3363	0.04706
							9000	26.0	21.44	60.24	0.3448	0.04698
							9500	26.4	22.31	62.78	0.3532	0.04690
							10000	26.7	23.16	65.31	0.3617	0.04682
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.6	13.79	40.98	0.2811	0.04876
							5500	23.8	14.33	42.29	0.2855	0.04872
							6000	24.2	15.39	44.90	0.2942	0.04863
							6500	24.5	16.41	47.50	0.3029	0.04855
							7000	24.9	17.41	50.08	0.3115	0.04847
							7500	25.3	18.37	52.65	0.3200	0.04839
							8000	25.7	19.31	55.22	0.3286	0.04830
							8500	26.0	20.23	57.77	0.3371	0.04822
							9000	26.4	21.11	60.32	0.3456	0.04814
							9500	26.8	21.98	62.85	0.3540	0.04806
							10000	27.1	22.82	65.38	0.3625	0.04798
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.95	37.25	0.3002	0.04910
							5500	23.5	14.50	38.53	0.3045	0.04906
							6000	23.9	15.57	41.09	0.3130	0.04898
							6500	24.3	16.60	43.64	0.3215	0.04890

							7000	24.6	17.61	46.17	0.3300	0.04882
							7500	25.0	18.59	48.69	0.3384	0.04874
							8000	25.4	19.54	51.21	0.3468	0.04866
							8500	25.7	20.47	53.71	0.3551	0.04858
							9000	26.1	21.37	56.21	0.3634	0.04849
							9500	26.4	22.25	58.70	0.3717	0.04841
							10000	26.8	23.10	61.18	0.3800	0.04834
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.6	13.81	40.74	0.2803	0.04877
							5500	23.7	14.36	42.04	0.2847	0.04873
							6000	24.1	15.42	44.62	0.2933	0.04864
							6500	24.5	16.44	47.20	0.3019	0.04856
							7000	24.9	17.44	49.76	0.3104	0.04848
							7500	25.2	18.41	52.32	0.3189	0.04840
							8000	25.6	19.35	54.86	0.3274	0.04831
							8500	26.0	20.27	57.39	0.3358	0.04823
							9000	26.3	21.16	59.92	0.3442	0.04815
							9500	26.7	22.03	62.43	0.3526	0.04807
							10000	27.1	22.87	64.94	0.3610	0.04799
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.97	37.00	0.2994	0.04911
							5500	23.5	14.52	38.28	0.3037	0.04907
							6000	23.9	15.59	40.82	0.3121	0.04899
							6500	24.2	16.63	43.34	0.3205	0.04891
							7000	24.6	17.65	45.85	0.3289	0.04883
							7500	24.9	18.63	48.36	0.3372	0.04875
							8000	25.3	19.58	50.85	0.3456	0.04867
							8500	25.7	20.51	53.33	0.3538	0.04859
							9000	26.0	21.42	55.81	0.3621	0.04851
							9500	26.4	22.30	58.27	0.3703	0.04843
							10000	26.7	23.16	60.73	0.3785	0.04835
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.8	15.65	36.39	0.2939	0.04195
							5500	21.0	16.25	37.66	0.2982	0.04191
							6000	21.3	17.42	40.19	0.3066	0.04183
							6500	21.7	18.55	42.70	0.3149	0.04175
							7000	22.1	19.64	45.20	0.3233	0.04167
							7500	22.4	20.71	47.69	0.3316	0.04159
							8000	22.8	21.74	50.17	0.3398	0.04151
							8500	23.1	22.73	52.64	0.3481	0.04143
							9000	23.5	23.70	55.11	0.3563	0.04135
							9500	23.9	24.64	57.56	0.3645	0.04127
							10000	24.2	25.56	60.01	0.3726	0.04119
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.98	36.87	0.2990	0.04912
							5500	23.5	14.53	38.14	0.3032	0.04908
							6000	23.8	15.61	40.66	0.3116	0.04900
							6500	24.2	16.65	43.17	0.3200	0.04891
							7000	24.6	17.66	45.68	0.3283	0.04883
							7500	24.9	18.65	48.17	0.3366	0.04875
							8000	25.3	19.61	50.65	0.3449	0.04867
							8500	25.6	20.54	53.12	0.3531	0.04859
							9000	26.0	21.44	55.58	0.3613	0.04852
							9500	26.3	22.33	58.04	0.3695	0.04844
							10000	26.7	23.19	60.48	0.3777	0.04836
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.7	14.35	36.75	0.2977	0.04738
							5500	22.9	14.91	38.02	0.3020	0.04734
							6000	23.2	16.01	40.55	0.3104	0.04726
							6500	23.6	17.07	43.06	0.3188	0.04718
							7000	24.0	18.11	45.56	0.3271	0.04710
							7500	24.3	19.11	48.05	0.3354	0.04702
							8000	24.7	20.08	50.53	0.3437	0.04694
							8500	25.0	21.03	53.00	0.3519	0.04686
							9000	25.4	21.95	55.47	0.3601	0.04678
							9500	25.7	22.85	57.92	0.3683	0.04670
							10000	26.1	23.72	60.37	0.3764	0.04662
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.98	36.87	0.2990	0.04912
							5500	23.5	14.53	38.14	0.3032	0.04908
							6000	23.8	15.61	40.66	0.3116	0.04900
							6500	24.2	16.65	43.17	0.3200	0.04891
							7000	24.6	17.66	45.68	0.3283	0.04883
							7500	24.9	18.65	48.17	0.3366	0.04875
							8000	25.3	19.61	50.65	0.3449	0.04867
							8500	25.6	20.54	53.12	0.3531	0.04859
							9000	26.0	21.44	55.58	0.3613	0.04852
							9500	26.3	22.33	58.04	0.3695	0.04844
							10000	26.7	23.19	60.48	0.3777	0.04836
USA | REGULAR CARGO VAN | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	23.4	13.92	33.83	0.3518	0.04958
							5500	23.6	14.48	34.98	0.3566	0.04955
							6000	23.9	15.57	37.25	0.3663	0.04947
							6500	24.2	16.62	39.50	0.3758	0.04940

							7000	24.6	17.65	41.74	0.3853	0.04933
							7500	24.9	18.66	43.96	0.3948	0.04926
							8000	25.2	19.64	46.17	0.4041	0.04918
							8500	25.6	20.59	48.36	0.4135	0.04911
							9000	25.9	21.52	50.54	0.4227	0.04904
							9500	26.2	22.43	52.71	0.4319	0.04897
							10000	26.6	23.32	54.87	0.4411	0.04890
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.8	14.29	47.56	0.2883	0.04348
							5500	22.9	14.84	48.91	0.2922	0.04344
							6000	23.3	15.92	51.59	0.2999	0.04337
							6500	23.7	16.97	54.26	0.3076	0.04331
							7000	24.1	17.98	56.92	0.3152	0.04324
							7500	24.5	18.96	59.57	0.3228	0.04317
							8000	24.9	19.91	62.21	0.3304	0.04310
							8500	25.2	20.84	64.84	0.3380	0.04303
							9000	25.6	21.74	67.46	0.3455	0.04297
							9500	26.0	22.61	70.07	0.3530	0.04290
							10000	26.4	23.46	72.67	0.3605	0.04283
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.0	13.03	48.10	0.2858	0.04995
							5500	25.2	13.54	49.45	0.2897	0.04992
							6000	25.6	14.55	52.13	0.2974	0.04985
							6500	25.9	15.52	54.80	0.3051	0.04978
							7000	26.3	16.47	57.46	0.3128	0.04971
							7500	26.7	17.40	60.11	0.3204	0.04964
							8000	27.1	18.29	62.75	0.3280	0.04958
							8500	27.5	19.16	65.38	0.3355	0.04951
							9000	27.8	20.02	68.00	0.3430	0.04944
							9500	28.2	20.84	70.61	0.3506	0.04937
							10000	28.6	21.65	73.21	0.3580	0.04931
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.4	13.31	47.97	0.2864	0.04839
							5500	24.6	13.84	49.32	0.2903	0.04835
							6000	25.0	14.86	52.00	0.2980	0.04828
							6500	25.4	15.85	54.67	0.3057	0.04821
							7000	25.8	16.81	57.33	0.3134	0.04814
							7500	26.2	17.75	59.98	0.3210	0.04808
							8000	26.5	18.66	62.62	0.3286	0.04801
							8500	26.9	19.55	65.25	0.3361	0.04794
							9000	27.3	20.41	67.87	0.3436	0.04787
							9500	27.7	21.24	70.48	0.3511	0.04781
							10000	28.0	22.06	73.08	0.3586	0.04774
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.4	12.82	48.20	0.2854	0.05116
							5500	25.6	13.33	49.55	0.2892	0.05112
							6000	26.0	14.32	52.23	0.2970	0.05105
							6500	26.3	15.28	54.91	0.3047	0.05099
							7000	26.7	16.22	57.56	0.3123	0.05092
							7500	27.1	17.13	60.21	0.3199	0.05085
							8000	27.5	18.02	62.85	0.3275	0.05078
							8500	27.9	18.88	65.48	0.3351	0.05071
							9000	28.2	19.72	68.10	0.3426	0.05065
							9500	28.6	20.54	70.71	0.3501	0.05058
							10000	29.0	21.35	73.31	0.3576	0.05051
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.8	14.24	47.58	0.2882	0.04371
							5500	23.0	14.79	48.93	0.2921	0.04367
							6000	23.4	15.87	51.61	0.2998	0.04360
							6500	23.8	16.91	54.28	0.3075	0.04353
							7000	24.2	17.92	56.94	0.3151	0.04347
							7500	24.6	18.90	59.59	0.3227	0.04340
							8000	24.9	19.85	62.23	0.3303	0.04333
							8500	25.3	20.77	64.86	0.3379	0.04326
							9000	25.7	21.67	67.47	0.3454	0.04319
							9500	26.1	22.54	70.09	0.3529	0.04313
							10000	26.4	23.39	72.69	0.3604	0.04306
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.8	13.14	48.05	0.2861	0.04935
							5500	25.0	13.65	49.40	0.2899	0.04932
							6000	25.3	14.66	52.08	0.2977	0.04925
							6500	25.7	15.65	54.75	0.3053	0.04918
							7000	26.1	16.60	57.41	0.3130	0.04911
							7500	26.5	17.53	60.06	0.3206	0.04904
							8000	26.9	18.43	62.70	0.3282	0.04897
							8500	27.3	19.31	65.33	0.3357	0.04891
							9000	27.6	20.16	67.95	0.3433	0.04884
							9500	28.0	21.00	70.56	0.3508	0.04877
							10000	28.4	21.81	73.16	0.3583	0.04871
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 390M | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.5	14.45	48.12	0.2905	0.04244
							5500	22.7	15.01	49.50	0.2945	0.04240
							6000	23.1	16.09	52.24	0.3024	0.04233
							6500	23.5	17.14	54.97	0.3102	0.04226

							7000	23.9	18.15	57.69	0.3181	0.04219
							7500	24.3	19.13	60.39	0.3258	0.04212
							8000	24.7	20.08	63.09	0.3336	0.04205
							8500	25.0	21.01	65.77	0.3413	0.04198
							9000	25.4	21.90	68.45	0.3490	0.04191
							9500	25.8	22.77	71.11	0.3567	0.04185
							10000	26.2	23.62	73.77	0.3643	0.04178
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.3	12.84	47.95	0.2846	0.05117
							5500	25.5	13.35	49.28	0.2885	0.05113
							6000	25.9	14.34	51.95	0.2961	0.05106
							6500	26.3	15.31	54.60	0.3038	0.05099
							7000	26.7	16.25	57.23	0.3113	0.05093
							7500	27.1	17.16	59.86	0.3189	0.05086
							8000	27.4	18.06	62.47	0.3264	0.05079
							8500	27.8	18.92	65.08	0.3339	0.05072
							9000	28.2	19.77	67.68	0.3414	0.05066
							9500	28.6	20.59	70.26	0.3488	0.05059
							10000	28.9	21.40	72.85	0.3562	0.05052
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.8	14.28	47.18	0.2871	0.04372
							5500	23.0	14.83	48.51	0.2909	0.04368
							6000	23.3	15.91	51.16	0.2985	0.04361
							6500	23.7	16.96	53.80	0.3061	0.04355
							7000	24.1	17.98	56.42	0.3136	0.04348
							7500	24.5	18.96	59.04	0.3212	0.04341
							8000	24.9	19.92	61.64	0.3286	0.04334
							8500	25.2	20.85	64.23	0.3361	0.04328
							9000	25.6	21.75	66.82	0.3435	0.04321
							9500	26.0	22.63	69.39	0.3509	0.04314
							10000	26.3	23.48	71.96	0.3583	0.04308
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.3	12.85	47.81	0.2842	0.05117
							5500	25.5	13.36	49.14	0.2881	0.05113
							6000	25.9	14.35	51.79	0.2957	0.05107
							6500	26.3	15.32	54.42	0.3033	0.05100
							7000	26.7	16.27	57.05	0.3108	0.05093
							7500	27.0	17.18	59.66	0.3183	0.05086
							8000	27.4	18.07	62.26	0.3258	0.05080
							8500	27.8	18.94	64.86	0.3333	0.05073
							9000	28.2	19.79	67.44	0.3407	0.05066
							9500	28.5	20.62	70.02	0.3481	0.05060
							10000	28.9	21.42	72.58	0.3555	0.05053
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.7	13.17	47.65	0.2849	0.04936
							5500	24.9	13.69	48.98	0.2887	0.04933
							6000	25.3	14.70	51.63	0.2964	0.04926
							6500	25.7	15.69	54.27	0.3039	0.04919
							7000	26.0	16.65	56.89	0.3115	0.04912
							7500	26.4	17.58	59.51	0.3190	0.04906
							8000	26.8	18.49	62.11	0.3265	0.04899
							8500	27.2	19.37	64.70	0.3340	0.04892
							9000	27.5	20.23	67.29	0.3414	0.04886
							9500	27.9	21.07	69.87	0.3488	0.04879
							10000	28.3	21.89	72.43	0.3562	0.04872
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.3	12.85	47.81	0.2842	0.05117
							5500	25.5	13.36	49.14	0.2881	0.05113
							6000	25.9	14.35	51.79	0.2957	0.05107
							6500	26.3	15.32	54.42	0.3033	0.05100
							7000	26.7	16.27	57.05	0.3108	0.05093
							7500	27.0	17.18	59.66	0.3183	0.05086
							8000	27.4	18.07	62.26	0.3258	0.05080
							8500	27.8	18.94	64.86	0.3333	0.05073
							9000	28.2	19.79	67.44	0.3407	0.05066
							9500	28.5	20.62	70.02	0.3481	0.05060
							10000	28.9	21.42	72.58	0.3555	0.05053
USA | REGULAR CARGO VAN | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	25.7	12.67	44.76	0.3361	0.05243
							5500	25.9	13.18	45.96	0.3406	0.05240
							6000	26.2	14.18	48.35	0.3495	0.05234
							6500	26.6	15.15	50.71	0.3584	0.05228
							7000	26.9	16.10	53.06	0.3672	0.05222
							7500	27.3	17.03	55.39	0.3760	0.05216
							8000	27.6	17.94	57.71	0.3847	0.05210
							8500	28.0	18.82	60.01	0.3933	0.05204
							9000	28.3	19.68	62.30	0.4019	0.05198
							9500	28.7	20.53	64.58	0.4104	0.05192
							10000	29.0	21.36	66.84	0.4189	0.05186
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	20.8	15.61	40.45	0.2756	0.04083
							5500	21.0	16.20	41.76	0.2799	0.04079
							6000	21.4	17.36	44.37	0.2886	0.04070
							6500	21.8	18.48	46.97	0.2973	0.04062

							7000	22.2	19.56	49.55	0.3059	0.04054
							7500	22.5	20.61	52.13	0.3145	0.04046
							8000	22.9	21.62	54.69	0.3230	0.04037
							8500	23.3	22.61	57.25	0.3315	0.04029
							9000	23.6	23.56	59.79	0.3400	0.04021
							9500	24.0	24.48	62.33	0.3485	0.04013
							10000	24.4	25.38	64.86	0.3569	0.04005
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.9	14.18	40.86	0.2798	0.04688
							5500	23.1	14.74	42.16	0.2842	0.04684
							6000	23.5	15.82	44.77	0.2929	0.04675
							6500	23.9	16.86	47.37	0.3015	0.04667
							7000	24.3	17.87	49.96	0.3101	0.04659
							7500	24.6	18.86	52.53	0.3187	0.04650
							8000	25.0	19.82	55.09	0.3273	0.04642
							8500	25.4	20.74	57.65	0.3358	0.04634
							9000	25.7	21.65	60.19	0.3443	0.04626
							9500	26.1	22.52	62.73	0.3527	0.04618
							10000	26.5	23.38	65.26	0.3611	0.04609
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.4	14.50	40.76	0.2788	0.04543
							5500	22.6	15.06	42.07	0.2832	0.04539
							6000	23.0	16.16	44.68	0.2919	0.04531
							6500	23.4	17.22	47.27	0.3005	0.04522
							7000	23.8	18.25	49.86	0.3091	0.04514
							7500	24.1	19.25	52.43	0.3177	0.04506
							8000	24.5	20.22	55.00	0.3262	0.04497
							8500	24.9	21.16	57.55	0.3348	0.04489
							9000	25.2	22.08	60.10	0.3432	0.04481
							9500	25.6	22.96	62.63	0.3517	0.04473
							10000	26.0	23.83	65.16	0.3601	0.04465
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.3	13.94	40.93	0.2806	0.04804
							5500	23.5	14.49	42.24	0.2850	0.04799
							6000	23.9	15.55	44.85	0.2937	0.04791
							6500	24.3	16.58	47.45	0.3023	0.04783
							7000	24.7	17.59	50.03	0.3110	0.04774
							7500	25.0	18.56	52.61	0.3195	0.04766
							8000	25.4	19.50	55.17	0.3281	0.04758
							8500	25.8	20.42	57.72	0.3366	0.04750
							9000	26.1	21.32	60.27	0.3451	0.04741
							9500	26.5	22.19	62.81	0.3535	0.04733
							10000	26.9	23.03	65.34	0.3620	0.04725
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.1	14.10	37.20	0.2997	0.04838
							5500	23.3	14.65	38.48	0.3040	0.04834
							6000	23.6	15.73	41.04	0.3125	0.04826
							6500	24.0	16.78	43.59	0.3210	0.04818
							7000	24.4	17.79	46.12	0.3295	0.04809
							7500	24.7	18.78	48.65	0.3379	0.04801
							8000	25.1	19.74	51.16	0.3462	0.04793
							8500	25.5	20.67	53.66	0.3546	0.04785
							9000	25.8	21.58	56.16	0.3629	0.04777
							9500	26.2	22.46	58.65	0.3712	0.04769
							10000	26.6	23.32	61.13	0.3795	0.04761
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	20.9	15.55	40.47	0.2757	0.04105
							5500	21.1	16.14	41.78	0.2801	0.04101
							6000	21.5	17.30	44.39	0.2888	0.04092
							6500	21.9	18.42	46.98	0.2974	0.04084
							7000	22.2	19.49	49.57	0.3060	0.04076
							7500	22.6	20.54	52.14	0.3146	0.04067
							8000	23.0	21.55	54.71	0.3232	0.04059
							8500	23.3	22.53	57.26	0.3317	0.04051
							9000	23.7	23.48	59.81	0.3402	0.04043
							9500	24.1	24.41	62.34	0.3486	0.04035
							10000	24.4	25.31	64.87	0.3570	0.04026
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.7	15.75	36.73	0.2948	0.04139
							5500	20.8	16.35	38.02	0.2991	0.04135
							6000	21.2	17.52	40.58	0.3076	0.04127
							6500	21.6	18.65	43.12	0.3161	0.04119
							7000	22.0	19.75	45.66	0.3245	0.04111
							7500	22.3	20.81	48.18	0.3329	0.04103
							8000	22.7	21.84	50.70	0.3413	0.04094
							8500	23.0	22.84	53.20	0.3497	0.04086
							9000	23.4	23.80	55.70	0.3580	0.04078
							9500	23.8	24.74	58.19	0.3663	0.04070
							10000	24.1	25.65	60.67	0.3745	0.04062
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.5	14.46	37.09	0.2985	0.04670
							5500	22.7	15.03	38.37	0.3028	0.04666
							6000	23.1	16.13	40.93	0.3113	0.04658
							6500	23.4	17.19	43.48	0.3198	0.04650

							7000	23.8	18.23	46.01	0.3283	0.04642
							7500	24.2	19.23	48.53	0.3367	0.04634
							8000	24.5	20.20	51.05	0.3451	0.04626
							8500	24.9	21.15	53.55	0.3534	0.04618
							9000	25.2	22.07	56.05	0.3617	0.04609
							9500	25.6	22.97	58.54	0.3700	0.04601
							10000	26.0	23.84	61.02	0.3783	0.04594
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 390M | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	20.6	15.80	41.01	0.2769	0.03983
							5500	20.8	16.39	42.34	0.2814	0.03978
							6000	21.2	17.55	45.01	0.2903	0.03970
							6500	21.6	18.68	47.66	0.2991	0.03961
							7000	21.9	19.76	50.30	0.3079	0.03953
							7500	22.3	20.81	52.93	0.3166	0.03944
							8000	22.7	21.82	55.54	0.3254	0.03936
							8500	23.1	22.80	58.15	0.3341	0.03928
							9000	23.4	23.75	60.75	0.3427	0.03919
							9500	23.8	24.67	63.34	0.3514	0.03911
							10000	24.2	25.56	65.93	0.3600	0.03903
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 390M | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.3	16.00	37.27	0.2960	0.04017
							5500	20.5	16.61	38.58	0.3004	0.04013
							6000	20.9	17.78	41.20	0.3091	0.04004
							6500	21.3	18.92	43.80	0.3178	0.03996
							7000	21.7	20.02	46.39	0.3264	0.03988
							7500	22.0	21.08	48.97	0.3350	0.03979
							8000	22.4	22.11	51.53	0.3435	0.03971
							8500	22.8	23.11	54.09	0.3521	0.03963
							9000	23.1	24.07	56.64	0.3606	0.03955
							9500	23.5	25.01	59.18	0.3690	0.03947
							10000	23.9	25.92	61.72	0.3775	0.03938
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.8	14.30	40.82	0.2795	0.04636
							5500	22.9	14.85	42.13	0.2838	0.04632
							6000	23.3	15.94	44.74	0.2925	0.04623
							6500	23.7	16.99	47.34	0.3012	0.04615
							7000	24.1	18.01	49.92	0.3098	0.04607
							7500	24.5	19.00	52.49	0.3184	0.04599
							8000	24.8	19.96	55.06	0.3269	0.04590
							8500	25.2	20.89	57.61	0.3354	0.04582
							9000	25.6	21.80	60.16	0.3439	0.04574
							9500	25.9	22.68	62.70	0.3523	0.04566
							10000	26.3	23.54	65.23	0.3608	0.04558
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.3	13.96	40.69	0.2798	0.04804
							5500	23.5	14.51	41.99	0.2842	0.04800
							6000	23.9	15.58	44.58	0.2928	0.04792
							6500	24.2	16.61	47.15	0.3014	0.04784
							7000	24.6	17.62	49.72	0.3099	0.04775
							7500	25.0	18.60	52.27	0.3184	0.04767
							8000	25.4	19.54	54.81	0.3269	0.04759
							8500	25.7	20.47	57.34	0.3353	0.04751
							9000	26.1	21.36	59.87	0.3437	0.04743
							9500	26.4	22.24	62.38	0.3521	0.04735
							10000	26.8	23.09	64.89	0.3605	0.04727
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.1	14.12	36.96	0.2989	0.04839
							5500	23.2	14.68	38.23	0.3032	0.04835
							6000	23.6	15.76	40.77	0.3116	0.04827
							6500	24.0	16.81	43.29	0.3200	0.04819
							7000	24.3	17.83	45.80	0.3284	0.04810
							7500	24.7	18.82	48.31	0.3367	0.04802
							8000	25.1	19.78	50.80	0.3450	0.04794
							8500	25.4	20.72	53.28	0.3533	0.04786
							9000	25.8	21.63	55.76	0.3616	0.04778
							9500	26.1	22.51	58.23	0.3698	0.04770
							10000	26.5	23.37	60.69	0.3780	0.04763
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.6	15.79	36.36	0.2935	0.04141
							5500	20.8	16.39	37.63	0.2978	0.04137
							6000	21.2	17.57	40.15	0.3062	0.04128
							6500	21.5	18.71	42.66	0.3146	0.04120
							7000	21.9	19.82	45.16	0.3229	0.04112
							7500	22.2	20.88	47.65	0.3312	0.04104
							8000	22.6	21.92	50.14	0.3395	0.04096
							8500	23.0	22.92	52.61	0.3477	0.04088
							9000	23.3	23.90	55.07	0.3559	0.04080
							9500	23.7	24.84	57.53	0.3641	0.04073
							10000	24.0	25.76	59.97	0.3722	0.04065
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.0	14.14	36.82	0.2985	0.04839
							5500	23.2	14.69	38.09	0.3027	0.04835
							6000	23.6	15.77	40.61	0.3111	0.04827
							6500	23.9	16.82	43.13	0.3195	0.04819

							7000	24.3	17.85	45.63	0.3278	0.04811
							7500	24.7	18.84	48.12	0.3361	0.04803
							8000	25.0	19.80	50.60	0.3444	0.04795
							8500	25.4	20.74	53.07	0.3526	0.04787
							9000	25.7	21.65	55.53	0.3608	0.04779
							9500	26.1	22.54	57.99	0.3690	0.04771
							10000	26.4	23.41	60.44	0.3772	0.04763
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.4	14.50	36.71	0.2973	0.04672
							5500	22.6	15.06	37.98	0.3015	0.04668
							6000	23.0	16.17	40.50	0.3099	0.04659
							6500	23.4	17.24	43.01	0.3183	0.04651
							7000	23.7	18.28	45.52	0.3266	0.04643
							7500	24.1	19.29	48.01	0.3349	0.04635
							8000	24.4	20.27	50.49	0.3432	0.04627
							8500	24.8	21.23	52.96	0.3514	0.04619
							9000	25.2	22.15	55.42	0.3596	0.04612
							9500	25.5	23.05	57.88	0.3678	0.04604
							10000	25.9	23.93	60.33	0.3760	0.04596
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.0	14.14	36.82	0.2985	0.04839
							5500	23.2	14.69	38.09	0.3027	0.04835
							6000	23.6	15.77	40.61	0.3111	0.04827
							6500	23.9	16.82	43.13	0.3195	0.04819
							7000	24.3	17.85	45.63	0.3278	0.04811
							7500	24.7	18.84	48.12	0.3361	0.04803
							8000	25.0	19.80	50.60	0.3444	0.04795
							8500	25.4	20.74	53.07	0.3526	0.04787
							9000	25.7	21.65	55.53	0.3608	0.04779
							9500	26.1	22.54	57.99	0.3690	0.04771
							10000	26.4	23.41	60.44	0.3772	0.04763
USA | CANADA | BUS-M2 | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	23.1	14.10	33.77	0.3511	0.04872
							5500	23.3	14.67	34.92	0.3560	0.04868
							6000	23.6	15.76	37.19	0.3657	0.04861
							6500	23.9	16.83	39.44	0.3752	0.04853
							7000	24.3	17.87	41.68	0.3847	0.04846
							7500	24.6	18.88	43.90	0.3942	0.04839
							8000	24.9	19.87	46.11	0.4035	0.04831
							8500	25.3	20.84	48.30	0.4129	0.04824
							9000	25.6	21.78	50.48	0.4221	0.04817
							9500	25.9	22.69	52.65	0.4313	0.04810
							10000	26.3	23.59	54.81	0.4405	0.04803
USA | CANADA | REGULAR CARGO VAN | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	23.1	14.08	33.78	0.3512	0.04886
							5500	23.3	14.63	34.93	0.3561	0.04882
							6000	23.6	15.73	37.20	0.3658	0.04875
							6500	24.0	16.80	39.45	0.3753	0.04868
							7000	24.3	17.84	41.69	0.3848	0.04860
							7500	24.7	18.85	43.91	0.3943	0.04853
							8000	25.0	19.83	46.12	0.4036	0.04846
							8500	25.3	20.79	48.31	0.4130	0.04839
							9000	25.7	21.73	50.49	0.4222	0.04832
							9500	26.0	22.65	52.66	0.4314	0.04825
							10000	26.3	23.54	54.82	0.4406	0.04818
USA | CANADA | REGULAR CARGO VAN | DUAL REAR WHEELS | 510E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 60 PSI.	5250	23.1	14.09	34.39	0.2994	0.04959
							5500	23.3	14.65	35.52	0.3042	0.04955
							6000	23.6	15.75	37.77	0.3138	0.04948
							6500	24.0	16.82	40.01	0.3233	0.04940
							7000	24.3	17.86	42.23	0.3327	0.04933
							7500	24.6	18.88	44.43	0.3421	0.04926
							8000	25.0	19.86	46.62	0.3514	0.04919
							8500	25.3	20.83	48.79	0.3606	0.04912
							9000	25.6	21.77	50.95	0.3698	0.04905
							9500	25.9	22.69	53.11	0.3789	0.04898
							10000	26.3	23.59	55.24	0.3880	0.04891
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.6	14.41	47.51	0.2885	0.04291
							5500	22.8	14.97	48.86	0.2924	0.04287
							6000	23.1	16.05	51.54	0.3001	0.04281
							6500	23.5	17.10	54.22	0.3078	0.04274
							7000	23.9	18.12	56.88	0.3154	0.04267
							7500	24.3	19.11	59.52	0.3231	0.04260
							8000	24.7	20.07	62.16	0.3306	0.04253
							8500	25.0	21.00	64.79	0.3382	0.04246
							9000	25.4	21.90	67.41	0.3457	0.04240
							9500	25.8	22.78	70.02	0.3532	0.04233
							10000	26.2	23.63	72.62	0.3607	0.04226
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.7	13.16	48.04	0.2861	0.04920
							5500	24.9	13.68	49.39	0.2900	0.04917
							6000	25.3	14.69	52.07	0.2977	0.04910
							6500	25.7	15.68	54.74	0.3054	0.04903

							7000	26.1	16.63	57.40	0.3130	0.04896
							7500	26.4	17.56	60.05	0.3207	0.04889
							8000	26.8	18.47	62.69	0.3282	0.04882
							8500	27.2	19.35	65.31	0.3358	0.04876
							9000	27.6	20.20	67.93	0.3433	0.04869
							9500	28.0	21.04	70.54	0.3508	0.04862
							10000	28.3	21.85	73.15	0.3583	0.04855
USA | CANADA | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.2	13.44	47.91	0.2867	0.04770
							5500	24.4	13.97	49.26	0.2906	0.04766
							6000	24.8	15.00	51.94	0.2983	0.04759
							6500	25.2	16.00	54.62	0.3060	0.04752
							7000	25.5	16.97	57.28	0.3136	0.04745
							7500	25.9	17.91	59.92	0.3212	0.04739
							8000	26.3	18.83	62.56	0.3288	0.04732
							8500	26.7	19.72	65.19	0.3364	0.04725
							9000	27.1	20.58	67.81	0.3439	0.04718
							9500	27.4	21.43	70.42	0.3514	0.04712
							10000	27.8	22.25	73.02	0.3589	0.04705
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.1	12.95	48.14	0.2857	0.05041
							5500	25.3	13.46	49.49	0.2895	0.05037
							6000	25.7	14.46	52.17	0.2973	0.05030
							6500	26.1	15.43	54.84	0.3049	0.05023
							7000	26.5	16.38	57.50	0.3126	0.05016
							7500	26.9	17.29	60.15	0.3202	0.05010
							8000	27.2	18.19	62.79	0.3278	0.05003
							8500	27.6	19.06	65.42	0.3353	0.04996
							9000	28.0	19.91	68.03	0.3429	0.04989
							9500	28.4	20.73	70.64	0.3504	0.04983
							10000	28.7	21.53	73.25	0.3579	0.04976
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.6	14.36	47.53	0.2884	0.04314
							5500	22.8	14.92	48.88	0.2923	0.04310
							6000	23.2	16.00	51.56	0.3000	0.04303
							6500	23.6	17.05	54.24	0.3077	0.04296
							7000	24.0	18.07	56.89	0.3153	0.04290
							7500	24.4	19.05	59.54	0.3230	0.04283
							8000	24.7	20.01	62.18	0.3306	0.04276
							8500	25.1	20.94	64.81	0.3381	0.04269
							9000	25.5	21.84	67.43	0.3456	0.04262
							9500	25.9	22.71	70.04	0.3531	0.04256
							10000	26.3	23.56	72.64	0.3606	0.04249
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.5	13.26	47.99	0.2863	0.04866
							5500	24.7	13.78	49.34	0.2902	0.04863
							6000	25.1	14.80	52.03	0.2979	0.04856
							6500	25.5	15.79	54.70	0.3056	0.04849
							7000	25.9	16.75	57.36	0.3132	0.04842
							7500	26.3	17.69	60.00	0.3209	0.04835
							8000	26.6	18.60	62.64	0.3284	0.04828
							8500	27.0	19.48	65.27	0.3360	0.04822
							9000	27.4	20.34	67.89	0.3435	0.04815
							9500	27.8	21.17	70.50	0.3510	0.04808
							10000	28.1	21.99	73.10	0.3585	0.04802
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 390M | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 64 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.3	14.58	48.07	0.2908	0.04187
							5500	22.5	15.14	49.45	0.2947	0.04183
							6000	22.9	16.23	52.19	0.3026	0.04176
							6500	23.3	17.28	54.92	0.3105	0.04169
							7000	23.7	18.30	57.64	0.3183	0.04162
							7500	24.1	19.29	60.34	0.3260	0.04155
							8000	24.5	20.24	63.04	0.3338	0.04148
							8500	24.8	21.17	65.72	0.3415	0.04141
							9000	25.2	22.07	68.40	0.3492	0.04135
							9500	25.6	22.94	71.06	0.3569	0.04128
							10000	26.0	23.79	73.72	0.3645	0.04121
USA | CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 1.9EF-430E-2T | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 80 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.1	12.97	47.89	0.2849	0.05041
							5500	25.3	13.48	49.22	0.2888	0.05038
							6000	25.7	14.48	51.88	0.2964	0.05031
							6500	26.0	15.46	54.53	0.3040	0.05024
							7000	26.4	16.41	57.17	0.3116	0.05017
							7500	26.8	17.33	59.80	0.3192	0.05011
							8000	27.2	18.22	62.41	0.3267	0.05004
							8500	27.6	19.10	65.02	0.3342	0.04997
							9000	27.9	19.95	67.61	0.3417	0.04990
							9500	28.3	20.78	70.20	0.3491	0.04984
							10000	28.7	21.59	72.78	0.3565	0.04977
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.6	14.40	47.14	0.2873	0.04315
							5500	22.8	14.96	48.47	0.2911	0.04311
							6000	23.2	16.05	51.12	0.2987	0.04304
							6500	23.5	17.10	53.75	0.3063	0.04298

							7000	23.9	18.12	56.38	0.3139	0.04291
							7500	24.3	19.11	58.99	0.3214	0.04284
							8000	24.7	20.07	61.59	0.3289	0.04278
							8500	25.0	21.01	64.19	0.3363	0.04271
							9000	25.4	21.92	66.77	0.3437	0.04264
							9500	25.8	22.80	69.35	0.3512	0.04258
							10000	26.1	23.66	71.91	0.3585	0.04251
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.1	12.98	47.74	0.2845	0.05042
							5500	25.3	13.49	49.07	0.2883	0.05038
							6000	25.6	14.50	51.72	0.2960	0.05031
							6500	26.0	15.47	54.36	0.3035	0.05025
							7000	26.4	16.42	56.98	0.3111	0.05018
							7500	26.8	17.35	59.60	0.3186	0.05011
							8000	27.1	18.25	62.20	0.3261	0.05004
							8500	27.5	19.12	64.79	0.3336	0.04998
							9000	27.9	19.97	67.38	0.3410	0.04991
							9500	28.3	20.81	69.95	0.3484	0.04984
							10000	28.6	21.61	72.52	0.3558	0.04978
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.5	13.29	47.60	0.2852	0.04867
							5500	24.7	13.82	48.93	0.2890	0.04864
							6000	25.0	14.84	51.58	0.2966	0.04857
							6500	25.4	15.84	54.21	0.3042	0.04850
							7000	25.8	16.80	56.84	0.3118	0.04843
							7500	26.2	17.74	59.45	0.3193	0.04837
							8000	26.6	18.65	62.05	0.3268	0.04830
							8500	26.9	19.54	64.65	0.3342	0.04823
							9000	27.3	20.41	67.23	0.3416	0.04817
							9500	27.7	21.25	69.81	0.3491	0.04810
							10000	28.0	22.07	72.38	0.3564	0.04803
USA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.1	12.98	47.74	0.2845	0.05042
							5500	25.3	13.49	49.07	0.2883	0.05038
							6000	25.6	14.50	51.72	0.2960	0.05031
							6500	26.0	15.47	54.36	0.3035	0.05025
							7000	26.4	16.42	56.98	0.3111	0.05018
							7500	26.8	17.35	59.60	0.3186	0.05011
							8000	27.1	18.25	62.20	0.3261	0.05004
							8500	27.5	19.12	64.79	0.3336	0.04998
							9000	27.9	19.97	67.38	0.3410	0.04991
							9500	28.3	20.81	69.95	0.3484	0.04984
							10000	28.6	21.61	72.52	0.3558	0.04978
USA | CANADA | BUS-M2 | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	25.4	12.82	44.68	0.3364	0.05153
							5500	25.6	13.34	45.88	0.3409	0.05150
							6000	25.9	14.35	48.27	0.3499	0.05143
							6500	26.3	15.33	50.64	0.3588	0.05137
							7000	26.6	16.29	52.99	0.3676	0.05131
							7500	27.0	17.23	55.32	0.3763	0.05125
							8000	27.3	18.14	57.63	0.3850	0.05119
							8500	27.7	19.03	59.94	0.3937	0.05113
							9000	28.0	19.90	62.23	0.4022	0.05108
							9500	28.3	20.75	64.50	0.4108	0.05102
							10000	28.7	21.58	66.77	0.4193	0.05096
USA | CANADA | REGULAR CARGO VAN | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	25.4	12.80	44.70	0.3364	0.05168
							5500	25.6	13.31	45.90	0.3409	0.05165
							6000	26.0	14.32	48.28	0.3498	0.05158
							6500	26.3	15.30	50.65	0.3587	0.05152
							7000	26.7	16.26	53.00	0.3675	0.05146
							7500	27.0	17.19	55.33	0.3763	0.05140
							8000	27.4	18.11	57.65	0.3850	0.05134
							8500	27.7	19.00	59.95	0.3936	0.05128
							9000	28.1	19.86	62.24	0.4022	0.05123
							9500	28.4	20.71	64.52	0.4107	0.05117
							10000	28.7	21.54	66.78	0.4192	0.05111
USA | CANADA | REGULAR CARGO VAN | DUAL REAR WHEELS | 510E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/HD DRW (spec 6b)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 60 PSI.	5250	25.2	12.94	45.24	0.2843	0.05167
							5500	25.3	13.46	46.43	0.2887	0.05164
							6000	25.7	14.48	48.79	0.2976	0.05158
							6500	26.0	15.47	51.14	0.3064	0.05152
							7000	26.4	16.44	53.47	0.3151	0.05146
							7500	26.7	17.38	55.78	0.3238	0.05140
							8000	27.1	18.30	58.08	0.3324	0.05134
							8500	27.4	19.20	60.36	0.3410	0.05128
							9000	27.8	20.08	62.63	0.3495	0.05122
							9500	28.1	20.94	64.89	0.3580	0.05117
							10000	28.4	21.78	67.13	0.3664	0.05111
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.8	15.65	36.39	0.2939	0.04195
							5500	21.0	16.25	37.66	0.2982	0.04191
							6000	21.3	17.42	40.19	0.3066	0.04183
							6500	21.7	18.55	42.70	0.3149	0.04175

							7000	22.1	19.64	45.20	0.3233	0.04167
							7500	22.4	20.71	47.69	0.3316	0.04159
							8000	22.8	21.74	50.17	0.3398	0.04151
							8500	23.1	22.73	52.64	0.3481	0.04143
							9000	23.5	23.70	55.11	0.3563	0.04135
							9500	23.9	24.64	57.56	0.3645	0.04127
							10000	24.2	25.56	60.01	0.3726	0.04119
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.98	36.87	0.2990	0.04912
							5500	23.5	14.53	38.14	0.3032	0.04908
							6000	23.8	15.61	40.66	0.3116	0.04900
							6500	24.2	16.65	43.17	0.3200	0.04891
							7000	24.6	17.66	45.68	0.3283	0.04883
							7500	24.9	18.65	48.17	0.3366	0.04875
							8000	25.3	19.61	50.65	0.3449	0.04867
							8500	25.6	20.54	53.12	0.3531	0.04859
							9000	26.0	21.44	55.58	0.3613	0.04852
							9500	26.3	22.33	58.04	0.3695	0.04844
							10000	26.7	23.19	60.48	0.3777	0.04836
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.7	14.35	36.75	0.2977	0.04738
							5500	22.9	14.91	38.02	0.3020	0.04734
							6000	23.2	16.01	40.55	0.3104	0.04726
							6500	23.6	17.07	43.06	0.3188	0.04718
							7000	24.0	18.11	45.56	0.3271	0.04710
							7500	24.3	19.11	48.05	0.3354	0.04702
							8000	24.7	20.08	50.53	0.3437	0.04694
							8500	25.0	21.03	53.00	0.3519	0.04686
							9000	25.4	21.95	55.47	0.3601	0.04678
							9500	25.7	22.85	57.92	0.3683	0.04670
							10000	26.1	23.72	60.37	0.3764	0.04662
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.98	36.87	0.2990	0.04912
							5500	23.5	14.53	38.14	0.3032	0.04908
							6000	23.8	15.61	40.66	0.3116	0.04900
							6500	24.2	16.65	43.17	0.3200	0.04891
							7000	24.6	17.66	45.68	0.3283	0.04883
							7500	24.9	18.65	48.17	0.3366	0.04875
							8000	25.3	19.61	50.65	0.3449	0.04867
							8500	25.6	20.54	53.12	0.3531	0.04859
							9000	26.0	21.44	55.58	0.3613	0.04852
							9500	26.3	22.33	58.04	0.3695	0.04844
							10000	26.7	23.19	60.48	0.3777	0.04836
CANADA | REGULAR CARGO VAN | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	23.4	13.92	33.83	0.3518	0.04958
							5500	23.6	14.48	34.98	0.3566	0.04955
							6000	23.9	15.57	37.25	0.3663	0.04947
							6500	24.2	16.62	39.50	0.3758	0.04940
							7000	24.6	17.65	41.74	0.3853	0.04933
							7500	24.9	18.66	43.96	0.3948	0.04926
							8000	25.2	19.64	46.17	0.4041	0.04918
							8500	25.6	20.59	48.36	0.4135	0.04911
							9000	25.9	21.52	50.54	0.4227	0.04904
							9500	26.2	22.43	52.71	0.4319	0.04897
							10000	26.6	23.32	54.87	0.4411	0.04890
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.8	14.28	47.18	0.2871	0.04372
							5500	23.0	14.83	48.51	0.2909	0.04368
							6000	23.3	15.91	51.16	0.2985	0.04361
							6500	23.7	16.96	53.80	0.3061	0.04355
							7000	24.1	17.98	56.42	0.3136	0.04348
							7500	24.5	18.96	59.04	0.3212	0.04341
							8000	24.9	19.92	61.64	0.3286	0.04334
							8500	25.2	20.85	64.23	0.3361	0.04328
							9000	25.6	21.75	66.82	0.3435	0.04321
							9500	26.0	22.63	69.39	0.3509	0.04314
							10000	26.3	23.48	71.96	0.3583	0.04308
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.3	12.85	47.81	0.2842	0.05117
							5500	25.5	13.36	49.14	0.2881	0.05113
							6000	25.9	14.35	51.79	0.2957	0.05107
							6500	26.3	15.32	54.42	0.3033	0.05100
							7000	26.7	16.27	57.05	0.3108	0.05093
							7500	27.0	17.18	59.66	0.3183	0.05086
							8000	27.4	18.07	62.26	0.3258	0.05080
							8500	27.8	18.94	64.86	0.3333	0.05073
							9000	28.2	19.79	67.44	0.3407	0.05066
							9500	28.5	20.62	70.02	0.3481	0.05060
							10000	28.9	21.42	72.58	0.3555	0.05053
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.7	13.17	47.65	0.2849	0.04936
							5500	24.9	13.69	48.98	0.2887	0.04933
							6000	25.3	14.70	51.63	0.2964	0.04926
							6500	25.7	15.69	54.27	0.3039	0.04919

							7000	26.0	16.65	56.89	0.3115	0.04912
							7500	26.4	17.58	59.51	0.3190	0.04906
							8000	26.8	18.49	62.11	0.3265	0.04899
							8500	27.2	19.37	64.70	0.3340	0.04892
							9000	27.5	20.23	67.29	0.3414	0.04886
							9500	27.9	21.07	69.87	0.3488	0.04879
							10000	28.3	21.89	72.43	0.3562	0.04872
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.3	12.85	47.81	0.2842	0.05117
							5500	25.5	13.36	49.14	0.2881	0.05113
							6000	25.9	14.35	51.79	0.2957	0.05107
							6500	26.3	15.32	54.42	0.3033	0.05100
							7000	26.7	16.27	57.05	0.3108	0.05093
							7500	27.0	17.18	59.66	0.3183	0.05086
							8000	27.4	18.07	62.26	0.3258	0.05080
							8500	27.8	18.94	64.86	0.3333	0.05073
							9000	28.2	19.79	67.44	0.3407	0.05066
							9500	28.5	20.62	70.02	0.3481	0.05060
							10000	28.9	21.42	72.58	0.3555	0.05053
CANADA | REGULAR CARGO VAN | DUAL REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD DRW (spec 6a)	NONDRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 70 PSI. || DRIVEN: P205/75R 16ALS HANKOOK (DYNAPRO HT) / D3JQH AT 55 PSI.	5250	25.7	12.67	44.76	0.3361	0.05243
							5500	25.9	13.18	45.96	0.3406	0.05240
							6000	26.2	14.18	48.35	0.3495	0.05234
							6500	26.6	15.15	50.71	0.3584	0.05228
							7000	26.9	16.10	53.06	0.3672	0.05222
							7500	27.3	17.03	55.39	0.3760	0.05216
							8000	27.6	17.94	57.71	0.3847	0.05210
							8500	28.0	18.82	60.01	0.3933	0.05204
							9000	28.3	19.68	62.30	0.4019	0.05198
							9500	28.7	20.53	64.58	0.4104	0.05192
							10000	29.0	21.36	66.84	0.4189	0.05186
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.6	15.79	36.36	0.2935	0.04141
							5500	20.8	16.39	37.63	0.2978	0.04137
							6000	21.2	17.57	40.15	0.3062	0.04128
							6500	21.5	18.71	42.66	0.3146	0.04120
							7000	21.9	19.82	45.16	0.3229	0.04112
							7500	22.2	20.88	47.65	0.3312	0.04104
							8000	22.6	21.92	50.14	0.3395	0.04096
							8500	23.0	22.92	52.61	0.3477	0.04088
							9000	23.3	23.90	55.07	0.3559	0.04080
							9500	23.7	24.84	57.53	0.3641	0.04073
							10000	24.0	25.76	59.97	0.3722	0.04065
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.0	14.14	36.82	0.2985	0.04839
							5500	23.2	14.69	38.09	0.3027	0.04835
							6000	23.6	15.77	40.61	0.3111	0.04827
							6500	23.9	16.82	43.13	0.3195	0.04819
							7000	24.3	17.85	45.63	0.3278	0.04811
							7500	24.7	18.84	48.12	0.3361	0.04803
							8000	25.0	19.80	50.60	0.3444	0.04795
							8500	25.4	20.74	53.07	0.3526	0.04787
							9000	25.7	21.65	55.53	0.3608	0.04779
							9500	26.1	22.54	57.99	0.3690	0.04771
							10000	26.4	23.41	60.44	0.3772	0.04763
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.4	14.50	36.71	0.2973	0.04672
							5500	22.6	15.06	37.98	0.3015	0.04668
							6000	23.0	16.17	40.50	0.3099	0.04659
							6500	23.4	17.24	43.01	0.3183	0.04651
							7000	23.7	18.28	45.52	0.3266	0.04643
							7500	24.1	19.29	48.01	0.3349	0.04635
							8000	24.4	20.27	50.49	0.3432	0.04627
							8500	24.8	21.23	52.96	0.3514	0.04619
							9000	25.2	22.15	55.42	0.3596	0.04612
							9500	25.5	23.05	57.88	0.3678	0.04604
							10000	25.9	23.93	60.33	0.3760	0.04596
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.0	14.14	36.82	0.2985	0.04839
							5500	23.2	14.69	38.09	0.3027	0.04835
							6000	23.6	15.77	40.61	0.3111	0.04827
							6500	23.9	16.82	43.13	0.3195	0.04819
							7000	24.3	17.85	45.63	0.3278	0.04811
							7500	24.7	18.84	48.12	0.3361	0.04803
							8000	25.0	19.80	50.60	0.3444	0.04795
							8500	25.4	20.74	53.07	0.3526	0.04787
							9000	25.7	21.65	55.53	0.3608	0.04779
							9500	26.1	22.54	57.99	0.3690	0.04771
							10000	26.4	23.41	60.44	0.3772	0.04763
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.6	14.40	47.14	0.2873	0.04315
							5500	22.8	14.96	48.47	0.2911	0.04311
							6000	23.2	16.05	51.12	0.2987	0.04304
							6500	23.5	17.10	53.75	0.3063	0.04298

							7000	23.9	18.12	56.38	0.3139	0.04291
							7500	24.3	19.11	58.99	0.3214	0.04284
							8000	24.7	20.07	61.59	0.3289	0.04278
							8500	25.0	21.01	64.19	0.3363	0.04271
							9000	25.4	21.92	66.77	0.3437	0.04264
							9500	25.8	22.80	69.35	0.3512	0.04258
							10000	26.1	23.66	71.91	0.3585	0.04251
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.1	12.98	47.74	0.2845	0.05042
							5500	25.3	13.49	49.07	0.2883	0.05038
							6000	25.6	14.50	51.72	0.2960	0.05031
							6500	26.0	15.47	54.36	0.3035	0.05025
							7000	26.4	16.42	56.98	0.3111	0.05018
							7500	26.8	17.35	59.60	0.3186	0.05011
							8000	27.1	18.25	62.20	0.3261	0.05004
							8500	27.5	19.12	64.79	0.3336	0.04998
							9000	27.9	19.97	67.38	0.3410	0.04991
							9500	28.3	20.81	69.95	0.3484	0.04984
							10000	28.6	21.61	72.52	0.3558	0.04978
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445L SERIES | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.5	13.29	47.60	0.2852	0.04867
							5500	24.7	13.82	48.93	0.2890	0.04864
							6000	25.0	14.84	51.58	0.2966	0.04857
							6500	25.4	15.84	54.21	0.3042	0.04850
							7000	25.8	16.80	56.84	0.3118	0.04843
							7500	26.2	17.74	59.45	0.3193	0.04837
							8000	26.6	18.65	62.05	0.3268	0.04830
							8500	26.9	19.54	64.65	0.3342	0.04823
							9000	27.3	20.41	67.23	0.3416	0.04817
							9500	27.7	21.25	69.81	0.3491	0.04810
							10000	28.0	22.07	72.38	0.3564	0.04803
CANADA | REGULAR CARGO VAN | SINGLE REAR WHEELS | 445E SERIES | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 83 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.1	12.98	47.74	0.2845	0.05042
							5500	25.3	13.49	49.07	0.2883	0.05038
							6000	25.6	14.50	51.72	0.2960	0.05031
							6500	26.0	15.47	54.36	0.3035	0.05025
							7000	26.4	16.42	56.98	0.3111	0.05018
							7500	26.8	17.35	59.60	0.3186	0.05011
							8000	27.1	18.25	62.20	0.3261	0.05004
							8500	27.5	19.12	64.79	0.3336	0.04998
							9000	27.9	19.97	67.38	0.3410	0.04991
							9500	28.3	20.81	69.95	0.3484	0.04984
							10000	28.6	21.61	72.52	0.3558	0.04978
MEXICO | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.0	15.47	40.49	0.2759	0.04138
							5500	21.2	16.06	41.80	0.2803	0.04134
							6000	21.6	17.21	44.41	0.2890	0.04125
							6500	22.0	18.32	47.01	0.2977	0.04117
							7000	22.4	19.39	49.59	0.3063	0.04109
							7500	22.7	20.44	52.16	0.3148	0.04100
							8000	23.1	21.45	54.73	0.3234	0.04092
							8500	23.5	22.42	57.28	0.3319	0.04084
							9000	23.8	23.37	59.83	0.3404	0.04076
							9500	24.2	24.29	62.37	0.3488	0.04067
							10000	24.6	25.19	64.89	0.3573	0.04059
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.0	15.47	40.49	0.2759	0.04138
							5500	21.2	16.06	41.80	0.2803	0.04134
							6000	21.6	17.21	44.41	0.2890	0.04125
							6500	22.0	18.32	47.01	0.2977	0.04117
							7000	22.4	19.39	49.59	0.3063	0.04109
							7500	22.7	20.44	52.16	0.3148	0.04100
							8000	23.1	21.45	54.73	0.3234	0.04092
							8500	23.5	22.42	57.28	0.3319	0.04084
							9000	23.8	23.37	59.83	0.3404	0.04076
							9500	24.2	24.29	62.37	0.3488	0.04067
							10000	24.6	25.19	64.89	0.3573	0.04059
MEXICO | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.7	14.35	40.80	0.2793	0.04610
							5500	22.9	14.91	42.11	0.2836	0.04605
							6000	23.2	16.00	44.72	0.2923	0.04597
							6500	23.6	17.05	47.32	0.3010	0.04589
							7000	24.0	18.08	49.90	0.3096	0.04580
							7500	24.4	19.07	52.48	0.3182	0.04572
							8000	24.7	20.03	55.04	0.3267	0.04564
							8500	25.1	20.97	57.60	0.3352	0.04556
							9000	25.5	21.88	60.14	0.3437	0.04547
							9500	25.8	22.76	62.68	0.3522	0.04539
							10000	26.2	23.62	65.21	0.3606	0.04531
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.7	14.35	40.80	0.2793	0.04610
							5500	22.9	14.91	42.11	0.2836	0.04605
							6000	23.2	16.00	44.72	0.2923	0.04597
							6500	23.6	17.05	47.32	0.3010	0.04589

							7000	24.0	18.08	49.90	0.3096	0.04580
							7500	24.4	19.07	52.48	0.3182	0.04572
							8000	24.7	20.03	55.04	0.3267	0.04564
							8500	25.1	20.97	57.60	0.3352	0.04556
							9000	25.5	21.88	60.14	0.3437	0.04547
							9500	25.8	22.76	62.68	0.3522	0.04539
							10000	26.2	23.62	65.21	0.3606	0.04531
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.1	15.41	40.50	0.2761	0.04160
							5500	21.3	16.00	41.81	0.2805	0.04155
							6000	21.7	17.15	44.42	0.2892	0.04147
							6500	22.1	18.26	47.02	0.2978	0.04139
							7000	22.4	19.33	49.61	0.3064	0.04130
							7500	22.8	20.37	52.18	0.3150	0.04122
							8000	23.2	21.38	54.74	0.3235	0.04114
							8500	23.5	22.35	57.30	0.3321	0.04106
							9000	23.9	23.30	59.84	0.3405	0.04097
							9500	24.3	24.22	62.38	0.3490	0.04089
							10000	24.6	25.11	64.91	0.3574	0.04081
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	21.1	15.41	40.50	0.2761	0.04160
							5500	21.3	16.00	41.81	0.2805	0.04155
							6000	21.7	17.15	44.42	0.2892	0.04147
							6500	22.1	18.26	47.02	0.2978	0.04139
							7000	22.4	19.33	49.61	0.3064	0.04130
							7500	22.8	20.37	52.18	0.3150	0.04122
							8000	23.2	21.38	54.74	0.3235	0.04114
							8500	23.5	22.35	57.30	0.3321	0.04106
							9000	23.9	23.30	59.84	0.3405	0.04097
							9500	24.3	24.22	62.38	0.3490	0.04089
							10000	24.6	25.11	64.91	0.3574	0.04081
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.9	15.61	36.77	0.2952	0.04194
							5500	21.0	16.20	38.06	0.2995	0.04190
							6000	21.4	17.37	40.61	0.3080	0.04182
							6500	21.8	18.49	43.16	0.3165	0.04174
							7000	22.1	19.58	45.69	0.3249	0.04165
							7500	22.5	20.64	48.22	0.3333	0.04157
							8000	22.9	21.66	50.73	0.3417	0.04149
							8500	23.2	22.65	53.24	0.3501	0.04141
							9000	23.6	23.61	55.73	0.3584	0.04133
							9500	24.0	24.54	58.22	0.3667	0.04125
							10000	24.3	25.45	60.70	0.3749	0.04117
				4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	20.9	15.61	36.77	0.2952	0.04194
							5500	21.0	16.20	38.06	0.2995	0.04190
							6000	21.4	17.37	40.61	0.3080	0.04182
							6500	21.8	18.49	43.16	0.3165	0.04174
							7000	22.1	19.58	45.69	0.3249	0.04165
							7500	22.5	20.64	48.22	0.3333	0.04157
							8000	22.9	21.66	50.73	0.3417	0.04149
							8500	23.2	22.65	53.24	0.3501	0.04141
							9000	23.6	23.61	55.73	0.3584	0.04133
							9500	24.0	24.54	58.22	0.3667	0.04125
							10000	24.3	25.45	60.70	0.3749	0.04117
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.0	14.16	40.86	0.2799	0.04702
							5500	23.2	14.71	42.17	0.2843	0.04698
							6000	23.6	15.78	44.78	0.2930	0.04690
							6500	23.9	16.83	47.38	0.3016	0.04681
							7000	24.3	17.84	49.97	0.3102	0.04673
							7500	24.7	18.82	52.54	0.3188	0.04665
							8000	25.1	19.77	55.10	0.3274	0.04657
							8500	25.4	20.70	57.66	0.3359	0.04648
							9000	25.8	21.61	60.20	0.3444	0.04640
							9500	26.2	22.48	62.74	0.3528	0.04632
							10000	26.5	23.34	65.27	0.3612	0.04624
				4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.0	14.16	40.86	0.2799	0.04702
							5500	23.2	14.71	42.17	0.2843	0.04698
							6000	23.6	15.78	44.78	0.2930	0.04690
							6500	23.9	16.83	47.38	0.3016	0.04681
							7000	24.3	17.84	49.97	0.3102	0.04673
							7500	24.7	18.82	52.54	0.3188	0.04665
							8000	25.1	19.77	55.10	0.3274	0.04657
							8500	25.4	20.70	57.66	0.3359	0.04648
							9000	25.8	21.61	60.20	0.3444	0.04640
							9500	26.2	22.48	62.74	0.3528	0.04632
							10000	26.5	23.34	65.27	0.3612	0.04624
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.7	14.32	37.13	0.2990	0.04737
							5500	22.9	14.88	38.42	0.3033	0.04733
							6000	23.3	15.97	40.97	0.3118	0.04724
							6500	23.7	17.03	43.52	0.3203	0.04716

							7000	24.0	18.05	46.05	0.3287	0.04708
							7500	24.4	19.05	48.58	0.3372	0.04700
							8000	24.8	20.02	51.09	0.3455	0.04692
							8500	25.1	20.96	53.60	0.3539	0.04684
							9000	25.5	21.87	56.09	0.3622	0.04676
							9500	25.8	22.76	58.58	0.3705	0.04668
							10000	26.2	23.63	61.06	0.3787	0.04660
				4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.7	14.32	37.13	0.2990	0.04737
							5500	22.9	14.88	38.42	0.3033	0.04733
							6000	23.3	15.97	40.97	0.3118	0.04724
							6500	23.7	17.03	43.52	0.3203	0.04716
							7000	24.0	18.05	46.05	0.3287	0.04708
							7500	24.4	19.05	48.58	0.3372	0.04700
							8000	24.8	20.02	51.09	0.3455	0.04692
							8500	25.1	20.96	53.60	0.3539	0.04684
							9000	25.5	21.87	56.09	0.3622	0.04676
							9500	25.8	22.76	58.58	0.3705	0.04668
							10000	26.2	23.63	61.06	0.3787	0.04660
MEXICO | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.2	14.03	40.90	0.2803	0.04760
							5500	23.4	14.58	42.21	0.2847	0.04756
							6000	23.8	15.65	44.82	0.2934	0.04748
							6500	24.1	16.69	47.42	0.3020	0.04739
							7000	24.5	17.69	50.00	0.3107	0.04731
							7500	24.9	18.67	52.58	0.3192	0.04723
							8000	25.3	19.62	55.14	0.3278	0.04714
							8500	25.6	20.54	57.70	0.3363	0.04706
							9000	26.0	21.44	60.24	0.3448	0.04698
							9500	26.4	22.31	62.78	0.3532	0.04690
							10000	26.7	23.16	65.31	0.3617	0.04682
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	23.6	13.79	40.98	0.2811	0.04876
							5500	23.8	14.33	42.29	0.2855	0.04872
							6000	24.2	15.39	44.90	0.2942	0.04863
							6500	24.5	16.41	47.50	0.3029	0.04855
							7000	24.9	17.41	50.08	0.3115	0.04847
							7500	25.3	18.37	52.65	0.3200	0.04839
							8000	25.7	19.31	55.22	0.3286	0.04830
							8500	26.0	20.23	57.77	0.3371	0.04822
							9000	26.4	21.11	60.32	0.3456	0.04814
							9500	26.8	21.98	62.85	0.3540	0.04806
							10000	27.1	22.82	65.38	0.3625	0.04798
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	23.3	13.95	37.25	0.3002	0.04910
							5500	23.5	14.50	38.53	0.3045	0.04906
							6000	23.9	15.57	41.09	0.3130	0.04898
							6500	24.3	16.60	43.64	0.3215	0.04890
							7000	24.6	17.61	46.17	0.3300	0.04882
							7500	25.0	18.59	48.69	0.3384	0.04874
							8000	25.4	19.54	51.21	0.3468	0.04866
							8500	25.7	20.47	53.71	0.3551	0.04858
							9000	26.1	21.37	56.21	0.3634	0.04849
							9500	26.4	22.25	58.70	0.3717	0.04841
							10000	26.8	23.10	61.18	0.3800	0.04834
MEXICO | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.8	14.29	47.56	0.2883	0.04348
							5500	22.9	14.84	48.91	0.2922	0.04344
							6000	23.3	15.92	51.59	0.2999	0.04337
							6500	23.7	16.97	54.26	0.3076	0.04331
							7000	24.1	17.98	56.92	0.3152	0.04324
							7500	24.5	18.96	59.57	0.3228	0.04317
							8000	24.9	19.91	62.21	0.3304	0.04310
							8500	25.2	20.84	64.84	0.3380	0.04303
							9000	25.6	21.74	67.46	0.3455	0.04297
							9500	26.0	22.61	70.07	0.3530	0.04290
							10000	26.4	23.46	72.67	0.3605	0.04283
MEXICO | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.0	13.03	48.10	0.2858	0.04995
							5500	25.2	13.54	49.45	0.2897	0.04992
							6000	25.6	14.55	52.13	0.2974	0.04985
							6500	25.9	15.52	54.80	0.3051	0.04978
							7000	26.3	16.47	57.46	0.3128	0.04971
							7500	26.7	17.40	60.11	0.3204	0.04964
							8000	27.1	18.29	62.75	0.3280	0.04958
							8500	27.5	19.16	65.38	0.3355	0.04951
							9000	27.8	20.02	68.00	0.3430	0.04944
							9500	28.2	20.84	70.61	0.3506	0.04937
							10000	28.6	21.65	73.21	0.3580	0.04931
MEXICO | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.4	13.31	47.97	0.2864	0.04839
							5500	24.6	13.84	49.32	0.2903	0.04835
							6000	25.0	14.86	52.00	0.2980	0.04828
							6500	25.4	15.85	54.67	0.3057	0.04821

							7000	25.8	16.81	57.33	0.3134	0.04814
							7500	26.2	17.75	59.98	0.3210	0.04808
							8000	26.5	18.66	62.62	0.3286	0.04801
							8500	26.9	19.55	65.25	0.3361	0.04794
							9000	27.3	20.41	67.87	0.3436	0.04787
							9500	27.7	21.24	70.48	0.3511	0.04781
							10000	28.0	22.06	73.08	0.3586	0.04774
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.8	14.24	47.58	0.2882	0.04371
							5500	23.0	14.79	48.93	0.2921	0.04367
							6000	23.4	15.87	51.61	0.2998	0.04360
							6500	23.8	16.91	54.28	0.3075	0.04353
							7000	24.2	17.92	56.94	0.3151	0.04347
							7500	24.6	18.90	59.59	0.3227	0.04340
							8000	24.9	19.85	62.23	0.3303	0.04333
							8500	25.3	20.77	64.86	0.3379	0.04326
							9000	25.7	21.67	67.47	0.3454	0.04319
							9500	26.1	22.54	70.09	0.3529	0.04313
							10000	26.4	23.39	72.69	0.3604	0.04306
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	25.4	12.82	48.20	0.2854	0.05116
							5500	25.6	13.33	49.55	0.2892	0.05112
							6000	26.0	14.32	52.23	0.2970	0.05105
							6500	26.3	15.28	54.91	0.3047	0.05099
							7000	26.7	16.22	57.56	0.3123	0.05092
							7500	27.1	17.13	60.21	0.3199	0.05085
							8000	27.5	18.02	62.85	0.3275	0.05078
							8500	27.9	18.88	65.48	0.3351	0.05071
							9000	28.2	19.72	68.10	0.3426	0.05065
							9500	28.6	20.54	70.71	0.3501	0.05058
							10000	29.0	21.35	73.31	0.3576	0.05051
MEXICO | REGULAR CARGO VAN | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 CYCLONE TIVCT	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	4.1	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.8	13.14	48.05	0.2861	0.04935
							5500	25.0	13.65	49.40	0.2899	0.04932
							6000	25.3	14.66	52.08	0.2977	0.04925
							6500	25.7	15.65	54.75	0.3053	0.04918
							7000	26.1	16.60	57.41	0.3130	0.04911
							7500	26.5	17.53	60.06	0.3206	0.04904
							8000	26.9	18.43	62.70	0.3282	0.04897
							8500	27.3	19.31	65.33	0.3357	0.04891
							9000	27.6	20.16	67.95	0.3433	0.04884
							9500	28.0	21.00	70.56	0.3508	0.04877
							10000	28.4	21.81	73.16	0.3583	0.04871
MEXICO | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	20.8	15.61	40.45	0.2756	0.04083
							5500	21.0	16.20	41.76	0.2799	0.04079
							6000	21.4	17.36	44.37	0.2886	0.04070
							6500	21.8	18.48	46.97	0.2973	0.04062
							7000	22.2	19.56	49.55	0.3059	0.04054
							7500	22.5	20.61	52.13	0.3145	0.04046
							8000	22.9	21.62	54.69	0.3230	0.04037
							8500	23.3	22.61	57.25	0.3315	0.04029
							9000	23.6	23.56	59.79	0.3400	0.04021
							9500	24.0	24.48	62.33	0.3485	0.04013
							10000	24.4	25.38	64.86	0.3569	0.04005
MEXICO | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.9	14.18	40.86	0.2798	0.04688
							5500	23.1	14.74	42.16	0.2842	0.04684
							6000	23.5	15.82	44.77	0.2929	0.04675
							6500	23.9	16.86	47.37	0.3015	0.04667
							7000	24.3	17.87	49.96	0.3101	0.04659
							7500	24.6	18.86	52.53	0.3187	0.04650
							8000	25.0	19.82	55.09	0.3273	0.04642
							8500	25.4	20.74	57.65	0.3358	0.04634
							9000	25.7	21.65	60.19	0.3443	0.04626
							9500	26.1	22.52	62.73	0.3527	0.04618
							10000	26.5	23.38	65.26	0.3611	0.04609
MEXICO | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X2 | LESS FUEL ECONOMY PACKAGES	RWD	3.73	V363 LD/LD SRW EPB (Spec e5c)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 52 NONDRIVEN PSI	5250	22.4	14.50	40.76	0.2788	0.04543
							5500	22.6	15.06	42.07	0.2832	0.04539
							6000	23.0	16.16	44.68	0.2919	0.04531
							6500	23.4	17.22	47.27	0.3005	0.04522
							7000	23.8	18.25	49.86	0.3091	0.04514
							7500	24.1	19.25	52.43	0.3177	0.04506
							8000	24.5	20.22	55.00	0.3262	0.04497
							8500	24.9	21.16	57.55	0.3348	0.04489
							9000	25.2	22.08	60.10	0.3432	0.04481
							9500	25.6	22.96	62.63	0.3517	0.04473
							10000	26.0	23.83	65.16	0.3601	0.04465
MEXICO | BUS-M2 | SINGLE REAR WHEELS | LOW ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 3.9	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	22.6	14.41	47.51	0.2885	0.04291
							5500	22.8	14.97	48.86	0.2924	0.04287
							6000	23.1	16.05	51.54	0.3001	0.04281
							6500	23.5	17.10	54.22	0.3078	0.04274

							7000	23.9	18.12	56.88	0.3154	0.04267
							7500	24.3	19.11	59.52	0.3231	0.04260
							8000	24.7	20.07	62.16	0.3306	0.04253
							8500	25.0	21.00	64.79	0.3382	0.04246
							9000	25.4	21.90	67.41	0.3457	0.04240
							9500	25.8	22.78	70.02	0.3532	0.04233
							10000	26.2	23.63	72.62	0.3607	0.04226
MEXICO | BUS-M2 | SINGLE REAR WHEELS | HIGH ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 5.16	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.7	13.16	48.04	0.2861	0.04920
							5500	24.9	13.68	49.39	0.2900	0.04917
							6000	25.3	14.69	52.07	0.2977	0.04910
							6500	25.7	15.68	54.74	0.3054	0.04903
							7000	26.1	16.63	57.40	0.3130	0.04896
							7500	26.4	17.56	60.05	0.3207	0.04889
							8000	26.8	18.47	62.69	0.3282	0.04882
							8500	27.2	19.35	65.31	0.3358	0.04876
							9000	27.6	20.20	67.93	0.3433	0.04869
							9500	28.0	21.04	70.54	0.3508	0.04862
							10000	28.3	21.85	73.15	0.3583	0.04855
MEXICO | BUS-M2 | SINGLE REAR WHEELS | MEDIUM ROOF LINE | LESS FRONTAL AREA LIMITATION | Frontal Area - 4.73	3.5L V6 GTDI	10R80 4X4 | LESS FUEL ECONOMY PACKAGES	AWD	3.73	V363 HD/LD SRW EPB (Spec e5a)	P235/65R 16 ALS CONTINENTAL (VAN CONTACT A/S) / D3JC8 AT 75 DRIVEN PSI AND 57 NONDRIVEN PSI	5250	24.2	13.44	47.91	0.2867	0.04770
							5500	24.4	13.97	49.26	0.2906	0.04766
							6000	24.8	15.00	51.94	0.2983	0.04759
							6500	25.2	16.00	54.62	0.3060	0.04752
							7000	25.5	16.97	57.28	0.3136	0.04745
							7500	25.9	17.91	59.92	0.3212	0.04739
							8000	26.3	18.83	62.56	0.3288	0.04732
							8500	26.7	19.72	65.19	0.3364	0.04725
							9000	27.1	20.58	67.81	0.3439	0.04718
							9500	27.4	21.43	70.42	0.3514	0.04712
							10000	27.8	22.25	73.02	0.3589	0.04705

Certification Dynamometer / Road Load Horsepower Procedures

Ford maintains the following roadload determination procedures, available upon request. The procedures have been based on SAE J2263 and J2264

12.01.05.01 & 12.01.05.02 – Procedure for Determining the Road Load Horsepower for 48 in. 'Single' Roll Electric Dynamometers.
- CETP: 00.00-L-908

12.01.06.00 – Certification Coast down Procedure for Determining Road Load Horsepower.
- CETP: 00.00-R-901

2026 MY Fuel Tank Temperature Profiles

FTTP Testing Information			Product Coverage		
Profile #[2]	Ending Fuel Temp	Tank Capacity as	Engine Size (Liters)	Vehicle Model Name	Certification Test Group(s)
16007	112.1	23.9	2.7L GTPFDI	F-150	TFMXT02.73JK
			3.5L GTPFDI	F-150* / F-150 Police Responder	TFMXT03.57AV, TFMXT03.57AT
			3.5L GTPFDI	F-150 Raptor	TFMXT03.57AT, TFMXT03.54JK
			5.0L PFDI	F-150	TFMXT05.03DP
			5.2L SC	F-150 Raptor R	TFMXT05.2AHS
			3.5L GTPFDI	Expedition / Expedition Max / Navigator / Navigator L	TFMXT03.57AT, TFMXT03.57AV, TFMXT03.54HT
16013	115.1	16.1	2.3L GTPFDI	Mustang	TFMXV02.3VJG, TFMXV02.3VJY
			5.0L PFDI	Mustang GT* / Mustang Dark Horse	TFMXV05.0VKN
			5.2L SC	Mustang Feature Car	TFMXV05.2VEZ
			5.2L SC	Mustang GTD	TFMXV05.2GTD
18003	112.4	21.4	2.3L GTPFDI	Explorer	TFMXT02.34K2, TFMXT02.34K4
			3.0L GTDI	Explorer* / Police Interceptor Utility / Aviator	TFMXT03.0JPC, TFMXT03.0TPC, TFMXT03.0JP1
			3.3L PFDI	Police Interceptor Utility	TFMXT03.33U3
18004	109.7	19.0	3.3L PFDI FHEV	Police Interceptor Utility Hybrid*	TFMXT03.33F1
18005	117.9	24.7	3.5L PFDI	Transit ≤10K*	TFMXD03.56BG
			3.5L GTDI	Transit ≤10K	TFMXD03.56BZ
				Transit >10K	TFMXD03.57BZ
18011	121.0	15.8	1.5L GTPFDI	Escape	TFMXT01.52X1
			1.5L GTPFDI	Bronco Sport	TFMXT01.52X2, TFMXT01.52X4
			2.0L GTPFDI	Escape* / Corsair	TFMXT02.02Y3
			2.0L GTPFDI	Bronco Sport / Maverick	TFMXT02.02Y3, TFMXT02.02Y5
18012	110.4	34.5	6.8L	F Series Super Duty Box Delete	TFMXD06.86CH
				F Series Super Duty Complete	TFMXD06.86CH, TFMXD06.87BC
				F Series Super Duty Complete*	TFMXD07.363H, TFMXD07.373K
			7.3L	F Series Super Duty Incomplete	TFMXE07.3BWU, TFMXE07.3BW7
				F59 Step Van Incomplete	TFMXE07.3BW7
18014	113.0	40.0	7.3L	E-350 ≤14k*	TFMXE07.3BWU
				E-450 >14k / F-650 / F-750	TFMXE07.3BW7
18015	109.7	47.2	7.3L	F53 Motorhome (F-650* 47.2 gal tested)	TFMXE07.3BW7
19002	104.3	12.0	2.5L PHEV	Escape PHEV	TFMXT02.52P1
				Corsair PHEV*	TFMXT02.53CE
			2.5L FHEV	Escape FHEV	TFMXT02.52F1
				Maverick FHEV	TFMXT02.54F1
19005	106.3	32.5	3.5L GTPFDI FHEV	F-150 Hybrid*	TFMXT03.51F1, TFMXT03.51F2
20001	112.3	18.7	2.3L GTPFDI	Bronco	TFMXT02.31EM, TFMXT02.31EN
			2.7L GTPFDI	Bronco*	TFMXT02.72V6
			3.0L GTPFDI	Bronco Raptor / Ranger Raptor	TFMXT03.03V7
			2.3L GTPFDI	Ranger	TFMXT02.36HG, TFMXT02.36HH
			2.7L GTPFDI	Ranger	TFMXT02.71HS
22009	116.9	19.8	2.0L GTPFDI FHEV	Nautilus Hybrid*	TFMXT02.02JF

2026 MY Fuel Tank Temperature Profiles

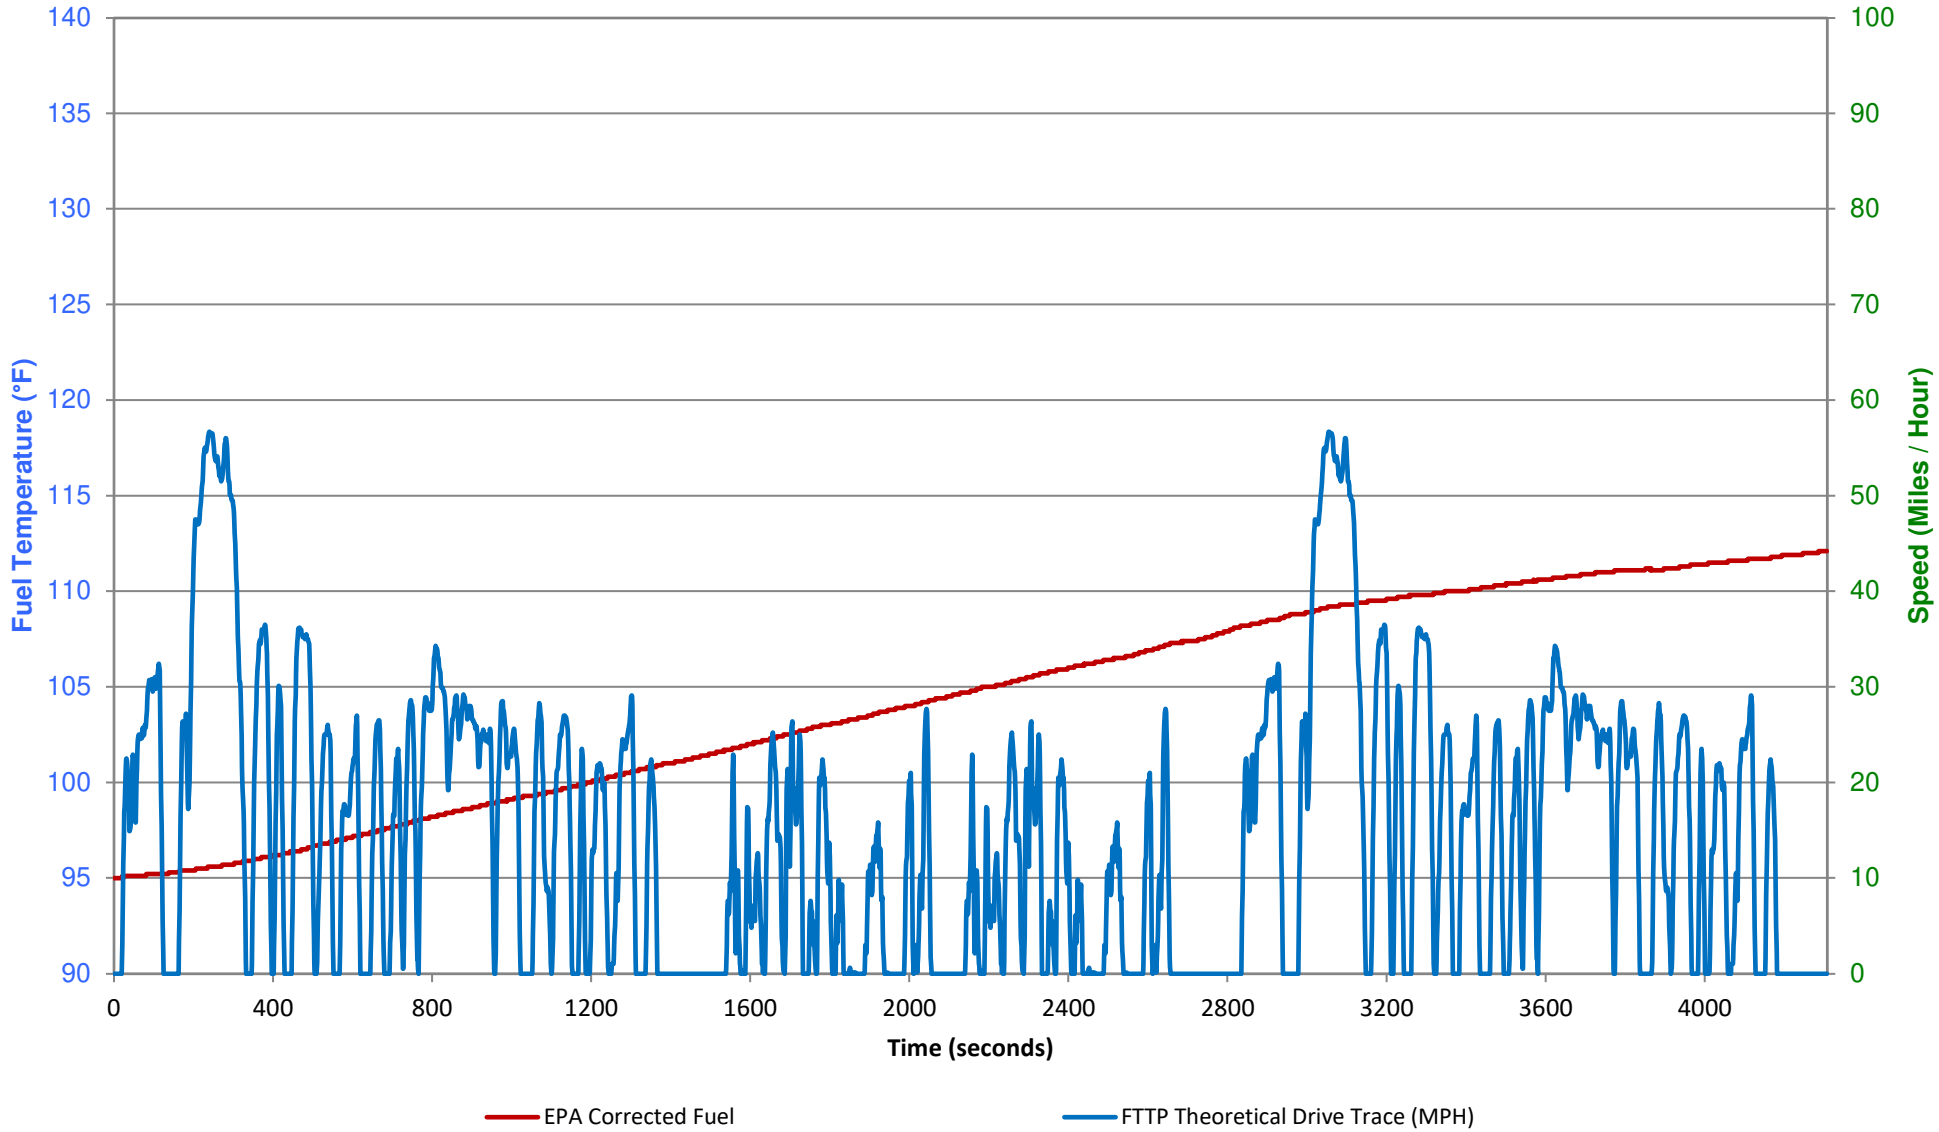
FTTP Testing Information			Product Coverage		
Profile #[2]	Ending Fuel Temp	Tank Capacity as	Engine Size (Liters)	Vehicle Model Name	Certification Test Group(s)
23001	113.0	19.8	2.0L GTPFDI	Nautilus*	TFMXT02.02Y5

Footnotes:

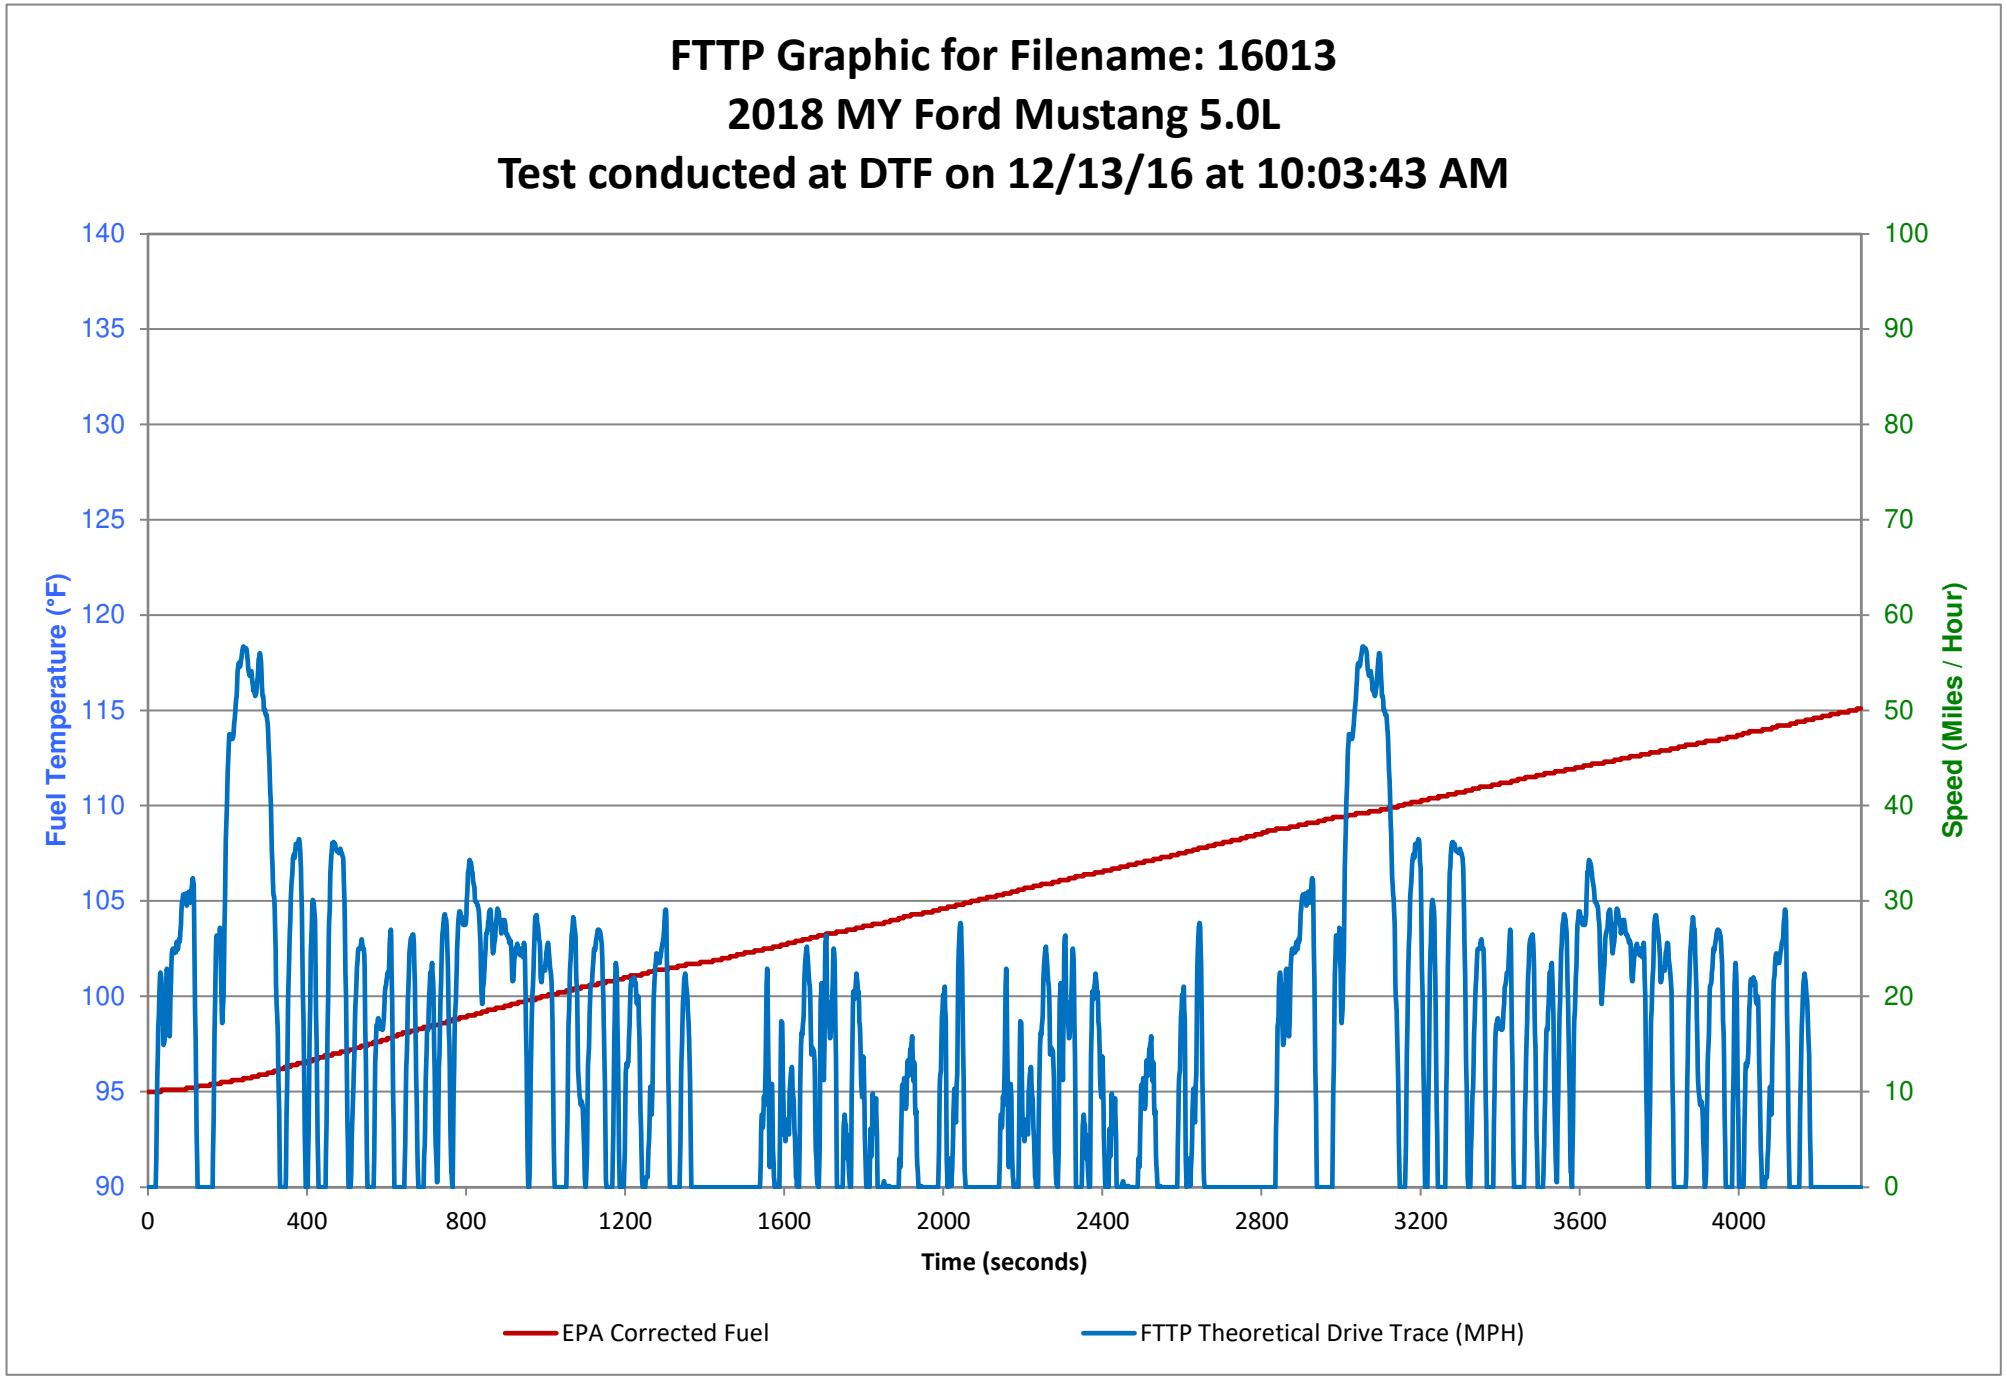
2) For 2004CY testing and beyond, the following suffixes, positions 5 - 8 in the FTTP profile name, correspond to the following subsequent test facilities: DTF [000 - 299] and Arizona [300 - 599]

* Denotes tested variant in the FTTP profile.

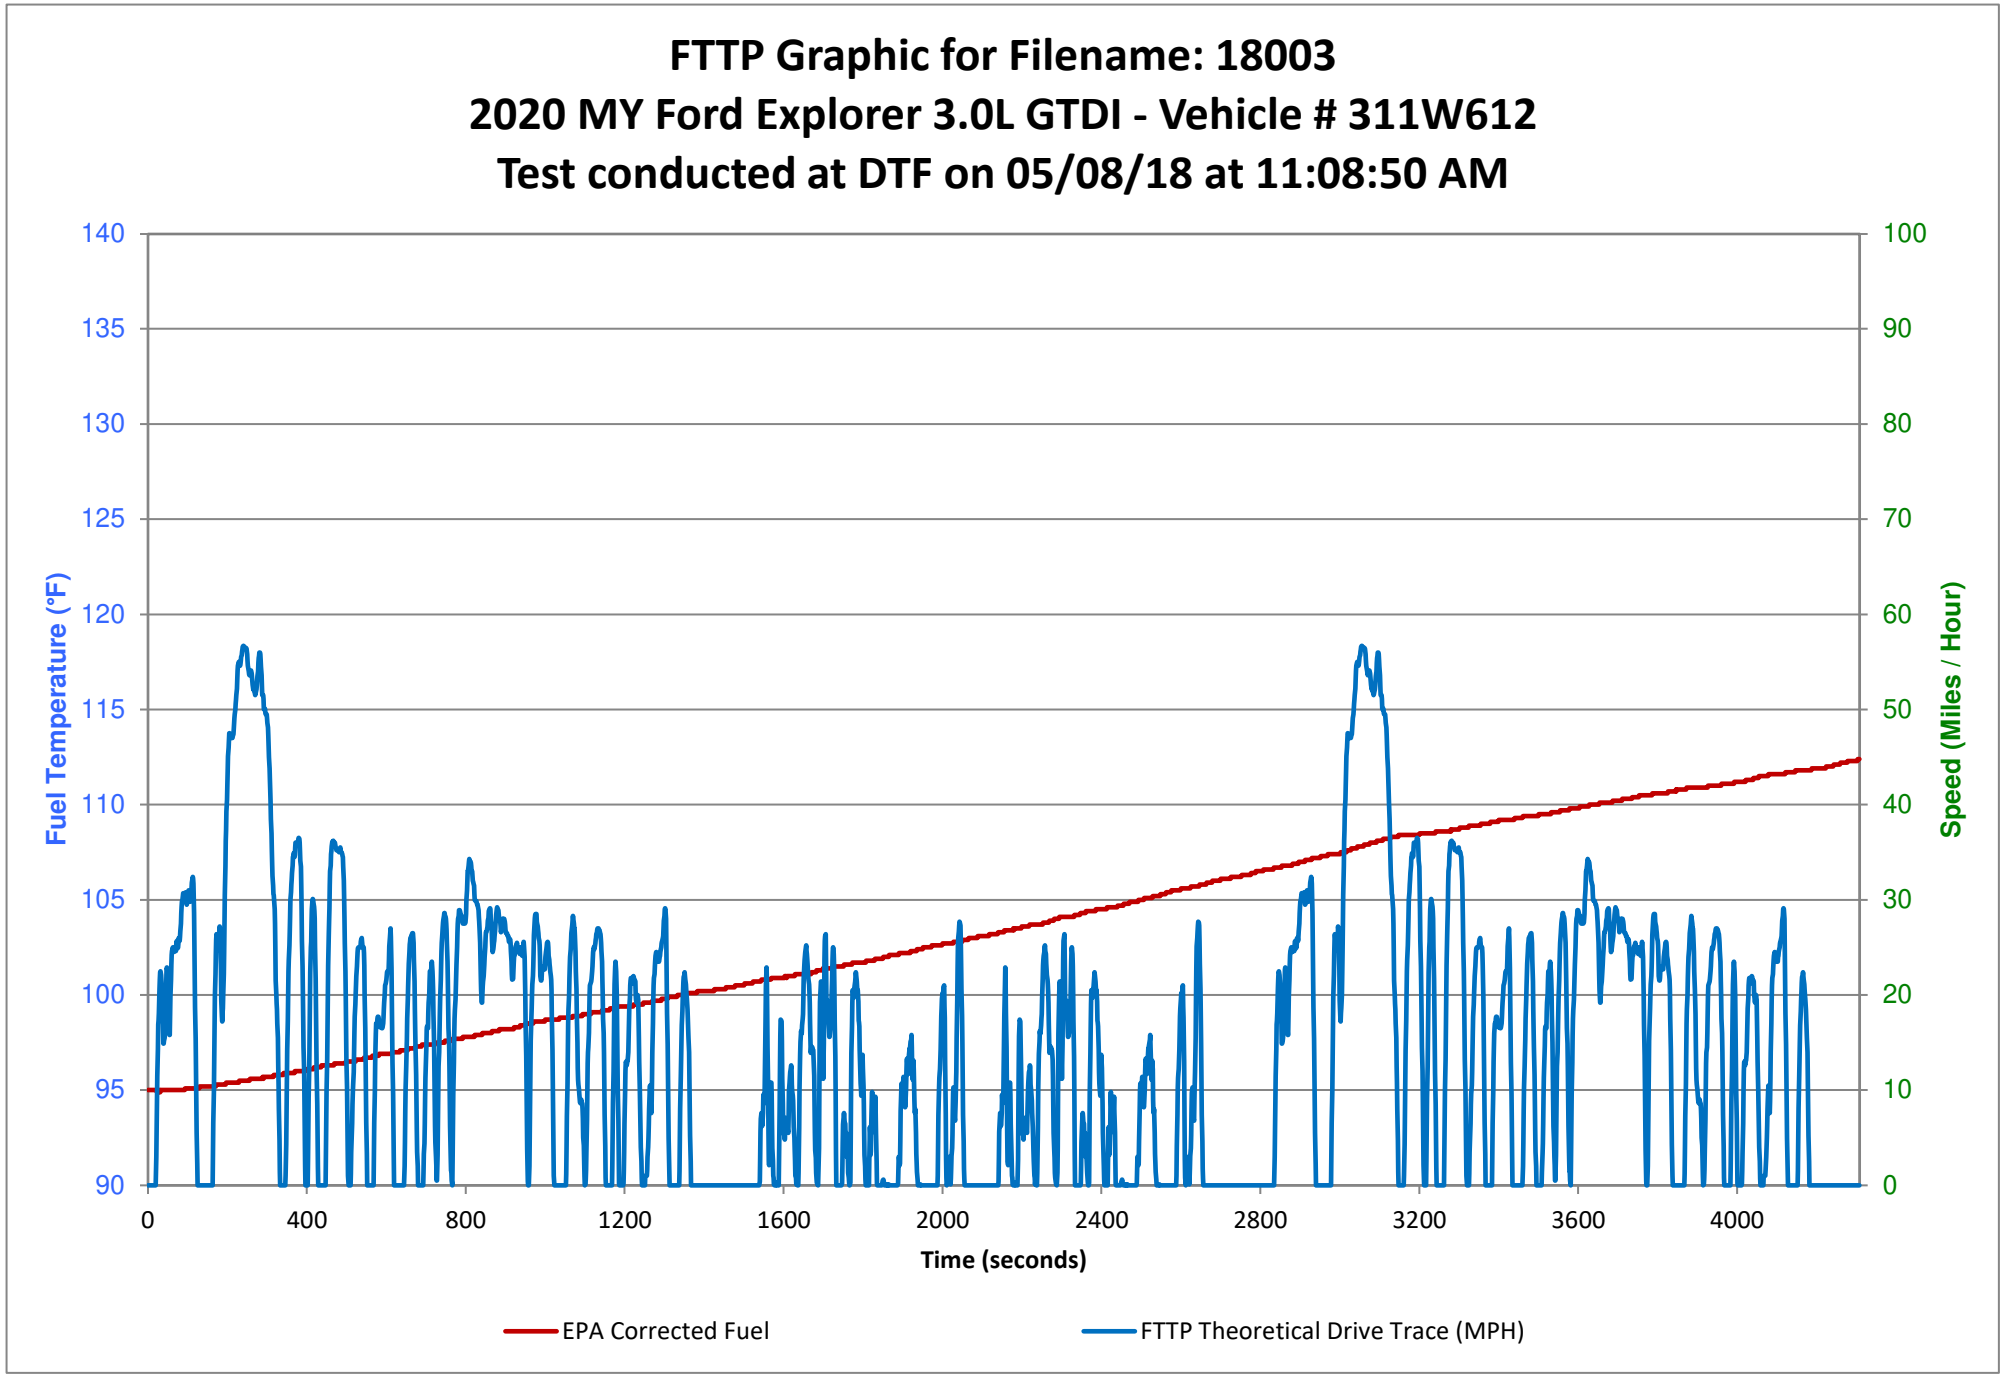
FTTP Graphic for Filename: 16007
2018 MY Ford F-150 3.5L GTPFDI
Test conducted at DTF on 09/13/16 at 10:11:21 AM



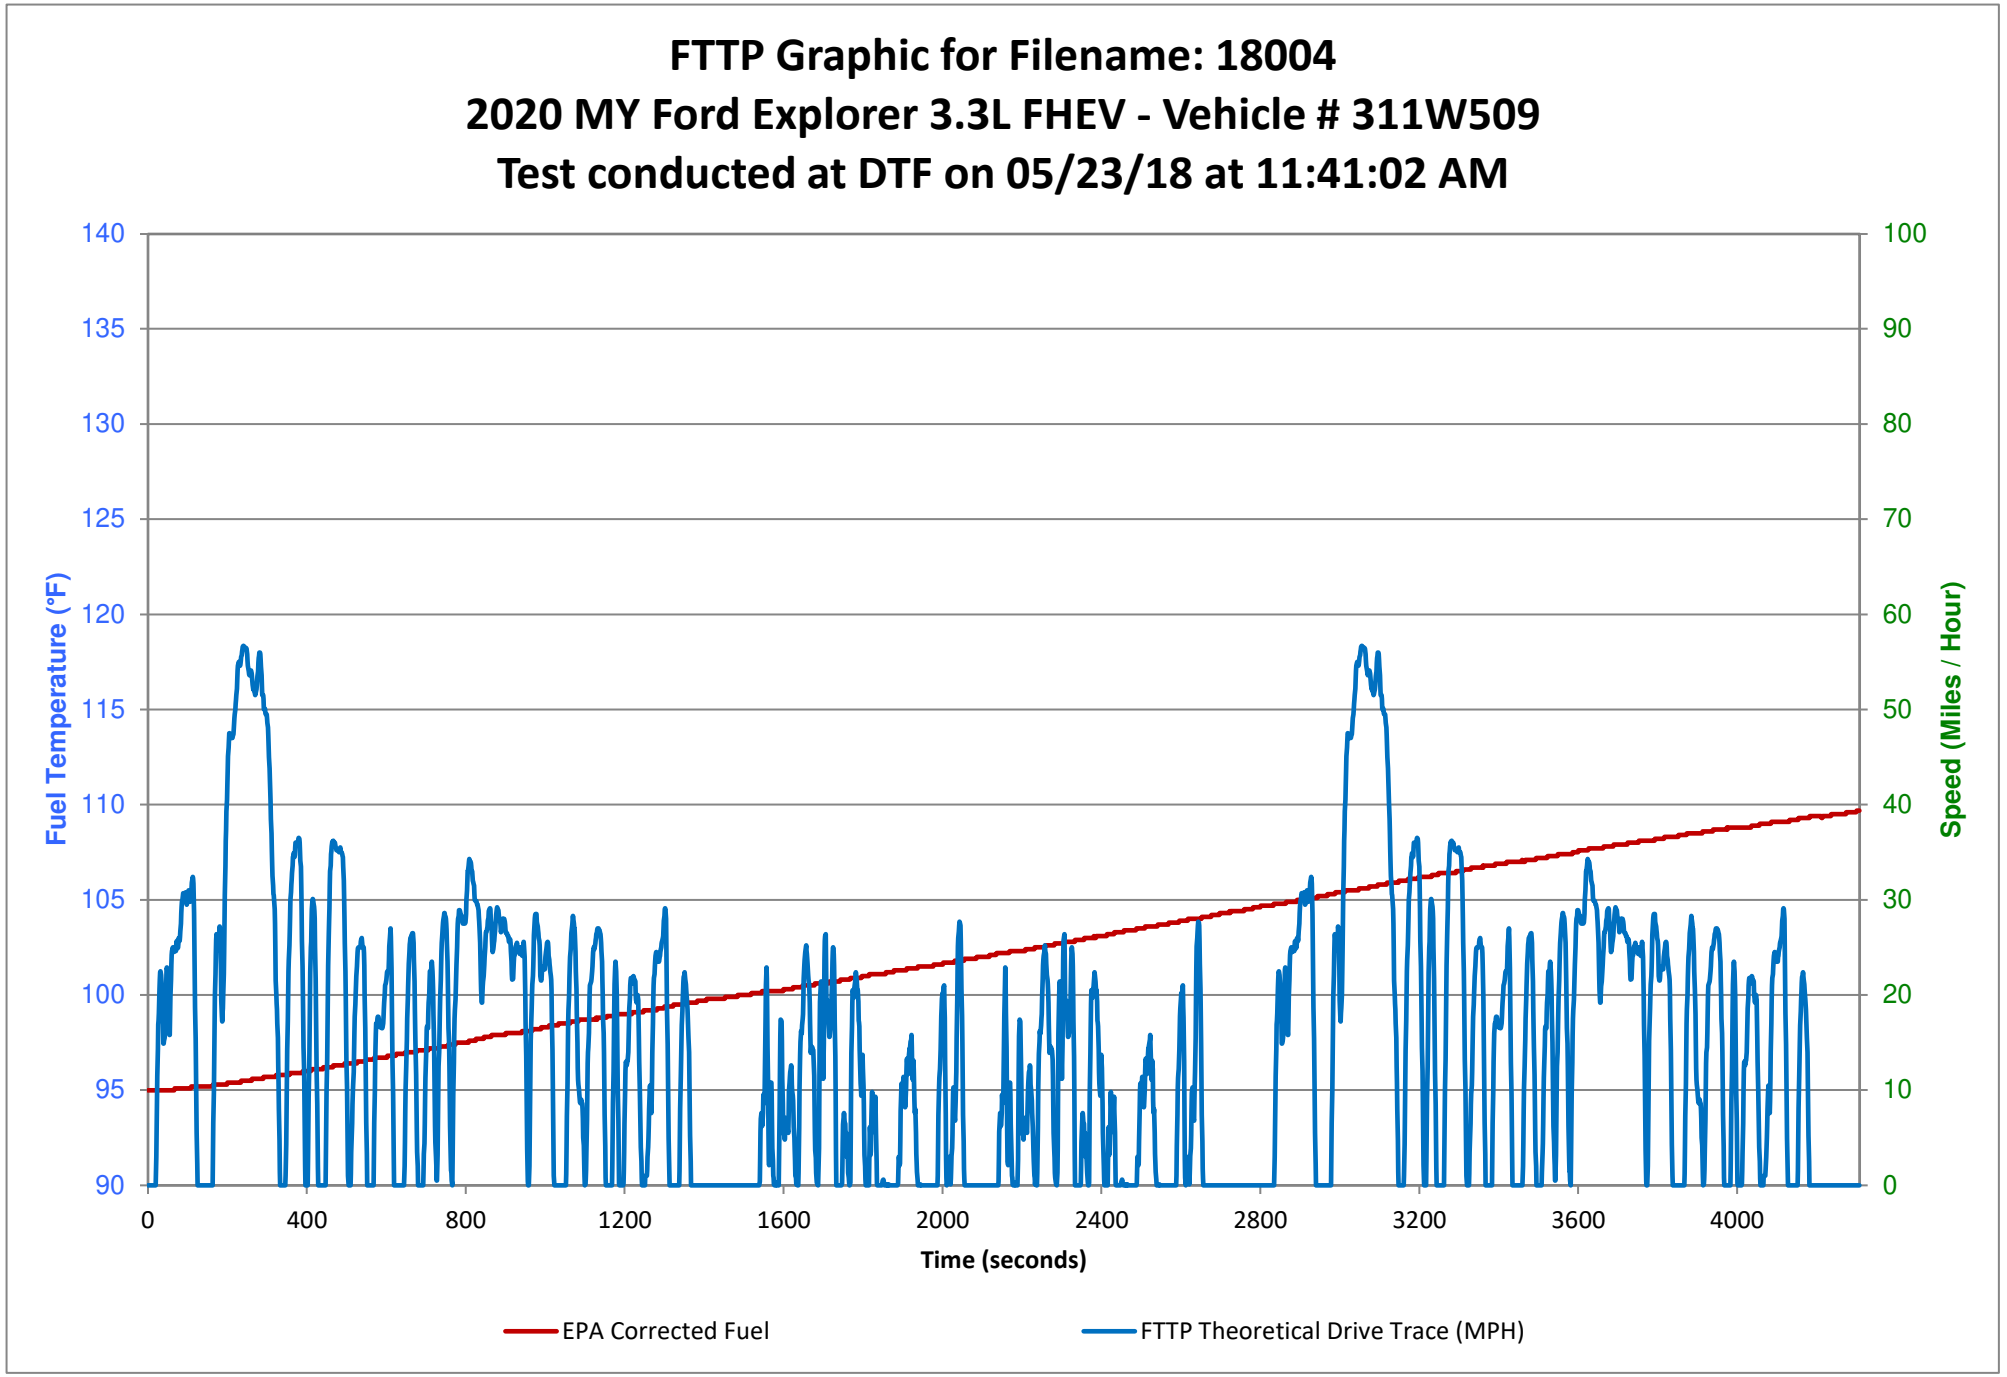
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.4
241	56.5	95.6
301	48.1	95.7
361	32.1	96.0
421	21.7	96.2
481	35.1	96.5
541	25.0	96.8
601	22.4	97.1
661	26.1	97.4
721	9.0	97.8
781	28.3	98.1
841	20.1	98.4
901	26.5	98.6
961	8.6	98.9
1021	1.0	99.2
1081	12.3	99.4
1141	24.6	99.7
1201	12.0	100.0
1261	8.0	100.3
1321	0.0	100.6
1381	0.0	101.0
1441	0.0	101.2
1501	0.0	101.5
1561	5.6	101.8
1621	9.9	102.1
1681	1.3	102.4
1741	0.0	102.7
1801	8.0	103.0
1861	0.0	103.3
1921	15.5	103.6
1981	0.0	103.9
2041	27.4	104.2
2101	0.0	104.5
2161	9.3	104.8
2221	10.5	105.1
2281	2.6	105.4
2341	0.0	105.7
2401	10.0	106.0
2461	0.0	106.2
2521	15.4	106.5
2581	0.0	106.8
2641	26.8	107.1
2701	0.0	107.4
2761	0.0	107.6
2821	0.0	108.1
2881	24.8	108.3
2941	0.0	108.6
3001	17.4	108.9
3061	56.5	109.2
3121	42.4	109.3
3181	34.9	109.5
3241	4.5	109.7
3301	35.0	109.8
3361	15.8	110.0
3421	24.0	110.1
3481	26.4	110.3
3541	0.5	110.4
3601	28.5	110.6
3661	23.4	110.8
3721	26.1	110.9
3781	20.2	111.1
3841	0.0	111.1
3901	9.0	111.2
3961	15.6	111.3
4021	13.1	111.5
4081	7.8	111.6
4141	0.0	111.7
4201	0.0	111.9
4261	0.0	112.0
4308	0.0	112.1


FTTP Graphic for Filename: 16013
2018 MY Ford Mustang 5.0L
Test conducted at DTF on 12/13/16 at 10:03:43 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

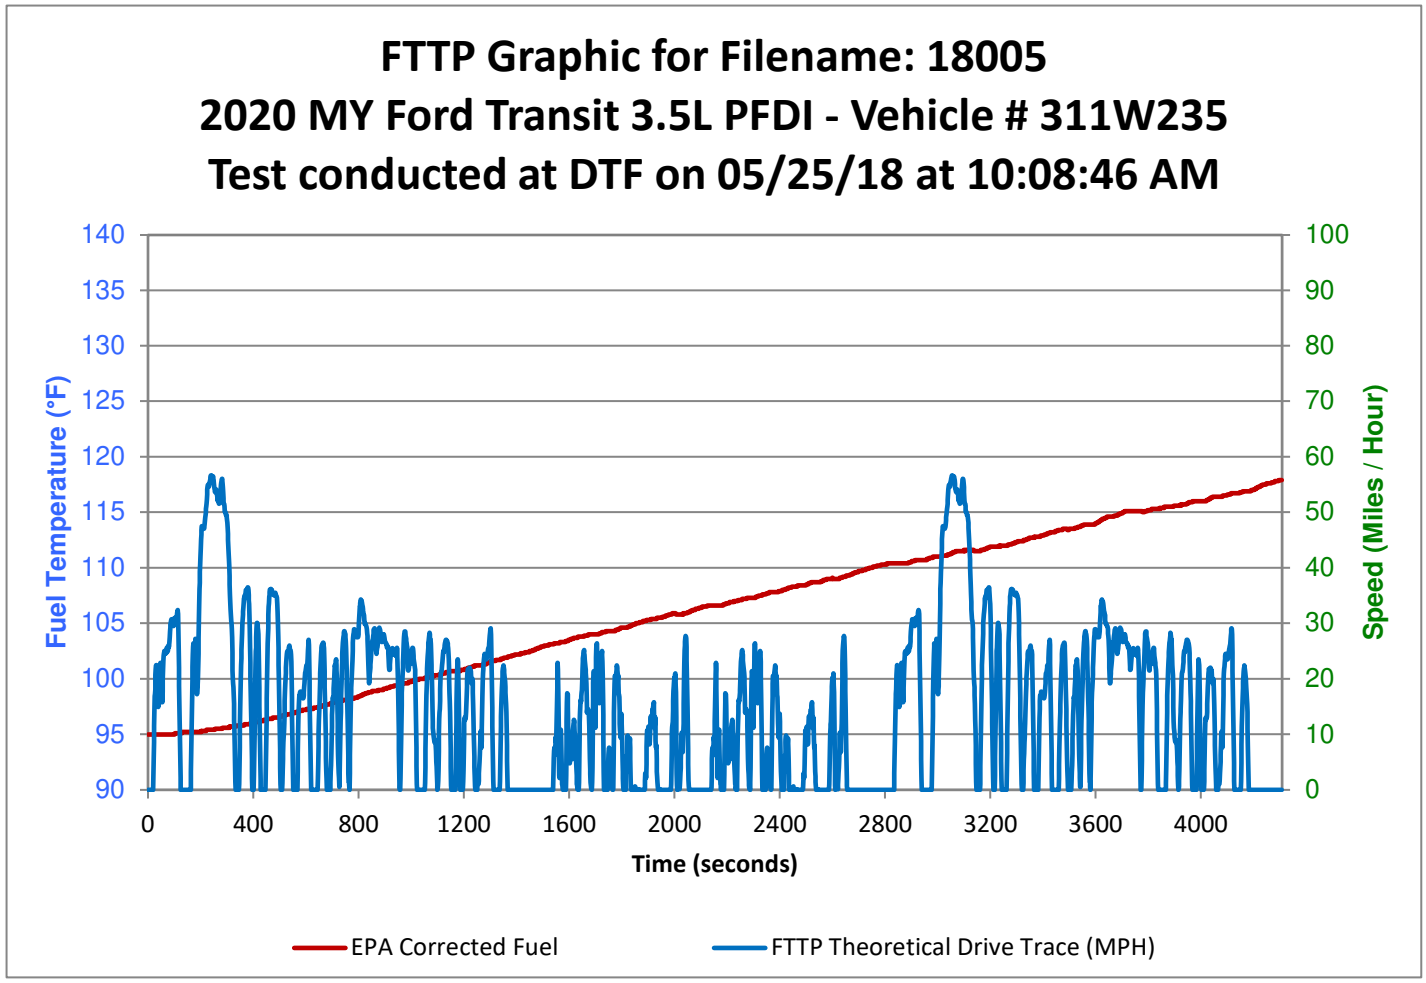
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.4
241	56.5	95.7
301	48.1	95.9
361	32.1	96.4
421	21.7	96.7
481	35.1	97.0
541	25.0	97.4
601	22.4	97.7
661	26.1	98.1
721	9.0	98.5
781	28.3	98.8
841	20.1	99.2
901	26.5	99.5
961	8.6	99.8
1021	1.0	100.1
1081	12.3	100.4
1141	24.6	100.7
1201	12.0	101.0
1261	8.0	101.3
1321	0.0	101.5
1381	0.0	101.7
1441	0.0	101.9
1501	0.0	102.3
1561	5.6	102.5
1621	9.9	102.8
1681	1.3	103.1
1741	0.0	103.4
1801	8.0	103.7
1861	0.0	103.9
1921	15.5	104.3
1981	0.0	104.5
2041	27.4	104.8
2101	0.0	105.1
2161	9.3	105.4
2221	10.5	105.7
2281	2.6	106.0
2341	0.0	106.3
2401	10.0	106.5
2461	0.0	106.8
2521	15.4	107.1
2581	0.0	107.4
2641	26.8	107.7
2701	0.0	108.0
2761	0.0	108.3
2821	0.0	108.7
2881	24.8	108.9
2941	0.0	109.1
3001	17.4	109.4
3061	56.5	109.6
3121	42.4	109.9
3181	34.9	110.2
3241	4.5	110.4
3301	35.0	110.7
3361	15.8	111.0
3421	24.0	111.2
3481	26.4	111.5
3541	0.5	111.8
3601	28.5	112.0
3661	23.4	112.2
3721	26.1	112.5
3781	20.2	112.8
3841	0.0	113.0
3901	9.0	113.3
3961	15.6	113.5
4021	13.1	113.8
4081	7.8	114.0
4141	0.0	114.3
4201	0.0	114.6
4261	0.0	114.9
4308	0.0	115.1


FTTP Graphic for Filename: 18003
2020 MY Ford Explorer 3.0L GTDI - Vehicle # 311W612
Test conducted at DTF on 05/08/18 at 11:08:50 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.1
181	26.5	95.3
241	56.5	95.5
301	48.1	95.7
361	32.1	95.9
421	21.7	96.2
481	35.1	96.4
541	25.0	96.6
601	22.4	96.9
661	26.1	97.2
721	9.0	97.4
781	28.3	97.7
841	20.1	97.9
901	26.5	98.2
961	8.6	98.5
1021	1.0	98.7
1081	12.3	98.9
1141	24.6	99.1
1201	12.0	99.4
1261	8.0	99.6
1321	0.0	99.9
1381	0.0	100.1
1441	0.0	100.3
1501	0.0	100.5
1561	5.6	100.8
1621	9.9	101.0
1681	1.3	101.2
1741	0.0	101.5
1801	8.0	101.7
1861	0.0	102.0
1921	15.5	102.3
1981	0.0	102.6
2041	27.4	102.8
2101	0.0	103.1
2161	9.3	103.4
2221	10.5	103.7
2281	2.6	103.9
2341	0.0	104.2
2401	10.0	104.5
2461	0.0	104.8
2521	15.4	105.1
2581	0.0	105.5
2641	26.8	105.7
2701	0.0	106.1
2761	0.0	106.3
2821	0.0	106.6
2881	24.8	106.8
2941	0.0	107.2
3001	17.4	107.4
3061	56.5	107.8
3121	42.4	108.2
3181	34.9	108.4
3241	4.5	108.5
3301	35.0	108.7
3361	15.8	109.0
3421	24.0	109.2
3481	26.4	109.4
3541	0.5	109.6
3601	28.5	109.8
3661	23.4	110.1
3721	26.1	110.3
3781	20.2	110.5
3841	0.0	110.7
3901	9.0	110.9
3961	15.6	111.0
4021	13.1	111.2
4081	7.8	111.6
4141	0.0	111.7
4201	0.0	111.9
4261	0.0	112.2
4308	0.0	112.4

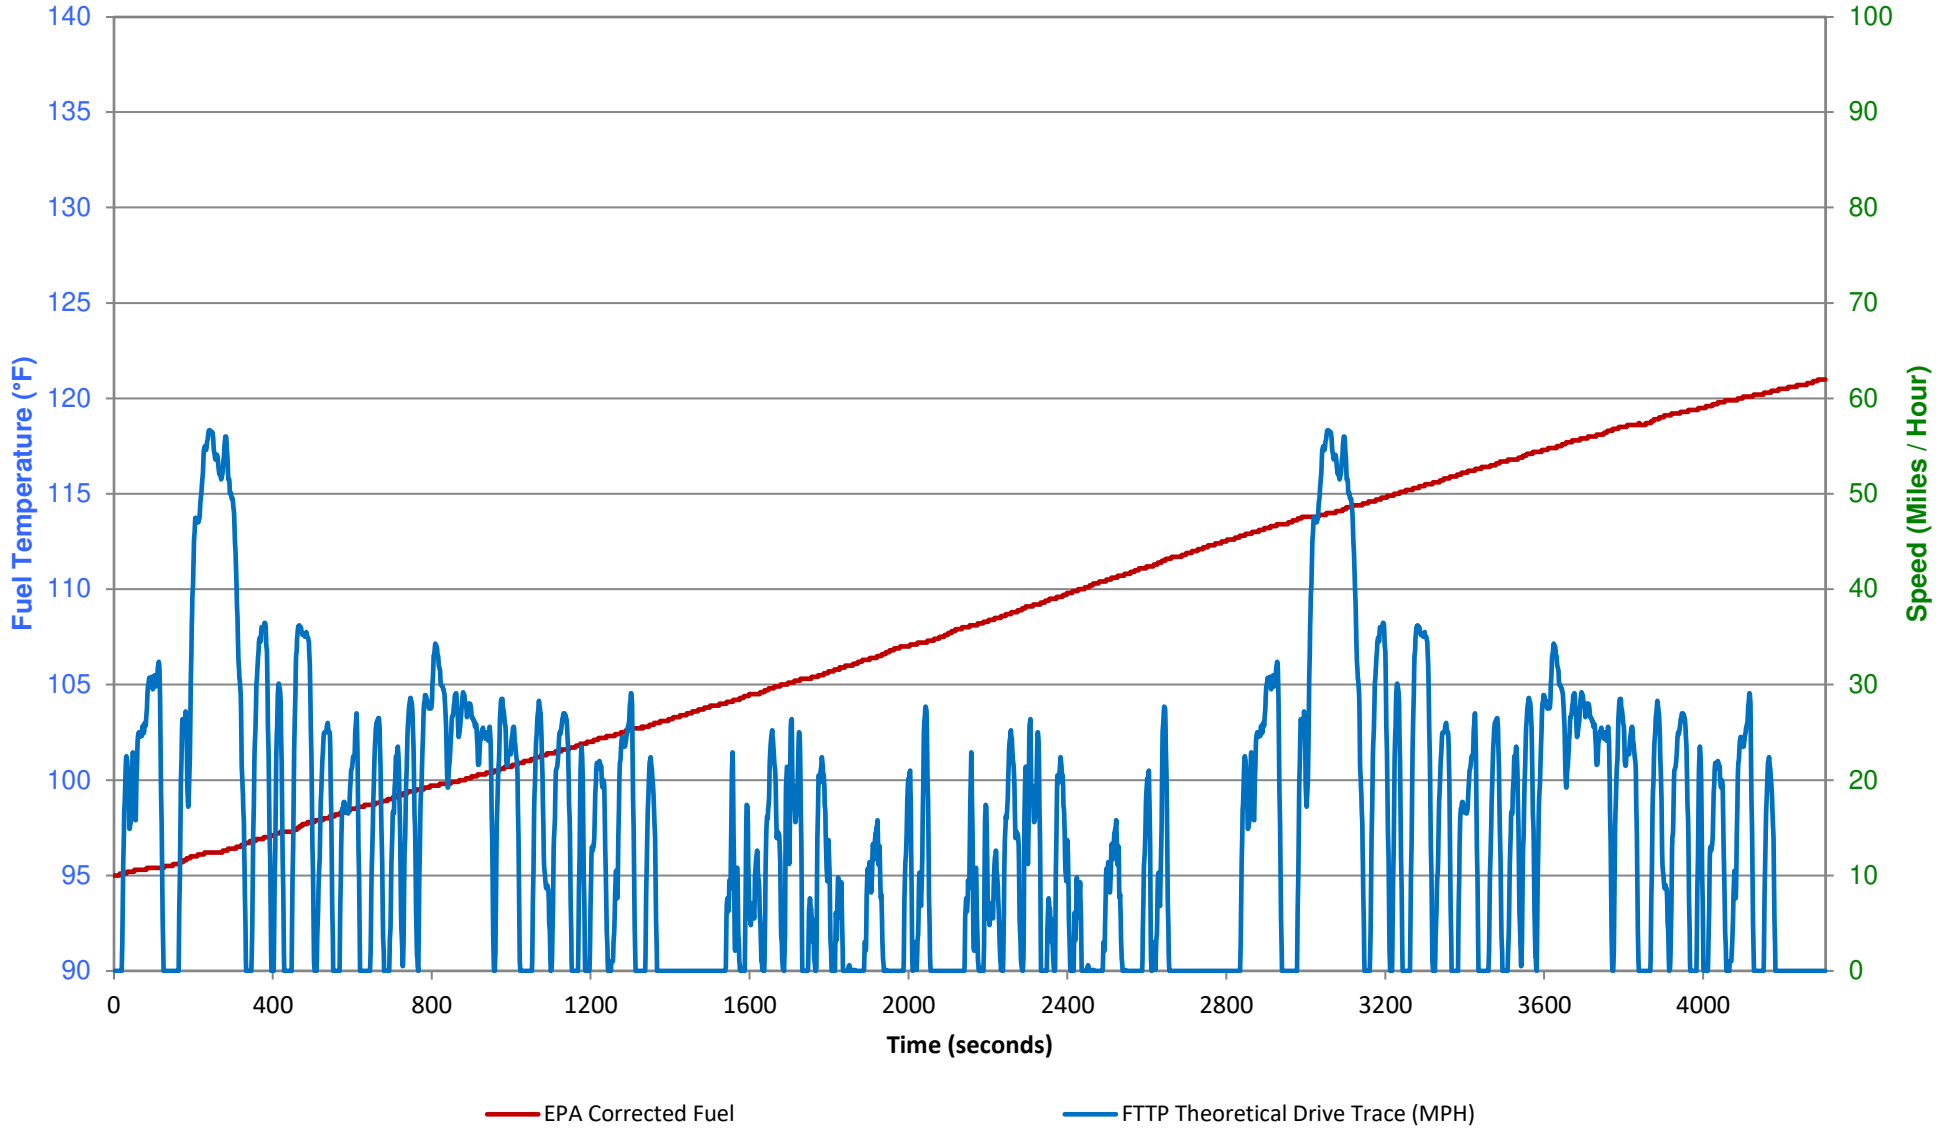

FTTP Graphic for Filename: 18004
2020 MY Ford Explorer 3.3L FHEV - Vehicle # 311W509
Test conducted at DTF on 05/23/18 at 11:41:02 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.2
181	26.5	95.3
241	56.5	95.5
301	48.1	95.7
361	32.1	95.9
421	21.7	96.1
481	35.1	96.3
541	25.0	96.5
601	22.4	96.7
661	26.1	97.0
721	9.0	97.2
781	28.3	97.5
841	20.1	97.7
901	26.5	97.9
961	8.6	98.1
1021	1.0	98.4
1081	12.3	98.6
1141	24.6	98.8
1201	12.0	99.0
1261	8.0	99.2
1321	0.0	99.4
1381	0.0	99.6
1441	0.0	99.8
1501	0.0	100.0
1561	5.6	100.2
1621	9.9	100.3
1681	1.3	100.6
1741	0.0	100.7
1801	8.0	101.0
1861	0.0	101.2
1921	15.5	101.4
1981	0.0	101.6
2041	27.4	101.8
2101	0.0	102.0
2161	9.3	102.2
2221	10.5	102.4
2281	2.6	102.6
2341	0.0	102.9
2401	10.0	103.1
2461	0.0	103.4
2521	15.4	103.6
2581	0.0	103.8
2641	26.8	104.0
2701	0.0	104.3
2761	0.0	104.5
2821	0.0	104.7
2881	24.8	104.9
2941	0.0	105.1
3001	17.4	105.4
3061	56.5	105.6
3121	42.4	105.9
3181	34.9	106.1
3241	4.5	106.3
3301	35.0	106.5
3361	15.8	106.8
3421	24.0	107.0
3481	26.4	107.1
3541	0.5	107.3
3601	28.5	107.5
3661	23.4	107.7
3721	26.1	107.9
3781	20.2	108.1
3841	0.0	108.3
3901	9.0	108.5
3961	15.6	108.7
4021	13.1	108.8
4081	7.8	109.0
4141	0.0	109.2
4201	0.0	109.4
4261	0.0	109.5
4308	0.0	109.7

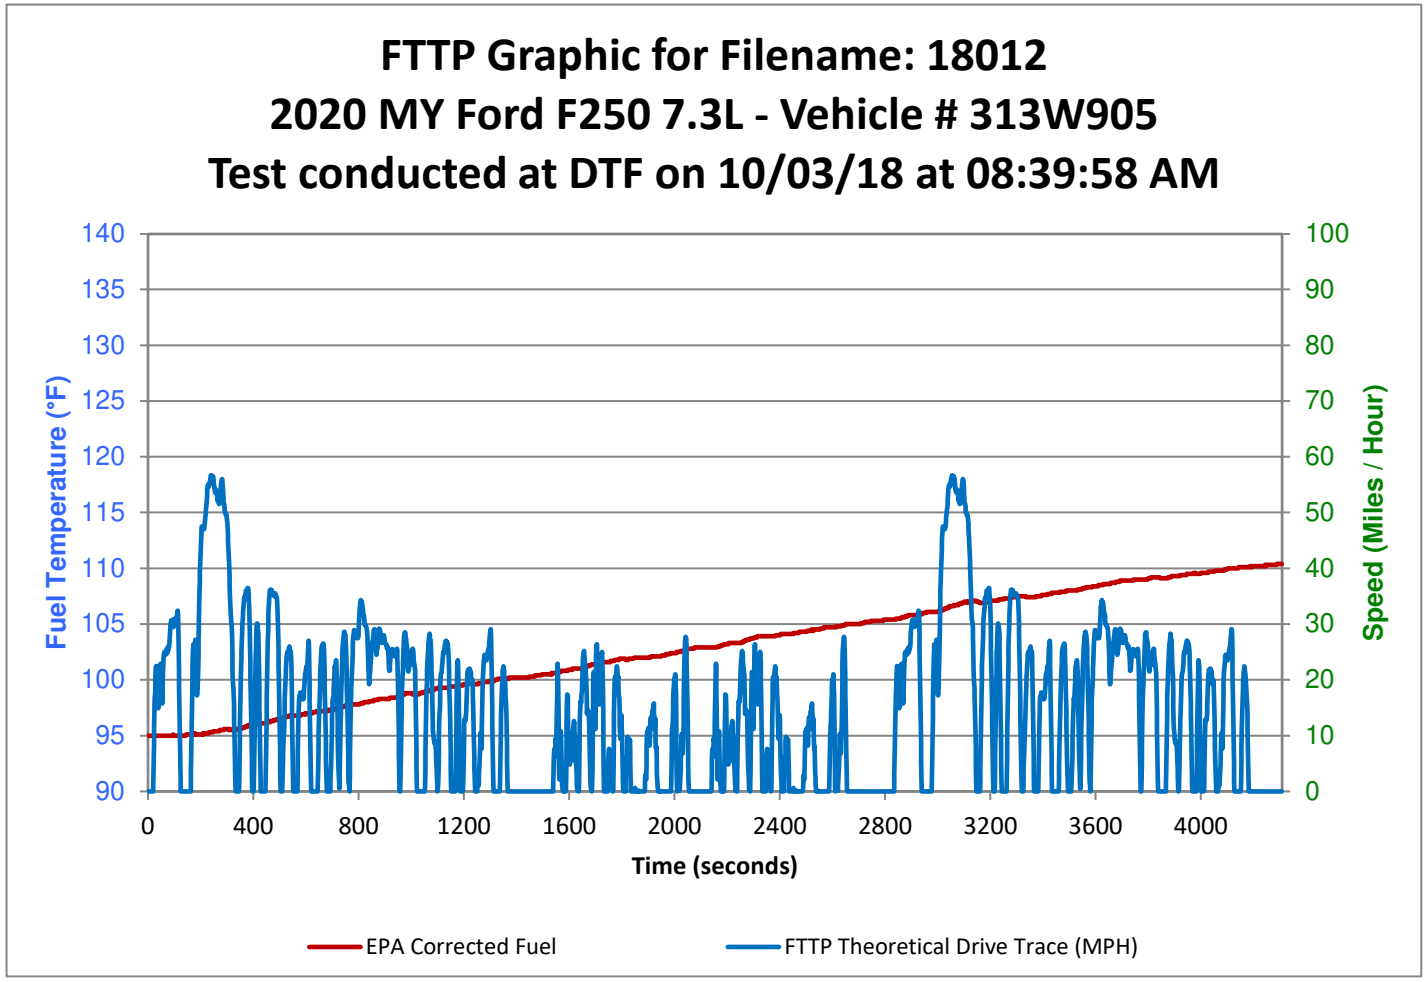

FTTP Graphic for Filename: 18005
2020 MY Ford Transit 3.5L PFDI - Vehicle # 311W235
Test conducted at DTF on 05/25/18 at 10:08:46 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.1
181	26.5	95.2
241	56.5	95.4
301	48.1	95.6
361	32.1	95.8
421	21.7	96.1
481	35.1	96.5
541	25.0	96.8
601	22.4	97.2
661	26.1	97.5
721	9.0	98.0
781	28.3	98.2
841	20.1	98.8
901	26.5	99.1
961	8.6	99.5
1021	1.0	99.9
1081	12.3	100.2
1141	24.6	100.6
1201	12.0	100.8
1261	8.0	101.2
1321	0.0	101.6
1381	0.0	102.0
1441	0.0	102.4
1501	0.0	102.9
1561	5.6	103.2
1621	9.9	103.7
1681	1.3	104.0
1741	0.0	104.3
1801	8.0	104.6
1861	0.0	105.0
1921	15.5	105.4
1981	0.0	105.8
2041	27.4	105.9
2101	0.0	106.4
2161	9.3	106.6
2221	10.5	106.9
2281	2.6	107.3
2341	0.0	107.6
2401	10.0	107.9
2461	0.0	108.3
2521	15.4	108.7
2581	0.0	109.0
2641	26.8	109.2
2701	0.0	109.7
2761	0.0	110.1
2821	0.0	110.4
2881	24.8	110.4
2941	0.0	110.7
3001	17.4	111.0
3061	56.5	111.4
3121	42.4	111.6
3181	34.9	111.7
3241	4.5	112.0
3301	35.0	112.3
3361	15.8	112.7
3421	24.0	113.1
3481	26.4	113.5
3541	0.5	113.7
3601	28.5	114.0
3661	23.4	114.6
3721	26.1	115.1
3781	20.2	115.0
3841	0.0	115.3
3901	9.0	115.6
3961	15.6	115.9
4021	13.1	116.0
4081	7.8	116.4
4141	0.0	116.7
4201	0.0	117.0
4261	0.0	117.6
4308	0.0	117.9

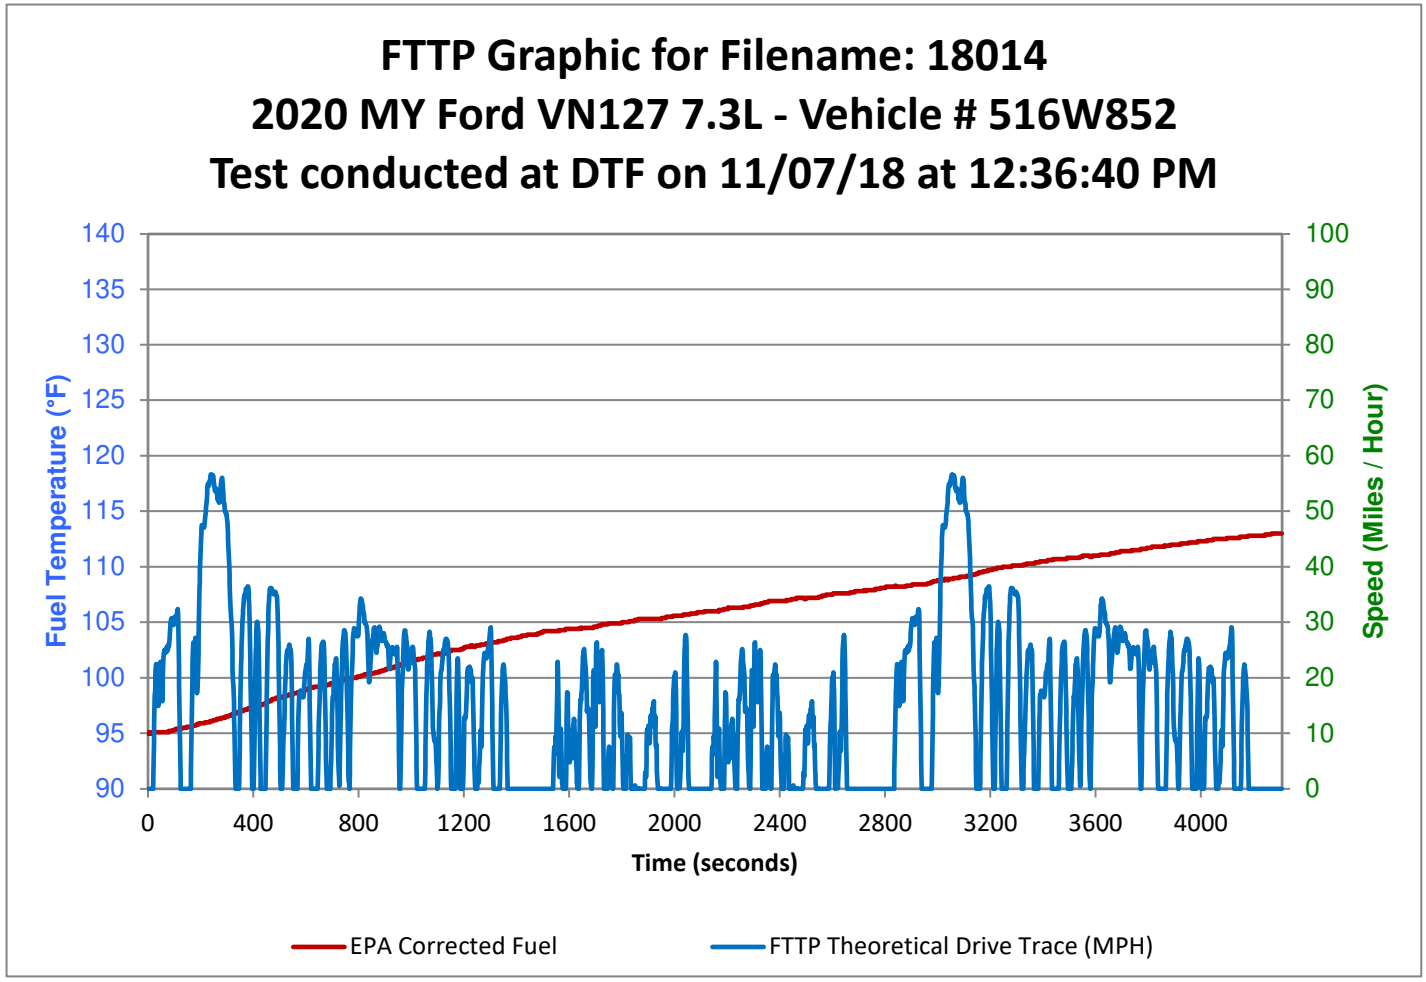
FTTP Graphic for Filename: 18011
2020 MY Ford Escape 2.0L GTDI - Vehicle # 313W456
Test conducted at DTF on 09/25/18 at 03:14:26 PM



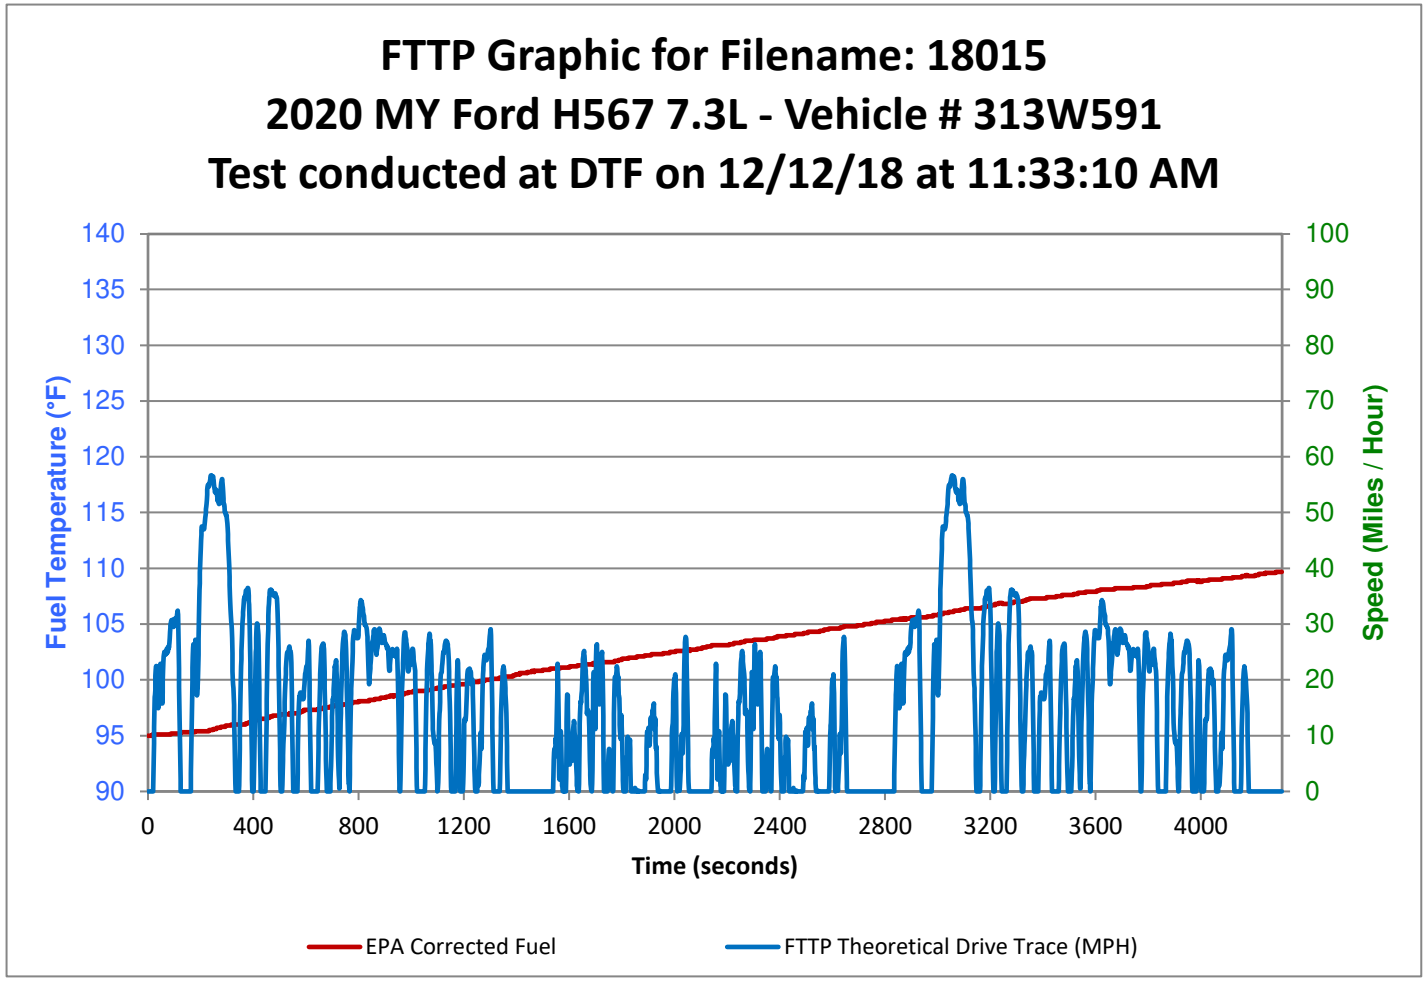
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.3
121	8.8	95.4
181	26.5	95.8
241	56.5	96.2
301	48.1	96.4
361	32.1	96.9
421	21.7	97.3
481	35.1	97.7
541	25.0	98.0
601	22.4	98.5
661	26.1	98.8
721	9.0	99.2
781	28.3	99.5
841	20.1	99.8
901	26.5	100.2
961	8.6	100.5
1021	1.0	100.9
1081	12.3	101.3
1141	24.6	101.6
1201	12.0	102.0
1261	8.0	102.3
1321	0.0	102.7
1381	0.0	103.1
1441	0.0	103.4
1501	0.0	103.8
1561	5.6	104.2
1621	9.9	104.5
1681	1.3	105.0
1741	0.0	105.3
1801	8.0	105.7
1861	0.0	106.0
1921	15.5	106.4
1981	0.0	107.0
2041	27.4	107.2
2101	0.0	107.7
2161	9.3	108.1
2221	10.5	108.5
2281	2.6	108.9
2341	0.0	109.3
2401	10.0	109.8
2461	0.0	110.2
2521	15.4	110.6
2581	0.0	111.1
2641	26.8	111.5
2701	0.0	111.9
2761	0.0	112.3
2821	0.0	112.6
2881	24.8	113.0
2941	0.0	113.4
3001	17.4	113.8
3061	56.5	114.0
3121	42.4	114.4
3181	34.9	114.7
3241	4.5	115.1
3301	35.0	115.5
3361	15.8	115.8
3421	24.0	116.2
3481	26.4	116.6
3541	0.5	116.9
3601	28.5	117.3
3661	23.4	117.7
3721	26.1	118.0
3781	20.2	118.4
3841	0.0	118.7
3901	9.0	119.0
3961	15.6	119.3
4021	13.1	119.6
4081	7.8	119.9
4141	0.0	120.2
4201	0.0	120.5
4261	0.0	120.7
4308	0.0	121.0


FTTP Graphic for Filename: 18012
2020 MY Ford F250 7.3L - Vehicle # 313W905
Test conducted at DTF on 10/03/18 at 08:39:58 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

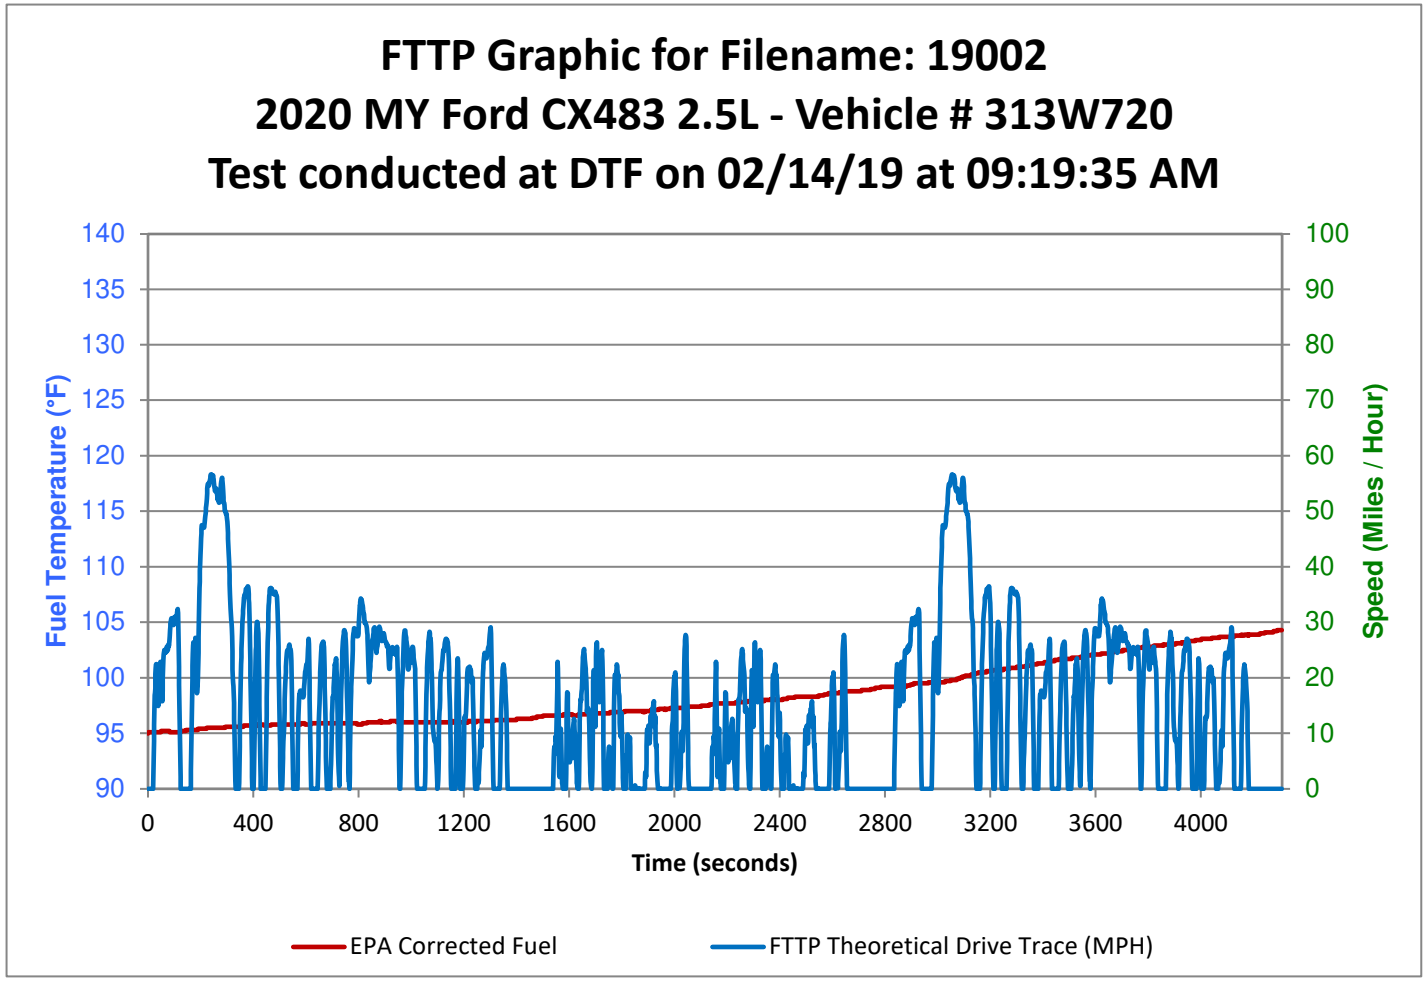
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.0
181	26.5	95.1
241	56.5	95.3
301	48.1	95.6
361	32.1	95.7
421	21.7	96.1
481	35.1	96.4
541	25.0	96.8
601	22.4	96.9
661	26.1	97.2
721	9.0	97.4
781	28.3	97.8
841	20.1	98.0
901	26.5	98.3
961	8.6	98.6
1021	1.0	98.7
1081	12.3	99.1
1141	24.6	99.3
1201	12.0	99.6
1261	8.0	99.7
1321	0.0	100.0
1381	0.0	100.2
1441	0.0	100.2
1501	0.0	100.5
1561	5.6	100.7
1621	9.9	101.0
1681	1.3	101.3
1741	0.0	101.6
1801	8.0	101.9
1861	0.0	102.0
1921	15.5	102.1
1981	0.0	102.3
2041	27.4	102.7
2101	0.0	102.9
2161	9.3	102.9
2221	10.5	103.3
2281	2.6	103.6
2341	0.0	103.9
2401	10.0	104.0
2461	0.0	104.2
2521	15.4	104.4
2581	0.0	104.7
2641	26.8	104.9
2701	0.0	105.0
2761	0.0	105.3
2821	0.0	105.4
2881	24.8	105.7
2941	0.0	105.9
3001	17.4	106.1
3061	56.5	106.6
3121	42.4	107.0
3181	34.9	106.9
3241	4.5	107.2
3301	35.0	107.5
3361	15.8	107.4
3421	24.0	107.7
3481	26.4	107.9
3541	0.5	108.1
3601	28.5	108.4
3661	23.4	108.7
3721	26.1	108.9
3781	20.2	109.0
3841	0.0	109.2
3901	9.0	109.3
3961	15.6	109.5
4021	13.1	109.6
4081	7.8	109.8
4141	0.0	110.0
4201	0.0	110.2
4261	0.0	110.3
4308	0.0	110.4


FTTP Graphic for Filename: 18014
2020 MY Ford VN127 7.3L - Vehicle # 516W852
Test conducted at DTF on 11/07/18 at 12:36:40 PM
Fuel Temperature (°F)
140
135
130
125
120
115
110
105
100
95
90
Speed (Miles / Hour)
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

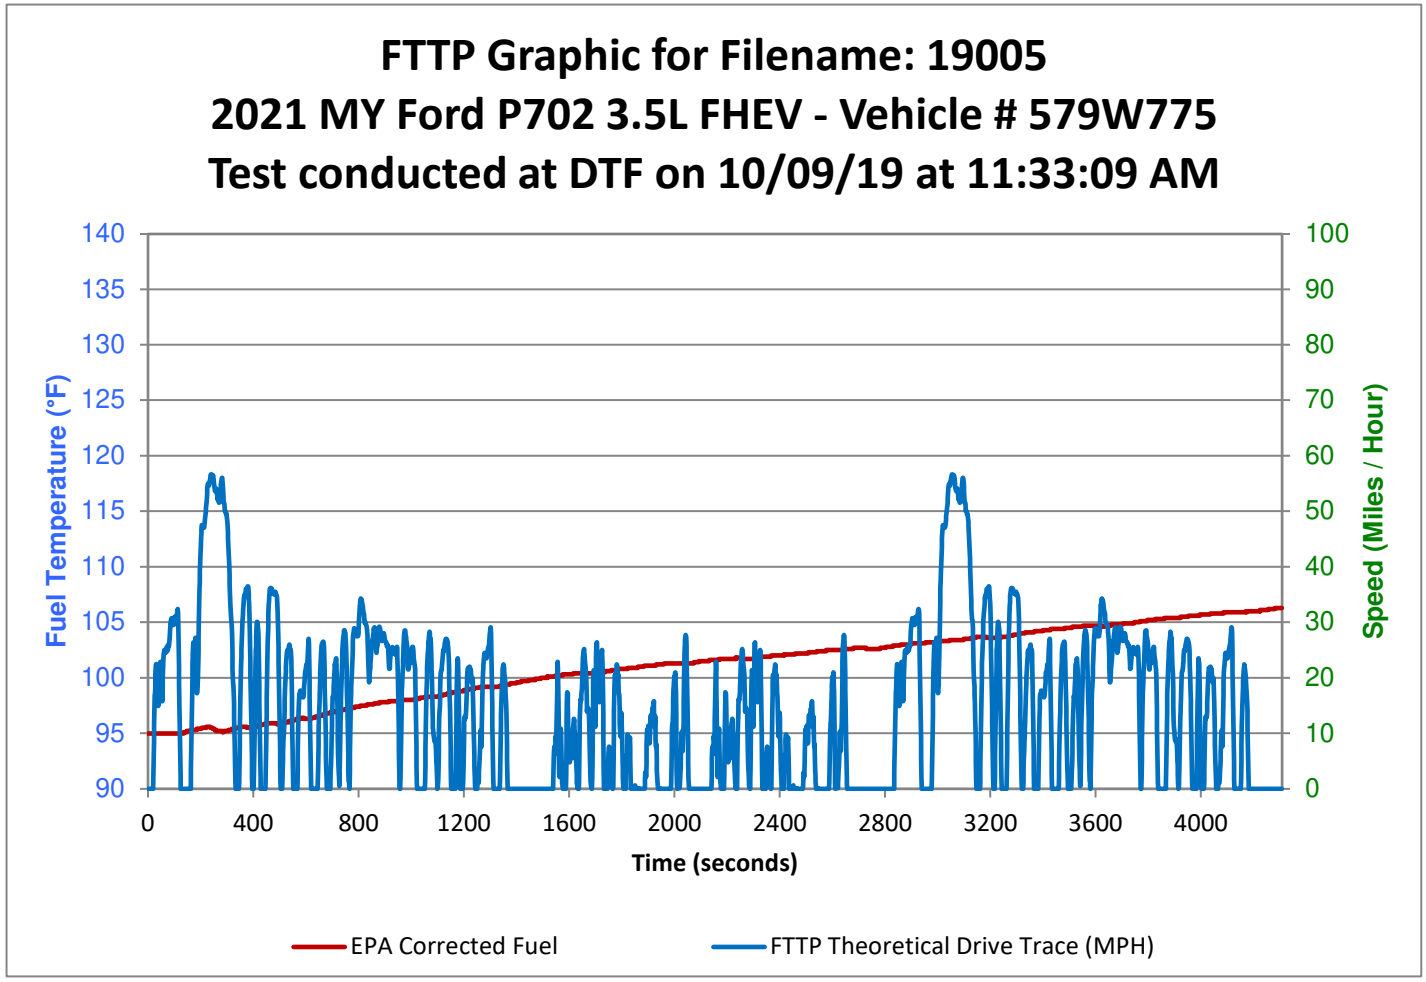
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.4
181	26.5	95.7
241	56.5	96.1
301	48.1	96.5
361	32.1	97.0
421	21.7	97.5
481	35.1	98.1
541	25.0	98.5
601	22.4	98.9
661	26.1	99.2
721	9.0	99.6
781	28.3	100.0
841	20.1	100.3
901	26.5	100.7
961	8.6	101.2
1021	1.0	101.6
1081	12.3	102.0
1141	24.6	102.3
1201	12.0	102.7
1261	8.0	102.9
1321	0.0	103.2
1381	0.0	103.6
1441	0.0	103.8
1501	0.0	104.1
1561	5.6	104.2
1621	9.9	104.4
1681	1.3	104.5
1741	0.0	104.8
1801	8.0	104.9
1861	0.0	105.2
1921	15.5	105.3
1981	0.0	105.5
2041	27.4	105.7
2101	0.0	105.9
2161	9.3	106.0
2221	10.5	106.3
2281	2.6	106.4
2341	0.0	106.7
2401	10.0	106.9
2461	0.0	107.1
2521	15.4	107.2
2581	0.0	107.5
2641	26.8	107.6
2701	0.0	107.8
2761	0.0	107.9
2821	0.0	108.2
2881	24.8	108.2
2941	0.0	108.4
3001	17.4	108.8
3061	56.5	109.0
3121	42.4	109.2
3181	34.9	109.6
3241	4.5	109.9
3301	35.0	110.1
3361	15.8	110.3
3421	24.0	110.6
3481	26.4	110.7
3541	0.5	110.9
3601	28.5	111.0
3661	23.4	111.2
3721	26.1	111.4
3781	20.2	111.6
3841	0.0	111.8
3901	9.0	112.0
3961	15.6	112.2
4021	13.1	112.3
4081	7.8	112.5
4141	0.0	112.6
4201	0.0	112.8
4261	0.0	112.9
4308	0.0	113.0


FTTP Graphic for Filename: 18015
2020 MY Ford H567 7.3L - Vehicle # 313W591
Test conducted at DTF on 12/12/18 at 11:33:10 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

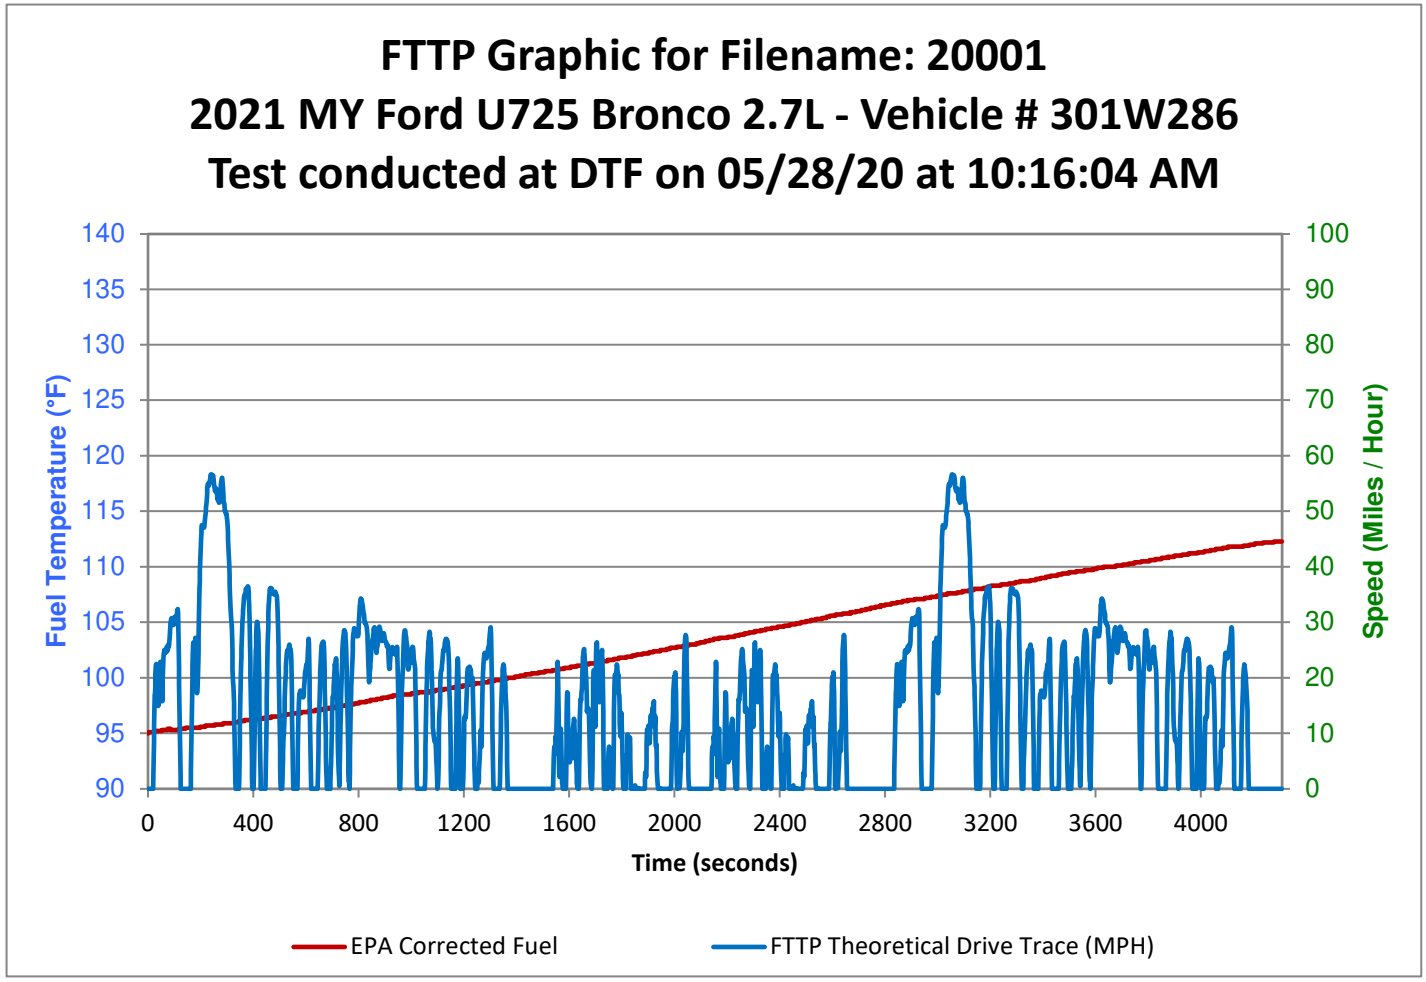
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.4
241	56.5	95.5
301	48.1	95.9
361	32.1	96.0
421	21.7	96.4
481	35.1	96.8
541	25.0	97.0
601	22.4	97.3
661	26.1	97.4
721	9.0	97.7
781	28.3	98.0
841	20.1	98.1
901	26.5	98.4
961	8.6	98.7
1021	1.0	99.0
1081	12.3	99.1
1141	24.6	99.4
1201	12.0	99.6
1261	8.0	99.9
1321	0.0	100.1
1381	0.0	100.3
1441	0.0	100.6
1501	0.0	100.8
1561	5.6	101.0
1621	9.9	101.2
1681	1.3	101.4
1741	0.0	101.6
1801	8.0	101.8
1861	0.0	102.1
1921	15.5	102.3
1981	0.0	102.4
2041	27.4	102.6
2101	0.0	102.8
2161	9.3	103.1
2221	10.5	103.2
2281	2.6	103.5
2341	0.0	103.6
2401	10.0	103.9
2461	0.0	104.1
2521	15.4	104.3
2581	0.0	104.5
2641	26.8	104.7
2701	0.0	104.9
2761	0.0	105.1
2821	0.0	105.3
2881	24.8	105.4
2941	0.0	105.6
3001	17.4	105.8
3061	56.5	106.1
3121	42.4	106.4
3181	34.9	106.5
3241	4.5	106.9
3301	35.0	107.0
3361	15.8	107.3
3421	24.0	107.4
3481	26.4	107.6
3541	0.5	107.8
3601	28.5	107.9
3661	23.4	108.1
3721	26.1	108.2
3781	20.2	108.3
3841	0.0	108.5
3901	9.0	108.7
3961	15.6	108.9
4021	13.1	108.9
4081	7.8	109.0
4141	0.0	109.2
4201	0.0	109.3
4261	0.0	109.6
4308	0.0	109.7


FTTP Graphic for Filename: 19002
2020 MY Ford CX483 2.5L - Vehicle # 313W720
Test conducted at DTF on 02/14/19 at 09:19:35 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

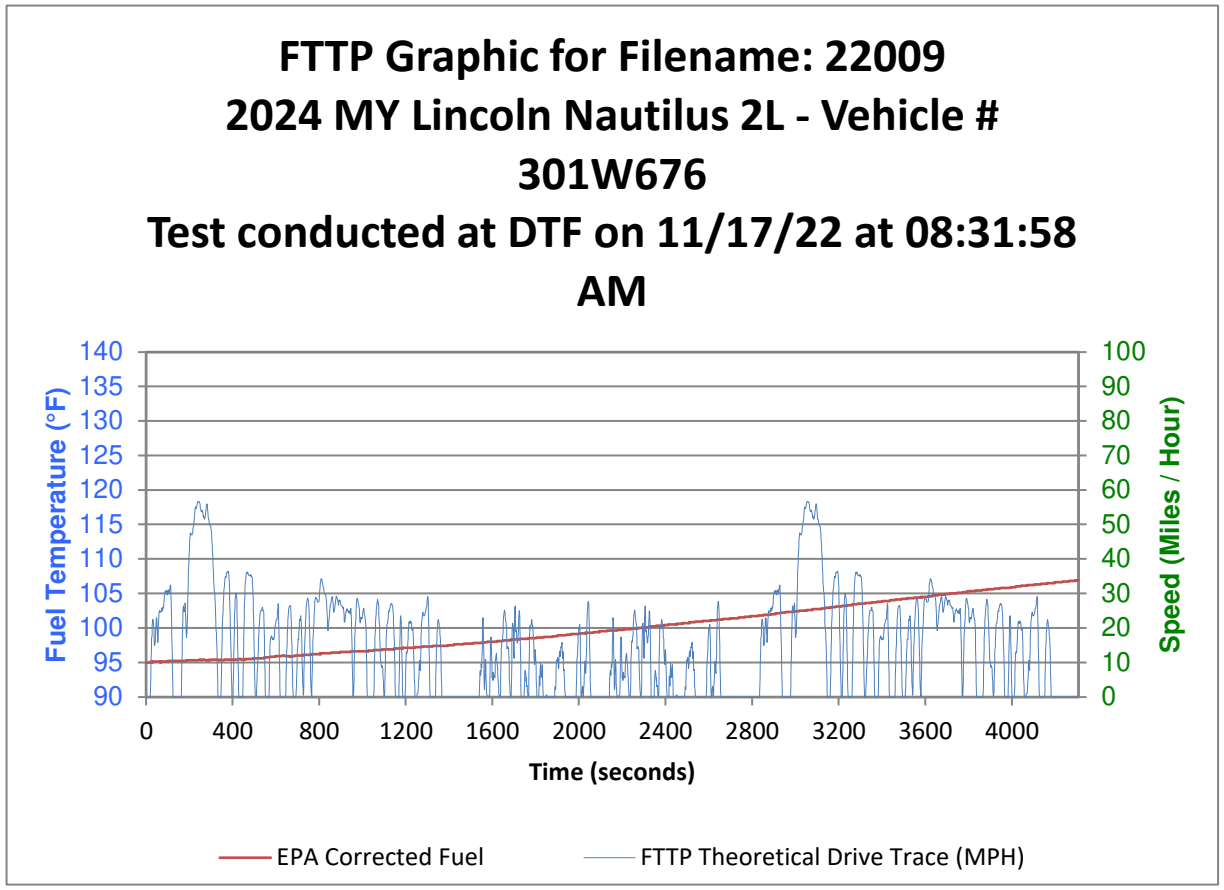
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.2
121	8.8	95.1
181	26.5	95.3
241	56.5	95.5
301	48.1	95.6
361	32.1	95.6
421	21.7	95.8
481	35.1	95.8
541	25.0	95.8
601	22.4	95.8
661	26.1	95.9
721	9.0	95.9
781	28.3	95.9
841	20.1	96.0
901	26.5	96.0
961	8.6	96.1
1021	1.0	96.0
1081	12.3	96.0
1141	24.6	96.0
1201	12.0	96.0
1261	8.0	96.1
1321	0.0	96.2
1381	0.0	96.2
1441	0.0	96.3
1501	0.0	96.5
1561	5.6	96.6
1621	9.9	96.6
1681	1.3	96.7
1741	0.0	96.8
1801	8.0	96.9
1861	0.0	97.0
1921	15.5	97.1
1981	0.0	97.2
2041	27.4	97.3
2101	0.0	97.4
2161	9.3	97.7
2221	10.5	97.7
2281	2.6	97.9
2341	0.0	97.9
2401	10.0	98.0
2461	0.0	98.3
2521	15.4	98.3
2581	0.0	98.5
2641	26.8	98.7
2701	0.0	98.8
2761	0.0	99.0
2821	0.0	99.2
2881	24.8	99.2
2941	0.0	99.5
3001	17.4	99.6
3061	56.5	99.8
3121	42.4	100.2
3181	34.9	100.5
3241	4.5	100.7
3301	35.0	100.9
3361	15.8	101.2
3421	24.0	101.4
3481	26.4	101.7
3541	0.5	101.8
3601	28.5	102.1
3661	23.4	102.3
3721	26.1	102.5
3781	20.2	102.8
3841	0.0	102.9
3901	9.0	103.0
3961	15.6	103.3
4021	13.1	103.5
4081	7.8	103.7
4141	0.0	103.8
4201	0.0	103.9
4261	0.0	104.1
4308	0.0	104.3


FTTP Graphic for Filename: 19005
2021 MY Ford P702 3.5L FHEV - Vehicle # 579W775
Test conducted at DTF on 10/09/19 at 11:33:09 AM
Fuel Temperature (°F)
140
135
130
125
120
115
110
105
100
95
90
Speed (Miles / Hour)
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

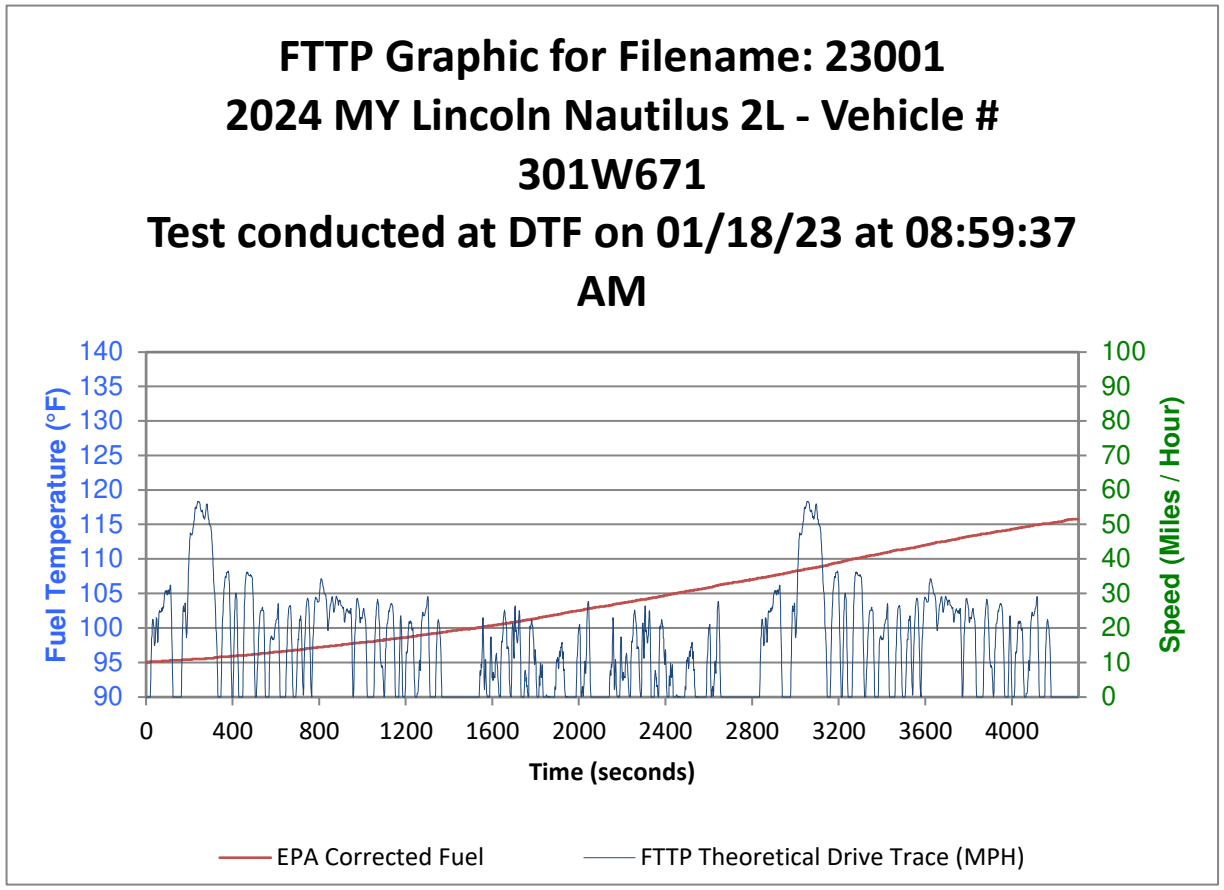
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.0
181	26.5	95.3
241	56.5	95.5
301	48.1	95.2
361	32.1	95.6
421	21.7	95.7
481	35.1	95.9
541	25.0	96.1
601	22.4	96.3
661	26.1	96.6
721	9.0	97.0
781	28.3	97.3
841	20.1	97.6
901	26.5	97.8
961	8.6	97.9
1021	1.0	98.1
1081	12.3	98.3
1141	24.6	98.6
1201	12.0	98.9
1261	8.0	99.1
1321	0.0	99.2
1381	0.0	99.5
1441	0.0	99.7
1501	0.0	100.0
1561	5.6	100.2
1621	9.9	100.4
1681	1.3	100.4
1741	0.0	100.6
1801	8.0	100.8
1861	0.0	100.9
1921	15.5	101.1
1981	0.0	101.3
2041	27.4	101.3
2101	0.0	101.5
2161	9.3	101.6
2221	10.5	101.7
2281	2.6	101.7
2341	0.0	101.9
2401	10.0	102.0
2461	0.0	102.2
2521	15.4	102.3
2581	0.0	102.5
2641	26.8	102.5
2701	0.0	102.7
2761	0.0	102.6
2821	0.0	102.8
2881	24.8	103.0
2941	0.0	103.1
3001	17.4	103.3
3061	56.5	103.4
3121	42.4	103.5
3181	34.9	103.7
3241	4.5	103.6
3301	35.0	103.9
3361	15.8	104.1
3421	24.0	104.3
3481	26.4	104.4
3541	0.5	104.6
3601	28.5	104.7
3661	23.4	104.7
3721	26.1	104.9
3781	20.2	105.1
3841	0.0	105.3
3901	9.0	105.4
3961	15.6	105.6
4021	13.1	105.7
4081	7.8	105.8
4141	0.0	105.9
4201	0.0	106.0
4261	0.0	106.2
4308	0.0	106.3


FTTP Graphic for Filename: 20001
2021 MY Ford U725 Bronco 2.7L - Vehicle # 301W286
Test conducted at DTF on 05/28/20 at 10:16:04 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.3
121	8.8	95.3
181	26.5	95.5
241	56.5	95.7
301	48.1	95.9
361	32.1	96.1
421	21.7	96.3
481	35.1	96.5
541	25.0	96.7
601	22.4	96.9
661	26.1	97.1
721	9.0	97.4
781	28.3	97.6
841	20.1	97.9
901	26.5	98.2
961	8.6	98.5
1021	1.0	98.6
1081	12.3	98.8
1141	24.6	99.0
1201	12.0	99.3
1261	8.0	99.5
1321	0.0	99.8
1381	0.0	100.0
1441	0.0	100.3
1501	0.0	100.5
1561	5.6	100.7
1621	9.9	101.0
1681	1.3	101.3
1741	0.0	101.5
1801	8.0	101.8
1861	0.0	102.1
1921	15.5	102.3
1981	0.0	102.6
2041	27.4	102.9
2101	0.0	103.2
2161	9.3	103.5
2221	10.5	103.7
2281	2.6	104.0
2341	0.0	104.3
2401	10.0	104.6
2461	0.0	104.8
2521	15.4	105.2
2581	0.0	105.5
2641	26.8	105.8
2701	0.0	106.0
2761	0.0	106.3
2821	0.0	106.6
2881	24.8	106.9
2941	0.0	107.1
3001	17.4	107.4
3061	56.5	107.6
3121	42.4	107.9
3181	34.9	108.1
3241	4.5	108.3
3301	35.0	108.6
3361	15.8	108.8
3421	24.0	109.1
3481	26.4	109.4
3541	0.5	109.6
3601	28.5	109.8
3661	23.4	110.0
3721	26.1	110.2
3781	20.2	110.5
3841	0.0	110.7
3901	9.0	111.0
3961	15.6	111.2
4021	13.1	111.4
4081	7.8	111.6
4141	0.0	111.8
4201	0.0	112.0
4261	0.0	112.2
4308	0.0	112.3


FTTP Graphic for Filename: 22009
2024 MY Lincoln Nautilus 2L - Vehicle # 301W676
Test conducted at DTF on 11/17/22 at 08:31:58 AM
Fuel Temperature (°F)
140
135
130
125
120
115
110
105
100
95
90
Speed (Miles / Hour)
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.2
241	56.5	95.3
301	48.1	95.4
361	32.1	95.3
421	21.7	95.4
481	35.1	95.5
541	25.0	95.6
601	22.4	95.9
661	26.1	95.9
721	9.0	96.0
781	28.3	96.2
841	20.1	96.3
901	26.5	96.5
961	8.6	96.6
1021	1.0	96.6
1081	12.3	96.8
1141	24.6	96.9
1201	12.0	97.1
1261	8.0	97.2
1321	0.0	97.3
1381	0.0	97.4
1441	0.0	97.6
1501	0.0	97.7
1561	5.6	97.9
1621	9.9	98.0
1681	1.3	98.2
1741	0.0	98.4
1801	8.6	98.5
1861	0.0	98.7
1921	15.8	98.9
1981	0.0	99.1
2041	27.3	99.3
2101	0.0	99.5
2161	10.2	99.6
2221	10.6	99.8
2281	2.9	100.0
2341	0.0	100.2
2401	10.4	100.4
2461	0.0	100.6
2521	15.3	100.8
2581	0.0	101.0
2641	26.7	101.2
2701	0.0	101.4
2761	0.0	101.5
2821	0.0	101.7
2881	24.8	101.9
2941	0.0	102.2
3001	17.2	102.4
3061	56.5	102.6
3121	42.6	102.7
3181	34.9	103.0
3241	5.2	103.3
3301	35.0	103.5
3361	16.5	103.7
3421	23.7	103.9
3481	26.5	104.1
3541	0.5	104.3
3601	28.5	104.5
3661	23.2	104.7
3721	26.2	105.0
3781	20.0	105.2
3841	0.0	105.4
3901	9.1	105.6
3961	16.0	105.8
4021	13.1	106.0
4081	7.6	106.2
4141	0.0	106.4
4201	0.0	106.6
4261	0.0	106.7
4308	0.0	106.9


FTTP Graphic for Filename: 23001
2024 MY Lincoln Nautilus 2L - Vehicle # 301W671
Test conducted at DTF on 01/18/23 at 08:59:37 AM
Fuel Temperature (°F)
140
135
130
125
120
115
110
105
100
95
90
Speed (Miles / Hour)
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.3
181	26.5	95.4
241	56.5	95.5
301	48.1	95.6
361	32.1	95.8
421	21.7	96.0
481	35.1	96.1
541	25.0	96.3
601	22.4	96.5
661	26.1	96.7
721	9.0	96.9
781	28.3	97.1
841	20.1	97.3
901	26.5	97.5
961	8.6	97.8
1021	1.0	97.9
1081	12.3	98.2
1141	24.6	98.4
1201	12.0	98.6
1261	8.0	98.9
1321	0.0	99.2
1381	0.0	99.4
1441	0.0	99.7
1501	0.0	99.9
1561	5.6	100.2
1621	9.9	100.4
1681	1.3	100.7
1741	0.0	101.0
1801	8.6	101.4
1861	0.0	101.7
1921	15.8	102.0
1981	0.0	102.4
2041	27.3	102.7
2101	0.0	103.1
2161	10.2	103.4
2221	10.6	103.7
2281	2.9	104.0
2341	0.0	104.4
2401	10.4	104.7
2461	0.0	105.1
2521	15.3	105.4
2581	0.0	105.7
2641	26.7	106.1
2701	0.0	106.5
2761	0.0	106.8
2821	0.0	107.1
2881	24.8	107.5
2941	0.0	107.8
3001	17.2	108.2
3061	56.5	108.5
3121	42.6	108.9
3181	34.9	109.4
3241	5.2	109.8
3301	35.0	110.2
3361	16.5	110.5
3421	23.7	110.9
3481	26.5	111.3
3541	0.5	111.6
3601	28.5	112.0
3661	23.2	112.4
3721	26.2	112.7
3781	20.0	113.1
3841	0.0	113.5
3901	9.1	113.7
3961	16.0	114.1
4021	13.1	114.4
4081	7.6	114.7
4141	0.0	115.0
4201	0.0	115.3
4261	0.0	115.7
4308	0.0	115.8

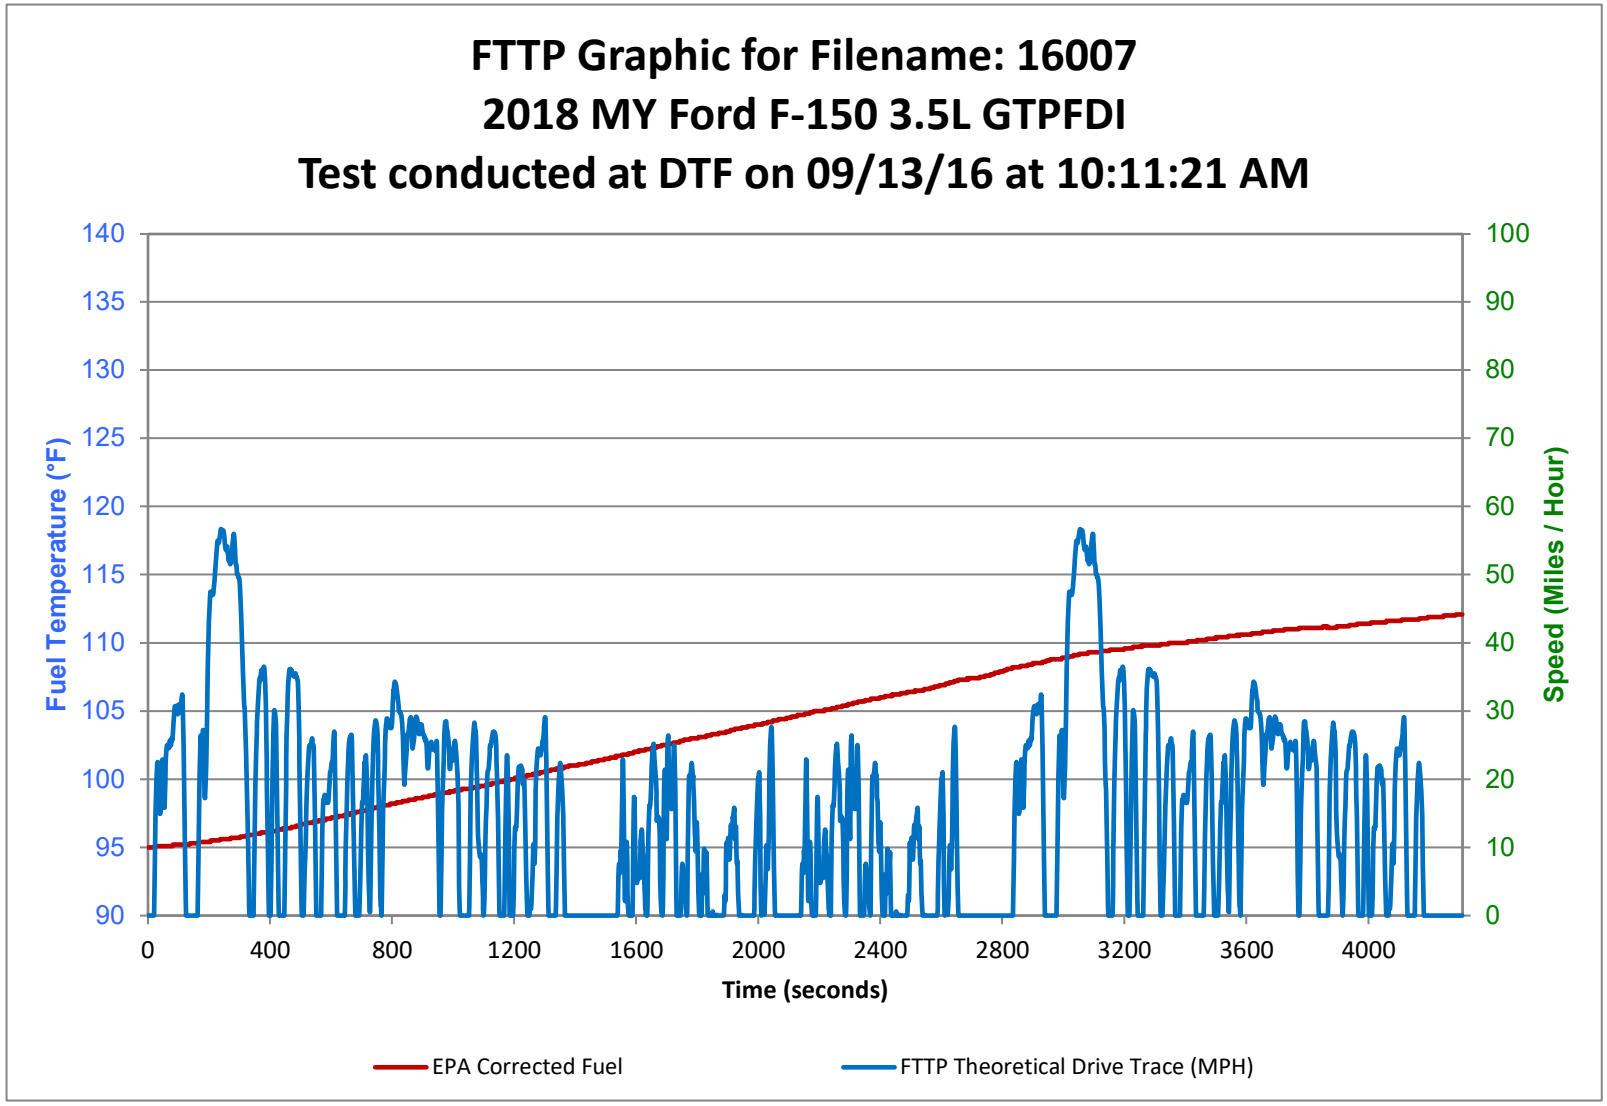
2026 MY Fuel Tank Temperature Profiles

FTTP Testing Information			Product Coverage		
Profile #[2]	Ending Fuel Temp	Tank Capacity as	Engine Size (Liters)	Vehicle Model Name	Certification Test Group(s)
16007	112.1	23.9	2.7L GTPFDI	F-150	TFMXT02.73JK
			3.5L GTPFDI	F-150* / F-150 Police Responder	TFMXT03.57AV, TFMXT03.57AT
			3.5L GTPFDI	F-150 Raptor	TFMXT03.57AT, TFMXT03.54JK
			5.0L PFDI	F-150	TFMXT05.03DP
			5.2L SC	F-150 Raptor R	TFMXT05.2AHS
			3.5L GTPFDI	Expedition / Expedition Max / Navigator / Navigator L	TFMXT03.57AT, TFMXT03.57AV, TFMXT03.54HT
16013	115.1	16.1	2.3L GTPFDI	Mustang	TFMXV02.3VJG, TFMXV02.3VJY
			5.0L PFDI	Mustang GT* / Mustang Dark Horse	TFMXV05.0VKN
			5.2L SC	Mustang Feature Car	TFMXV05.2VEZ
			5.2L SC	Mustang GTD	TFMXV05.2GTD
18003	112.4	21.4	2.3L GTPFDI	Explorer	TFMXT02.34K2, TFMXT02.34K4
			3.0L GTDI	Explorer* / Police Interceptor Utility / Aviator	TFMXT03.0JPC, TFMXT03.0TPC
			3.3L PFDI	Police Interceptor Utility	TFMXT03.33U3
18004	109.7	19.0	3.3L PFDI FHEV	Police Interceptor Utility Hybrid*	TFMXT03.33F1
18005	117.9	24.7	3.5L PFDI	Transit ≤10K*	TFMXD03.56BG
			3.5L GTDI	Transit ≤10K	TFMXD03.56BZ
				Transit >10K	TFMXD03.57BZ
18011	121.0	15.8	1.5L GTPFDI	Escape	TFMXT01.52X1
			1.5L GTPFDI	Bronco Sport	TFMXT01.52X2, TFMXT01.52X4
			2.0L GTPFDI	Escape* / Corsair	TFMXT02.02Y3
			2.0L GTPFDI	Bronco Sport / Maverick	TFMXT02.02Y3, TFMXT02.02Y5
18012	110.4	34.5	6.8L	F Series Super Duty Box Delete	TFMXD06.86CH
				F Series Super Duty Complete	TFMXD06.86CH, TFMXD06.87BC
			7.3L	F Series Super Duty Complete*	TFMXD07.363H, TFMXD07.373K
				F Series Super Duty Incomplete	TFMXE07.3BWU, TFMXE07.3BW7
				F59 Step Van Incomplete	TFMXE07.3BW7
18014	113.0	40.0	7.3L	E-350 ≤14k*	TFMXE07.3BWU
				E-450 >14k	TFMXE07.3BW7
18015	109.7	47.2	7.3L	F-650* / F-750 / F53 Motorhome	TFMXE07.3BW7
19002	104.3	12.0	2.5L PHEV	Escape PHEV	TFMXT02.52P1
				Corsair PHEV*	TFMXT02.53CE
			2.5L FHEV	Escape FHEV	TFMXT02.52F1
				Maverick FHEV	TFMXT02.54F1
19005	106.3	32.5	3.5L GTPFDI FHEV	F-150 Hybrid*	TFMXT03.51F1, TFMXT03.51F2
20001	112.3	18.7	2.3L GTPFDI	Bronco	TFMXT02.31EM, TFMXT02.31EN
			2.7L GTPFDI	Bronco*	TFMXT02.72V6, TFMXT02.72V9
			3.0L GTPFDI	Bronco Raptor / Ranger Raptor	TFMXT03.03V7, TFMXT03.03V8
			2.3L GTPFDI	Ranger	TFMXT02.36HG, TFMXT02.36HH
			2.7L GTPFDI	Ranger	TFMXT02.71HS, TFMXT02.71HT
22009	116.9	19.8	2.0L GTPFDI FHEV	Nautilus Hybrid*	TFMXT02.02JF

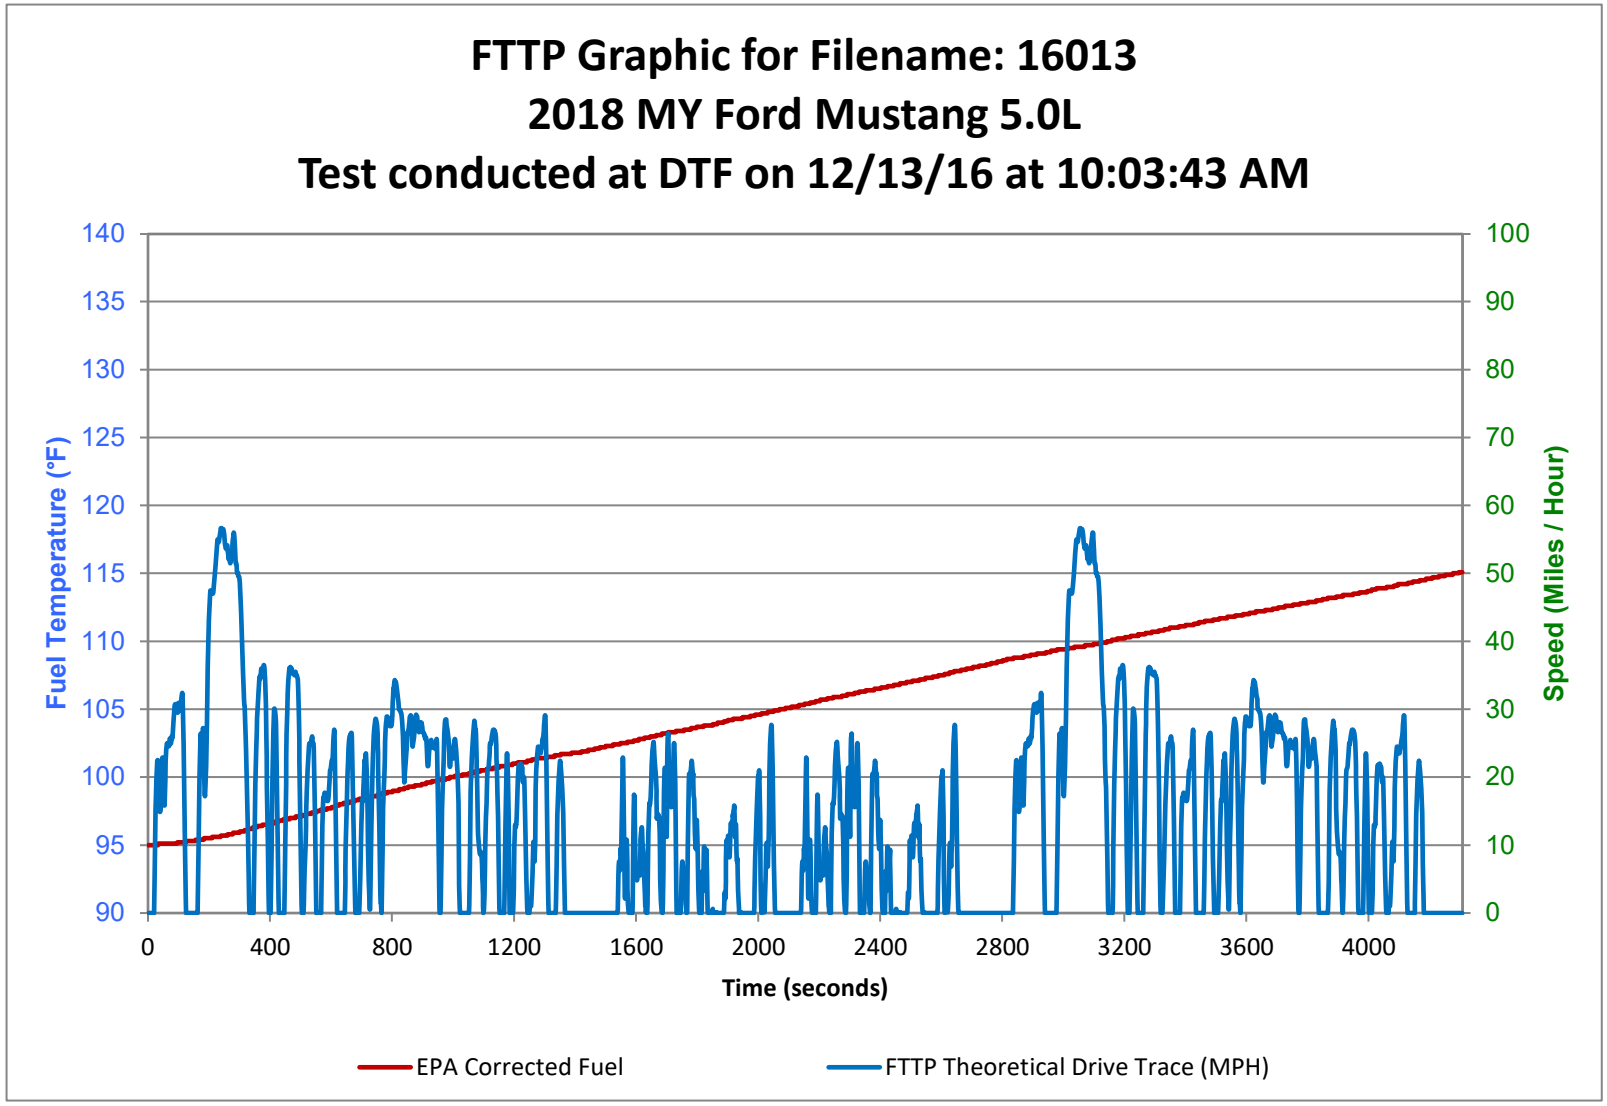
Footnotes:

2) For 2004CY testing and beyond, the following suffixes, positions 5 - 8 in the FTTP profile name, correspond to the following subsequent test facilities: DTF [000 - 299] and Arizona [300 - 599]

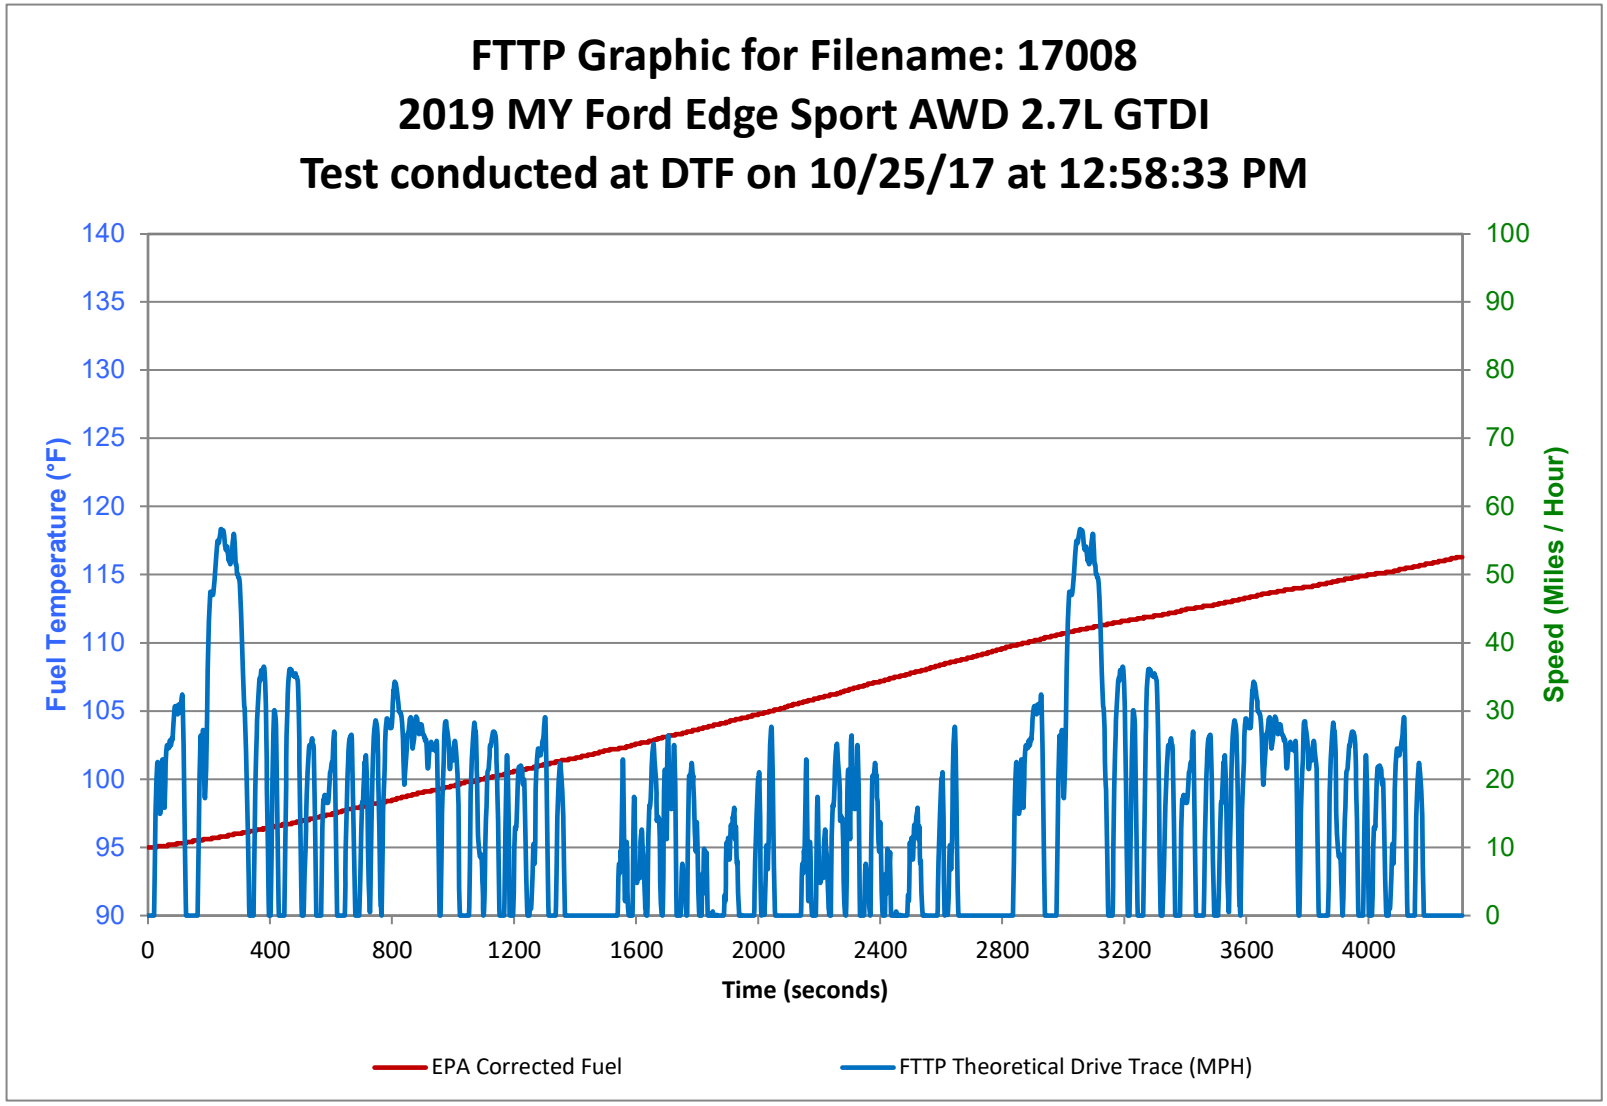
* Denotes tested variant in the FTTP profile.


FTTP Graphic for Filename: 16007
2018 MY Ford F-150 3.5L GTPFDI
Test conducted at DTF on 09/13/16 at 10:11:21 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

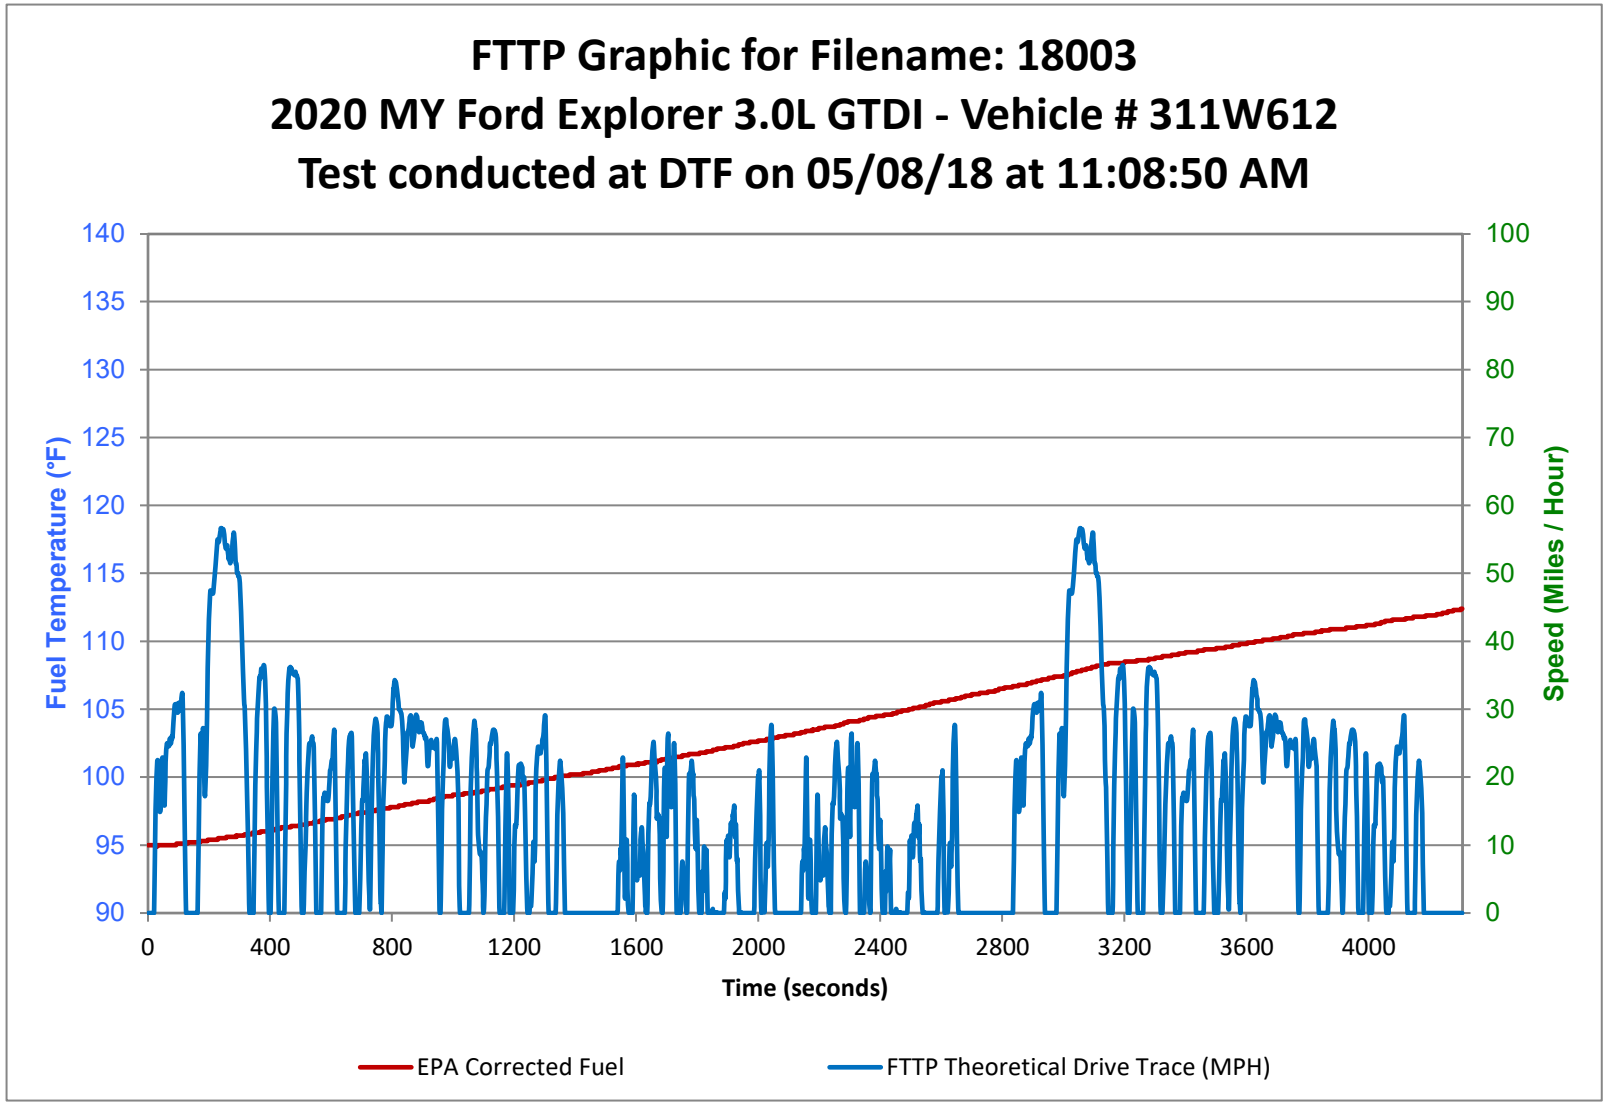
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.4
241	56.5	95.6
301	48.1	95.7
361	32.1	96.0
421	21.7	96.2
481	35.1	96.5
541	25.0	96.8
601	22.4	97.1
661	26.1	97.4
721	9.0	97.8
781	28.3	98.1
841	20.1	98.4
901	26.5	98.6
961	8.6	98.9
1021	1.0	99.2
1081	12.3	99.4
1141	24.6	99.7
1201	12.0	100.0
1261	8.0	100.3
1321	0.0	100.6
1381	0.0	101.0
1441	0.0	101.2
1501	0.0	101.5
1561	5.6	101.8
1621	9.9	102.1
1681	1.3	102.4
1741	0.0	102.7
1801	8.0	103.0
1861	0.0	103.3
1921	15.5	103.6
1981	0.0	103.9
2041	27.4	104.2
2101	0.0	104.5
2161	9.3	104.8
2221	10.5	105.1
2281	2.6	105.4
2341	0.0	105.7
2401	10.0	106.0
2461	0.0	106.2
2521	15.4	106.5
2581	0.0	106.8
2641	26.8	107.1
2701	0.0	107.4
2761	0.0	107.6
2821	0.0	108.1
2881	24.8	108.3
2941	0.0	108.6
3001	17.4	108.9
3061	56.5	109.2
3121	42.4	109.3
3181	34.9	109.5
3241	4.5	109.7
3301	35.0	109.8
3361	15.8	110.0
3421	24.0	110.1
3481	26.4	110.3
3541	0.5	110.4
3601	28.5	110.6
3661	23.4	110.8
3721	26.1	110.9
3781	20.2	111.1
3841	0.0	111.1
3901	9.0	111.2
3961	15.6	111.3
4021	13.1	111.5
4081	7.8	111.6
4141	0.0	111.7
4201	0.0	111.9
4261	0.0	112.0
4308	0.0	112.1


FTTP Graphic for Filename: 16013
2018 MY Ford Mustang 5.0L
Test conducted at DTF on 12/13/16 at 10:03:43 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

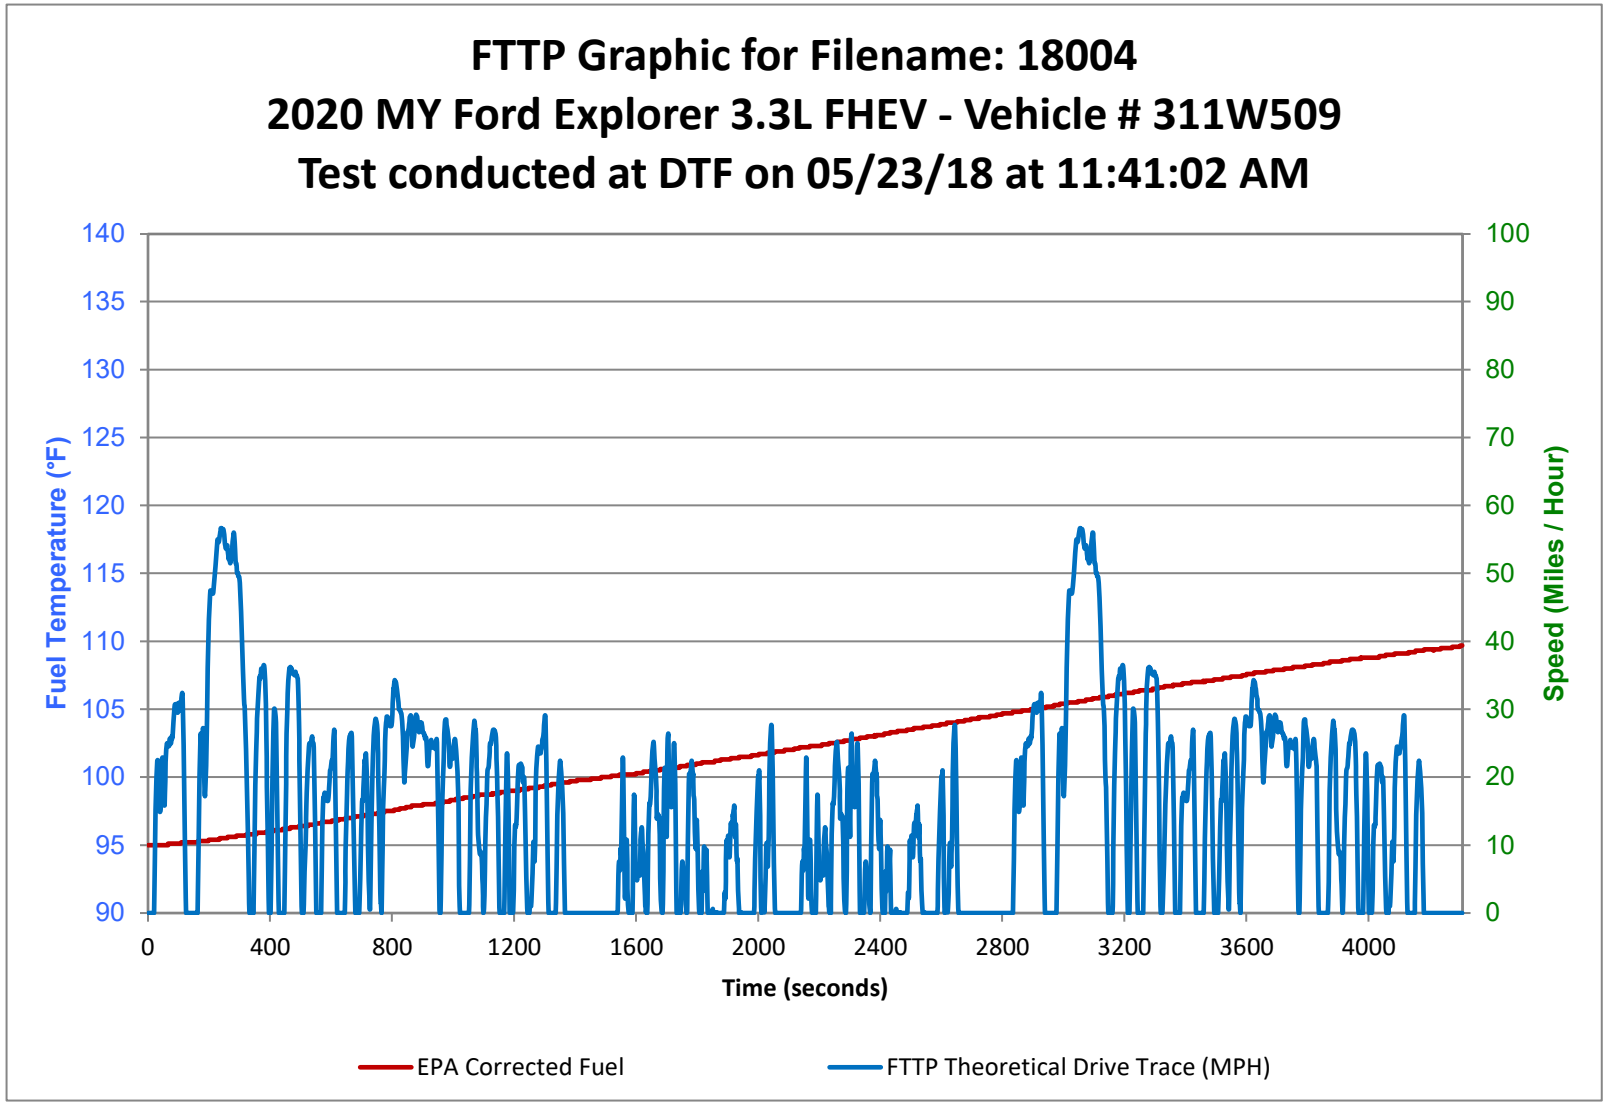
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.4
241	56.5	95.7
301	48.1	95.9
361	32.1	96.4
421	21.7	96.7
481	35.1	97.0
541	25.0	97.4
601	22.4	97.7
661	26.1	98.1
721	9.0	98.5
781	28.3	98.8
841	20.1	99.2
901	26.5	99.5
961	8.6	99.8
1021	1.0	100.1
1081	12.3	100.4
1141	24.6	100.7
1201	12.0	101.0
1261	8.0	101.3
1321	0.0	101.5
1381	0.0	101.7
1441	0.0	101.9
1501	0.0	102.3
1561	5.6	102.5
1621	9.9	102.8
1681	1.3	103.1
1741	0.0	103.4
1801	8.0	103.7
1861	0.0	103.9
1921	15.5	104.3
1981	0.0	104.5
2041	27.4	104.8
2101	0.0	105.1
2161	9.3	105.4
2221	10.5	105.7
2281	2.6	106.0
2341	0.0	106.3
2401	10.0	106.5
2461	0.0	106.8
2521	15.4	107.1
2581	0.0	107.4
2641	26.8	107.7
2701	0.0	108.0
2761	0.0	108.3
2821	0.0	108.7
2881	24.8	108.9
2941	0.0	109.1
3001	17.4	109.4
3061	56.5	109.6
3121	42.4	109.9
3181	34.9	110.2
3241	4.5	110.4
3301	35.0	110.7
3361	15.8	111.0
3421	24.0	111.2
3481	26.4	111.5
3541	0.5	111.8
3601	28.5	112.0
3661	23.4	112.2
3721	26.1	112.5
3781	20.2	112.8
3841	0.0	113.0
3901	9.0	113.3
3961	15.6	113.5
4021	13.1	113.8
4081	7.8	114.0
4141	0.0	114.3
4201	0.0	114.6
4261	0.0	114.9
4308	0.0	115.1


FTTP Graphic for Filename: 17008
2019 MY Ford Edge Sport AWD 2.7L GTDI
Test conducted at DTF on 10/25/17 at 12:58:33 PM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

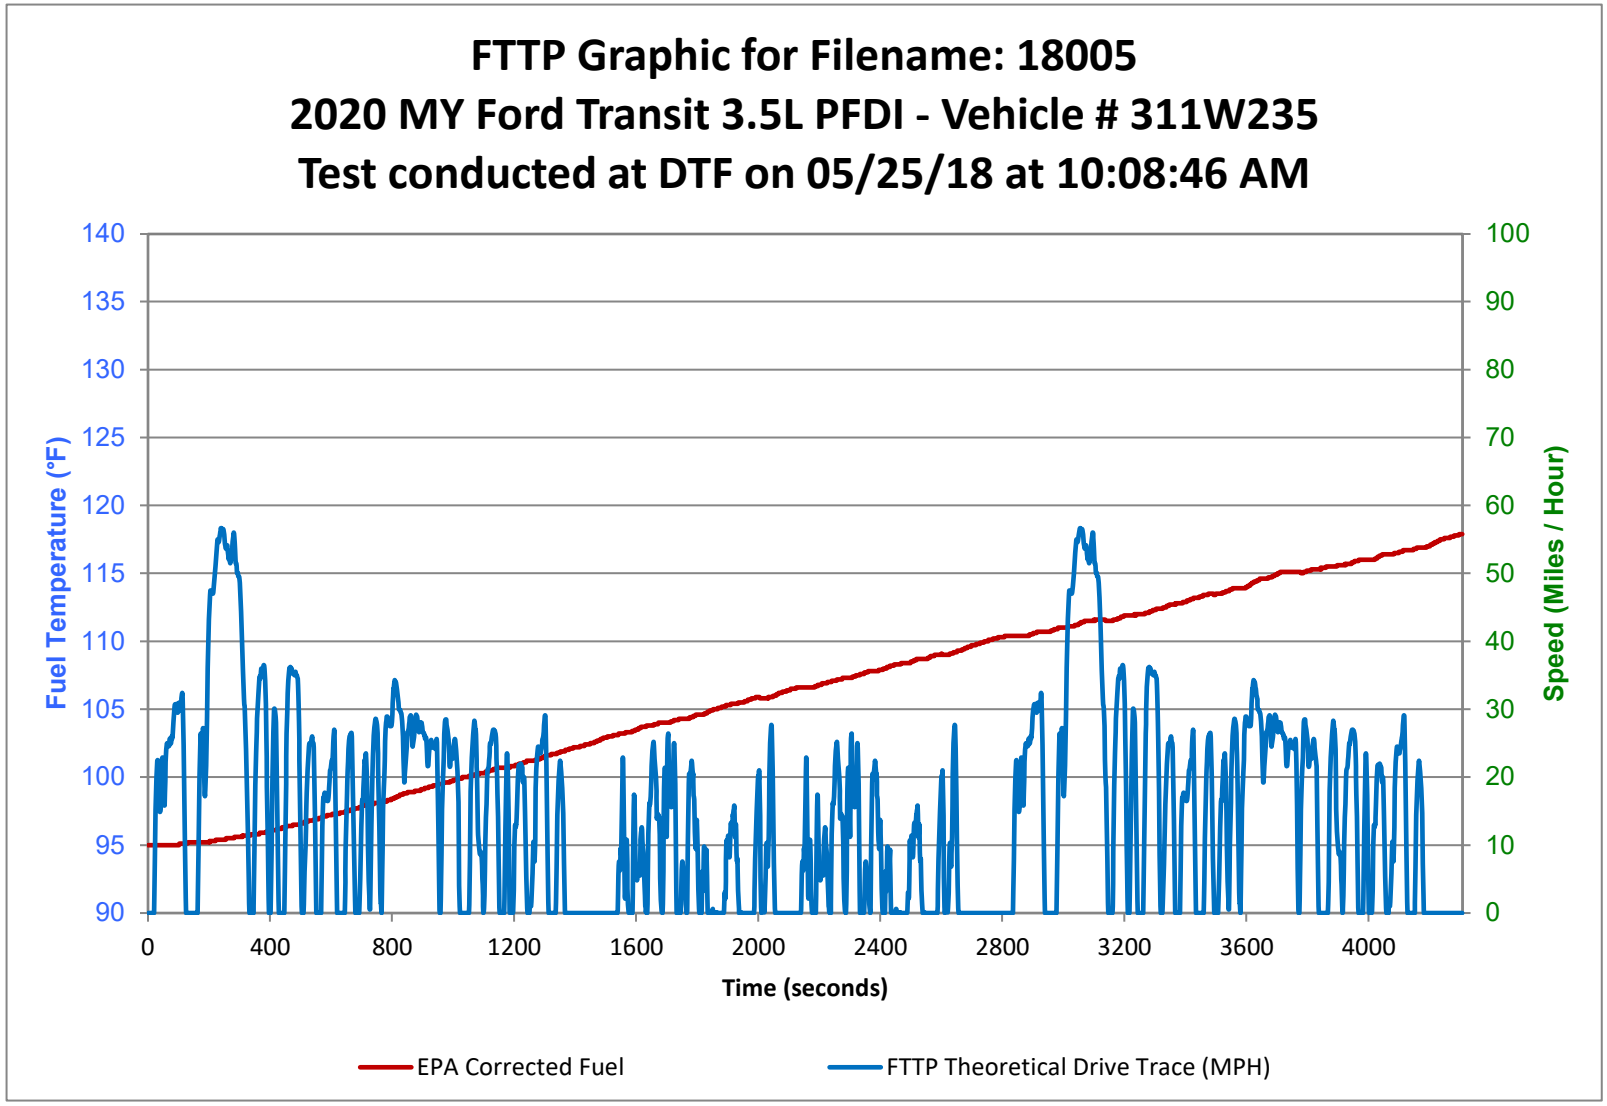
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.3
181	26.5	95.5
241	56.5	95.8
301	48.1	96.0
361	32.1	96.3
421	21.7	96.6
481	35.1	96.8
541	25.0	97.1
601	22.4	97.4
661	26.1	97.8
721	9.0	98.1
781	28.3	98.4
841	20.1	98.7
901	26.5	99.0
961	8.6	99.3
1021	1.0	99.6
1081	12.3	99.9
1141	24.6	100.2
1201	12.0	100.6
1261	8.0	100.8
1321	0.0	101.2
1381	0.0	101.5
1441	0.0	101.7
1501	0.0	102.1
1561	5.6	102.3
1621	9.9	102.7
1681	1.3	103.0
1741	0.0	103.3
1801	8.0	103.6
1861	0.0	104.0
1921	15.5	104.3
1981	0.0	104.6
2041	27.4	105.0
2101	0.0	105.4
2161	9.3	105.7
2221	10.5	106.1
2281	2.6	106.4
2341	0.0	106.8
2401	10.0	107.2
2461	0.0	107.5
2521	15.4	107.9
2581	0.0	108.3
2641	26.8	108.6
2701	0.0	108.9
2761	0.0	109.3
2821	0.0	109.7
2881	24.8	110.0
2941	0.0	110.4
3001	17.4	110.7
3061	56.5	111.0
3121	42.4	111.3
3181	34.9	111.5
3241	4.5	111.7
3301	35.0	112.0
3361	15.8	112.2
3421	24.0	112.5
3481	26.4	112.7
3541	0.5	113.0
3601	28.5	113.3
3661	23.4	113.6
3721	26.1	113.8
3781	20.2	114.0
3841	0.0	114.3
3901	9.0	114.6
3961	15.6	114.8
4021	13.1	115.0
4081	7.8	115.2
4141	0.0	115.5
4201	0.0	115.8
4261	0.0	116.1
4308	0.0	116.3


FTTP Graphic for Filename: 18003
2020 MY Ford Explorer 3.0L GTDI - Vehicle # 311W612
Test conducted at DTF on 05/08/18 at 11:08:50 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

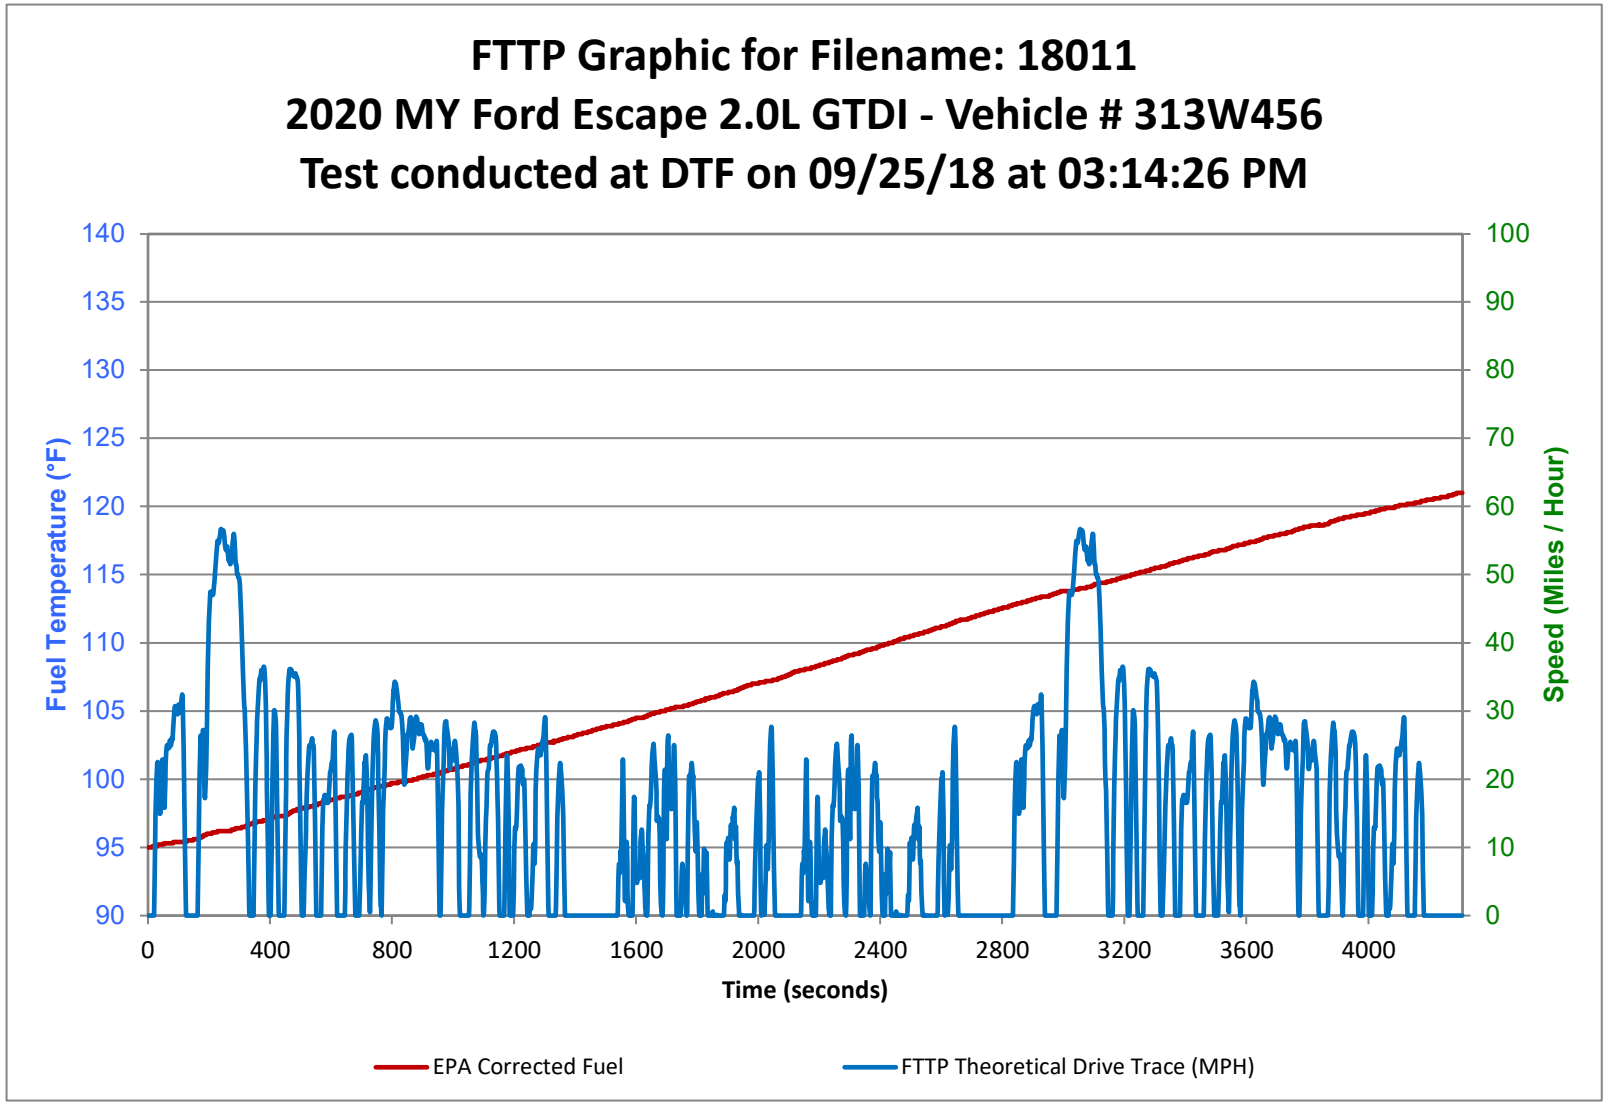
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.1
181	26.5	95.3
241	56.5	95.5
301	48.1	95.7
361	32.1	95.9
421	21.7	96.2
481	35.1	96.4
541	25.0	96.6
601	22.4	96.9
661	26.1	97.2
721	9.0	97.4
781	28.3	97.7
841	20.1	97.9
901	26.5	98.2
961	8.6	98.5
1021	1.0	98.7
1081	12.3	98.9
1141	24.6	99.1
1201	12.0	99.4
1261	8.0	99.6
1321	0.0	99.9
1381	0.0	100.1
1441	0.0	100.3
1501	0.0	100.5
1561	5.6	100.8
1621	9.9	101.0
1681	1.3	101.2
1741	0.0	101.5
1801	8.0	101.7
1861	0.0	102.0
1921	15.5	102.3
1981	0.0	102.6
2041	27.4	102.8
2101	0.0	103.1
2161	9.3	103.4
2221	10.5	103.7
2281	2.6	103.9
2341	0.0	104.2
2401	10.0	104.5
2461	0.0	104.8
2521	15.4	105.1
2581	0.0	105.5
2641	26.8	105.7
2701	0.0	106.1
2761	0.0	106.3
2821	0.0	106.6
2881	24.8	106.8
2941	0.0	107.2
3001	17.4	107.4
3061	56.5	107.8
3121	42.4	108.2
3181	34.9	108.4
3241	4.5	108.5
3301	35.0	108.7
3361	15.8	109.0
3421	24.0	109.2
3481	26.4	109.4
3541	0.5	109.6
3601	28.5	109.8
3661	23.4	110.1
3721	26.1	110.3
3781	20.2	110.5
3841	0.0	110.7
3901	9.0	110.9
3961	15.6	111.0
4021	13.1	111.2
4081	7.8	111.6
4141	0.0	111.7
4201	0.0	111.9
4261	0.0	112.2
4308	0.0	112.4


FTTP Graphic for Filename: 18004
2020 MY Ford Explorer 3.3L FHEV - Vehicle # 311W509
Test conducted at DTF on 05/23/18 at 11:41:02 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

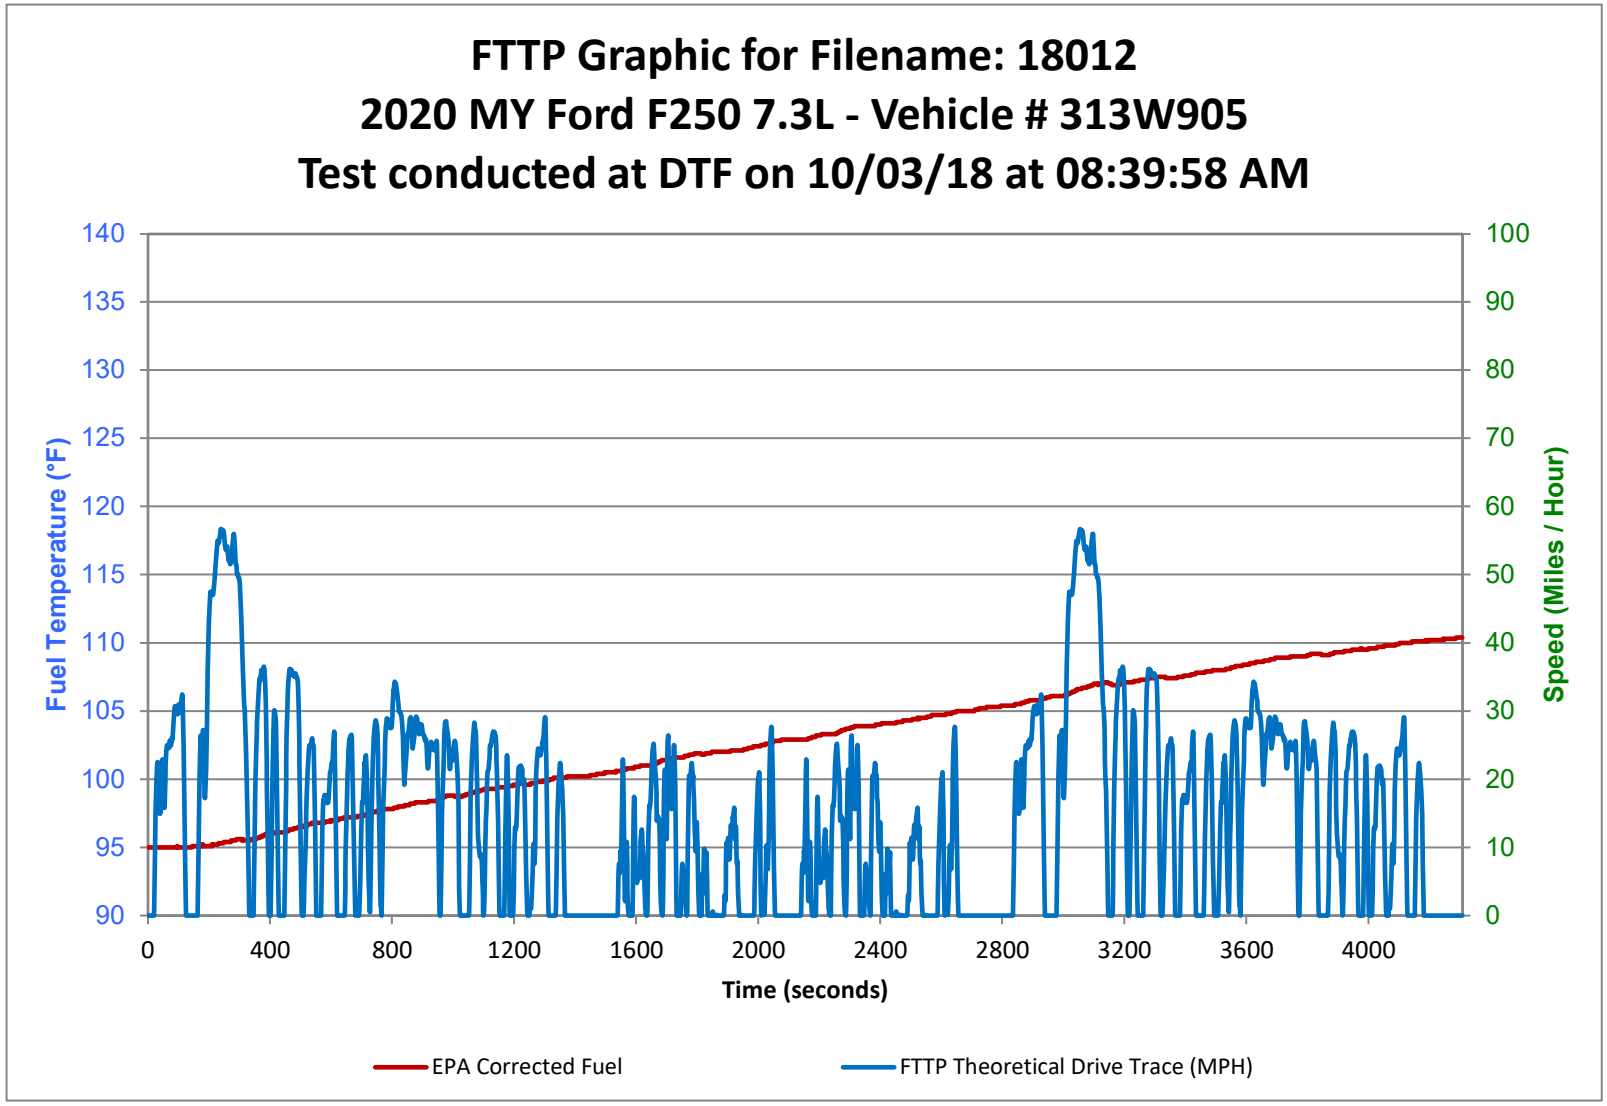
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.2
181	26.5	95.3
241	56.5	95.5
301	48.1	95.7
361	32.1	95.9
421	21.7	96.1
481	35.1	96.3
541	25.0	96.5
601	22.4	96.7
661	26.1	97.0
721	9.0	97.2
781	28.3	97.5
841	20.1	97.7
901	26.5	97.9
961	8.6	98.1
1021	1.0	98.4
1081	12.3	98.6
1141	24.6	98.8
1201	12.0	99.0
1261	8.0	99.2
1321	0.0	99.4
1381	0.0	99.6
1441	0.0	99.8
1501	0.0	100.0
1561	5.6	100.2
1621	9.9	100.3
1681	1.3	100.6
1741	0.0	100.7
1801	8.0	101.0
1861	0.0	101.2
1921	15.5	101.4
1981	0.0	101.6
2041	27.4	101.8
2101	0.0	102.0
2161	9.3	102.2
2221	10.5	102.4
2281	2.6	102.6
2341	0.0	102.9
2401	10.0	103.1
2461	0.0	103.4
2521	15.4	103.6
2581	0.0	103.8
2641	26.8	104.0
2701	0.0	104.3
2761	0.0	104.5
2821	0.0	104.7
2881	24.8	104.9
2941	0.0	105.1
3001	17.4	105.4
3061	56.5	105.6
3121	42.4	105.9
3181	34.9	106.1
3241	4.5	106.3
3301	35.0	106.5
3361	15.8	106.8
3421	24.0	107.0
3481	26.4	107.1
3541	0.5	107.3
3601	28.5	107.5
3661	23.4	107.7
3721	26.1	107.9
3781	20.2	108.1
3841	0.0	108.3
3901	9.0	108.5
3961	15.6	108.7
4021	13.1	108.8
4081	7.8	109.0
4141	0.0	109.2
4201	0.0	109.4
4261	0.0	109.5
4308	0.0	109.7


FTTP Graphic for Filename: 18005
2020 MY Ford Transit 3.5L PFDI - Vehicle # 311W235
Test conducted at DTF on 05/25/18 at 10:08:46 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

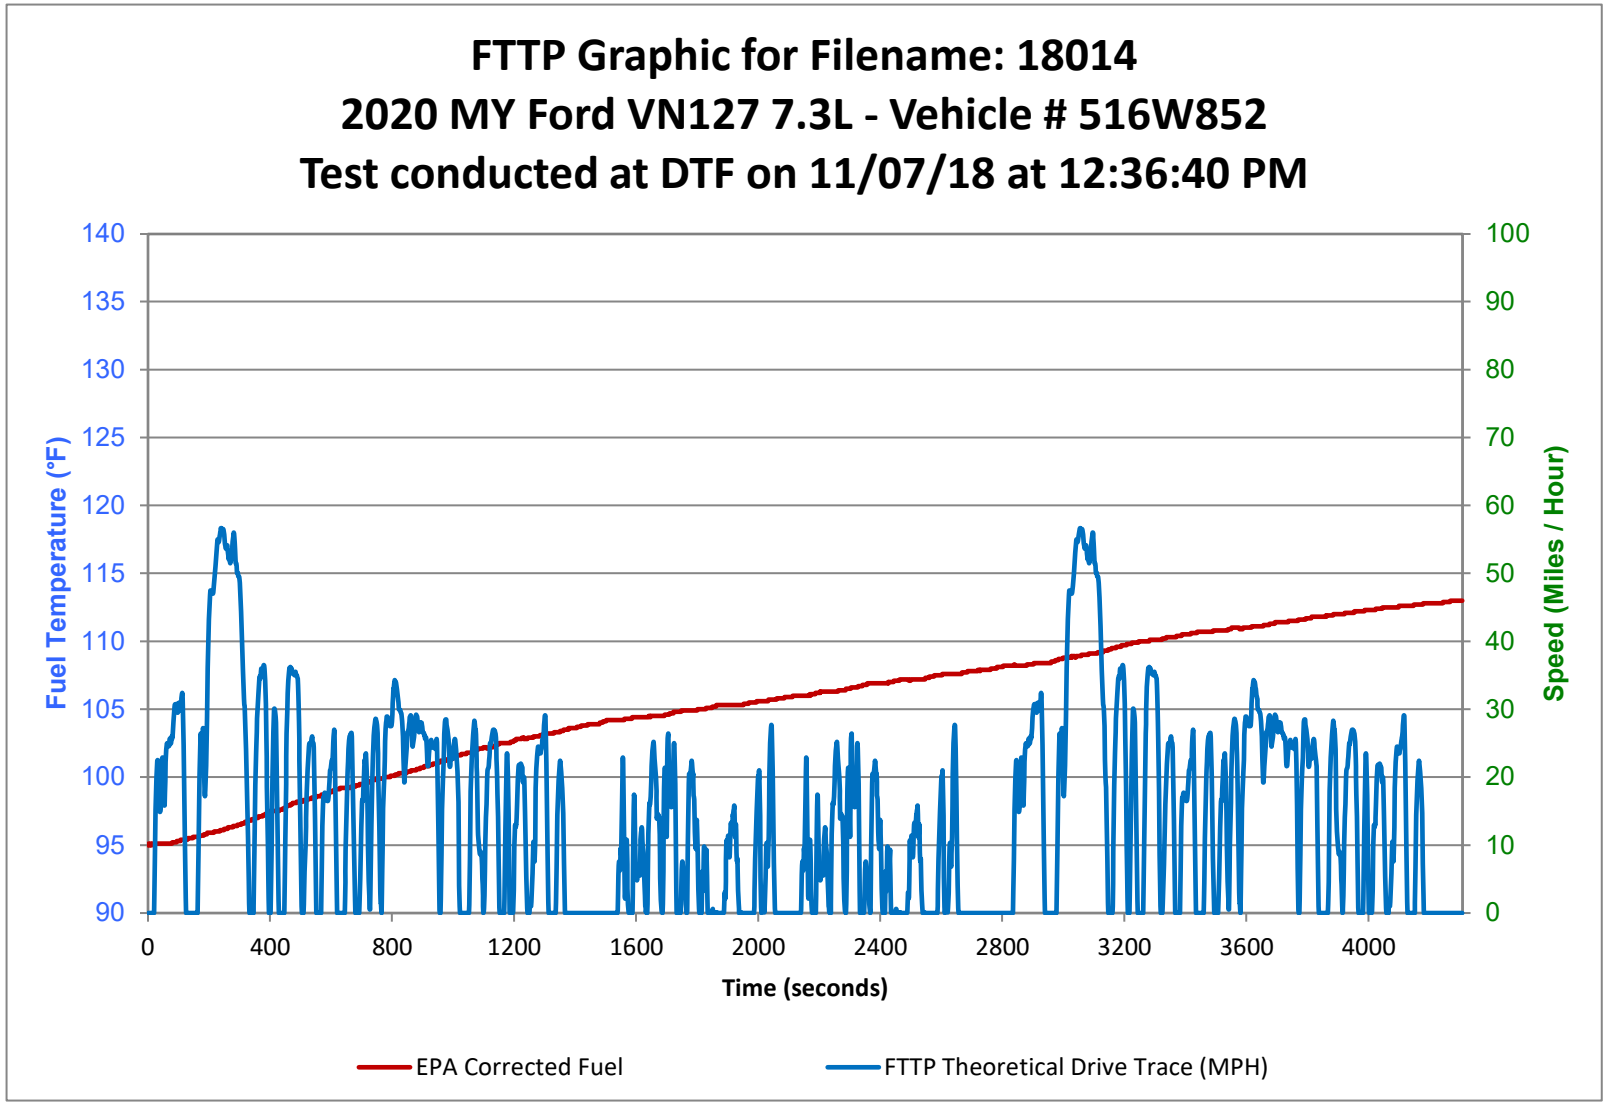
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.1
181	26.5	95.2
241	56.5	95.4
301	48.1	95.6
361	32.1	95.8
421	21.7	96.1
481	35.1	96.5
541	25.0	96.8
601	22.4	97.2
661	26.1	97.5
721	9.0	98.0
781	28.3	98.2
841	20.1	98.8
901	26.5	99.1
961	8.6	99.5
1021	1.0	99.9
1081	12.3	100.2
1141	24.6	100.6
1201	12.0	100.8
1261	8.0	101.2
1321	0.0	101.6
1381	0.0	102.0
1441	0.0	102.4
1501	0.0	102.9
1561	5.6	103.2
1621	9.9	103.7
1681	1.3	104.0
1741	0.0	104.3
1801	8.0	104.6
1861	0.0	105.0
1921	15.5	105.4
1981	0.0	105.8
2041	27.4	105.9
2101	0.0	106.4
2161	9.3	106.6
2221	10.5	106.9
2281	2.6	107.3
2341	0.0	107.6
2401	10.0	107.9
2461	0.0	108.3
2521	15.4	108.7
2581	0.0	109.0
2641	26.8	109.2
2701	0.0	109.7
2761	0.0	110.1
2821	0.0	110.4
2881	24.8	110.4
2941	0.0	110.7
3001	17.4	111.0
3061	56.5	111.4
3121	42.4	111.6
3181	34.9	111.7
3241	4.5	112.0
3301	35.0	112.3
3361	15.8	112.7
3421	24.0	113.1
3481	26.4	113.5
3541	0.5	113.7
3601	28.5	114.0
3661	23.4	114.6
3721	26.1	115.1
3781	20.2	115.0
3841	0.0	115.3
3901	9.0	115.6
3961	15.6	115.9
4021	13.1	116.0
4081	7.8	116.4
4141	0.0	116.7
4201	0.0	117.0
4261	0.0	117.6
4308	0.0	117.9


FTTP Graphic for Filename: 18011
2020 MY Ford Escape 2.0L GTDI - Vehicle # 313W456
Test conducted at DTF on 09/25/18 at 03:14:26 PM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

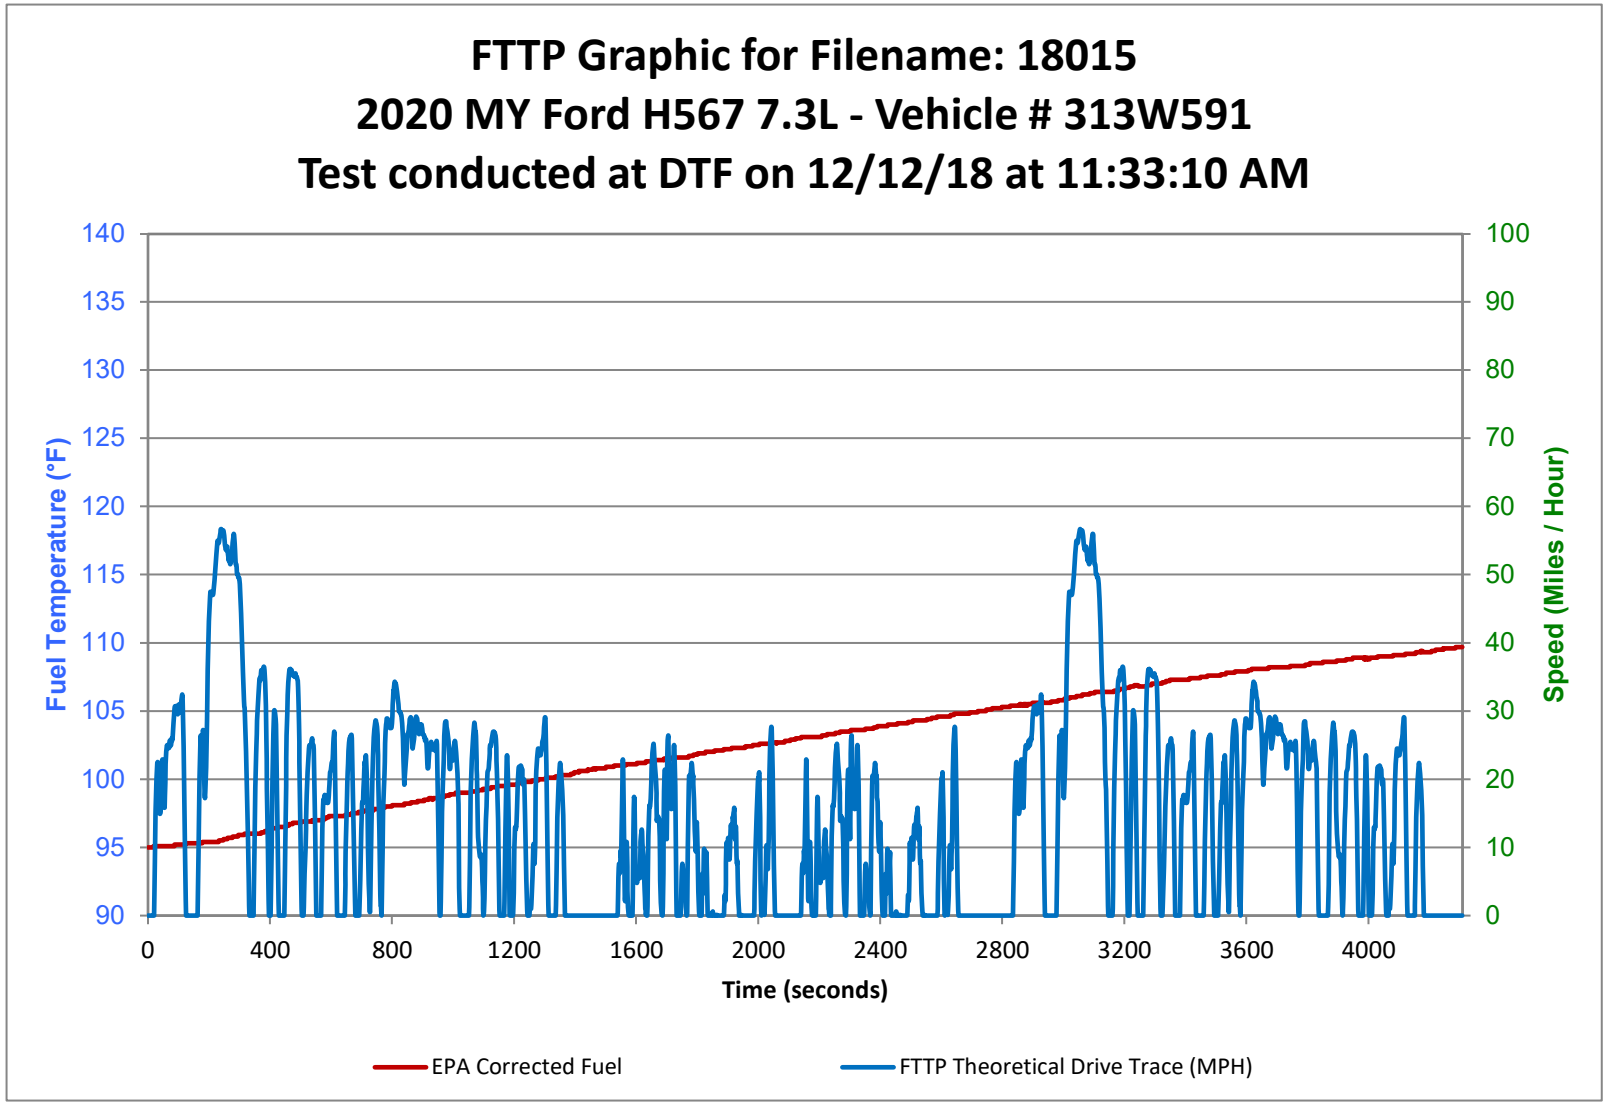
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.3
121	8.8	95.4
181	26.5	95.8
241	56.5	96.2
301	48.1	96.4
361	32.1	96.9
421	21.7	97.3
481	35.1	97.7
541	25.0	98.0
601	22.4	98.5
661	26.1	98.8
721	9.0	99.2
781	28.3	99.5
841	20.1	99.8
901	26.5	100.2
961	8.6	100.5
1021	1.0	100.9
1081	12.3	101.3
1141	24.6	101.6
1201	12.0	102.0
1261	8.0	102.3
1321	0.0	102.7
1381	0.0	103.1
1441	0.0	103.4
1501	0.0	103.8
1561	5.6	104.2
1621	9.9	104.5
1681	1.3	105.0
1741	0.0	105.3
1801	8.0	105.7
1861	0.0	106.0
1921	15.5	106.4
1981	0.0	107.0
2041	27.4	107.2
2101	0.0	107.7
2161	9.3	108.1
2221	10.5	108.5
2281	2.6	108.9
2341	0.0	109.3
2401	10.0	109.8
2461	0.0	110.2
2521	15.4	110.6
2581	0.0	111.1
2641	26.8	111.5
2701	0.0	111.9
2761	0.0	112.3
2821	0.0	112.6
2881	24.8	113.0
2941	0.0	113.4
3001	17.4	113.8
3061	56.5	114.0
3121	42.4	114.4
3181	34.9	114.7
3241	4.5	115.1
3301	35.0	115.5
3361	15.8	115.8
3421	24.0	116.2
3481	26.4	116.6
3541	0.5	116.9
3601	28.5	117.3
3661	23.4	117.7
3721	26.1	118.0
3781	20.2	118.4
3841	0.0	118.7
3901	9.0	119.0
3961	15.6	119.3
4021	13.1	119.6
4081	7.8	119.9
4141	0.0	120.2
4201	0.0	120.5
4261	0.0	120.7
4308	0.0	121.0


FTTP Graphic for Filename: 18012
2020 MY Ford F250 7.3L - Vehicle # 313W905
Test conducted at DTF on 10/03/18 at 08:39:58 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

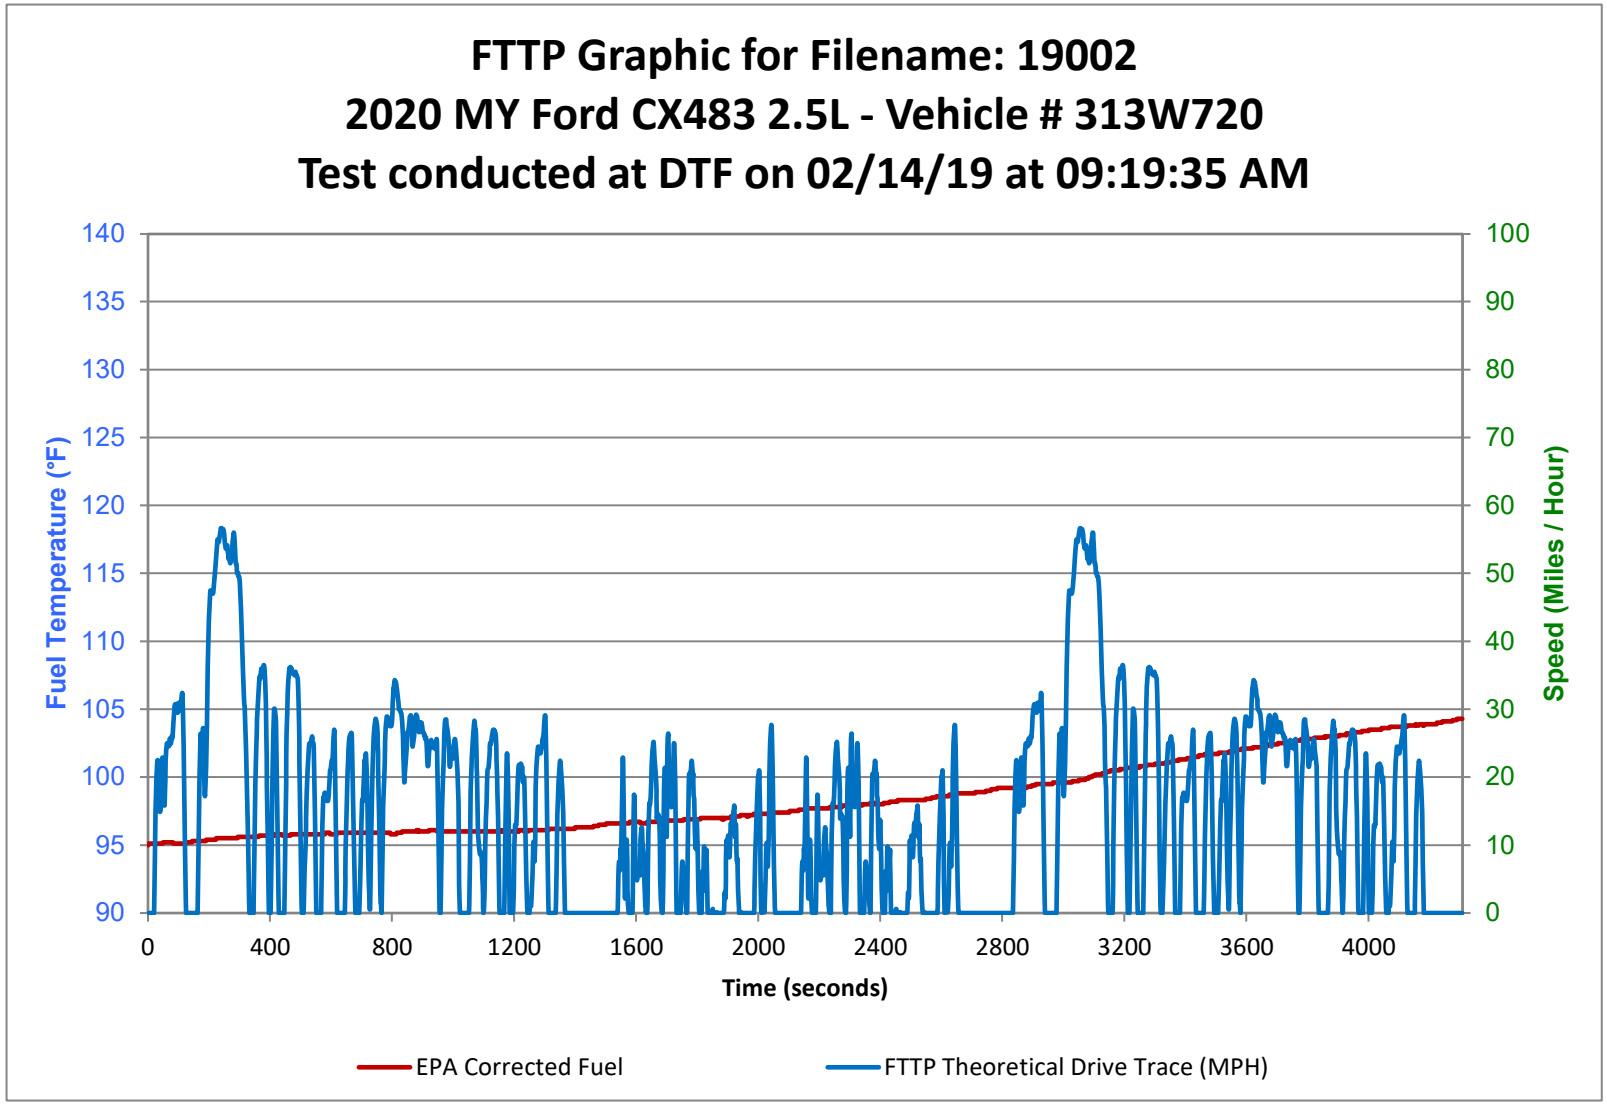
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.0
181	26.5	95.1
241	56.5	95.3
301	48.1	95.6
361	32.1	95.7
421	21.7	96.1
481	35.1	96.4
541	25.0	96.8
601	22.4	96.9
661	26.1	97.2
721	9.0	97.4
781	28.3	97.8
841	20.1	98.0
901	26.5	98.3
961	8.6	98.6
1021	1.0	98.7
1081	12.3	99.1
1141	24.6	99.3
1201	12.0	99.6
1261	8.0	99.7
1321	0.0	100.0
1381	0.0	100.2
1441	0.0	100.2
1501	0.0	100.5
1561	5.6	100.7
1621	9.9	101.0
1681	1.3	101.3
1741	0.0	101.6
1801	8.0	101.9
1861	0.0	102.0
1921	15.5	102.1
1981	0.0	102.3
2041	27.4	102.7
2101	0.0	102.9
2161	9.3	102.9
2221	10.5	103.3
2281	2.6	103.6
2341	0.0	103.9
2401	10.0	104.0
2461	0.0	104.2
2521	15.4	104.4
2581	0.0	104.7
2641	26.8	104.9
2701	0.0	105.0
2761	0.0	105.3
2821	0.0	105.4
2881	24.8	105.7
2941	0.0	105.9
3001	17.4	106.1
3061	56.5	106.6
3121	42.4	107.0
3181	34.9	106.9
3241	4.5	107.2
3301	35.0	107.5
3361	15.8	107.4
3421	24.0	107.7
3481	26.4	107.9
3541	0.5	108.1
3601	28.5	108.4
3661	23.4	108.7
3721	26.1	108.9
3781	20.2	109.0
3841	0.0	109.2
3901	9.0	109.3
3961	15.6	109.5
4021	13.1	109.6
4081	7.8	109.8
4141	0.0	110.0
4201	0.0	110.2
4261	0.0	110.3
4308	0.0	110.4


FTTP Graphic for Filename: 18014
2020 MY Ford VN127 7.3L - Vehicle # 516W852
Test conducted at DTF on 11/07/18 at 12:36:40 PM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

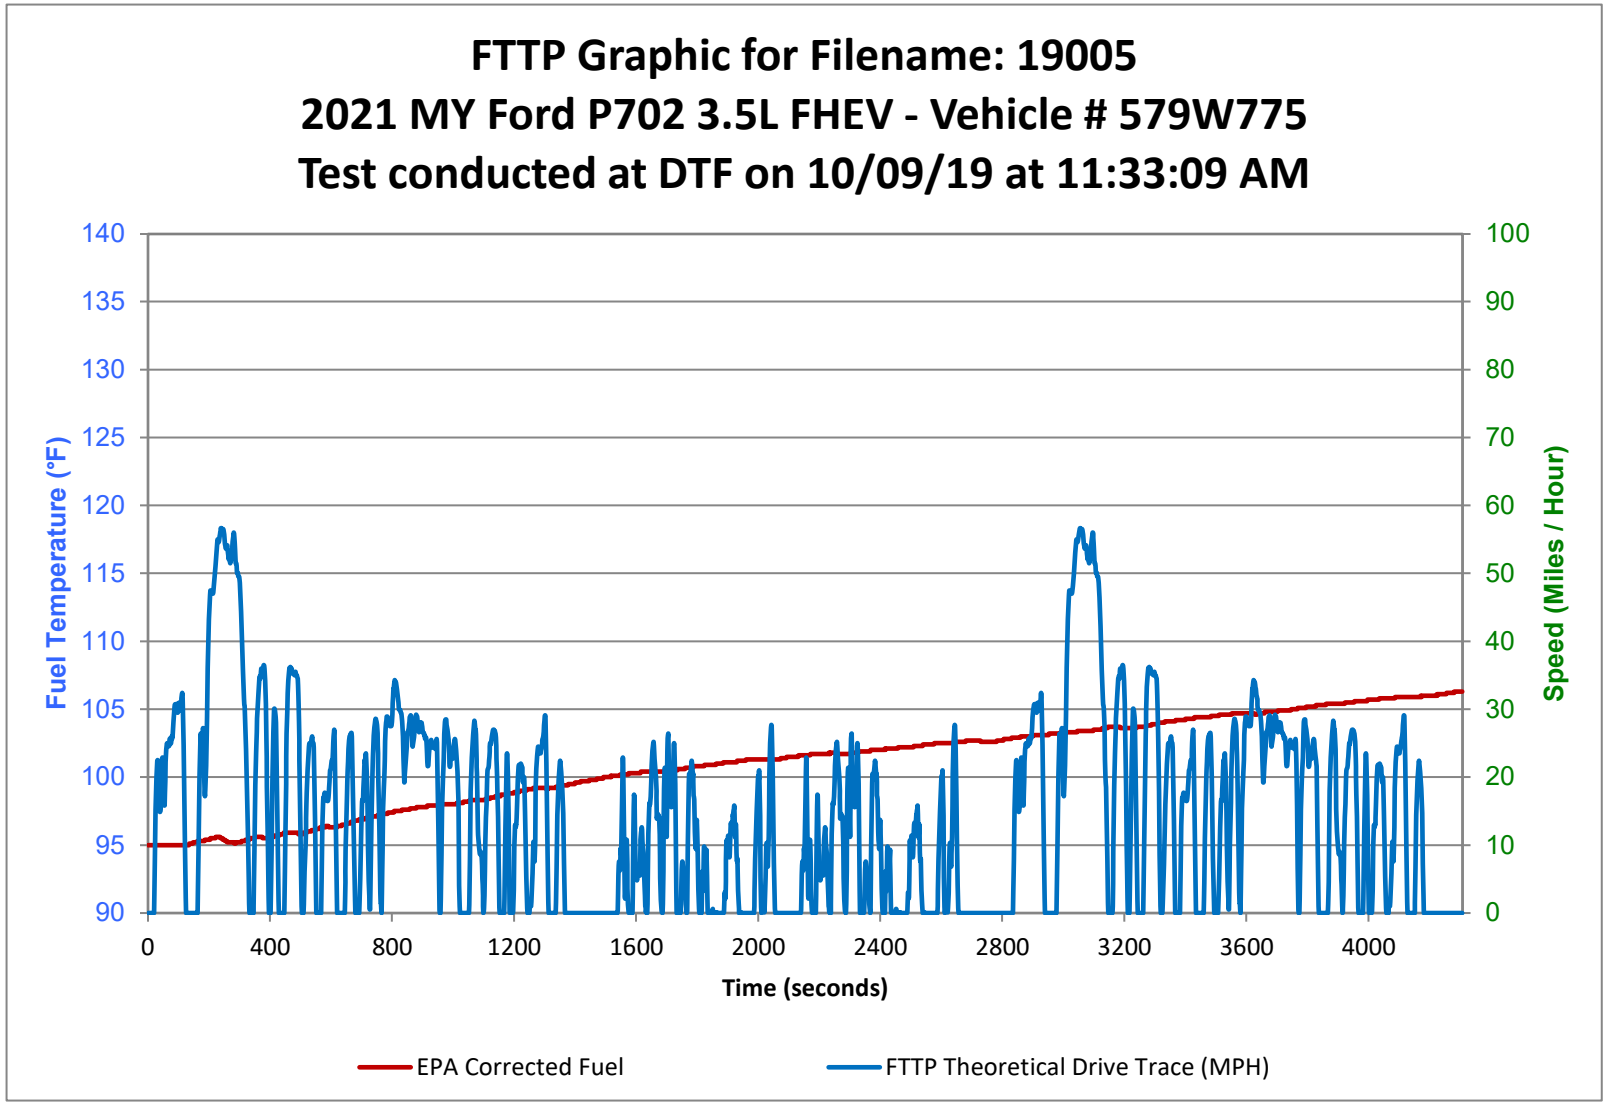
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.4
181	26.5	95.7
241	56.5	96.1
301	48.1	96.5
361	32.1	97.0
421	21.7	97.5
481	35.1	98.1
541	25.0	98.5
601	22.4	98.9
661	26.1	99.2
721	9.0	99.6
781	28.3	100.0
841	20.1	100.3
901	26.5	100.7
961	8.6	101.2
1021	1.0	101.6
1081	12.3	102.0
1141	24.6	102.3
1201	12.0	102.7
1261	8.0	102.9
1321	0.0	103.2
1381	0.0	103.6
1441	0.0	103.8
1501	0.0	104.1
1561	5.6	104.2
1621	9.9	104.4
1681	1.3	104.5
1741	0.0	104.8
1801	8.0	104.9
1861	0.0	105.2
1921	15.5	105.3
1981	0.0	105.5
2041	27.4	105.7
2101	0.0	105.9
2161	9.3	106.0
2221	10.5	106.3
2281	2.6	106.4
2341	0.0	106.7
2401	10.0	106.9
2461	0.0	107.1
2521	15.4	107.2
2581	0.0	107.5
2641	26.8	107.6
2701	0.0	107.8
2761	0.0	107.9
2821	0.0	108.2
2881	24.8	108.2
2941	0.0	108.4
3001	17.4	108.8
3061	56.5	109.0
3121	42.4	109.2
3181	34.9	109.6
3241	4.5	109.9
3301	35.0	110.1
3361	15.8	110.3
3421	24.0	110.6
3481	26.4	110.7
3541	0.5	110.9
3601	28.5	111.0
3661	23.4	111.2
3721	26.1	111.4
3781	20.2	111.6
3841	0.0	111.8
3901	9.0	112.0
3961	15.6	112.2
4021	13.1	112.3
4081	7.8	112.5
4141	0.0	112.6
4201	0.0	112.8
4261	0.0	112.9
4308	0.0	113.0


FTTP Graphic for Filename: 18015
2020 MY Ford H567 7.3L - Vehicle # 313W591
Test conducted at DTF on 12/12/18 at 11:33:10 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

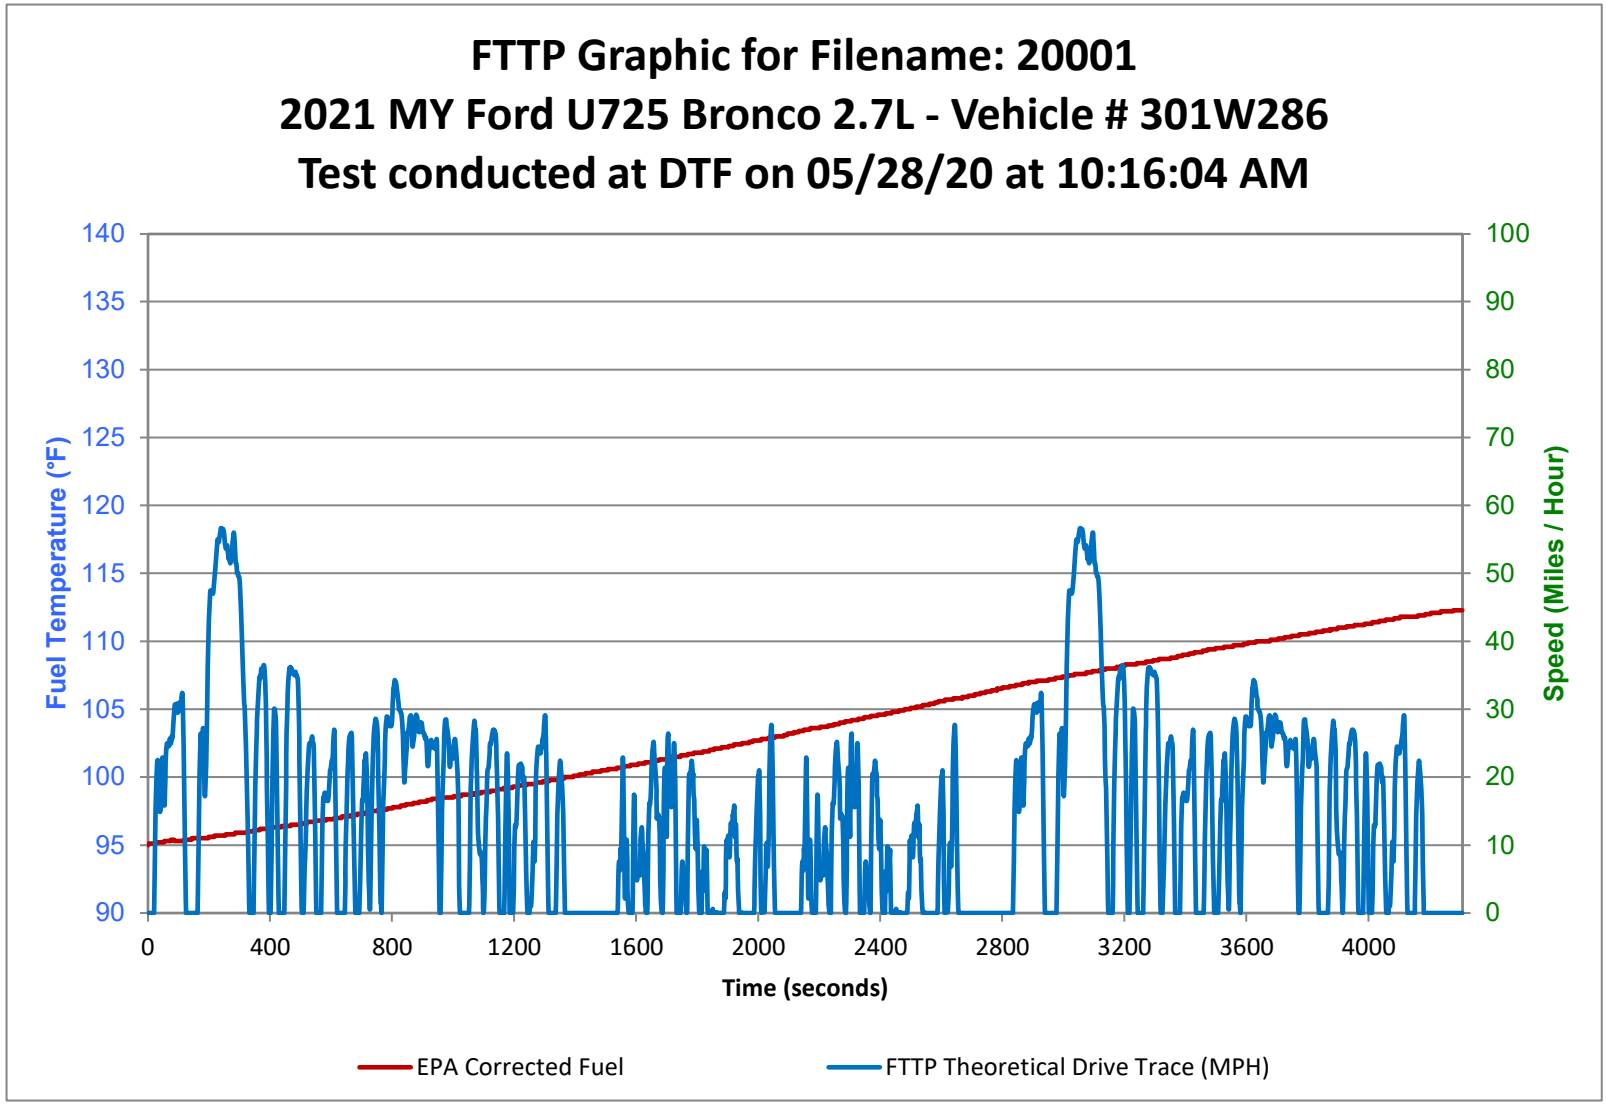
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.4
241	56.5	95.5
301	48.1	95.9
361	32.1	96.0
421	21.7	96.4
481	35.1	96.8
541	25.0	97.0
601	22.4	97.3
661	26.1	97.4
721	9.0	97.7
781	28.3	98.0
841	20.1	98.1
901	26.5	98.4
961	8.6	98.7
1021	1.0	99.0
1081	12.3	99.1
1141	24.6	99.4
1201	12.0	99.6
1261	8.0	99.9
1321	0.0	100.1
1381	0.0	100.3
1441	0.0	100.6
1501	0.0	100.8
1561	5.6	101.0
1621	9.9	101.2
1681	1.3	101.4
1741	0.0	101.6
1801	8.0	101.8
1861	0.0	102.1
1921	15.5	102.3
1981	0.0	102.4
2041	27.4	102.6
2101	0.0	102.8
2161	9.3	103.1
2221	10.5	103.2
2281	2.6	103.5
2341	0.0	103.6
2401	10.0	103.9
2461	0.0	104.1
2521	15.4	104.3
2581	0.0	104.5
2641	26.8	104.7
2701	0.0	104.9
2761	0.0	105.1
2821	0.0	105.3
2881	24.8	105.4
2941	0.0	105.6
3001	17.4	105.8
3061	56.5	106.1
3121	42.4	106.4
3181	34.9	106.5
3241	4.5	106.9
3301	35.0	107.0
3361	15.8	107.3
3421	24.0	107.4
3481	26.4	107.6
3541	0.5	107.8
3601	28.5	107.9
3661	23.4	108.1
3721	26.1	108.2
3781	20.2	108.3
3841	0.0	108.5
3901	9.0	108.7
3961	15.6	108.9
4021	13.1	108.9
4081	7.8	109.0
4141	0.0	109.2
4201	0.0	109.3
4261	0.0	109.6
4308	0.0	109.7


FTTP Graphic for Filename: 19002
2020 MY Ford CX483 2.5L - Vehicle # 313W720
Test conducted at DTF on 02/14/19 at 09:19:35 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

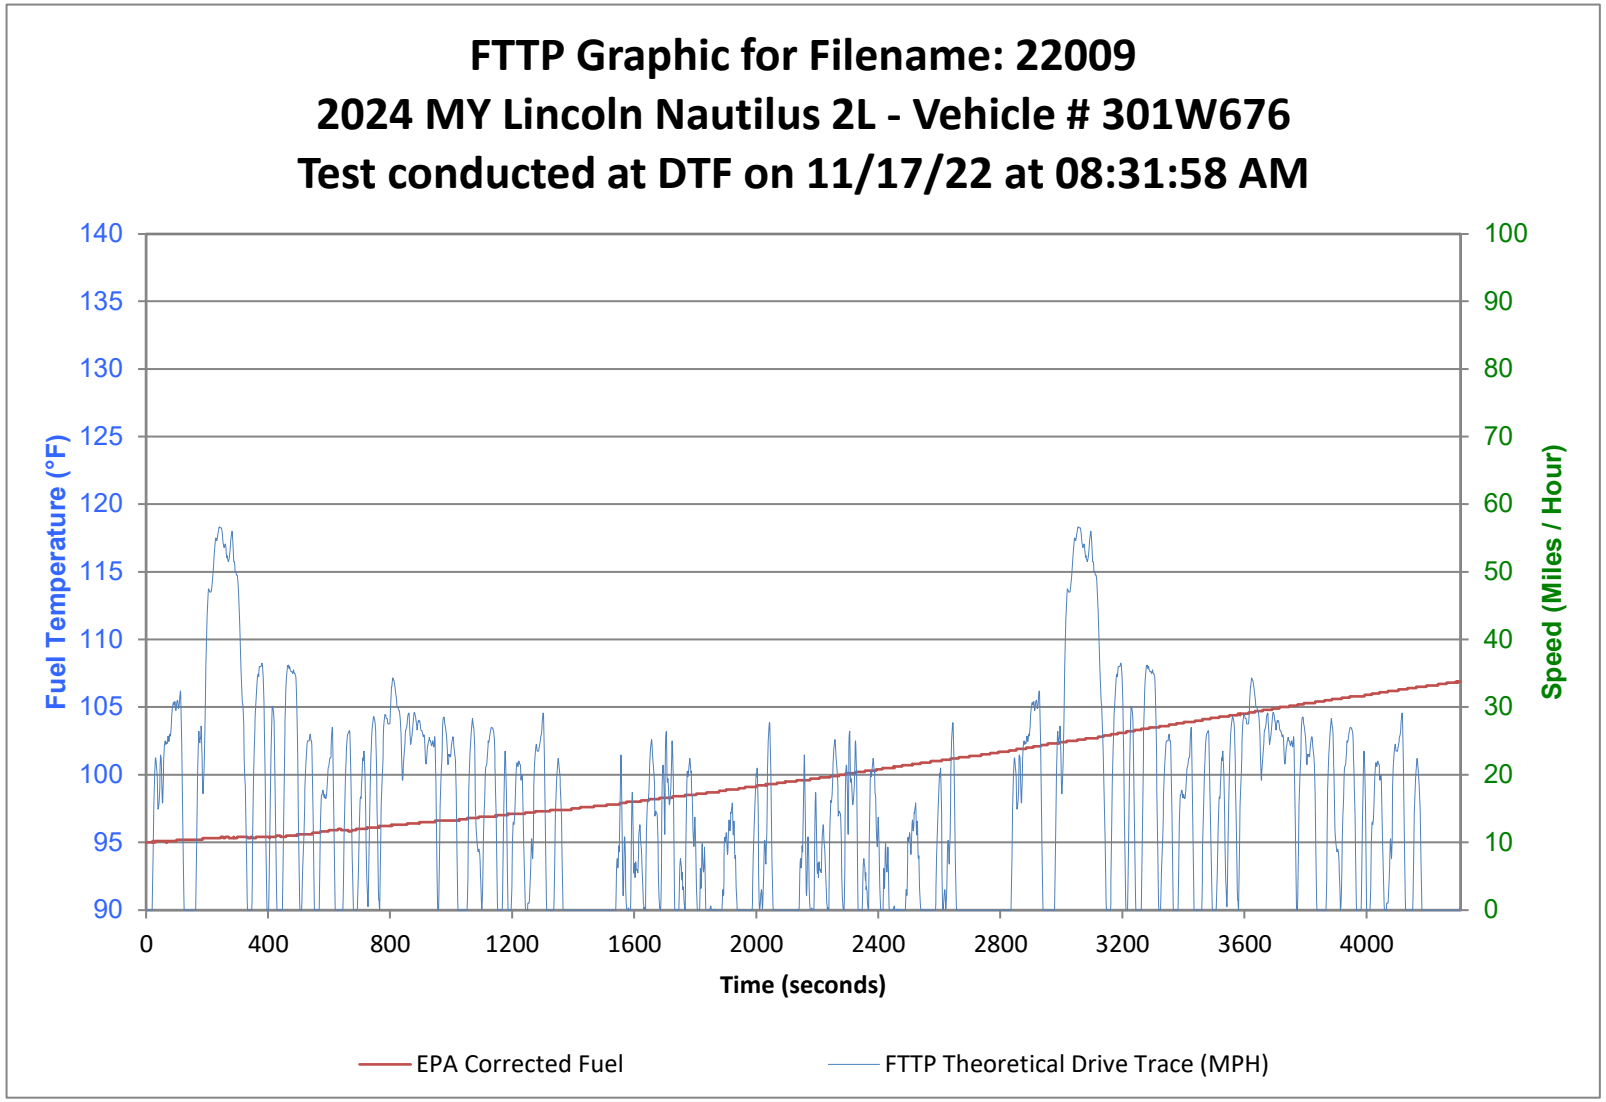
Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.2
121	8.8	95.1
181	26.5	95.3
241	56.5	95.5
301	48.1	95.6
361	32.1	95.6
421	21.7	95.8
481	35.1	95.8
541	25.0	95.8
601	22.4	95.8
661	26.1	95.9
721	9.0	95.9
781	28.3	95.9
841	20.1	96.0
901	26.5	96.0
961	8.6	96.1
1021	1.0	96.0
1081	12.3	96.0
1141	24.6	96.0
1201	12.0	96.0
1261	8.0	96.1
1321	0.0	96.2
1381	0.0	96.2
1441	0.0	96.3
1501	0.0	96.5
1561	5.6	96.6
1621	9.9	96.6
1681	1.3	96.7
1741	0.0	96.8
1801	8.0	96.9
1861	0.0	97.0
1921	15.5	97.1
1981	0.0	97.2
2041	27.4	97.3
2101	0.0	97.4
2161	9.3	97.7
2221	10.5	97.7
2281	2.6	97.9
2341	0.0	97.9
2401	10.0	98.0
2461	0.0	98.3
2521	15.4	98.3
2581	0.0	98.5
2641	26.8	98.7
2701	0.0	98.8
2761	0.0	99.0
2821	0.0	99.2
2881	24.8	99.2
2941	0.0	99.5
3001	17.4	99.6
3061	56.5	99.8
3121	42.4	100.2
3181	34.9	100.5
3241	4.5	100.7
3301	35.0	100.9
3361	15.8	101.2
3421	24.0	101.4
3481	26.4	101.7
3541	0.5	101.8
3601	28.5	102.1
3661	23.4	102.3
3721	26.1	102.5
3781	20.2	102.8
3841	0.0	102.9
3901	9.0	103.0
3961	15.6	103.3
4021	13.1	103.5
4081	7.8	103.7
4141	0.0	103.8
4201	0.0	103.9
4261	0.0	104.1
4308	0.0	104.3


FTTP Graphic for Filename: 19005
2021 MY Ford P702 3.5L FHEV - Vehicle # 579W775
Test conducted at DTF on 10/09/19 at 11:33:09 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
Time (seconds)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.0
121	8.8	95.0
181	26.5	95.3
241	56.5	95.5
301	48.1	95.2
361	32.1	95.6
421	21.7	95.7
481	35.1	95.9
541	25.0	96.1
601	22.4	96.3
661	26.1	96.6
721	9.0	97.0
781	28.3	97.3
841	20.1	97.6
901	26.5	97.8
961	8.6	97.9
1021	1.0	98.1
1081	12.3	98.3
1141	24.6	98.6
1201	12.0	98.9
1261	8.0	99.1
1321	0.0	99.2
1381	0.0	99.5
1441	0.0	99.7
1501	0.0	100.0
1561	5.6	100.2
1621	9.9	100.4
1681	1.3	100.4
1741	0.0	100.6
1801	8.0	100.8
1861	0.0	100.9
1921	15.5	101.1
1981	0.0	101.3
2041	27.4	101.3
2101	0.0	101.5
2161	9.3	101.6
2221	10.5	101.7
2281	2.6	101.7
2341	0.0	101.9
2401	10.0	102.0
2461	0.0	102.2
2521	15.4	102.3
2581	0.0	102.5
2641	26.8	102.5
2701	0.0	102.7
2761	0.0	102.6
2821	0.0	102.8
2881	24.8	103.0
2941	0.0	103.1
3001	17.4	103.3
3061	56.5	103.4
3121	42.4	103.5
3181	34.9	103.7
3241	4.5	103.6
3301	35.0	103.9
3361	15.8	104.1
3421	24.0	104.3
3481	26.4	104.4
3541	0.5	104.6
3601	28.5	104.7
3661	23.4	104.7
3721	26.1	104.9
3781	20.2	105.1
3841	0.0	105.3
3901	9.0	105.4
3961	15.6	105.6
4021	13.1	105.7
4081	7.8	105.8
4141	0.0	105.9
4201	0.0	106.0
4261	0.0	106.2
4308	0.0	106.3


FTTP Graphic for Filename: 20001
2021 MY Ford U725 Bronco 2.7L - Vehicle # 301W286
Test conducted at DTF on 05/28/20 at 10:16:04 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.3
121	8.8	95.3
181	26.5	95.5
241	56.5	95.7
301	48.1	95.9
361	32.1	96.1
421	21.7	96.3
481	35.1	96.5
541	25.0	96.7
601	22.4	96.9
661	26.1	97.1
721	9.0	97.4
781	28.3	97.6
841	20.1	97.9
901	26.5	98.2
961	8.6	98.5
1021	1.0	98.6
1081	12.3	98.8
1141	24.6	99.0
1201	12.0	99.3
1261	8.0	99.5
1321	0.0	99.8
1381	0.0	100.0
1441	0.0	100.3
1501	0.0	100.5
1561	5.6	100.7
1621	9.9	101.0
1681	1.3	101.3
1741	0.0	101.5
1801	8.0	101.8
1861	0.0	102.1
1921	15.5	102.3
1981	0.0	102.6
2041	27.4	102.9
2101	0.0	103.2
2161	9.3	103.5
2221	10.5	103.7
2281	2.6	104.0
2341	0.0	104.3
2401	10.0	104.6
2461	0.0	104.8
2521	15.4	105.2
2581	0.0	105.5
2641	26.8	105.8
2701	0.0	106.0
2761	0.0	106.3
2821	0.0	106.6
2881	24.8	106.9
2941	0.0	107.1
3001	17.4	107.4
3061	56.5	107.6
3121	42.4	107.9
3181	34.9	108.1
3241	4.5	108.3
3301	35.0	108.6
3361	15.8	108.8
3421	24.0	109.1
3481	26.4	109.4
3541	0.5	109.6
3601	28.5	109.8
3661	23.4	110.0
3721	26.1	110.2
3781	20.2	110.5
3841	0.0	110.7
3901	9.0	111.0
3961	15.6	111.2
4021	13.1	111.4
4081	7.8	111.6
4141	0.0	111.8
4201	0.0	112.0
4261	0.0	112.2
4308	0.0	112.3


FTTP Graphic for Filename: 22009
2024 MY Lincoln Nautilus 2L - Vehicle # 301W676
Test conducted at DTF on 11/17/22 at 08:31:58 AM
Fuel Temperature (°F)
Speed (Miles / Hour)
140
135
130
125
120
115
110
105
100
95
90
100
90
80
70
60
50
40
30
20
10
0
0
400
800
1200
1600
2000
2400
2800
3200
3600
4000
Time (seconds)
EPA Corrected Fuel
FTTP Theoretical Drive Trace (MPH)

Time Sec	Trace Speed MPH	EPA Fuel Temp °F
1	0.0	95.0
61	24.9	95.1
121	8.8	95.2
181	26.5	95.2
241	56.5	95.3
301	48.1	95.4
361	32.1	95.3
421	21.7	95.4
481	35.1	95.5
541	25.0	95.6
601	22.4	95.9
661	26.1	95.9
721	9.0	96.0
781	28.3	96.2
841	20.1	96.3
901	26.5	96.5
961	8.6	96.6
1021	1.0	96.6
1081	12.3	96.8
1141	24.6	96.9
1201	12.0	97.1
1261	8.0	97.2
1321	0.0	97.3
1381	0.0	97.4
1441	0.0	97.6
1501	0.0	97.7
1561	5.6	97.9
1621	9.9	98.0
1681	1.3	98.2
1741	0.0	98.4
1801	8.6	98.5
1861	0.0	98.7
1921	15.8	98.9
1981	0.0	99.1
2041	27.3	99.3
2101	0.0	99.5
2161	10.2	99.6
2221	10.6	99.8
2281	2.9	100.0
2341	0.0	100.2
2401	10.4	100.4
2461	0.0	100.6
2521	15.3	100.8
2581	0.0	101.0
2641	26.7	101.2
2701	0.0	101.4
2761	0.0	101.5
2821	0.0	101.7
2881	24.8	101.9
2941	0.0	102.2
3001	17.2	102.4
3061	56.5	102.6
3121	42.6	102.7
3181	34.9	103.0
3241	5.2	103.3
3301	35.0	103.5
3361	16.5	103.7
3421	23.7	103.9
3481	26.5	104.1
3541	0.5	104.3
3601	28.5	104.5
3661	23.2	104.7
3721	26.2	105.0
3781	20.0	105.2
3841	0.0	105.4
3901	9.1	105.6
3961	16.0	105.8
4021	13.1	106.0
4081	7.6	106.2
4141	0.0	106.4
4201	0.0	106.6
4261	0.0	106.7
4308	0.0	106.9

1.0 INTRODUCTION

This procedure describes the vehicle wind tunnel test to determine the Fuel Tank Temperature Profile (Temperature vs. Time) required per the Code of Federal Regulations 40 CFR 86.129-94 for vehicles tested for running loss emissions.

1.1 COMMONALITY. This is a CONTROL TEST and can be used to qualify vehicles or components throughout the world. The test may be conducted at any location having the necessary equipment and facilities. Proposed revisions to this procedure must be submitted per FAP 03-179.

2.0 INSTRUMENTATION

2.1 The test requesting activity is responsible for instrumenting the vehicle as required in 40 CFR 86.129-94. Vehicle Homologation & Compliance (VH&C) is responsible for providing the datalogger.

2.1.1 Thermocouples or equivalent devices, accuracy +/- 1 °C

2.1.2 Pressure/vacuum sensors, accuracy +/- 2 % full scale

2.1.3 Engine speed instrumentation, range 0 to 7000, accuracy +/- 20 RPM

2.1.4 Vehicle speed, range 0 to 240 kph, accuracy +/- 2 kph

2.2 The Wind Tunnel shall be able to record all test facility parameters including ambient air temperature, humidity, wind speed, hot road temperature, hot road on/off, and dynanometer speed at a 1Hz rate.

2.3 Prior to start of the test, the Wind Tunnel shall verify sun load.
Sun load sensors, range 1 kw/m2, and accuracy +/- 5%

2.4 All test measurement equipment must be calibrated and maintained per FAP 03-015, Control, Calibration, and Maintenance of Measurement and Test Equipment.

2.5 All applicable safety guidelines and procedures must be followed.

3.0 EQUIPMENT AND FACILITIES

3.1 Vehicle wind tunnel with adequate dynamometer power absorption for loads specified, automated roadload simulation, temperature control to 37.8 °C (100 °F), 1 kW/m2 (86 Langley/hr) sun load capacity, hot road control to 57.2 °C (135 °F) and the ability to modulate windspeed with vehicle speed.

3.2 An attached pre-soak chamber capable of attaining 36.1 ± 0.5 °C (96.5 ± 0.9 °F) at fuel tank or the ability to perform a minimum 16 hour vehicle soak in the test chamber. Chamber

temperature should be stabilized for 8 hours prior to the start of the 16 hour minimum vehicle soak to ensure surface temperatures are equalized.

3.3 Two metal wind deflectors with minimum dimensions 5'W x 1'4"D x 1'4" H.

3.4 Vehicle wind tunnel will be correlated to Road-based FTTPs as in Test Method 00.00-R-449.

4.0 VEHICLE PREPARATION

4.1 It is the responsibility of the test requester to assure that the steps taken in section 4.1 have been completed before the test, either prior to or after delivery of the vehicle to the wind tunnel. The requester is to provide all data on the ELMS Test Request, including make, model, model year, vehicle number, test weight, tire pressures, fuel tank volume, fuel type, frontal area, drag coefficient and a description of any special components and/or operating procedures. A help sheet with some of the required procedural information is provided in Attachment I.

4.1.1 Install instrumentation specified in section 2.

4.1.2 Install datalogger in the vehicle.

4.1.3 Install driver's aid in vehicle (allows driver to follow the trace) and connect to datalogger if necessary.

4.2 Wind Tunnel personnel are responsible for the vehicle preparation in section 4.2:

4.2.1 Dynamometer Tractive Forces: If not provided on the TestNet Request, calculate the dynamometer tractive force settings per Test Method 02.00-L-401, Chassis Dynamometer Tractive Force Determination using vehicle parameters (weight, Cd, frontal area, and tire size).

4.2.2 Completely drain and then refill fuel tank (as directed below) to 40% of capacity by volume with fuel as specified in 40 CFR 86-113 (ESE-M4C50-E : EEE (Gas programs meeting Tier2/LEVII Evap. Regulations), XE-M4CX617-10A: E10 Fuel (FFV programs meeting Tier2/LEVII Evap. Regulations) , XE-M4CX373-B: E-10 fuel (Gas or FFV programs meeting Tier3/LEVIII Regulations (not requiring Premium Grade fuel)), or XE-M4CX374-B: E-10 fuel (Programs meeting Tier3/LEVIII Regulations that require Premium Grade fuel). The drain and refill event may be recorded using the datalogger to verify thermocouple placement.

- As a reference, the laboratory can choose their preferred method to ensure the fuel tank is drained thoroughly (referencing a site glass, idling the engine to stall, etc.). Please note during engine idle to stall at every key-on cycle: 1) Disengage stop/start by running the vehicle with max A/C with the windows open and by pressing 'stop/start off' button. 2) Disable 'Auto Engine Off' option via cluster.

- The fuel fill should be delivered by a reliable method to ensure that the 40% capacity as specified in the test request is delivered (to the tenth of a gallon accuracy).

- The 40% fuel fill should be completed within 72 total hours prior to the start of the FTTP drive. To enable meeting of this metric, please plan to perform this 40% fill within approximately 15 hours of the start of the 16-hour high temperature soak if possible. Please refer to sections 3.2 and 4.2.5 of this Test Method.
- Once filled, the engine can be started briefly, but should not be run more than one minute to cycle fuel through the vehicle. It is preferred that the engine not be started after the fueling step and a mototruck (or vehicle mover) be utilized to transport the vehicle from the fueling area to the high temperature soak area.

4.2.3 Check tires and pressures in accordance with Test Method 00.00-R-603, Tire Pressure Standards.

4.2.4 For Plug-In Hybrid Vehicles (PHEVs) only, ensure vehicle is in fully charged state then drive the EPA 75. After drive trace has completed, turn off vehicle and do not restart prior to beginning soak. Requestor will specify if the EPA75 step can be skipped and SOC (hybrid battery State-of-Charge) will be set at the start of the FTTP (either via charging or draining the HV battery to align with emissions data).

4.2.5 After the 8-hour chamber pre-soak (reference section 3.2), place the vehicle in the soak chamber for at least 16 hours (but no more than 72 hours) at 36.1 ± 0.5 °C (96.5 ± 0.9 °F) at fuel tank. Ensure under-vehicle air flow by installing a floor fan.

4.2.6 Mark the wind deflector location at approximately a 45° angle from the longitudinal axis and approximately 15 cm (6 inches) horizontally from the B-pillar of the vehicle.

4.2.7 Verify that the wind tunnel hot road surface is functional and install in the test site. Install 3 plates for cars or 4 plates for trucks, additional side plate for Super Duty vehicles with step-side tanks. Please note: Cars are defined as vehicles with a Frontal Area <= 2.468 m^2 or 26.565 ft^2. If possible, store the heated plates in the soak chamber during the 16-hour high temperature soak, to ensure they are at the same temperature as the vehicle. Refer to section 4.2.5.

4.2.8 Set the tunnel environment to 35.0° C (95° F) and 20% Relative Humidity (RH).

4.2.9 Verify the temperature of the tunnel by using a hand-held thermocouple to record the temperature mid-way between the two rear dynamometers and 12 inches above the floor. Do not bring the vehicle into the tunnel until this reading is at least 95°F.

4.2.10 Move the vehicle from the soak chamber to the tunnel test section without breaking soak conditions and without starting the vehicle.

4.2.11 Connect the tunnel supplied speed signal to the datalogger and/or driver's aid in the vehicle.

4.2.12 Configure the WT data acquisition system to record 1Hz data for ambient air temperature, wind speed, humidity, hot road temperature and mats ON/OFF, roadload values, and dynamometer vehicle speed and acceleration. Please include the flag to indicate any dynamometer dropouts.

4.2.13 To improve air flow near the site solar panels, wind flow should be maintained in an idle bypass mode (wind tunnel door closed) during vehicle set up and pre-test operations. Once the test begins, dyno tracking should be turned off (to ensure idle bypass door stays open during idle). Wind speed should never drop below 5 mph during test sequence.

5.0 OPERATION

5.1 If this is a certification test, it must be supervised and/or witnessed by a Certification Engineer from VH&C unless otherwise approved by VH&C. The test must be performed by a certified driver.

5.2 If this is a development test, it must be supervised and/or witnessed by the requesting engineer or by a representative authorized by the requesting engineer. The test may be performed by the development engineer requesting the test or a representative selected by the development engineer.

5.3 Turn on the datalogger within the vehicle. Check the readings for validity.

5.4 Once the vehicle is installed and instrumentation is connected, set the wind tunnel conditions to:

5.4.1 37.8 °C (100 °F) ambient air temperature

5.4.2 Sunload On

5.4.3 57.2 °C (135 °F) hot road temperature (3 plates for cars or 4 plates for trucks, additional side plate for Super Duty vehicles with step-side tanks. Please note: Cars are defined as vehicles with a Frontal Area <= 2.468 m2 or 26.565 ft2).

5.5 Verify the wind tunnel speed signal by motoring the dynamometer to 16 kph (10 mph) and verifying the reading on the datalogger and/or driver's aid. Do not start the vehicle.

5.6 Verify that the average liquid fuel temperature is at least 35.0 °C (95 °F) before beginning the test. If it reads less than 35.0 °C (95 °F), leave the vehicle off and set the windspeed to 100 kph (60 mph) until the temperature reaches the desired level.

5.7 Once the conditions are met, the driver should enter the vehicle and set up for the test.

5.7.1 Turn off auxiliary/rear AC (if available).

5.7.2 Set front AC as follows:

- **For Automatic AC systems**: Activate MAX AC. Do not make any other adjustments after activating "MAX AC"
- **For Manual AC systems**: Set fan/blower speed to highest setting and then activate MAX AC. Do not make any other adjustments after activating "MAX AC"

5.7.3 Place transmission in Drive with Overdrive on (Automatic Transmissions) or in 1st gear (Manual Transmissions)

5.7.4 Verify with the tunnel operator that the ambient conditions are correct.

5.8 Start the tunnel data acquisition recording of the data specified in 4.2.7 and 4.2.8.

5.9 The driver follows the trace as defined in EPA 40 CFR 86.134-96(b).

Note: Vehicle speed must not deviate more than 6.4 kph (4 mph) from the target value for more than 3 seconds.

5.10 At 1371 seconds into the trace, the following actions should be taken by wind tunnel personnel:

5.10.1 Install wind deflectors at location as marked in step 4.2.6.

5.10.2 Turn off the hot roads

5.11 The trace is completed after an elapsed time of 4308 seconds.

6.0 GENERAL INSTRUCTIONS

6.1 Whenever a driver is operating a vehicle inside the tunnel, a portable CO detector must be brought into the vehicle with the driver. A method of communication between the driver and the control room should be used (i.e., a wireless intercom system).

6.2 The test is invalid if any of the following occur:

- If 3 times during the test, vehicle speed deviates more than 6.4 kph (4 mph) from the target value for more than 3 consecutive seconds
- vehicle speed deviates more than 6.4 kph (4 mph) from the target value for more than 15 consecutive seconds
- vapor pressure exceeds 2.5 kPa (10 inches water)

7.0 PRESENTATION OF DATA

7.1 A data file describing the Average Liquid Fuel Temperature vs. Time must be generated.

7.2 A curve describing the Average Liquid Fuel Temperature vs. Time should be generated.

7.3 A curve describing the Vapor Temperature vs. Time should be generated.

8.0 REFERENCES

8.1 40 CFR 86.129-94, 40 CFR 86-113, Road Load Power, test weight, inertia weight class determination, and fuel temperature profile.

8.2 40 CFR 86.134-96(b) Driving Schedule as defined in Running Loss Test.

8.3 Test Method 00.00-R-449, Road-based Fuel Tank Temperature Profile (FTTP) Determination

8.4 Test Method 00.00-R-603, Tire Pressure Standards.

8.5 Test Method 02.00-L-401, Chassis Dynamometer Tractive Force Determination.

8.6 FAP03-015, Control, Calibration, and Maintenance of Measurement and Test Equipment.

8.7 FAP03-179, Developing Corporate Engineering Test Procedures.

9.0 RECORD OF REVISIONS

See metadata field "Review Note".

10.0 ATTACHMENT

I. FTTP ELMS Test Request Help Sheet. Please reference a complete help sheet (ELMS Parameters.docx) at the Certification SharePoint Site:

https://ses.spt.ford.com/sites/VEE/certification/cert_testing/Shared%20Web%20Pages/FTTP_Page.aspx

ATTACHMENT I

FTTP ELMS TEST REQUEST HELP SHEET

(Updated to support Global Wind Tunnel ELMs and the policy of utilizing dual roll dyno capability for FTTP)

The following information has been compiled to assist in completing required fields when requesting an FTTP using the Enhanced Laboratory Management System (ELMS) at the Driveability Test Facility (DTF).

ELMS website: http://www.elmsweb.ford.com/elmsGEN3/default.cfm

⇨ Select "Facility Instances, GWT – Global Wind Tunnels"
⇨ Select "New Request" from the Top Ribbon

Fill out the Basic Questions to Start a New Test Request

Requestor CDSID	:please complete with your information.
Alternate Requestor (Name and Phone)	**Erin Walkowicz (3138056656)** (or current VH&C representative).
Work Task Number	:please complete for your program (Program information will then auto feed).
Functional Organization	Typically Powertrain
Purpose of Test	Regulatory/Homologation
Requestor Not Present?	No (Certification rep will be present to run this test).
Vehicle Build Level	:please complete for your program **Calibration should test VP level unless otherwise approved by Certification**
Driveline Mode for Test	:please complete for your program ***We now run FTTP with dual roll capability.*** • **FWD/RWD/AWD test with the applicable drive wheels. Select FWD/RWD or AWD in ELMs.** • **4x4 (Auto): Vehicle equipped with 4x4 Auto Mode test in 4x4 Auto Mode. Select 4x4 in ELMs.** • **4x4 vehicles without 4x4 Auto Mode test in 4x2 Mode (do not use 4x4 High or 4x4 Low). Select FWD or RWD in ELMs. You will still run on dual dyno rolls.** • **Vehicles should be delivered to DTF with 4x4/AWD driveshafts INSTALLED (do not remove prior to delivery).** • **Vehicle should have all ABS sensors PLUGGED IN prior to delivery.** • **Vehicle will NOT be placed into Dyno Mode for FTTP testing at DTF**

Vehicle Security Level	:please complete for your program
Test Article Availability Date	:please complete for your program **Please note: Provide reasonable date of delivery to DTF (after build and FTTP instrumentation, adding at least 2 weeks for unexpected delays)**
Desired Test Completion Date	:please complete for your program **(Note that Valid FTTP feeds Assessment 3-Day SHED testing requirements by R00 timing.**
Number of Shifts	**1**

Shift Duration (hours)	**8**
Vehicle Input Source	**Vehicle Tag #**. :please complete for your vehicle. All remaining vehicle data will auto fill.
Vehicle Weight (kg)	**Please note: Required for Test!! Should be ETW for your specific vehicle (or ALVW ETW for Super Duty). Please obtain for your program from the VEME Weight Engineering Group. Do NOT use carryover values. Please note that weight is in metric (kilograms).**
Does this vehicle need to be fueled?	**Yes**
Fuel Type	**ESE-M4C50-E : EEE** (Gas programs meeting Tier2/LEVII Evap. Regulations), **XE-M4CX617-10A:** E-10 Fuel (FFV programs meeting Tier2/LEVII Evap. Regulations), **XE-M4CX373-B:** E-10 fuel (Gas or FFV programs meeting Tier3/LEVIII Regulations (not requiring Premium Grade fuel), or **XE-M4CX374-B:** E-10 fuel (Programs meeting Tier3/LEVIII Regulations that require Premium Grade fuel),
How much fuel is required?	***Enter the 40% fill amount (please make sure this is correct for the tank size that you are testing!!). Cert matrix for current programs: Certification SharePoint or contact Fuel Systems (Core: Dawn Woodring) for new programs.***
Test Method	00.00-L-414-FTTP
Instrumentation	Allow to auto fill

Test Temp	(100°F), **37.8°C (ELMS requires metric/°C)**
Soak Required?	**Yes**
Soak Temperature	(97°F), **36.1°C (ELMS requires metric/°C)**
Soak Duration (hrs)	**16**
Altitude (ft)	Leave blank
Relative Humidity (%)	**20%**
Does your testing require Liquid or Skin coolant TCs?	None
Will solars be needed for testing?	**Yes**
Frontal Area (square meters)	:please complete for your program **Please note: Required for Test!! Please obtain for your program from the VEME Aero group. Do NOT use carryover values. Note: Value in metric (m^2).**
Drag Coefficient	:please complete for your program **Please note: Required for Test!! Please obtain for your program from the VEME Aero group. Do NOT use carryover values.**

Throttle Actuator Needed?	**No**
Will you be using MCS1/ATI/CarDaq/MyCanic/ETAS?	**No**
Axle Ratio	:please complete for your program
Load % to Rear	:please complete for your program **Please note: Required for Test!! Please obtain for your program from the VEME Weight Engineering Group. Do NOT use carryover values.**
F0	:skip this question **(unless supplying from a previous test in the SAME WINDTUNNEL that you are scheduled).**
F1	:skip this question **(unless supplying from a previous test in the SAME WINDTUNNEL that you are scheduled).**
F2	:skip this question **(unless supplying from a previous test in the SAME WINDTUNNEL that you are scheduled).**

Do you need trickle chargers on the batteries?	:please complete for your program
Do you need battery blankets?	No
Do you need heated roads? (DTF ONLY)	**YES**
High Speed Nozzle Required?	**NO**
Other special requirements for testing (or in NOTES).	**Please complete with the following comments:** **Heated plates required: 3 for car (frontal area <= 2.468 m2), 4 for truck (please specify for your program. Please also include tire pressure specifications here. Any other instructions, please add here.** **.....** **Please add a note that ABS should be left CONNECTED and 4x4 driveshaft INSTALLED (if applicable).** *(Since we test dual rolls, dyno mode is not necessary (except HEV) and these two items should be specified to avoid confusion in the garage/prep).* **.....** ***Please also deliver the vehicle in this condition.***

PLEASE NOTE:

We now run FTTP with dual roll capability (including AWD, 4x4 Auto Mode). Please see above comments for Driveline Mode to determine the appropriate selection for your vehicle.

Vehicle will NOT be put into dyno mode (to run single roll). Please ensure that AWD/4x4 driveshaft is INSTALLED for test (where applicable) and all ABS sensors are PLUGGED IN prior to delivery to DTF.

Please make Certification aware of any special test hardware (such as neutral override switches, difficulty achieving neutral with a rotary knob) or any other unique program/vehicle nuances.

For reference purposes, the below chart shows how the driveline type will be translated throughout the testing process on the dual roll Wind Tunnel dynamometer:

Vehicle DRIVELINE TYPE	ELMS Driveline Selection (Requestor)	Tractive Force Calculator Driveline Selection (DTF Operator)	DTF Setting for Dyno (DTF Operator)
FWD	FWD	FWD	Front Active, Rear Follow
RWD	RWD	RWD	Rear Active, Front Follow
AWD	AWD	4WD	Both
4x4 AUTO	4x4	4WD	Both
4x4 Manual	FWD or RWD	FWD or RWD	Front or Rear Active, Other Follow

Program	Vehicle Name	ansmissi	Engine	Conv. Dia.	K- Factor	rogram Cod	CFDR	Torque Converter Designation	Part 1 Code			Nominal Torque Ratio	Nominal K	Stall Torque Ratio		Stall Speed RPM@Torque	
														lower	upper	lower	upper
Front Wheel Drive																	
C482 FWD	Escape FHEV	HF45	2.5 L I4	N/A	N/A	GA	2.91	N/A	GA	GA2911		N/A	N/A	N/A	N/A	N/A	N/A
C482 AWD	Escape FHEV	HF55	2.5 L I4	N/A	N/A	AI	3.37	N/A	AI	AI3371		N/A	N/A	N/A	N/A	N/A	N/A
C482 FWD	Escape PHEV	HF55	2.5 L I4	N/A	N/A	AI	3.37	N/A	AI	AI3371		N/A	N/A	N/A	N/A	N/A	N/A
C483 FWD	CORSAIR	8F35	2.0 L GTDI	9.0	236	GM	3.81	K	GM	381	K	1.85	236	1.75	1.95	2180	2560
C483 AWD	CORSAIR	8F35	2.0 L GTDI	9.0	236	GM	3.81	K	GM	381	K	1.85	236	1.75	1.95	2350	2750
C483 AWD	CORSAIR PHEV	HF45	2.5 L I4	N/A	N/A	GA	2.91	N/A	GA	GA2911		N/A	N/A	N/A	N/A	N/A	N/A
CDX707	Nautilus	8F35	2.0 L GTDI	9.0	236	GM	3.81	R	GM	381	R	1.85	236	1.75	1.95	2350	2750
CDX707	Nautilus	HF55	2.0 L GTDI	N/A	N/A	AI	3.37	K	AI	AI3371		N/A	N/A	N/A	N/A	N/A	N/A
Rear Wheel Drive																	
P708	Superduty	10R140	6.7L	12.25"	112K	ES		C	ES	C		2.04	112	1.94	2.14	1970	2200
P708	Superduty	10R140	7.3L	12.25"	112K	ES		C	ES	C		2.04	112	1.94	2.14	1970	2200
P708	Superduty	10R100	6.8L	10 1/4"	163K	GF		A	GF	A		1.82	163	1.72	1.92	1970	2200
VN127/H567/F5X	Econoline/Med Dty/Stripped chassis	6R140	7.3L	12"	129K	CP		B	CP	B		1.98	127.7	1.88	2.08	2200	2600
P702	F150	10R80	2.7L/3.5L	10 1/4"	163K	EU		A	EU	A		1.82	164	1.72	1.92	3478	3845
P702	F150	10R80	5.0L	10 1/4"	163K	EU		J	EU	J		1.82	164	1.72	1.92	3478	3845
P702	F150	10R80	5.2L SC	10 1/4"	163K	EU		P	EU	P		1.82	164	1.72	1.92		
P702	F150 FHEV	0R80MH	3.5L	10 1/4"	162K	GC		C	GC	C		1.81	162	1.72	1.92	4192	4634
U71X	Expedition/ Navigator	10R80	3.5L	10 1/4"	164K	EU		A	EU	A		1.82	164	1.72	1.92	3478	3845
S650	Mustang	10R80	2.3L	9 3/8"	198K	EU		B	EU	B		2.09	198	1.98	2.19	3500	3820
S650	Mustang	10R80	5.0L	9 3/8"	177K	EU		C	EU	C		2.05	177	1.95	2.15	3225	3650
V363	Transit	10R80	.5L GTDI/PF	10 1/4"	164K	EU		A	EU	A		1.82	164	1.72	1.92	3478	3845
U625	Explorer - Police	10R80	3.3L	10 1/4"	164K	EU		A	EU	A		1.82	164	1.72	1.92	2332	2593
U625	plorer - Police FH	0R80MH	3.3L	9-3/8"	177K	GB		A	GB	A		2.05	177	1.95	2.15	3225	3650
U625	Explorer - Police	10R80	3L	10 1/4"	164K	EU		H	EU	H		1.82	164	1.73	1.91	3118	3458
U625/U611	Explorer/Aviator	10R60	3L	10-1/4"	163K	ET		B	ET	B		1.82	164	1.73	1.91	3118	3458
U611	Aviator PHEV	0R80MH	3L	9-3/8"	177K	GB		B	GB	B		2.05	177	1.95	2.15	4088	4518
U625	Explorer	10R60	3.3L	10-1/4"	163K	ET		C	ET	C		1.82	164	1.73	1.91	2332	2593
U725	Bronco	10R60	2.3L GTDI	9-3/8"	220K	ET		A	ET	A		1.83	220	1.74	1.92	3978	4348
U725	Bronco	10R60	2.7L GTDI	10-1/4"	163K	ET		D	ET	D		1.82	164	1.73	1.91	2332	2593
U725	Bronco	10R60	3.0L GTDI	10-1/4"	163K	ET		D	ET	D		1.82	164	1.73	1.91	2332	2593
P703N	Ranger	10R60	2.3L GTDI	9-3/8"	220K	ET		A	ET	A		1.83	220	1.74	1.92	3978	4348
P703N	Ranger	10R60	2.7L/3L	10-1/4"	163K	ET		D	ET	D		1.82	164	1.73	1.91	3118	3458
U625	Explorer	10R60	2.3L	9-3/8"	220K	ET		E	ET	E		1.83	220	1.74	1.92	3978	4348

2025 MY
Emission Certification
Transmission Identification Chart

Program	Vehicle Name	Transmission	Engine	Conv. Dia.	K- Factor	Engine Emission Code	GEAR	Torque Converter Designation	Part 1 Code			Nominal Torque Ratio	Nominal K	Stall Torque Ratio		Stall Speed RPM@Torque	
Front Wheel Drive														lower	upper	lower	upper
CX482 FWD	Escape	8F35	1.5L GTDI	9	268	GM	3.81	S	GM	381	S	1.68	268	1.58	1.78	2790	3290
CX482 AWD	Escape	8F35	1.5L GTDI	9	268	GM	3.81	S	GM	381	S	1.68	268	1.58	1.78	2790	3290
CX482 AWD	Escape	8F35	2.0 L GTDI	9	236	GM	3.47	K	GM	347	K	1.85	236	1.75	1.95	2460	2880
CX483 FWD	Corsair	8F35	2.0 L GTDI	9	236	GM	3.81	K	GM	381	K	1.85	236	1.75	1.95	2180	2560
CX483 AWD	Corsair	8F35	2.0 L GTDI	9	236	GM	3.81	K	GM	381	K	1.85	236	1.75	1.95	2350	2750
P758 FWD	Maverick	8F35	2.0 L GTDI	9	236	GM	3.63	K	GM	363	K	1.85	236	1.75	1.95	2350	2750
P758 AWD	Maverick	8F35	2.0 L GTDI	9	236	GM	3.81	K	GM	381	K	1.85	236	1.75	1.95	2350	2750
CX430 AWD	Bronco Sport	8F35	2.0 L GTDI	9	236	GM	3.81	K	GM	381	K	1.85	236	1.75	1.95	2350	2750
CX430 AWD	Bronco Sport	8F35	1.5L GTDI	9	268	GM	3.81	S	GM	381	S	1.68	268	1.58	1.78	2790	3290
P758 FWD	Maverick	HF55	2.5 L I4	N/A	N/A	AI	3.368	N/A	AI			N/A	N/A	N/A	N/A	N/A	N/A
P758 AWD	Maverick	HF55	2.5 L I4	N/A	N/A	AI	3.368	N/A	AI			N/A	N/A	N/A	N/A	N/A	N/A

2025 MY
Emission Certification
Transmission Identification Chart

Program	Vehicle Name	Transmission	Engine	Conv. Dia.	K- Factor	Transmission Code	GEAR	Torque Converter Designation	Part 1 Code			Nominal Torque Ratio	Nominal K	Stall Torque Ratio		Stall Speed RPM@Torque	
C727	Mustang Mach-E RWD	BEV	0.0L	NA	NA	WA		NA	WA			NA	NA	NA	NA	NA	NA
C727	Mustang Mach-E AWD	BEV	0.0L	NA	NA	WA		NA	WA			NA	NA	NA	NA	NA	NA
C727	Mustang Mach-E GT AWD	BEV	0.0L	NA	NA	WA		NA	WA			NA	NA	NA	NA	NA	NA
P702	F150 BEV AWD PDU	BEV	0.0L	NA	NA	AA		NA	AA			NA	NA	NA	NA	NA	NA
P702	F150 BEV AWD SDU	BEV	0.0L	NA	NA	AA		NA	AA			NA	NA	NA	NA	NA	NA
V363	Transit BEV	BEV	0.0L	NA	NA	WA		NA	WA			NA	NA	NA	NA	NA	NA

2026 MY NA MANUAL TRANSMISSION SUMMARY

Part 1 Code	Model	No. of Forward Gears	Overdrive	Transaxle Final Drive Ratio	Gear Ratios	Fluid Type	Factory Fill	Application(s)
AX324N	MT82	6	Yes	N/A	3.24 / 2.10 / 1.42 / 1.00 / 0.81 / 0.62 2.94 (reverse)	WSS-M2C200-D2	2.6L	5.0L V8 Mustang S650
EX325N	TREMEC TR3160	6	Yes	N/A	3.253 / 2.233 / 1.611 / 1.243 / 1.00 / 0.629 / 2.955 (reverse)	Dexron VI original / Mercon LV service	3.1L w/cooler	S650 Mustang Feature Car
GQ428N	MT88	7	Yes	N/A	6.588 / 4.283 / 2.365 / 1.453 / 1.000 / 0.776 / 0646 / 5.625 (reverse)	WSS-M2C200-E1	2.3L	U725 Bronco
GH	TREMEC TR9070	7	Yes	N/A	3.137/ 2.046 / 1.425 / 1.099 / 0.863 / 0.680 / 0.558 / 2.758 (reverse)	Fuchs Titan EG FFL-4 TREMEC (WSS-M2C949-A)	9.05 L	S650 Mustang Darkhorse SC

2026 10R140 AUTOMATIC TRANSMISSION SUMMARY (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
GG P708 7.3L Gas Engine	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.615 2nd 2.919 3rd 2.132 4th 1.773 5th 1.519 6th 1.277 7th 1.000 8th 0.851 9th 0.687 10th 0.632 R - 4.695	a/	12-1/4”	1.97 +/- 0.1	calibration dependent and there are truncation values at IPS for the axle
GG P708 6.7L Diesel Engine H567 6.7L Diesel Engine	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.615 2nd 2.919 3rd 2.132 4th 1.773 5th 1.519 6th 1.277 7th 1.000 8th 0.851 9th 0.687 10th 0.632 R - 4.695	a/	12-1/4”	1.97 +/- 0.1	calibration dependent and there are truncation values at IPS for the axle

a/ The transmission shift schedule is contained within the Powertrain Control Module (PCM) for gas engine vehicles and the Transmission Control Module (TCM) for diesel engine vehicles.

General Description: The 10R140 is an electronically controlled, fully automatic 10 speed overdrive transmission with input through a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transmission application.

Special Features: The torque converter includes unique hardware which enables the PCM to electronically control clutch apply and release. The powertrain calibration determines the operation of this feature. The Tow/Haul Mode (THM) Switch is an On/Off switch located on the end of the transmission range selector lever or on the dash, depending on vehicle application. It allows the operator to select a mode that changes the transmission operation for use when driving with a heavy load, trailer towing or when additional engine braking is required. The switch and control logic are designed so that the vehicle always powers up with the THM feature disabled. A Tow/Haul Mode Indicator Lamp gives visual indication when the THM feature is selected.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to a specific powertrain calibration and may lockup in all ten (10) forward gears. The apply conditions are contingent upon the following:

- Throttle position.
- Transmission has warmed up sufficiently.
- Transmission range selector lever is not in reverse.

Revised: 03-20-25

2026 10R100 AUTOMATIC TRANSMISSION SUMMARY (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
GF P708 6.8L/7.3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696 2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle

a/ The transmission shift schedule is contained within the Powertrain Control Module (PCM) for gas engine vehicles and the Transmission Control Module (TCM) for diesel engine vehicles.

General Description: The 10R100 is an electronically controlled, fully automatic 10 speed overdrive transmission with input through a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transmission application.

Special Features: The torque converter includes unique hardware which enables the PCM to electronically control clutch apply and release. The powertrain calibration determines the operation of this feature. The Tow/Haul Mode (THM) Switch is an On/Off switch located on the end of the transmission range selector lever or on the dash, depending on vehicle application. It allows the operator to select a mode that changes the transmission operation for use when driving with a heavy load, trailer towing or when additional engine braking is required. The switch and control logic are designed so that the vehicle always powers up with the THM feature disabled. A Tow/Haul Mode Indicator Lamp gives visual indication when the THM feature is selected.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to a specific powertrain calibration and may lockup in all ten (10) forward gears. The apply conditions are contingent upon the following:

- Throttle position.
- Transmission has warmed up sufficiently.
- Transmission range selector lever is not in reverse.

Revised: 3-20-25

2026 10R80 AUTOMATIC TRANSMISSION SUMMARY (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
EU P702 2.7L/3.5L, U71X 3.5L V363 3.5L, U625 3.3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696 2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle
EU P702 5L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696 2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle
EU S650 2.3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696	a/	9-3/8”	2.09	calibration dependent and there are truncation values at IPS for the axle

				2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866				
EU S650 5.0L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696 2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866	a/	9-3/8”	2.05	calibration dependent and there are truncation values at IPS for the axle
EU U625 3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.6957 2nd 2.9851 3rd 2.1488 4th 1.7690 5th 1.5209 6th 1.2755 7th 1.0000 8th 0.8535 9th 0.6890 10th 0.6357	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle

				R - 4.8854				
EU P702 5.2L SC Carnivore	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.6957 2nd 2.9851 3rd 2.1488 4th 1.7690 5th 1.5209 6th 1.2755 7th 1.0000 8th 0.8535 9th 0.6890 10th 0.6357 R - 4.8854	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle

a/ The transmission shift schedule is contained within the Powertrain Control Module (PCM) for gas engine vehicles and the Transmission Control Module (TCM) for diesel engine vehicles.

General Description: The 10R80 is an electronically controlled, fully automatic 10 speed overdrive transmission with input through a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transmission application.

Special Features: The torque converter includes unique hardware which enables the PCM to electronically control clutch apply and release. The powertrain calibration determines the operation of this feature. The Tow/Haul Mode (THM) Switch is an On/Off switch located on the end of the transmission range selector lever or on the dash, depending on vehicle application. It allows the operator to select a mode that changes the transmission operation for use when driving with a heavy load, trailer towing or when additional engine braking is required. The switch and control logic are designed so that the vehicle always powers up with the THM feature disabled. A Tow/Haul Mode Indicator Lamp gives visual indication when the THM feature is selected.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to a specific powertrain calibration and may lockup in all ten (10) forward gears. The apply conditions are contingent upon the following:

- Throttle position.
- Transmission has warmed up sufficiently.
- Transmission range selector lever is not in reverse.

Revised: 3/20/25

2026 10R80 MHT AUTOMATIC TRANSMISSION SUMMARY (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
GC P702 3.5L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696 2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866	a/	10-1/4”	1.81	calibration dependent and there are truncation values at IPS for the axle
GB U625 3.3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.696 2nd 2.985 3rd 2.146 4th 1.769 5th 1.520 6th 1.275 7th 1.000 8th 0.854 9th 0.689 10th 0.636 R - 4.866	a/	10-1/4”	1.90	calibration dependent and there are truncation values at IPS for the axle

a/ The transmission shift schedule is contained within the Powertrain Control Module (PCM) for gas engine vehicles and the Transmission Control Module (TCM) for diesel engine vehicles.

General Description: The 10R80 MHT is an electronically controlled, fully automatic 10 speed overdrive transmission containing a high voltage electric machine (Motor/Generator), engine disconnect clutch and a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which

transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transmission application.

Special Features: The torque converter includes unique hardware which enables the PCM to electronically control clutch apply and release. The powertrain calibration determines the operation of this feature. The Tow/Haul Mode (THM) Switch is an On/Off switch located on the end of the transmission range selector lever or on the dash, depending on vehicle application. It allows the operator to select a mode that changes the transmission operation for use when driving with a heavy load, trailer towing or when additional engine braking is required. The switch and control logic are designed so that the vehicle always powers up with the THM feature disabled. A Tow/Haul Mode Indicator Lamp gives visual indication when the THM feature is selected. The Motor/Generator provides torque to the transmission input through the torque converter and provides Brake Regeneration Power recovery.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to a specific powertrain calibration and may lockup in all ten (10) forward gears. The apply conditions are contingent upon the following:

- Throttle position.
- Transmission has warmed up sufficiently.
- Transmission range selector lever is not in reverse.

Revised: 03/20/25

2026 10R60 AUTOMATIC TRANSMISSION SUMMARY (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
ET U725N 2.3L P703N 2.3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.7143 2nd 2.9969 3rd 2.1488 4th 1.7690 5th 1.5209 6th 1.2755 7th 1.000 8th 0.8535 9th 0.6890 10th 0.6357 R - 4.8854	a/	9-3/8	1.83	calibration dependent and there are truncation values at IPS for the axle
ET U611N 3L U625N 3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.7143 2nd 2.9969 3rd 2.1488 4th 1.7690 5th 1.5209 6th 1.2755 7th 1.000 8th 0.8535 9th 0.6890 10th 0.6357 R - 4.8854	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle
ET U625N 2.3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.7143	a/	9-3/8	1.83	calibration dependent and there are truncation values at IPS for the axle

				2nd 2.9969 3rd 2.1488 4th 1.7690 5th 1.5209 6th 1.2755 7th 1.000 8th 0.8535 9th 0.6890 10th 0.6357 R - 4.8854				
ET U725N 2.7L/3L P703N 2.7L/3L	Automatic	10	Yes	GEARBOX Ratio Steps 1st 4.7143 2nd 2.9969 3rd 2.1488 4th 1.7690 5th 1.5209 6th 1.2755 7th 1.000 8th 0.8535 9th 0.6890 10th 0.6357 R - 4.8854	a/	10-1/4”	1.82	calibration dependent and there are truncation values at IPS for the axle

a/ The transmission shift schedule is contained within the Powertrain Control Module (PCM) for gas engine vehicles and the Transmission Control Module (TCM) for diesel engine vehicles.

General Description: The 10R60 is an electronically controlled, fully automatic 10 speed overdrive transmission with input through a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transmission application.

Special Features: The torque converter includes unique hardware which enables the PCM to electronically control clutch apply and release. The powertrain calibration determines the operation of this feature. The Tow/Haul Mode (THM) Switch is an On/Off switch located on the end of the transmission range selector lever or on the dash, depending on vehicle application. It allows the operator to select a mode that changes the transmission operation for use when driving with a heavy load, trailer towing or when additional engine braking is required. The switch and control logic are designed so that the vehicle always powers up with the THM feature disabled. A Tow/Haul Mode Indicator Lamp gives visual indication when the THM feature is selected.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to a specific powertrain calibration and may lockup in all ten (10) forward gears. The apply conditions are contingent upon the following:

- Throttle position.
- Transmission has warmed up sufficiently.
- Transmission range selector lever is not in reverse.

Revised: 3-20-25

2026 HF55 HYBRID AUTOMATIC TRANSMISSION SUMMARY

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
AI	eCVT	Infinite	No	N/A	a/	N/A	N/A	N/A

a/ The eCVT does not explicitly command specific gear ratios. It uses torque based control (motor control schedule) which is contained within the Hybrid Powertrain Control Module (HPCM).
b/ The eCVT does not use a torque converter.

General Description: The HF55 is an electronically controlled hybrid Powersplit transaxle containing two high voltage electric machines. The first electric machine (Generator) controls the engine speed and torque levels through a planetary gear set. The second electric machine (Traction Motor) puts torque to the wheels through a fixed gear ratio.

Special Features: The Traction Motor also provides Brake Regeneration Power recovery. New TSC (transmission system characterization) process requires VO to flash vehicle HPCM with a unique TRID data provided by the transmission assembly plant (known as Resolver Offset). All models are equipped with an electric pump for transmission fluid. This pump is speed controlled through the HPCM.

Initial: 04/01/2025 // Colin HU

2026 HF45 HYBRID AUTOMATIC TRANSMISSION SUMMARY

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
GA	eCVT	Infinite	No	N/A	a/	N/A	N/A	N/A

a/ The eCVT does not explicitly command specific gear ratios. It uses torque based control (motor control schedule) which is contained within the Hybrid Powertrain Control Module (HPCM).
b/ The eCVT does not use a torque converter.

General Description: The HF45 is an electronically controlled hybrid Powersplit transaxle containing two high voltage electric machines. The first electric machine (Generator) controls the engine speed and torque levels through a planetary gear set. The second electric machine (Traction Motor) puts torque to the wheels through a fixed gear ratio.

Special Features: The Traction Motor also provides Brake Regeneration Power recovery. New TSC (transmission system characterization) process requires VO to flash vehicle HPCM with a unique TRID data provided by the transmission assembly plant (known as Resolver Offset). Some models also are equipped with an external electric pump for Plug-In Hybrid Electric Vehicle (PHEV) applications. This pump operates only when in pure electric drive mode (engine off) and is speed controlled through the HPCM.

Initial: 04/01/2025 // Colin HU

2026 6R140 AUTOMATIC TRANSMISSION SUMMARY (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transmission Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
CP/B 7.3L Econoline/ Med Dty/ Stripped Chassis	Automatic	6	Yes	1st 3.974 2nd 2.318 3rd 1.516 4th 1.149 5th 0.858 6th 0.674 Rev -3.128	a/	12	1.88 - 2.08	2200 – 2600 rpm @ 350 ft-lb

a/ The transmission shift schedule is contained within the Powertrain Control Module (PCM) for gas engine vehicles and the Transmission Control Module (TCM) for diesel engine vehicles.

General Description: The 6R140 is an electronically controlled, fully automatic 6 speed overdrive transmission with input through a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transmission application.

Special Features: The torque converter includes unique hardware which enables the PCM to electronically control clutch apply and release. The powertrain calibration determines the operation of this feature. The Tow/Haul Mode (THM) Switch is an On/Off switch located on the end of the transmission range selector lever or on the dash, depending on vehicle application. It allows the operator to select a mode that changes the transmission operation for use when driving with a heavy load, trailer towing or when additional engine braking is required. The switch and control logic are designed so that the vehicle always powers up with the THM feature disabled. A Tow/Haul Mode Indicator Lamp gives visual indication when the THM feature is selected.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to a specific powertrain calibration and may lockup in all six (6) forward gears. The apply conditions are contingent upon the following:

- Throttle position.
- Transmission has warmed up sufficiently.
- Transmission range selector lever is not in reverse.

Revised: 3-20-25

2026 MY 8F35 AUTOMATIC TRANSAXLE SUMMARY North America (Index Reference 12.03.01.00)

A/T Code	Class	No. of Forward Gears	Overdrive	Gear Ratios	Transaxle Shift Schedule	Torque Converter Characteristics		
						Size (in.)	Stall Torque Ratio	Stall Speed RPM @ Torque (lb.ft.)
GM381S	AUTOMATIC	8	YES	1st 4.689	a/	9.0	1.58 – 1.78	2790 - 3290
GM381K	AUTOMATIC	8	YES	2nd 3.306	a/	9.0	1.75 - 1.95	2180 - 2750
GM347K	AUTOMATIC	8	YES	3rd 3.012	a/	9.0	1.75 – 1.95	2460 - 2880
GM363K	AUTOMATIC	8	YES	4th 1.923	a/	9.0	1.75 – 1.95	2350 - 2750
GM381R	AUTOMATIC	8	YES	5th 1.446	a/	9.0	1.75 – 1.95	2350 - 2750
				6th 1				
				7th 0.747				
				8th 0.617				
				REV – 2.96				

a/ The transaxle shift schedule is contained within the Powertrain Control Module (PCM).

Updated: 1APR2025

General Description: The 8F35/40 is an electronically controlled, fully automatic 8 speed overdrive transaxle with input through a two phase, single stage torque converter. The torque converter incorporates an internal friction clutch which transmits engine torque mechanically when applied. The shift points and converter clutch application are a function of throttle position and vehicle speed. Each powertrain calibration contains the individual shift points for the corresponding transaxle application. Note: Some vehicles (e.g. C519 ST, P758 Lobo) are calibrated as 7 speed transaxles, in these instances 2nd gear ratio is skipped.

Special Features: The PCM electronically controls The Torque Converter Clutch apply and release. The powertrain calibration determines the operation of this feature. Vehicles with SelectShift (SST) permit manual operation of the transmission. A Multi-function Warning Lamp gives visual indication when a Transaxle Diagnostic Trouble Code(s) has been stored. Both lamps are located on the instrument cluster.

Torque Converter Operation: The application of the converter clutch is scheduled electronically according to the powertrain calibration. The apply conditions are contingent upon the following:

- Throttle position is above a closed throttle breakpoint.
- Throttle position is not changing rapidly.
- Transaxle has warmed up sufficiently.
- Transaxle range selector lever is not in reverse or manual low.
- Transaxle is not operating in first gear
- Transaxle is above a calibratable speed ratio

ETHANOL FFV CERTIFICATION VEHICLE "SIMPLIFIED" C-PREP PROCEDURE

SPECIAL PREP CYCLE TO ADAPT A VEHICLE TO A NEW FUEL TYPE (WITH DIFFERENT ETHANOL CONTENT) PRIOR TO THE NEXT TEST PROCEDURE

1. **KEY MUST BE OFF >** DRAIN FUEL TANK TO EMPTY
2. START THE ENGINE AND IDLE FOR **60** SECONDS > **TURN KEY OFF**
3. **KEY MUST BE OFF >** ADD **45%** FILL OF THE SPECIFIED TEST FUEL (45% = _____ GAL.) (FUEL CODE _____)
4. **CONDUCT SINGLE HIGHWAY CYCLE** > **TURN KEY OFF.**
5. **LEAVE KEY OFF FOR 60 SECONDS.**
6. **CONDUCT SINGLE HIGHWAY CYCLE.**

In addition to the "Simplified" C-Prep steps shown above, the following modification will be made to all FFV emissions test procedures:

- The initial drain and 40% fill will be included for all emissions tests (even in cases where the regulations allow for waiver of the initial drain and fill). This requirement is being added to allow the official FTP to represent a typical start-up condition where alcohol learning has completed following a refueling event.

Ford Motor Company
2026 Model Year Common Section Application

12.04.02.05 – **SHED Calibration**

• Please refer to the letter with subject "Approval to Use CARB – Specified Evaporative Emission Calibration Procedures" from Dave Kulp (Ford Motor Company) to Marty Reineman (EPA) dated December 19, 2002.

12.04.02.06 – **Road-speed modulated fan for testing**

• The Part 1066 Regulations allow the use of the Road Speed Modulated fan for all test cycles, and Ford is using this option for certification of select vehicles.

Special PCM Reflash Preconditioning Procedure

The *Adaptive Learning Cycle (ALC*) is conducted to ensure mature and stable keep alive memory (KAM) which allows the emissions control systems to respond as they would under normal operation. The ALC is to be used after any recalibration, PCM replacement, or loss of power to the PCM. It may also be used to condition test vehicles that have not been operated for extended periods of time, to ensure the vehicle is in a representative state for testing. The cycle consists of the following elements:

The ALC consists of the following:

- 2 x Highway cycle (no sampling)
- US06 drive cycle* (no sampling)
- EPA 74 drive cycle (no sampling)

    * For 10K-14K GVWR vehicles, the US06 is replaced with an LA92 drive cycle or an EPA 74 drive cycle.

These drive cycles are conducted for transmission and fuel control adaptive learning in the conditions where the vehicle will be tested. This procedure will ensure the vehicle is in a production-representative state for further testing.

Additional Mileage Accumulation/Maintenance to Ensure Representativeness of EDVs
(For EDVs with extended periods of vehicle inactivity)

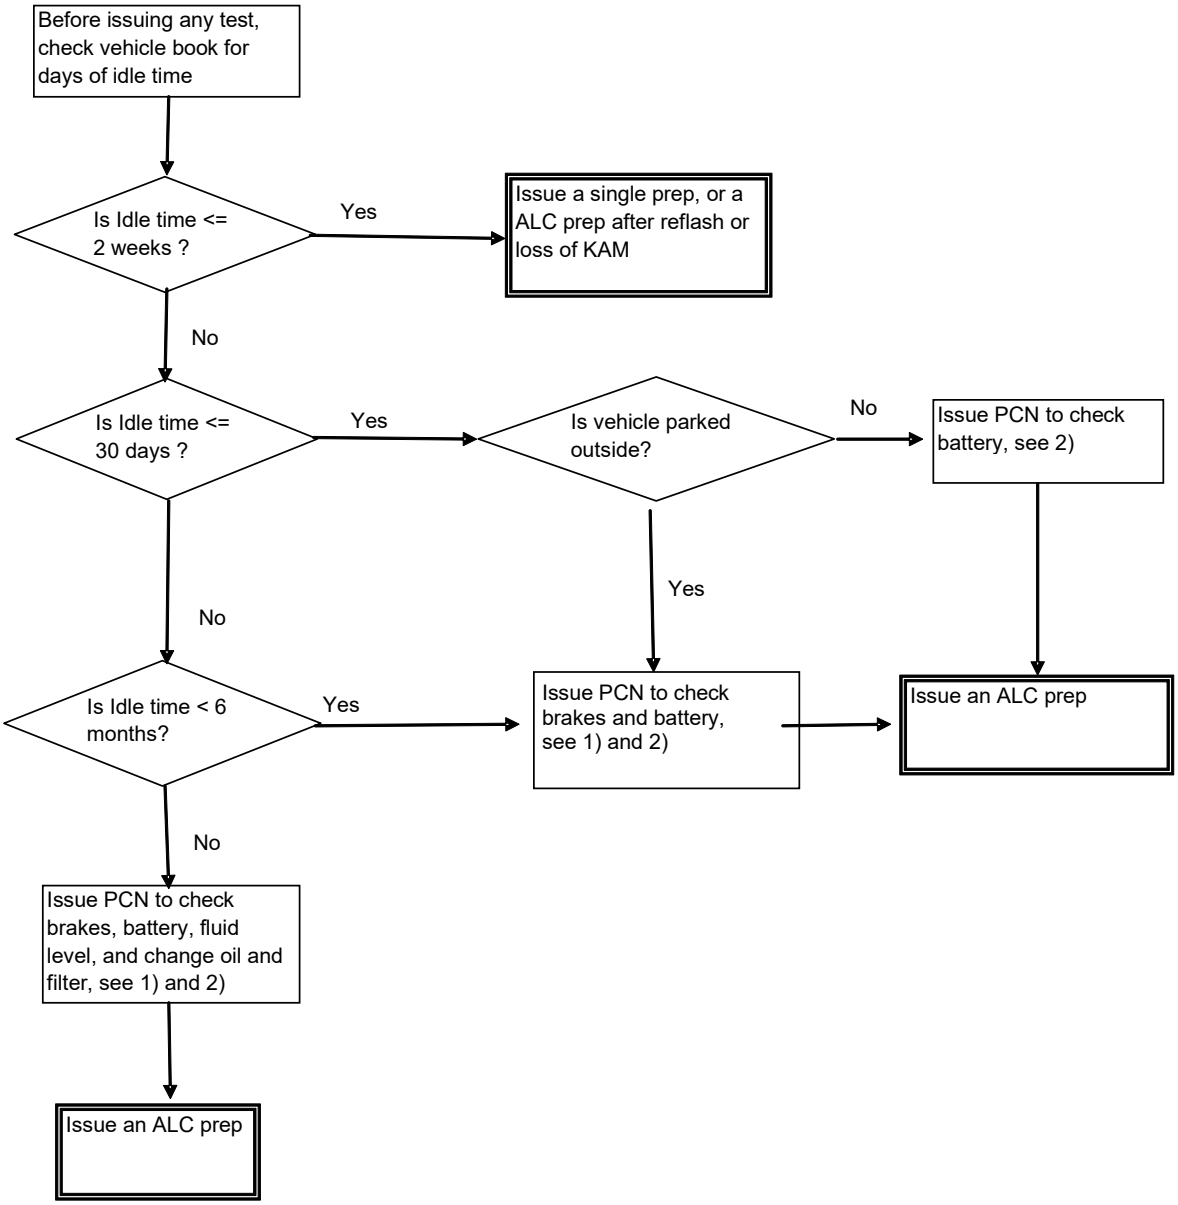
Under normal circumstances, certification vehicles undergoing testing are not expected to be inactive for long periods of time. Such vehicles are representative of real world, in-use conditions, so no additional mileage accumulation, beyond that conducted for initial vehicle break-in, is needed to ensure vehicle emissions stability and in-use representativeness.

However, there are occasions when vehicles are not actively tested for extended periods of time (weeks/months), for instance, when waiting for new calibrations or component updates, or when being reconfigured to represent a new model year vehicle. During periods of extended inactivity vehicles are typically parked outside in a parking structure or an impound lot. The inactivity period, coupled with draws on batteries of these vehicles by frequent use of key fobs in the parking lot, may cause battery voltages to drop too low to maintain Keep-Alive Memory (KAM) and PCM functionality. In addition, with uncontrollable weather conditions, brake, tires, and other component functions could be compromised. For the above reasons, it is difficult to ensure these vehicles are in a condition representative of in-use, and/or whether KAM on these vehicles has been maintained. For such vehicles, additional mileage accumulation and/or maintenance may be required to address the unique situations which occur during the certification process, but are not common in-use.

Additional mileage accumulation and maintenance are allowed and justified in the CFR 40 Part 86.1830-01 "Acceptance of vehicle for emissions testing", and CFR 40 Part 86.1831-01 "Mileage accumulation requirement for test vehicle":

- 86.1830-01 (c) (1), "All EDV's shall have at least the minimum number of miles accumulated to achieve stabilized emissions results…"
- 86.1830-01 (c) (2), "…manufacturer may alter any emission data vehicle… in lieu of building a new test vehicle providing that the modification will not impact the representativeness of vehicle's test results. Manufacturer shall use good engineering judgment in making such determinations."
- 86.1830-01 (c) (3), "Components used to reconfigure EDV's under the provisions of paragraph (c)(2) of this section shall be appropriately aged if necessary to achieve representative emission results. Manufacturer shall determine the need for component aging and the type and amount of aging required using good engineering judgment."
- 86.1831-01 (b) (2), "The manufacturer may use an alternative mileage accumulation method providing the form and extent of the service accumulation represents normal driving patterns for that vehicle, the method is consistent with good engineering judgment and the method is described in the application for certification."

Typical additional mileage accumulation and maintenance actions are described in the flow chart (attachment). For vehicles that are parked for weeks, the battery's state of charge is checked using a battery tester e.g. Micro 490 Digital Battery Analyzer, recommended by Ford in its Service Manual used by the dealerships. The battery shall be replaced or charged as needed to ensure adequate/representative state of charge. The brakes are also checked and maintained to ensure safety and representative function. For vehicles inactive longer than 6 months, additional maintenance such as filter and oil change is performed as prescribed via Ford Service Manuals. As documented in the flow-chart, these actions will be followed by the completion of a vehicle drive cycle called Adaptive Learning Cycle (ALC) to ensure the KAM is relearned and other component functions are stabilized to a condition representative of in-use. The ALC is also described in the Ford's Common Section of the Application 12.04.02.08.



Note:
1) Brakes - repair/ replace as required
2) Battery - Use battery tester such as Micro 490 Digital Battery Analyzer to check battery SOC. Charge as needed

Ford Mileage Accumulation Option, for Battery Electric Vehicles

On March 19, 2021, Ford has received confirmation from EPA that we are eligible under 86.1831-01(b)(2) to run the MCT for the second 1,000 mile segment of a Batter Electric Vehicles mileage accumulation process. In addition, Ford will ensure BEV EDV/FEDVs accumulate at least 2000 miles to achieve stabilization. In the future, if we have data to demonstrate stabilization occurs at a lower odometer on certain BEVs, we could pursue that at that time, but have now no plans to do so.

For the 2000+ mile stabilization, Ford plans to accumulate at least 1000 miles over the SRC. Then for the balance of mileage accumulation, we would accumulate mileage either via SRC or MCT or a combination thereof. At this time we plan to use five MCTs after 1000 miles of SRC mileage accumulation to accomplish the 2000+ miles of mileage accumulation.

Front

Activating DYNO MODE Automatic Transmission DTM001

- Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

w/in 10 sec

Full Depress Brake Pedal and release

Full Depress Accel Pedal and release

Full Depress and hold Accel Pedal and Brake Pedal

w/in 20 sec

PRNDL

Switch gear selector from Park to Reverse and back to Park 6 times

PRNDL (ABS)

DYNO Mode Active

ABS Light should be on or flashing

Release pedals.

The following must occur before every start event.

- **Key vehicle to accessory mode**
- **Wait 10 seconds**
- **Once ABS light is on or flashing start vehicle**

Version4

Back

Things to consider- Please read-NH

- Best practice to pull passenger seat belt over to driver's side clasp for driver comfort.

Front

Activating DYNO MODE Manual Transmission DTM002

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off

For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

w/in 10 sec

Full Depress Brake Pedal and release

Full Depress Clutch Pedal and release

Full Depress and hold Brake and Clutch Pedals

w/in 20 sec

Switch gear selector from Neutral to Reverse and back to Neutral 6 times

DYNO Mode Active

ABS Light should be on or flashing

Release pedals.

The following must occur before every start event.

- **Key vehicle to accessory mode**
- **Wait 10 seconds**
- **Once ABS light is on or flashing start vehicle**

Version4

Back

Things to consider- Please read-NH

- Best practice to pull passenger seat belt over to driver's side clasp for driver comfort.

Front

Activating Neutral Hold DTM003

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button



Full Depress Accel Pedal and Brake Pedal

P R N D L

- For Piano style shifter- Press the "N" button twice
- For Rotary dial shifter- Rotate the PRNDL to neutral then Push the center button twice
- For Other Electronic gear shifters - Place in neutral then press 'S', 'M', or 'L' (on top interface) twice.

P R N D L

Neutral Hold Mode Active

Neutral should be flashing on gear selector now

Release pedals.

Key should be turned off once mode is entered to preserve battery SOC. When moving or centering is complete, apply brake and shift back to park. This will exit the mode.

Version4

Front

Activating Neutral hold MPR DTM003-B

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive.

Module Sleep

- **Fasten Driver seatbelt**
- Enter vehicle and close door; re-open and close door.
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button



Full Depress Accel Pedal and Brake Pedal

P R N D L

- For Piano style shifter- Press the "N" button twice
- For Rotary dial shifter- Rotate the PRNDL to neutral then Push the center button twice
- For mono stable shifters (always return to home position) press neutral twice
- For Other Electronic gear shifters - Place in neutral then press 'S', 'M', or 'L' (on top interface) twice.

P R N D L

Neutral Hold Mode Active

Neutral should be flashing on gear selector now

Release pedals.

Pull the MPR until it locks into place and release it. The cable should stay in place and "N" should flash on the shifter dial. If "P" flashes instead, do not proceed and redo the procedure. Wait 30 seconds to verify cluster continues to indicate N.

Key should be turned off once mode is entered to preserve battery SOC. When moving or centering is complete, apply brake and shift back to park. This will exit the mode. The MPR must be released and shifter moved back to park when finished otherwise a battery drain will occur

Version 4

Back

Things to consider- Please read-NH

- If not driving vehicle on the road, Best practice to pull passenger seat belt over to driver's side clasp for driver comfort on Dyno.
- Neutral hold measure of success is a flashing “N” on the gear selector. This may be only a couple of flashes then go solid. If unsure go to park and back to Neutral and watch for flashes.
- When using Neutral hold, a message will appear on instrument panel. Select “OK” on steering wheel spoke for related message for staying in Neutral.
- For Neutral hold with MPR, the order of steps is critical. When taking out of the mode the MPR lever must be released before shifting back to park.







E-Shifter Styles





Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral

PRNDL

19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Brake/Park

PRNDL

Front

Activating COASTDOWN MODE (CDM) with Roll Method DTM004

- Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- Perform this procedure before warm up when performing a DCD
- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive. Aside from holding accelerator pedal down for 10 seconds, do not pause once activating Accessory Mode. A full 10 seconds is needed, if short will not work.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate **Accessory Mode**
Key-On / Engine-Off
For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

within 5 sec

Full Depress Accel Pedal for 10 sec

Off Pedal

within 5 sec

Brake to P R N D L

Transmission to **Neutral** *
Press Brake and select Neutral release Brake

Full Depress Accel Pedal for 10 sec

Off Pedal

Brake-> P R N D L

Transmission to **Park**
Press Brake and select Park then Release brake


CDM Active
While key remains on

Apply brake and start Engine.

8F Transmissions
(if applicable)

Roll Wheels
dyno in road sim mode
On Dyno Rolls put int DRIVE and allow wheels to turn a few revolutions at low speed and then brake to stop

Shift to Neutral and Confirm in CDM
Brake & Shift to Neutral to confirm in CDM with wrench light or a few "N" flashes in dash



Look on instrument cluster behind steering wheel. Ignore flashing "N" on eShifter for confirmation.

Keep Key-ON until coastdowns are complete.

Stay in Neutral Mode (for lab coastdowns)

Activate and automatically confirm as follows:

For piano key and push button eShifters:
- Press the 'N' button selector 3x

Other eShifters:
- Shift to Neutral and
- Press the 'S', 'M', or 'L' button 2x

"N" indicator on eShifter will flash approx. once per second when active and in neutral.

Select OK on steering wheel spoke for stay in Neutral Message

Version4

Back

Things to consider- Please read

- If not driving vehicle on the road, Best practice to pull passenger seat belt over to driver's side clasp for driver comfort on Dyno.
- CDM (Coast Down Mode) will only stay active during current key cycle. If key is turned off, it will exit CDM.
- Statement regarding full 10 seconds. The count while fully depressing accelerator pedal is important. Using a 1-1000, 2-1000, 3-1000 etc.., method seems to work best. It must be a minimum of 10 seconds and not exceed 15 seconds.
- If running a DCD, enter the mode before starting warm up. Once warm up is complete do not shut vehicle off.
- The measure of success is either a flashing “N” on instrument panel or a wrench light (depending on vehicle type). BEV, PHEV and FHEV are wrench light, ICE (internal combustion Engine) programs are “N” flashing.
- Neutral hold measure of success is a flashing “N” on the gear selector. This may be only a couple of flashes then go solid. If unsure go to park and back to Neutral and watch for flashes.
- When using Neutral hold, a message will appear on instrument panel. Select “OK” on steering wheel spoke for related message for staying in Neutral.

Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral



19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Brake/Park









E-Shifter Styles





Version4

Front

Activating COASTDOWN MODE (CDM) – W/O roll method DTM005

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- Perform this procedure before warm up when performing a DCD
- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive. Aside from holding accelerator pedal down for 10 seconds, do not pause once activating Accessory Mode. A full 10 seconds is needed, if short will not work.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

w/in 5 sec



Full Depress Accel Pedal for 10 sec

Off Pedal

w/in 5 sec

Brake to P R N D L

Transmission to **Neutral** *

Press Brake and select Neutral and release brake



Full Depress Accel Pedal for 10 sec

Off Pedal

Brake-> P R N D L

Transmission to **Park**

Press Brake and select Park then release brake


CDM Active

While key remains on

Apply Brake and start Engine

Shift to Neutral and Confirm in CDM

Brake & Shift to Neutral to confirm in CDM with wrench light or a few "N" flashes in dash



Look on instrument cluster behind steering wheel. Ignore flashing "N" on eShifter for confirmation.

Keep Key-ON until coastdowns are complete.

Stay in Neutral Mode (for lab coastdowns)

Activate and automatically confirm as follows:

For piano key and push button eShifters:
- Press the 'N' button selector 3x

Other eShifters:
- Shift to Neutral and
- Press the 'S', 'M', or 'L' button 2x

"N" indicator on eShifter will flash approx. once per second when active and in neutral.

Select OK on steering wheel spoke for stay in Neutral Message

Version4

Back

Things to consider- Please read

- If not driving vehicle on the road, Best practice to pull passenger seat belt over to driver's side clasp for driver comfort on Dyno.
- CDM (Coast Down Mode) will only stay active during current key cycle. If key is turned off, it will exit CDM.
- Statement regarding full 10 seconds. The count while fully depressing accelerator pedal is important. Using a 1-1000, 2-1000, 3-1000 etc.., method seems to work best. It must be a minimum of 10 seconds and not exceed 15 seconds.
- If running a DCD, enter the mode before starting warm up. Once warm up is complete do not shut vehicle off.
- The measure of success is either a flashing “N” on instrument panel or a wrench light (depending on vehicle type). BEV, PHEV and FHEV are wrench light, ICE (internal combustion Engine) programs are “N” flashing.
- Neutral hold measure of success is a flashing “N” on the gear selector. This may be only a couple of flashes then go solid. If unsure go to park and back to Neutral and watch for flashes.
- When using Neutral hold, a message will appear on instrument panel. Select “OK” on steering wheel spoke for related message for staying in Neutral.

Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral

PRNDL

19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Brake/Park

PRNDL







E-Shifter Styles





Version4

Front

Activating COASTDOWN MODE (CDM) – No eShifter DTM006

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- Perform this procedure before warm up when performing a DCD
- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive. Aside from holding accelerator pedal down for 10 seconds, do not pause once activating Accessory Mode. A full 10 seconds is needed, if short will not work.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

w/in 5 sec



Full Depress Accel Pedal for 10 sec

Off Pedal

w/in 5 sec

Brake to P R N D L

Transmission to **Neutral** *

Press Brake and select Neutral and release brake



Full Depress Accel Pedal for 10 sec

Off Pedal

Brake-> P R N D L

Transmission to **Park**

Press Brake and select Park then release brake


CDM Active

While key remains on

Apply brake and start Engine

Shift to Neutral and Confirm in CDM

Brake & Shift to Neutral to confirm in CDM with wrench light or a few "N" flashes in dash



Look on instrument cluster behind steering wheel. Ignore flashing "N" on eShifter for confirmation.

Keep Key-ON until coastdowns are complete.

Version4

Back

Things to consider- Please read

- If not driving vehicle on the road, Best practice to pull passenger seat belt over to driver's side clasp for driver comfort on Dyno.
- CDM (Coast Down Mode) will only stay active during current key cycle. If key is turned off, it will exit CDM.
- Statement regarding full 10 seconds. The count while fully depressing accelerator pedal is important. Using a 1-1000, 2-1000, 3-1000 etc.., method seems to work best. It must be a minimum of 10 seconds and not exceed 15 seconds.
- If running a DCD, enter the mode before starting warm up. Once warm up is complete do not shut vehicle off.
- The measure of success is either a flashing “N” on instrument panel or a wrench light (depending on vehicle type). BEV, PHEV and FHEV are wrench light, ICE (internal combustion Engine) programs are “N” flashing.







E-Shifter Styles





Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral

PRNDL

19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Brake/Park

PRNDL

Version4

Front

Activating COASTDOWN MODE (CDM) – No eShifter prior to 18MY P552/S550 DTM007

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- Perform this procedure before warm up when performing a DCD
- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive. Aside from holding accelerator pedal down for 10 seconds, do not pause once activating Accessory Mode. A full 10 seconds is needed, if short will not work.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate **Accessory Mode**

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

w/in 5 sec



Full Depress Accel Pedal for 10 sec

Off Pedal

w/in 5 sec

Brake to P R N D ?

Transmission to **5th position on gear selector***

Apply brake and switch to 5th position. Release brake

*The position after "D" could be a "S" "M" or "L".



Full Depress Accel Pedal for 10 sec

Off Pedal

Brake-> P R N D L

Transmission to **Park**

Press Brake and select Park then release brake

CDM Active

While key remains on

Apply brake and start Engine

Shift to Neutral and Confirm in CDM

Brake & Shift to Neutral to confirm in CDM with wrench light or a few "N" flashes in dash





Look on instrument cluster behind steering wheel. Ignore flashing "N" on eShifter for confirmation.

Keep Key-ON until coastdowns are complete.

Version4

Back

Things to consider- Please read

- If not driving vehicle on the road, Best practice to pull passenger seat belt over to driver's side clasp for driver comfort on Dyno.
- CDM (Coast Down Mode) will only stay active during current key cycle. If key is turned off, it will exit CDM.
- Statement regarding full 10 seconds. The count while fully depressing accelerator pedal is important. Using a 1-1000, 2-1000, 3-1000 etc.., method seems to work best. It must be a minimum of 10 seconds and not exceed 15 seconds.
- If running a DCD, enter the mode before starting warm up. Once warm up is complete do not shut vehicle off.
- The measure of success is either a flashing “N” on instrument panel or a wrench light (depending on vehicle type). BEV, PHEV and FHEV are wrench light, ICE (internal combustion Engine) programs are “N” flashing.







E-Shifter Styles





Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral

PRNDL

19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Brake/Park

PRNDL

Version4

Front

Activating COASTDOWN MODE (CDM) – 17-20MY GENIII xHEV DTM008

• Additional detail provided on the back of sheet. Contact technologist if not successful after two attempts.

Read back & front of sheet First

- Perform this procedure before warm up when performing a DCD
- All steps performed with **ENGINE OFF**
- Begin with **KEY-OFF**
- Note: Steps are time-sensitive. Aside from holding accelerator pedal down for 10 seconds, do not pause once activating Accessory Mode. A full 10 seconds is needed, if short will not work.

Module Sleep

- Enter vehicle and close door
- **Fasten Driver seatbelt**
- Re-open and close door
- Allow vehicle to sleep at least one minute with key/ ignition off. Ensure the center stack and IP go dark before starting the following steps.

Activate

Accessory Mode

Key-On / Engine-Off



For Keyless Ignitions, Keep foot off brake pedal and hit Engine "Start" button

w/in 5 sec



Full Depress Accel Pedal for 10 sec

Off Pedal

w/in 5 sec

Brake to P R N D L

Transmission to **"L" (Low) ***

Press Brake and select Low "L" and release brake



Full Depress Accel Pedal for 10 sec

Off Pedal

Brake-> P R N D L

Transmission to **Park**

Press Brake and select Park then release brake


CDM Active

While key remains on

Apply Brake and start Engine

Shift to Neutral and Confirm in CDM

Brake & Shift to Neutral to confirm in CDM with wrench light or a few "N" flashes in dash



Look on instrument cluster behind steering wheel. Ignore flashing "N" on eShifter for confirmation.

Keep Key-ON until coastdowns are complete.

Stay in Neutral Mode (for lab coastdowns)

Activate and automatically confirm as follows:

For piano key and push button eShifters:
- Press the 'N' button selector 3x

Other eShifters:
- Shift to Neutral and
- Press the 'S', 'M', or 'L' button 2x

"N" indicator on eShifter will flash approx. once per second when active and in neutral.

Select OK on steering wheel spoke for stay in Neutral Message

Version4

Back

Things to consider- Please read

- If not driving vehicle on the road, Best practice to pull passenger seat belt over to driver's side clasp for driver comfort on Dyno.
- CDM (Coast Down Mode) will only stay active during current key cycle. If key is turned off, it will exit CDM.
- Statement regarding full 10 seconds. The count while fully depressing accelerator pedal is important. Using a 1-1000, 2-1000, 3-1000 etc.., method seems to work best. It must be a minimum of 10 seconds and not exceed 15 seconds.
- If running a DCD, enter the mode before starting warm up. Once warm up is complete do not shut vehicle off.
- The measure of success is either a flashing “N” on instrument panel or a wrench light (depending on vehicle type). BEV, PHEV and FHEV are wrench light, ICE (internal combustion Engine) programs are “N” flashing.
- Neutral hold measure of success is a flashing “N” on the gear selector. This may be only a couple of flashes then go solid. If unsure go to park and back to Neutral and watch for flashes.
- When using Neutral hold, a message will appear on instrument panel. Select “OK” on steering wheel spoke for related message for staying in Neutral.

Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral

PRNDL

19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Brake/Park

PRNDL







E-Shifter Styles





Version4

DTM-010

Activation method – DPS6 (Transmission) Flat Tow Mode Procedure:

- Programs with DPS6 Transmissions (11MY+ 1.6L Fiesta/ 12MY+ 2.0L Focus)
- Due to the design of the transmission (no torque converter or planetary gears used to shift), moving the vehicle around the lab will create unnecessary wear to the transmission.

Activation Steps:

1. Start procedure with vehicle in Park, Key off
2. Key on, depress brake pedal
3. Shift to Neutral
4. Wait for center stack to display "transmission ready" (a scroll bar will move across the bottom of the screen during the waiting period)



5. Key off
6. Vehicle will remain in flat tow mode until key is cycle, or transmission is placed in Park

Following slides for future use

When printing select pages 1 & 2 only

Backup / Notes

- Need separate for 8F Transmission Vs. all other (roll method)
- Write further instruction regarding where to start engine and ensure roll method is in appropriate step.
- Requestor is to send the applicable sheet to the garage for confirmation of the correct DTM before issuing test requests

Quick Reminder Coastdown Mode

Accessory mode



10 seconds Accelerator



Brake/Neutral

PRNDL

19MY+ except Fusion/MKZ FHEV

10 seconds Accelerator



Park Reverse

PRNDL

Brake/Park

PRNDL



eShifter styles

Rotary/dial



Lever/Console



Stalk



Lincoln Piano Key



Lincoln Push Button



Program Type (any of the following for combined sequences)	Dyno Mode Entry Method	Likely User
Auto Transmission *OR*	**DTM-001 (Easter Egg)**	Most users
*** Note: some 20MY+ CX48x and CX430 production level vehicles have a delayed response to recognize Dyno Mode (up to 30 sec). In later MYs as well. Suggest note on steering wheel to key-on before start of test until dyno mode indicators are displayed in the cluster. (ABS S/W LX6C-2D053-NS and previous has issue/ Mchael Neufeld is Brake Engineering contact).* *** Note: 22MY P758 production level vehicle found to disable Dyno Mode if started quickly after key-off. Must wait for full module power down after DM entry and watch for ABS flash indicator before starting engine.*		
21MY+ "New" Platform Manual Transmission *OR*		
GENIII xHEV programs (may or may not work depending on level)		
Manual Transmission (any or pre-21MY New Platform Man. Transmission)	**DTM-002 (Easter Egg)**	Rare users
GENIII xHEV programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV, 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV	**Requester only, not an operator task (PT Diag/SBA2 only) Later MY MAY use DTM-001**	Rare users. If used for IUVP, must be manually deactivated after lab testing.
Program Type (any of the following for combined sequences)	**Coast Down Mode Entry Method**	**Likely User**
GENIV xHEV w/ powersplit transmission *OR*	**DTM-004 (Easter Egg with 8F Trans)** **DTM-005 (easter Egg without 8F Trans)**	Many users
21MY+ BEV		
xHEV programs w/ MHT Transmission *OR*	**DTM-004 (Easter Egg with 8F Trans)** **DTM-005 (easter Egg without 8F Trans)**	Most users
All other 8F/10R transmission programs (Not applicable to: 21+MY BEV, Powersplit trans., 17-*18MY P552, *18MY S550)		
18MY P552, *18MY S550 w/ 10R Transmission (*Later 18MY may be able to use DTM-005). **No "E" Shifter**	**DTM-006 (Easter Egg)**	IUVP primary
Prior to *18MY S550 w/ 10R Transmission **No "E" Shifter**	**DTM-007 (Easter Egg)**	
17-20MY GENIII xHEV programs: 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV	**DTM-008 (Easter Egg)**	IUVP primary
13-16MY GENIII xHEV programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV	**Place vehicle in neutral and key off (no DTM required for Coast Down)**	IUVP primary
1.6L Fiesta (11MY+), 2.0L Focus (12MY+) w/ DPS6 transmission only	**DTM-010 (Flat Tow Mode)** **Also needed for towing around the lab to avoid trans. damage.**	IUVP primary

Programs w/ 6-speed transmissions do not typically require Coast Down mode.

Program Type	Neutral Method for Centering on Rolls	Likely User
Primarily for GenIII xHEV programs, BEV programs, or programs **without** MPR cable required.	**DTM-003 (Easter Egg)**	Most users
Primarily for all programs with E-shifter and **with** MPR cable. (24MY+ is the understanding as of now)	**DTM-003B (Easter Egg)**	Most Users

Hybrid programs for reference:

GENIV xHEV programs w/ powersplit transmission: 20MY+ CX48x xHEV; 22MY+ P758 FHEV, 23MY CDx706/7, 23MY Cx48x MCA, 23MY CD764 FHEV, 23MY P758 FHEV ICA, 23MY CD542 FHEV, 23MY Cx788 FHEV, 23.75MY V710 PHEV **21+MY BEV:** 22MY Cx727 ICA, 22MY P702, 22MY V363, 23MY Cx771, 23.75MY V710, 24MY CDx746/7 **xHEV programs w/ MHT transmission**: 20MY+U6xx, 21MY+ P702; 24MY U6xx MCA, 24MY P702 FHEV MCA, 24MY P703 PHEV MCA

GENIII xHEV Programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV, 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV

Reference for DTM Entry Method (by Program Type)

https://azureford.sharepoint.com/sites/VehicleDynoTestingModes/Lists/Program%20Specific%20List/AllItems.aspx

Revision Date 10/21/2022

Ford Motor Company - Confidential

Program Type (any of the following for combined sequences)	Dyno Mode Entry Method	Likely User
Auto Transmission OR *** Note: some 20MY+ CX48x and CX430 production level vehicles have a delayed response to recognize Dyno Mode (up to 30 sec). In later MYs as well. Suggest note on steering wheel to key-on before start of test until dyno mode indicators are displayed in the cluster. (ABS S/W LX6C-2D053-NS and previous has issue/ Mchael Neufeld is Brake Engineering contact).* *** Note: 22MY P758 production level vehicle found to disable Dyno Mode if started quickly after key-off. Must wait for full module power down after DM entry and watch for ABS flash indicator before starting engine.* 21MY+ "New" Platform Manual Transmission OR GENIII xHEV programs (may or may not work depending on level)	**DTM-001 (Easter Egg)**	Most users
Manual Transmission (any or pre-21MY New Platform Man. Transmission)	**DTM-007 (Easter Egg)**	Rare users
GENIII xHEV programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV, 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV	**DTM-005 (PT Diag/SBA2 only)** **Later MY MAY use DTM-001**	Rare users. If used for IUVP, must be manually deactivated after lab testing.

	Dyno Mode Differentiating Steps					
Transmission	Brake-Accel-Brake	Brake-Clutch-Brake	Park-Rev-Park	Neut-Rev-Neut	PT Diag/Tool Reqd.	VS/Accel exit
A/T A/T 21MY+ M/T HF35	Y	n/a	Y	n/a	n/a	Y
M/T	n/a	Y	n/a	Y	n/a	Y
HF35	n/a	n/a	n/a	n/a	Y	Mix. **EBB method must be manually exited.**

Program Type (any of the following for combined sequences)	Coast Down Mode Entry Method	Likely User
GENIV xHEV w/ powersplit transmission OR 21MY+ BEV	**DTM-004 (Easter Egg)**	Many users
xHEV programs w/ MHT Transmission OR All other 8F/10R transmission programs (Not applicable to: 21+MY BEV, Powersplit trans., 17-*18MY P552, *18MY S550)	**DTM-006 (Easter Egg)**	Most users
17-*18MY P552, *18MY S550 w/ 10R Transmission (*Later 18MY may be able to use DTM-006).	**DTM-008 (Easter Egg)** **(Confirmed no eShifters w/ Mike Zyskowski); Later 18MY may be able to use DTM-006)**	IUVP primary
17-20MY GENIII xHEV programs: 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV	**DTM-009 (Easter Egg)**	IUVP primary
13-16MY GENIII xHEV programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV	**Place vehicle in neutral and key off (no DTM required for Coast Down)**	IUVP primary
1.6L Fiesta (11MY+), 2.0L Focus (12MY+) w/ DPS6 transmission only	**DTM-010 (Flat Tow Mode)** **Also needed for towing around the lab to avoid trans. damage.**	IUVP primary

Programs w/ 6-speed transmissions do not typically require Coast Down mode.

	Coast Down Differentiating Steps								
Transmission	Fasten Seatbelt	Re-open/close door, power down	Accel-Neut-Accel	Accel-L/S/M - Accel	Accel-Park	(Park) Wrench light flashes - indicates entry success	Park-Drive, Road Sim., Spin Veh wheels (8F/10R)	Neut, N flashes - indicates entry success	Cluster confirm/ Hold in Neut. eShifter w/ Maturity
HF45 or HF55 N/A (gear box)	Y	Y	Y (Neut.)	n/a	Y	**Y**	n/a	*Y (but irrelevant - does NOT indicate successful entry)*	Y - many eShifters
MHT (10R80) 8F/10R	Y	n/a	Y (Neut.)	n/a	Y	n/a	Y	**Y**	Y - many eShifters
10R	Y	n/a	Some, end of 18'	Y (L/S/M)	Y	n/a	n/a	**Y**	n/a - confirmed no eShifters
HF35	n/a	Y	n/a	Y (Low)	Y	**Y**	n/a	**Y**	Y - 17 MY+ Fusion xHEV has eshifter

Program Type	Neutral Method for Centering on Rolls	Likely User
Primarily for GenIII xHEV programs, BEV programs, or programs with no MPR cable required.	**DTM-003 (Easter Egg)**	Some users

Hybrid programs for reference:

GENIV xHEV programs w/ powersplit transmission: 20MY+ CX48x xHEV; 22MY+ P758 FHEV, 23MY CDx706/7, 23MY Cx48x MCA, 23MY CD764 FHEV, 23MY P758 FHEV ICA, 23MY CD542 FHEV, 23MY Cx788 FHEV, 23.75MY V710 PHEV

21+MY BEV: 22MY Cx727 ICA, 22MY P702, 22MY V363, 23MY Cx771, 23.75MY V710, 24MY CDx746/7

xHEV programs w/ MHT transmission: 20MY+U6xx, 21MY+ P702; 24MY U6xx MCA, 24MY P702 FHEV MCA, 24MY P703 PHEV MCA

GENIII xHEV Programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV, 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV

https://azureford.sharepoint.com/sites/VehicleDynoTestingModes/Lists/Program%20Specific%20List/AllItems.aspx

DTM Version Update Tracking (from Original Versions)

Procedure Name	Description (original)	Description (new)	Updates/Differences from Original (or comments)
DTM-001	Dyno Mode-Easter Egg sequence (or) Manual activation sequence	Dyno Mode-Easter Egg sequence (or) Manual activation sequence - **Typical Auto Trans. Method (21MY+ New platform Manual Transmission (and some later MY GENIII xHEV programs) can also use this method)**	- Title/Applicability - Minor clarification wording in procedure - Addition of Measures to Avoid Deactivation - Addition of Methods of Deactivation - Link to Vehicle Dyno Testing Modes VH&C SharePoint
DTM-002	Coast Down test mode; Easter Egg activation method or Manual Activation Sequence	N/A	**DTM-002 should no longer be referenced. The procedure has been seperated to apply with clear steps and activation for unique applications.**
DTM-003	Neutral Method for Centering on Rolls	Neutral Method for Centering on Rolls **Primarily for GENIII xHEV programs (that don't need hydraulic pressure to shift out of Park), BEV (no trans), or no MPR cable required.**	- Title/Applicability - Updates to specific instructions for varied types of gear shifters (Piano/Rotary/Other style electronic) - Link to Vehicle Dyno Testing Modes VH&C SharePoint
DTM-004	Originally written for BEVCX727 programs	Coast Down - East Egg Activation - **For GENIV xHEV w/ Powersplit trans., 21+MY BEV**	**Similar to DTM-002 w/ the following exceptions:** **- Place in Coast Down Mode PRIOR to Warm-up where Applicable** **- Fasten Seatbelt (for return-to-park protection)** **- Corrections from original sequence for sequence timing** **- Correct specification for CD Mode activation confirmation (flashing "Wrench Light")** **- Hold in Neutral confirmation added (depending on vehicle maturity) as extra protection for return-to-park avoidance.- Power down comments for variance between 23MY+ (and previous programs).** **- Link to Vehicle Dyno Testing Modes VH&C SharePoint**
DTM-005	N/A (method existed, but not carried in recent Cert. documentation).	Dyno Mode Activation Method for GENIII xHEV programs ONLY! - Using PTDiag/Tool	Requires manual deactivation, so take care for use with IUVP. **Easter Egg (DTM-001) MAY be functional for some GENIII xHEV programs and should be attempted first.**
DTM-006	N/A - Based on DTM-002, but revised for xHEV programs w/ MHT transmissions and all *other 8F/10R transmissions.	Coast Down - East Egg Activation - **For xHEV w/ MHT Transmission and all other 8F/10R transmissions** **(with the following exceptions: GENIV xHEV w/ Powersplit trans., 21+MY BEV, 17-*18MY P552, *18MY S550** *** does apply to some later vehicles in 18MY P552/S550)**	**Similar to DTM-002 w/ the following exceptions:** - Place in Coast Down Mode PRIOR to Warm-up where Applicable - Fasten Seatbelt (for return-to-park protection) - Corrections from original sequence for sequence timing - Correct specification for CD Mode activation confirmation (flashing "N") - Addition of dyno rotation in "D" for avoidance of 8F one-way clutch locking during coast down procedure. - Hold in Neutral confirmation added (depending on vehicle maturity) as extra protection for return-to-park avoidance. - Link to Vehicle Dyno Testing Modes VH&C SharePoint
DTM-007	N/A (method existed, but not carried in recent Cert. documentation).	Dyno Mode-Easter Egg sequence (or) Manual activation sequence - **Typical Manual Trans. Method (21MY+ New platform Manual Transmissions can also use Auto Trans. Method DTM-001)**	**Similar to DTM-001 w/ the following exceptions:** - Clutch instead of Accelerator pedal - Neutral instead of Park gear
DTM-008	N/A (method existed on FE SharePoint, but not carried in recent Cert. documentation). Still req'd by IUVP.	Coast Down - Easter Egg Activation - **For 17-*18MY P552 and *18MY S550 10R programs only.** *** FYI that programs moved to "NEUTRAL in Step #5" in mid 18MY (like DTM-006).** 10R only w/ mechanical gearshifts only.	- Place in Coast Down Mode PRIOR to Warm-up where Applicable - Fasten Seatbelt (for lab consistency as program confirmed mechanical shifters only). - Corrections from original sequence for sequence timing - Clarification of "5th PRNDx" location and that mid-18MY moved to Neutral in strategy (like DTM-006). - 10R only w/ no electronic gearshifts (so extra protections for 8F and return-to-park not added).

DTM-009	N/A (method existed, but not carried in recent Cert. documentation). Still req'd by IUVP.	Coast Down - Easter Egg Activation - **GENIII xHEV programs ONLY:** ~~**(13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/CMA**~~**X PHEV, 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY CMAX FHEV, 17MY C-MAX PHEV)** HF35 transmission only.	- Place in Coast Down Mode PRIOR to Warm-up where Applicable - Fasten Seatbelt (only 17MY+ xHEV has eShifter). - Corrections from original sequence for sequence timing - Clarification of "Low" gear required; Wrench Light confirmation and Neutral flashing. - 10R only w/ only 17MY+ xHEV electronic shifter; Added neutral hold confirmation for return-to-park protection).
DTM-010	N/A (method existed on FE SharePoint, but not carried in recent Cert. documentation). Still req'd by IUVP.		

Hybrid programs for reference:

GENIV xHEV programs w/ powersplit transmission: 20MY+ CX48x xHEV; 22MY+ P758 FHEV, 23MY CDx706/7, 23MY Cx48x MCA, 23MY CD764 FHEV, 23MY P758 FHEV ICA, 23MY CD542 FHEV, 23MY Cx788 FHEV, 23.75MY V710 PHEV

21+MY BEV: 22MY Cx727 ICA, 22MY P702, 22MY V363, 23MY Cx771, 23.75MY V710, 24MY CDx746/7 **xHEV programs w/ MHT**

transmission: 20MY+U6xx, 21MY+ P702; 24MY U6xx MCA, 24MY P702 FHEV MCA, 24MY P703 PHEV MCA

GENIII xHEV Programs: 13MY-16MY Fusion/MKZ/C-MAX FHEV, 13MY-16MY Fusion/C-MAX PHEV, 17MY-20MY Fusion/MKZ FHEV, 17MY-18MY C-MAX FHEV, 17MY C-MAX PHEV

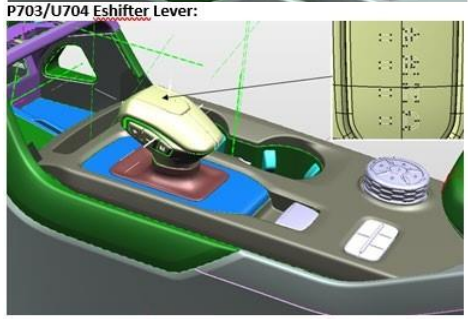
Gear Shifter Complexity (Expected)

Shifter Type (16MY+)			
Program	**Mechanical (mShifter)**	**Electronic (eShifter)**	**Comment**
All programs w/ 6 speed trans.	Lever Shifters	Rotary or pushbutton shifter	Irrelevant for Coastdown, 6 speed trans. doesn't require Coast Down Mode
GENIII xHEV	Most Lever mShifters	13MY+ MKZ FHEV; 17MY+ Fusion xHEV eShifter	Mix; Mostly mechanical lever.
all MY V408	Yes, all mShifter	n/a	(If V408 is replaced w/ new program, will have electronic shifter)
21MY+ P702	n/a	LED lever are electronic, but may appear mechanical	Appearance may be confusing
24MY+ P703	non-LED are mechanical	LED lever are electronic, but may appear mechanical	Mix - see illustration
23MY+ U704	non-LED are mechanical	LED lever are electronic, but may appear mechanical	Mix - see illustration
18-22MY+ U553	~3% are column shifter (mechanical) - SSV version	Most eShifter	Mix (column shifter on mShifter)
20MY+ U625	~3% are column shifter (mechanical) - SSV version	Most eShifter	Mix (column shifter on mShifter)
All MY Mustang through end of S550	All mShifter except EVO version	EVO version is electronic shifter (contracted transmission)	Mix (EVO is only eShifter)
All S650	Yes, all mShifter	n/a	
P552	Yes, all mShifter	n/a	
P558	Yes, all mShifter	n/a	
19MY+ all GENIV xHEV and BEVs	n/a	Yes, all eShifter	

P703/U704 Mechanical Lever (essentially c/o from UP375):



P703/U704 Eshifter Lever:



- Any programs not explicitly shown on the chart have eShifter (electronic gearshifts). <u>MOST</u> programs 21MY+ are moving towards eShifter, but there may still be exceptions.

- Electronic Gearshifts include (but are not limited to): Push Button, Rotary, Electronic Lever
- Mechanical Gearshifts include (but are not limited to): Mechanical Lever, Column
- Global/Future include Toggle and Monostable Shifters

(Key Contact: Mike Zyskowski)

JIRA Approval for 23MY+ xHEV w/ Powersplit Trans. and BEV Programs

New strategy for separation of module powerdown requirement (powersplit and BEV programs only) (starting w/ CX48x 23MY) - Coastdown:

23MY Powersplit and BEV programs (North America):

- **CX48x xHEV (PHSE0/TMTE0) - for R00 (Feb timing/23MY).**
- P758 FHEV (23MY/25MY)
- **CX727 BEV (23MY)**
- **P702 BEV (23MY service releases only/24MY next program)**
- V363 BEV (23.5 or 23MY?)
- CD707 FHEV (24MY)

Global:

- CD706/707 FHEV (23MY)
- CD764 FHEV (23MY)
- CD542 FHEV (23MY)
- CX788 FHEV (23MY)
- CX771 BEV (23MY)
- V710 PHEV/BEV (23.75MY/25MY)
- ~~CDx746/7 BEV~~ turning into U759/760 and delayed 18 months (MY?)
- BX726/769 BEV (25MY)
- B769 BEV (25MY)
- CX748N/C BEV (24/26MY)
- P800/801 BEV (26MY)
- P812 BEV (26MY)

SSFT-23327	PS/MHT/BEV - Change the diagnostic state machine logic for test modes to ensure robustness	Zamora, Andy (J.A.)	Venkatesan, Naren (N.)	

PowerPack	Application Path
MY23 2.5L CX482 R00	PHSE0 / TMTE0
Mainline	

Section 14.01.00.00: Request for Certification/Executive Order and Common Application Statements

Ford Motor Company (Ford) has elected to submit its 2026 MY Requests for Certificate of Conformity/Executive Order on a test group basis. The "common" material is a part of each individual Request for Executive Order and/or Certificate of Conformity, unless otherwise indicated.

Section 14.01.01.01: Statement of Compliance

The test vehicles for which data are submitted to demonstrate compliance with the 2026 MY emissions standards, are in all material respects as described in this Application. These vehicles have been tested in accordance with both good engineering practice and with applicable test procedures, utilizing fuels and equipment in compliance with the regulations. On the basis of such tests, these vehicles have met the requirements described in either 40 CFR 86.1811-10 or 86.1811-17; descriptions of tests performed to ascertain compliance with the said section and the data derived from such tests are available to the EPA administrator upon request.

Pursuant to 40 CFR 86.1829-15(b)~~,~~ Ford has conducted testing and engineering evaluations of vehicles representative of 2026 model year light duty vehicle (LDV) and light duty truck (LDT) test groups and evaporative/refueling families. Based on such testing and evaluations, Ford believes that the vehicles in these LDV and LDT test groups have been designed to comply with the applicable exhaust emission standards and evaporative/refueling standards at high altitude.

Further, with respect to 40 CFR 86.1810-17(a)(b), Ford states that new motor vehicles of each engine family conform to the terms of the Statement of Device Safety contained in this Application.

The evaporative emission deterioration factors for each evaporative emission family/evaporative emission control system combination have been derived from test data obtained from testing conducted in accordance with good engineering practice to meet the requirements of 40 CFR 86.1824-08.

Section 14.01.01.02: Statement of Device Safety

Ford Motor Company (Ford) states that the emission control devices, systems or elements of design installed on or incorporated in Ford Motor Company new motor vehicles or new motor vehicle engines for the purposes of complying with standards prescribed under Section 202 of the Clean Air Act, will not in their operation, to the best of Ford's information and belief, cause the emission into the ambient air of pollutants which cause or contribute to an unreasonable risk to public health, except as specifically permitted by the standards prescribed under the Clean Air Act.

Ford Motor Company also states that to the best of its information and belief the aforementioned emission control devices, systems or design elements do not in their operation or function, result in any reasonably foreseeable unsafe condition which would unreasonably endanger the motor vehicle, its occupants, or persons or property in close proximity to the vehicle, except that any reasonably foreseeable "unsafe condition" that may occur would result only from conditions of abuse or misuse (including tampering or lack of proper maintenance), or a malfunction that is related to abuse or misuse and which would sufficiently affect vehicle drivability, or otherwise put the driver on notice of the condition, so that a reasonably prudent person would likely to have service performed. In support of the above statement, Ford (or it's suppliers) has designed and carried out a testing and analysis program, in accordance with good engineering practice, designed (1) to identify vehicle operations or functions with respect to which it is reasonable to foresee that an "unsafe condition" would result, (2) to identify the reasonably foreseeable causes of such "unsafe conditions", and (3) to determine if such causes are reasonably likely to affect vehicle drivability, or otherwise put the driver on notice of the "unsafe condition" so that a reasonably prudent person would be likely to have service performed.

Descriptions and results of these tests are available for submission to EPA upon its request.

Statement of Conformity Qualification Information – Gasoline Fueled

<u>General Description of Principal Unsafe Condition(s) Being Qualified</u>

The principal unsafe condition being qualified is catalyst or exhaust system overheating. Typically, the overheating could cause combustible material in contact with the exhaust system to be ignited (e.g., grass fire) or materials inside the vehicle to be damaged (e.g., carpet smoldering or melting).

<u>General Description of the Immediate Cause of the Unsafe Condition Being Qualified</u>

The immediate cause of exhaust system overheating is an excess amount of unburned fuel delivered to the exhaust system in the presence of sufficient air to promote oxidation of the fuel.

Principal Types of Abuse, Misuse, Tampering, or Malfunction, Which Might Cause the Unsafe Condition

The principal types of abuse or misuse or malfunction that might cause catalyst or exhaust system overheating are as follows:

Abuse/Misuse/Tampering

Continued driving with an engine over-temperature warning.
Prolonged operation of a vehicle when an overt indication of malfunction exists, e.g., continual operation with an engine that repeatedly misfires.
Excess starter cranking (in excess of 30 seconds) with an intermittently firing or flooded engine.
Disregard of recommended maintenance for the ignition system, fuel system, and emission control system.
Extended high engine speed idle (above normal engine control speed) for more than 5 minutes using a commercial throttle kicker for use as a stationary power source or manually elevating the idle speed above the normal idle speed through the throttle.
Operation of passenger cars in excess of specified maximum passenger and luggage loads and/or maximum recommended trailer weight.
Operation of the light truck in excess of specified GVW and/or GCW.
Tampering or unauthorized modifications to the engine or vehicle such as:
Adjusting ignition timing beyond specified limits.
Altering emissions system components or location or removing components.
Use of unauthorized emission control processors, strategies, and/or calibrations.

Malfunction

Ignition system problems, e.g., persistently misfiring spark plugs, ignition module or coil failure, ignition timing retard.

General Identification of the Manner in Which the Principal Causes Would Affect Drivability or Otherwise Put the Driver on Notice

The principal causes generally would result in a significant degradation of vehicle performance with one or more of the following symptoms:

Extended dieseling (more than 5 seconds or engine run-on with key off)
Persistent misfiring
Odor or smoke
Oil pressure, over-temperature, or charge indicator warning
Repetitive stalls or backfires
Heavy surging
Fluid leakage

Section 14.01.01.03: Statement of Compliance for Unregulated Pollutants

Statement of Conformance with 86.1810-17(a) and CAA Section 202(a) (4)

Ford Motor Company states that the emission control devices, systems, or elements of design installed or incorporated in Ford's new motor vehicles or new motor vehicle engines are expected to conform to the requirements of 86.1810-17(a) and Section 202(a)(4) of the Clean Air Act, to the best of Ford's knowledge and belief. Information and data pertaining to any tests performed in connection with this statement, including but not limited to the emissions characterization information submitted periodically by Ford to EPA, are available to the Administrator upon request.

Section 14.01.01.04: Statement of Compliance with Tier 3/LEV-IV Leak Test

In accordance with 40 CFR 86.1829–15 (e)(4), manufacturers may provide a statement in the application for certification that vehicles comply with the leak standard in § 86.1813 instead of submitting test data. Ford Motor Company certifies, to the best of its knowledge and belief, that all Tier 3 Evap. and LEV-IV Evap. certified vehicles are designed to meet the leak standard specified in § 86.1813. This statement is based on development tests, other applicable information and good engineering judgment.

Section 14.01.01.05: Statement of Particulate Emissions

Pursuant to 40 CFR 86.1829-01(b) (iii) (B) and 86.1829-15(d), Ford Motor Company asserts that the designs of Ford's Otto-cycle gasoline and methanol fueled vehicles described in the applications are substantially similar to existing designs which have particulate levels significantly below the applicable standards prescribed under 40 CFR 86.1811-10 and 86.1811-17. Ford also asserts that to the best of its information and belief, these vehicles are expected to demonstrate particulate emission characteristics similar to the existing designs.

Section 14.01.01.06: Statement of Compliance for Warranty

The warranty statements contained in Ford Motor Company Warranty Guides comply with all applicable EPA and CARB regulations

Section 14.01.01.07: Statement of Low Leak Exhaust

Ford Motor Company has conducted its analysis and can therefore state that for Tier 2 and Tier 3 vehicles beginning with the 2009 model year, the exhaust system has been designed to facilitate leak-free (CFR 86.1844) assembly, installation and operation for the full useful life of the vehicle. Additionally, exhaust systems have been designed to facilitate that such repairs as might be necessary on a properly maintained, undamaged, or unaltered used vehicle can be performed in such a manner as to maintain leak-free operation, using tools commonly available in a motor vehicle dealership or independent repair shop for the full useful life of the vehicle.

Section 14.01.01.08: Statement of Compliance in Lieu of measuring formaldehyde (HCHO) emissions

In accordance of 40 CFR 86.1829-15(d)(4) , manufacturer for gasoline fueled and diesel fueled vehicles may provide a statement in its application for certification that such vehicles comply with the applicable standards in lieu of testing formaldehyde emissions. CARB adopted the EPA regulation unchanged, except vehicles references to Tier 2, Tier 3 or Tier 4 shall mean California LEV II, LEV III and LEV IV vehicles. See “California 2026 And Subsequent Model Year Criteria Pollutant Exhaust Emission Standards And Test Procedures For Passenger Cars, Light-Duty Trucks, And Medium-Duty Vehicles” Part 1, G. 3.1.2. Based on past testing and engineering judgment, where required all vehicles are expected to conform to the applicable HCHO emission standard.

Section 14.01.01.09: Use of applicable NMOG/NMHC Ratio in Lieu of NMOG Testing

In accordance with 40 CFR 86.1810-09(o) and “California 2026 and Subsequent Model Criteria Pollutant Exhaust Emission Standards and Test Procedures and 2017 and Subsequent Model Greenhouse Gas Exhaust Emission Standards and Test Procedures for Passenger Cars, Light-duty Trucks and Medium-duty Vehicles” Part 1, D.1.7.5, for gasonline tests, Ford has measured NMHC in lieu of NMOG and used the applicable adjustment factor based on the standards and the testing fuel used. For tests using alternative fuels (e.g., E85, CNG, etc.), NMOG has continued to be measured via cartridges.

Section 14.01.01.11: High Altitude Testing

Pursuant to 40 CFR 86.1829-15 (c), based on engineering evaluation of appropriate high-altitude emission testing, all light-duty vehicles, light-duty trucks and complete heavy-duty vehicles are expected to comply with the applicable emission standards at high altitude.

Section 14.01.01.12: 91 RON (Knock Sensor)

Pursuant to VPCD-97-01, based on testing and engineering judgment, the city and highway fuel economy test result differences between 91 RON operation and 96 RON operation for vehicles equipped with a knock sensor are expected to be within 3%.

Section 14.01.01.13: Defeat Device Avoidance

The applicable test groups have been designed and engineered to comply with 40 CFR 86.1809-12, prohibition of defeat devices.

Based on engineering evaluation of intermediate cold temperature emissions test data, the applicable test groups are expected to comply with intermediate cold testing defeat device avoidance requirements as described in 40 CFR 86.1809-12(e).

Section 14.01.01.14: Fuel Spitback Emissions for ORVR Certified Vehicles

In accordance with 40 CFR 86.1829-15 (e)(5), manufacturers may provide a statement of compliance in lieu of testing Fuel Spitback emissions for ORVR certified vehicles. Ford Motor Company certifies, to the best of its knowledge and belief, that its ORVR-certified vehicles are designed to meet the fuel dispensing Spitback standard as part of compliance with the refueling emission standard. This statement is based on previous emission tests, development tests, other applicable information, and good engineering judgment.

Section 14.01.01.15: Air to Fuel Ratio Requirement

In accordance with 40 CFR §86.1811-17(d), Ford Motor Company attests that the nominal air-fuel ratio throughout the US06 cycle is not richer than the leanest air-fuel mixture required for lean best torque, except as allowed under paragraph (d)(2) of §86.1811-17(d). The allowable tolerance around the nominal value for any given speed and load point over the US06 cycle for a particular vehicle is 4 percent, which is calculated as the nominal mass-based air-fuel ratio for lean best torque divided by 1.04.

In accordance with “California 2026 and Subsequent Model Year Criteria Pollutant Exhaust Emission Standards and Test Procedures for Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles”, Ford Motor Company attests that the nominal air to fuel ratio throughout the US06 cycle is not richer than the leanest air to fuel mixture required for lean best torque including an allowable tolerance around the nominal value for any given speed and load point over the US06 cycle for a particular vehicle of 4 percent, which is calculated as the nominal mass-based air to fuel ratio for lean best torque divided by 1.04.

Ford gasoline engines utilize enrichment under full load and high exhaust temperature conditions as necessary to avoid component damage. Spark timing under full load conditions is calculated in the strategy according to the operating conditions, including the knock sensor input, and is limited as necessary to avoid knocking or engine damage. Conditions in which additional enrichment is requested to protect the engine, emission control hardware, or vehicle and occupants are described in section 12.00.02.00 with key calibratable parameters listed in section 16.00.05.00 of the Certification Application. Additional control details are provided in section 16.05.00 of the Common Section.

Section 14.01.02.00: California Fuel Fill Pipe Compliance

Ford Motor Company attests that all gasoline vehicles comply with the California fuel fill pipe access zone requirements, as specified by CARB in "Specifications for Fill Pipes and Openings of 2015 and Subsequent Model Motor Vehicle Fuel Tanks", Title 13, California Code of Regulations, Section 2235, amended May 31, 2019. In addition, Ford attests that all gasoline vehicles comply with the Fill Rate, Spillage and Spitback refueling test requirements and the Bench Leak test requirements specified in the CARB regulation. Access zone specifications and bench leak test data are provided in documents included in Section 17.00.00.00 of the Common Section.

Section 14.01.02.01: SMOG Label/Environmental Performance Label Statement

The Environmental Performance Label will utilize the identical materials, color, size, font, style, overall specifications and printing process as approved by ARB on December 4, 2008.

Per “California Environmental Performance Label Specifications for 2009 and Subsequent Model Year Passenger Cars, Light-Duty Trucks, and Medium-Duty Passenger Vehicles”, adopted May 2, 2008, as last amended September 2, 2015, Ford will continue to use the Federal Fuel Economy and Environmental Label to comply with Environmental Performance Label requirements on all products for the 2026 Model Year.

Section 14.01.02.02: California I/M Tests

Based on past testing and engineering judgment, where required all vehicles are expected to conform with the applicable emission standards for which emissions data are not provided, as allowed under "California 2026 And Subsequent Model Year Criteria Pollutant Exhaust Emission Standards And Test Procedures For Passenger Cars, Light-Duty Trucks, And Medium-Duty Vehicles ".

Section 14.01.02.03: ORVR Compliance Attestation for Diesel Fueled Vehicles

Ford Motor Company attests that all diesel fueled vehicles will comply with the 0.20 grams/gallon ORVR refueling emission standard for the full useful life of the vehicle.

ADJUSTABLE PARAMETERS

Ford gas engines do not incorporate any parameters that are considered adjustable. Electronic throttle bodies which electrically control the idle airflow setpoint incorporate a throttle stop or mechanical plunger to set the closed position of the throttle plate. This stop is protected by one of the following methods:

1. A threaded plunger provides a stop which is fixed with a thread adhesive and is designed to break-off to prevent adjustment, or
2. An internal drive hex screw provides a stop and is fixed with thread adhesive and designed to strip to prevent adjustment, or
3. An internal gear provides the stop which is laser-welded and does not have any adjustment capability.

Diesel Exhaust Fluid (DEF) Range Declaration

Ford Motor Company's nominal DEF refill range adheres to the requirements listed in EPA's "Control of Emissions from New Highway Vehicles and Engines; Approval of New Scheduled Maintenance for Selective Catalytic Reduction Technologies" published January 5, 2012. The DEF range for 2020MY Ford Motor Company diesel applications is shown in the table below.

Test Group/Engine Family	Program	DEF Range	Max Fuel Tank Size (if applicable)
MFMXT03.03DZ	P702 Diesel	Oil Change Interval	N/A
MFMXD06.761B	P558	Oil Change Interval	N/A
MFMXD06.771D	P558	Oil Change Interval	N/A
MFMXH06.7P4A	P558 Dyno >14K	3 X Fuel Tank Range	67 gallons
MFMXH06.7P4B	P558 Dyno <14K	3 X Fuel Tank Range	67 gallons
MFMXH06.7C45	H567	3 X Fuel Tank Range	107.4 gallons

Heavy Duty Vehicle Speed Simulation Procedure

- Please refer to the letter from Todd M. Fagerman (Ford Motor Company) to K. Jennings (EPA) dated May 27, 2004.
- Please refer to the letter from David L. Kulp (Ford Motor Company) to R.B. Summerfield (ARB) dated October 5, 2001.
- Please refer to the letter from David L. Kulp to John Guy (EPA) dated May 18, 2001.
- Please refer to the letter from R.B. Summerfield to David L. Kulp dated July 29, 1996.
- Please refer to the letter from Chester France (EPA) to David L. Kulp dated July 18, 1996.

Fuel Recommendation to Vehicle Owners

Refer to the Vehicle Owner Manuals for fuel recommendations provided to the customer.

CRANKCASE EMISSION CONTROL SYSTEM DESCRIPTION

GENERAL CRANKCASE VENTILATION (PCV) SYSTEM

The Ford Crankcase Emission control System is a Closed Loop (CL) ventilation system that is designed to evacuate crankcase gases from the crankcase and prevent them from escaping into the atmosphere. The crankcase control system controls these gases or vapors, otherwise known as "blow-by" gases, by directing them back into the intake manifold where they are consumed in the normal combustion process.

POSITIVE CRANKCASE VENTILATION (PCV) SYSTEM

The crankcase ventilating air source is the Air Cleaner or Zip Tube. The fresh air passes through a filter located in the air cleaner and then through a hose connecting the air cleaner to the cam/rocker cover(s). The fresh air flows into the overhead and travels throughout the crankcase. The fresh air and blow-by gas leave the crankcase through a flow regulator called a Positive Crankcase Ventilation Valve (PCV valve), and pass into the intake manifold through a connecting hose. The ventilation process goes on continuously while the engine is running.

Service Manuals and Bulletins

Ford has provided EPA and CARB with the Motorcraft website (https://www.motorcraftservice.com/Home/Index) and password by which these agencies may access owner guides, warranty guides, shop manuals and technical service bulletins.

Section 18.00.00.00: Revisions

The 2026MY Common Section
Initial submission date: 04/07/2025

Revision Number	Revision Date	Page(s) Affected	Description of Revision
RC01	05/16/2025	12.01.02.00 16.06.02.03 16.06.02.05 16.06.02.07 16.11.03.00 17.01.00.00	Revised documents to include the latest information available for 26MY programs.
RC02	06/10/2025	12.04.01.02 16.05.03.00 16.10.00.00 16.10.01.00	Revised documents to include the latest information available for 26MY programs.
RC03	06/30/2025	12.01.01.00 12.01.02.00 12.03.00.00 12.03.00.01 16.05.00.00 16.05.01.00 16.05.02.00 16.05.03.00 16.11.01.00 17.01.00.00	Revised documents to include the latest information available for 26MY programs.
RC04	07/10/2025	16.05.03.00	Revised documents to include the latest information available for 26MY programs.
RC05	07/18/2025	12.03.00.00 16.11.01.00 16.11.03.00	Revised documents to include the latest information available for 26MY programs.
RC06	08/08/2025	09.01.00.01 14.01.00.00 16.05.03.00 16.11.01.00	Revised documents to include the latest information available for 26MY programs.
RC07	08/20/2025	12.02.01.01 14.01.00.00 16.11.01.00	Revised documents to include the latest information available for 26MY programs.
RC08	08/25/2025	16.11.03.00	Revised documents to include the latest information available for 26MY programs.
RC09	10/28/2025	16.11.01.00 16.11.03.00 16.13.00.00	Revised documents to include the latest information available for 26MY programs.

		17.01.00.00	
RC10 - EOY	12/08/2025	12.01.01.00 12.01.02.00 12.02.01.01 12.02.02.00 16.05.00.00 16.11.01.00 16.11.03.00 16.13.03.00	Revised documents to include the latest information available for 26MY programs.
RC11 – EOY V2	12/10/2025	12.04.01.01 12.04.01.02	Revised documents to include the latest information available for 26MY programs.
RC12	01/15/2026	01.00.00.00 12.01.02.00 12.04.01.01 12.04.01.02 16.11.01.00	Revised documents to include the latest information available for 26MY programs.
RC13	02/18/2026	01.00.00.00 16.11.03.00	Revised documents to include the latest information available for 26MY programs.
RC14	02/27/2026	12.03.00.01 12.03.00.02	Revised documents to include the latest information available for 26MY programs.
RC15	03/03/2026	14.01.02.00 17.01.00.00	Revised documents to include the latest information available for 26MY programs.