

Application For Certification

Part1

Individual application for 2027 Model Year

Durability Group	VNSXEEVNN310
Evaporative / Refueling Family	N.A.
Test Group	VNSXV0000C3A
Test Group Description	BEV (Battery Electric Vehicle) Federal LDV
Exhaust Emission Standard	Federal Tier 4 Bin 0, CFV-ZEV, ILEV
Evaporative Emission Standard	N.A.
Vehicles Covered	NISSAN ARIYA FWD 63kWh (Canada)
Vehicles Run	URBM55-00 (MCT TN:VNSX10093218)
Issue Date	March 30, 2026
Response Requested By	May 25, 2026
For Questions, Contact	Ryuichi Haya Telephone No. 248-488-4654

NISSAN MOTOR CO., LTD.

Part1
TABLE OF CONTENTS

Section	Title	Application	
		General	Individual
1	Correspondence and Communications	X	
2	Durability Group Description	X	
3	Evaporative/Refueling Family	X	
4	Durability Procedure Description	X	
5	Test Group Description		X
6	Test Vehicle Description		X
7	Test Results		X
8	Emission Testing Waiver Statement and Other Statement	X	X (Excluding BEV Interim Tier 4)
9	OBD System Description		X
10	Description of Alternate-fueled Vehicles		X
11	AECD Description		X
12	Description of Vehicles Covered by Certificate and Test Parameters		
	(1) Starting	X	
	(2) Shifting	X	
	(a) Automatic transmission	X	
	(b) Electric vehicle	X	
	(c) Manual transmission		X
	(3) List of Certified Vehicles		X
	(4) Test Parameter		X
	(5) Fuel storage system leak test method	X	
13	Projected Sales	X	
14	Request for Certification		X
15	Other Information		
	(1) Fee Filing Form		X
16	Confidential Information		
	(1) OBD System Description (related to Sec 9 in Part 1)		X
	(2) Catalyst Information and GPF Information (related to Sec 2 in Part 1)	X	
	(3) Durability Procedures (related to Sec 4 in Part 1)	X	
	(a) Bench aging procedure for Exhaust Emission (flow)	X	
	(b) Bench aging procedure for Exhaust Emission (aging conditions)		X
	(c) Bench aging procedure for Evaporative Emission	X	
	(4) Projected Sales (related to Sec 13 in Part 1) and Applicable Standard	X	
	(5) Phase-in Plan (related to Sec 13 in Part 1)	X	
	(6) Catalyst Code Identification (related to Sec 3 in Part 2)	X	
	(7) Projected Fleet Average Calculation	X	
	(8) AECD Description (related to Sec 11 in Part 1)		X
	(9) Description of Electric Vehicles		
	(a) Battery Information (related to Sec 12(3) in Part 1)		X
	(b) Summary Information (related to Sec 7 in Part 1)		X
	(10) The procedure of setting maintenance mode (related to Sec12(1) in Part 1)	X	
	(11) Engine Oil Specification	X	

5. Test Group Description

Test Group Name	Fuel	Sales area	Vehicle Class	Emission St'd Class
VNSXV0000C3A	Electricity	CAN	Federal LDV	Federal Tier 4 Bin 0, CFV-ZEV, ILEV

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

6. Test Vehicle Description

Vehicle Class	Model Covered	Engine Code	Motor Model	Transmission	ETW (lbs)	GVWR (lbs)	Axle Ratio	Tire Size	Tire Type
Federal LDV	ARIYA FWD 63kWh	EVAAN	AM67	Auto (Fixed single Speed)	4500	5291	11.090	235/55R19	All season

7. Test Results

Test Loc.	Test Number	Mode	Sales Area	Official Test (marked by X)	Certification Level
Mfr	VNSX10093218	MCT All-Electric Range Test	CANADA	X	Refer to the Certification Summary Information Report

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

Certification Summary Information Report

Manufacturer	Nissan Motor Co., Ltd.	Manufacturer Code	NSX
Test Group	VNSXV0000C3A	Evaporative/Refueling Family	--
Certificate Number	--	CARB Executive Order #	--
Certificate Issue Date	--	Certificate Revision Date	--
Certificate Effective Date	--	Conditional Certificate	--
CSI Revision #	--	CSI Submission/Revision Date	03/02/2026 09:24:51 PM
Model Year	2027		

Test Group Information

CSI Type	New	Running Change Reference Number	--
GHG Exempt Status	Not Exempt		

Drive Sources and Fuel(s)

Drive Source #1: Electric Motor

Fuel	Basic Fuel Metering System	Lean Burn Strategy Indicator
Electricity	--	--

Hybrid Indicator	No		
Multiple Fuel Storage	--	Rechargeable Energy Storage System Indicator	Yes
Multiple Fuel Combustion	--	Off-board Charge Capable Indicator	Yes
Fuel Cell Indicator	No	EPA Vehicle Class	LDV
Federal Clean Fuel Vehicle	Yes	Federal Clean Fuel Vehicle Standard	ZEV
Federal Clean Fuel Vehicle ILEV	Yes	California Partial Zero Emissions Vehicle Indicator	No
Durability Group Name	VNSXEEVNN310	Durability Group Equivalency Factor	5.0
Reduced Fee Test Group	No	Certification Region Code(s)	FA, CA
Complies with HD GHG 2b/3 regulations?	No		
Introduction into Commerce Date	--	CAP2000 Conditional Certificate?	N/A
Independent Commercial Importer?	--	Alternative Fuel Converter Certificate?	--
SFTP Federal Composite Compliance Identifier	Not Applicable	SFTP Tier 2 Composite CO Option	No
SFTP LEV-III Composite Compliance Indicator	No		
OBD Compliance Type	CARB	OBD Demonstration Vehicle Test Group	VNSXT01.53CF
Test Group OBD Compliance Level	Full - no deficiencies	Number of Test Group OBD Deficiencies	0
OBD Deficiencies Comments	This vehicle is exempted from OBD requirement because this vehicle is BEV.		
Mfr Test Group Comments	Durability Group Equivalency Factor is not available because this vehicle is BEV.(5.0 is a dummy) Sales volume for CAN		
Mfr Exhaust / Evap Standards Comments	--		

Certification Summary Information Report

Test Group	VNSXV0000C3A			Evaporative/Refueling Family			--			
Models Covered by this Certificate										
Carline Manufacturer	Division	Carline	Certification Region Code(s)	Drive System	Trans - Type	- # of Gears	Trans - Lockup			
Nissan Motor Co., Ltd.	1 - NISSAN	93 - ARIYA FWD 63kWh	Federal	2-Wheel Drive, Front	Automatic	1	Yes			
Engine Description										
Hybrid Type			--		Hybrid Description			--		
Engine Type			--		Mfr Engine Description			--		
Engine Block Arrangement			--		Mfr Engine Block Arrangement Description			--		
Camless Valvetrain Indicator			--		Oil Viscosity/Classification					
Number of Cylinders/Rotors			--		Mechanically Variable Compression Ratio Indicator			--		
After Treatment Device(s) (ATD)										
Mfr After Treatment Device (ATD) Comments			--							
Direct Ozone Reduction (DOR) Device			--							
Mfr Emission Control Device Comments			--							
Official Test Numbers										
Test Group Fuel	FTP	US06	SC03	Cold CO	Highway	EPA City Litmus Value	EPA City Litmus Threshold	EPA Highway Litmus Value	EPA Highway Litmus Threshold	CREE Weighting Factor
Electricity	--	--	--	--	--	--	--	--	--	--

Certification Summary Information Report

Test Group	VNSXV0000C3A	Evaporative/Refueling Family	--
Hybrid Electric Vehicle And Fuel Cell Information			
Rechargable Energy Storage System	Battery(s)	Rechargable Energy Storage System, if Other	--
Battery Type	Lithium Ion	Number of Battery Packs	1
Total Voltage of Battery Packs	352	Battery Energy Capacity	187
Battery Specific Energy	146.7	Battery Charger Type	On-Board
Number of Capacitors	--	Capacitor Rating (In Farads)	--
Mfr Capacitor Comments	--		
Hydraulic System Description	--		
Regenerative Braking Type	Electrical Regen Brake		
Regenerative Braking Source	Front Wheels	Driver Controlled Regenerative Braking	No
Mfr Regenerative Braking Description	--		
Drive Motor(s)/Generator(s)	1		
Motor/Generator Type 1	Alternating Current 3-phase	Rated Motor/Generator Power	160
Mfr Fuel Cell Description	--		
Fuel Cell On-Board H2 Storage Capacity (kg)	--	Usable H2 Fill Capacity (kg)	--
Mfr Hybrid Electric/ Electric Vehicle Comments	--		

Page 4 of 14 CSI Submission/Revision Date: 03/02/2026 09:24:51 PM

Certification Summary Information Report

Test Group	VNSXV0000C3A	Evaporative/Refueling Family	--
Manufacturer Test Vehicle Comments	CANADA only. Normal mode. Axle Ratio is 11.09.		

Certification Summary Information Report

Test Group	VNSXV0000C3A	Evaporative/Refueling Family	--
Test #	VNSX10093218	Test Procedure	77 - Multi-Cycle Test (MCT)
Exhaust Test # for this Evap Test	--	Test Fuel Type	62 - Electricity
Test Date	02/10/2026	Fuel	Electricity
Fuel Batch ID	--	Fuel Calibration Number	--
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	560-2 Okatsukoku		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	1121	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	--		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes
PHEV/EV Charge Depleting Test Information			
Recharge Event Voltage	240	Recharge Event Energy (kiloWatt-hours)	72.8656
Charge Depleting Range (Calculated miles)	324.368	Charge Depleting Range (Actual miles)	324.368
Charge Depleting Range Highway (Calculated miles)	280.258	Derived 5-Cycle Coefficient Model Year	--
All Electric Range Unadjusted (miles)	--	Equivalent All Electric Range (miles)	324.368
Number of Charge Depleting Bags/Phases Conducted	8	Transition Bag/Phase Number	--
Charge Depleting Bag/Phase #1			
Test Result/Emission Name		Unrounded Test Result	
Actual Distance Driven (miles)		7.448	
Carbon-Related Exhaust Emissions		0	
Drive Trace Absolute Speed Change Rating		1.0734199	
Drive Trace Energy Economy Rating		1.1852799	
Drive Trace Inertia Work Ratio Rating		2.0446049	
Integrated DC KW-HRS		1.90208	
Manufacturer Fuel Economy		28.8314987	
Charge Depleting Bag/Phase #2			

Certification Summary Information Report

Test Group	VNSXV0000C3A	Evaporative/Refueling Family	--
------------	--------------	------------------------------	----

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.265
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	4.9203172
Drive Trace Energy Economy Rating	-0.1262458
Drive Trace Inertia Work Ratio Rating	6.7338546
Integrated DC KW-HRS	2.40933
Manufacturer Fuel Economy	26.4981432

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.445
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.9077414
Drive Trace Energy Economy Rating	0.6628584
Drive Trace Inertia Work Ratio Rating	1.5503372
Integrated DC KW-HRS	1.49779
Manufacturer Fuel Economy	22.7124682

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	153.644
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0
Drive Trace Energy Economy Rating	0
Drive Trace Inertia Work Ratio Rating	0
Integrated DC KW-HRS	47.7184
Manufacturer Fuel Economy	35.0629438

Charge Depleting Bag/Phase #5

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.443
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	2.5110887
Drive Trace Energy Economy Rating	0.9185329
Drive Trace Inertia Work Ratio Rating	1.4130359
Integrated DC KW-HRS	1.4612
Manufacturer Fuel Economy	22.1635719

Charge Depleting Bag/Phase #6

Certification Summary Information Report

Test Group	VNSXV0000C3A	Evaporative/Refueling Family	--
-------------------	--------------	-------------------------------------	----

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.263
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	2.4777766
Drive Trace Energy Economy Rating	0.621304
Drive Trace Inertia Work Ratio Rating	3.7717084
Integrated DC KW-HRS	2.3182
Manufacturer Fuel Economy	25.5008514

Charge Depleting Bag/Phase #7

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.454
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.5748874
Drive Trace Energy Economy Rating	0.4036276
Drive Trace Inertia Work Ratio Rating	0.9523484
Integrated DC KW-HRS	1.4483
Manufacturer Fuel Economy	21.9354854

Charge Depleting Bag/Phase #8

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	18.141
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0
Drive Trace Energy Economy Rating	0
Drive Trace Inertia Work Ratio Rating	0
Integrated DC KW-HRS	5.787
Manufacturer Fuel Economy	36.0139176

Manufacturer Test Comments

AC Energy[Wh/mile] UDDS/Highway:225/260 , Net Vehicle DC energy consumption [DC Wh/mile] UDDS/Highway:199/230 , MFR FE[mpg] UDDS/Highway:150/129.6 , Charge Time[sec]:38267

Certification Summary Information Report

Test Group		VNSXV0000C3A				Evaporative/Refueling Family				--		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
Fed	150,000 miles	Federal Tier 4 Bin 0	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
CA	150,000 miles	California ZEV	CREE	0	--	--	--	0	--	0	--	--
Fuel Properties												

Certification Summary Information Report

Test Group		VNSXV0000C3A			Evaporative/Refueling Family			--	
Consolidated List of Standards									
Exhaust Standards									
Cert Region		Federal			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 4 Bin 0	
Fuel		Electricity			Test Procedure			Multi-Cycle Test (MCT)	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0.0
150,000 miles	CREE	--	--	--	--	--	--	0	999.999
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			California ZEV	
Fuel		Electricity			Test Procedure			Multi-Cycle Test (MCT)	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0.0
150,000 miles	CREE	--	--	--	--	--	--	0	999.999

Certification Summary Information Report

Test Group		VNSXV0000C3A	Evaporative/Refueling Family		--
Glossary					
Useful Life					
4	4,000 miles		120	120,000 miles	
50	50,000 miles		150	150,000 miles	
100	100,000 miles				
Emission Name					
HC-TOTAL	Total Hydrocarbon		COMB-CREE	Combined Carbon-Related Exhaust Emissions	
CO	Carbon Monoxide		COMB-OPT-CREE	Combined Optional Carbon-Related Exhaust Emissions	
CO2	Carbon dioxide		HC-TOTAL-EQUIV	Total Hydrocarbon equivalent - Evap only	
CREE	Carbon-Related Exhaust Emissions		METHANE-COMB	Combined CH4 for HD 2b/3 vehicles only	
OPT-CREE	Optional Carbon-Related Exhaust Emissions		N2O-COMB	Combined Nitrous Oxide for HD 2b/3 vehicles only	
NOX	Nitrogen Oxide		LEAK-DIA	Effective Leak Diameter (inches)	
PM	Particulate Matter		LEAK-GAS CAP	Gas Cap Leakage (cc/min)	
PM-COMP	SFTP Composite Particulate Matter		CO2-COMB	Combined Carbon Dioxide for HD 2b/3 Vehicles Only	
HC-NM	Non-methane Hydrocarbon		KW-HRS	Integrated DC KW-HRS	
OMHCE	Organic material Hydrocarbon Equivalent		CH4 BAG 1	Bag 1 Methane	
OMNMHCE	Organic material non-methane HC equivalent		CH4 BAG 2	Bag 2 Methane	
NMOG	Non-methane organic gases		CH4 BAG 3	Bag 3 Methane	
HCHO	Formaldehyde		CH4 BAG 4	Bag 4 Methane	
H3C2HO	Acetaldehyde		CO BAG 1	Bag 1 Carbon Monoxide	
HC-NM+NOX	SFTP Non-methane Hydrocarbon + Nitrogen Oxides for US06 or SC03		CO BAG 2	Bag 2 Carbon Monoxide	
HC-NM+NOX-COMP	SFTP Composite Non-methane Hydrocarbon + Nitrogen Oxides		CO BAG 3	Bag 3 Carbon Monoxide	
CO-COMP	SFTP Composite Carbon Monoxide		CO BAG 4	Bag 4 Carbon Monoxide	
ETHANOL	C2H5OH - Ethanol		NMOG BAG 1	Bag 1 Non-methane organic gases	
FE BAG 1	Bag 1 Fuel Economy		NMOG BAG 2	Bag 2 Non-methane organic gases	
FE BAG 2	Bag 2 Fuel Economy		NMOG BAG 3	Bag 3 Non-methane organic gases	
FE BAG 3	Bag 3 Fuel Economy		NMOG BAG 4	Bag 4 Non-methane organic gases	
FE BAG 4	Bag 4 Fuel Economy		ACT-DISTANCE BAG 1	Bag 1 Actual Distance	
MFR FE	Manufacturer Fuel Economy		ACT-DISTANCE BAG 2	Bag 2 Actual Distance	
HC	Hydrocarbon for Running Loss and ORVR		ACT-DISTANCE BAG 3	Bag 3 Actual Distance	
METHANE	CH4 - Methane		ACT-DISTANCE BAG 4	Bag 4 Actual Distance	
METHANOL	CH3OH - Methanol		HC-TOTAL BAG 1	Bag 1 Total Hydrocarbon	
N2O	Nitrous Oxide		HC-TOTAL BAG 2	Bag 2 Total Hydrocarbon	
SPITBACK	Spitback Hydrocarbon in grams		HC-TOTAL BAG 3	Bag 3 Total Hydrocarbon	
AMP-HRS	Integrated Amp-hours		HC-TOTAL BAG 4	Bag 4 Total Hydrocarbon	
START-SOC	System Start State of Charge Watt-hours		WATT-HRS BAG 1	Bag 1 Watt Hours	
END-SOC	System End State of Charge Watt-hours		WATT-HRS BAG 2	Bag 2 Watt Hours	

Certification Summary Information Report

Test Group		VNSXV0000C3A	Evaporative/Refueling Family		--
ACT-DISTANCE	Actual Distance Driven (miles)		WATT-HRS BAG 3	Bag 3 Watt Hours	
AS-VOLT	Average System Voltage		WATT-HRS BAG 4	Bag 4 Watt Hours	
CO2 BAG 1	Bag 1 Carbon Dioxide		WATT-HRS	Watt Hours	
CO2 BAG 2	Bag 2 Carbon Dioxide		HC-NM BAG 1	Bag 1 Non-methane Hydrocarbon	
CO2 BAG 3	Bag 3 Carbon Dioxide		HC-NM BAG 2	Bag 2 Non-methane Hydrocarbon	
CO2 BAG 4	Bag 4 Carbon Dioxide		HC-NM BAG 3	Bag 3 Non-methane Hydrocarbon	
NMOG+NOX	Non-methane organic gases plus Nitrogen Oxides		HC-NM BAG 4	Bag 4 Non-methane Hydrocarbon	
NMOG+NOX-COMP	SFTP Composite Non-methane Organic Gases + Nitrogen Oxides		N2O BAG 1	Bag 1 Nitrous Oxide	
DT-IWRR	Drive Trace Inertia Work Ratio Rating		N2O BAG 2	Bag 2 Nitrous Oxide	
DT-ASCR	Drive Trace Absolute Speed Change Rating		N2O BAG 3	Bag 3 Nitrous Oxide	
DT-EER	Drive Trace Energy Economy Rating		N2O BAG 4	Bag 4 Nitrous Oxide	
Certification Region					
CA	California + CAA Section 177 states		FA	Federal	
Exhaust Emission Standard Level					
B1	Federal Tier 2 Bin 1		HDV2B340	Federal Tier 3 HD Class 2b Transitional Bin 340	
B2	Federal Tier 2 Bin 2		HDV2B250	Federal Tier 3 HD Class 2b Bin 250	
B3	Federal Tier 2 Bin 3		HDV2B200	Federal Tier 3 HD Class 2b Bin 200	
B4	Federal Tier 2 Bin 4		HDV2B170	Federal Tier 3 HD Class 2b Bin 170	
B5	Federal Tier 2 Bin 5		HDV2B150	Federal Tier 3 HD Class 2b Bin 150	
B6	Federal Tier 2 Bin 6		HDV2B0	Federal Tier 3 HD Class 2b Bin 0	
B7	Federal Tier 2 Bin 7		HDV3B630	Federal Tier 3 HD Class 3 Transitional Bin 630	
B8	Federal Tier 2 Bin 8		HDV3B570	Federal Tier 3 HD Class 3 Transitional Bin 570	
B9	Federal Tier 2 Bin 9		HDV3B400	Federal Tier 3 HD Class 3 Bin 400	
B10	Federal Tier 2 Bin 10		HDV3B270	Federal Tier 3 HD Class 3 Bin 270	
B11	Federal Tier 2 Bin 11		HDV3B230	Federal Tier 3 HD Class 3 Bin 230	
HDV1	HDV1 (Federal HD chassis Class 2b GVW 8501-10000)		HDV3B200	Federal Tier 3 HD Class 3 Bin 200	
HDV2	HDV2 (Federal HD chassis Class 3 GVW 10001-14000)		HDV3B0	Federal Tier 3 HD Class 3 Bin 0	
L2	California LEV-II LEV		L4SULEV100	California LEV-IV SULEV100	
L2OP	California LEV-II LEV Optional		L4SULEV125	California LEV-IV SULEV125	
U2	California LEV-II ULEV		L4SULEV15	California LEV-IV SULEV15	
S2	California LEV-II SULEV		L4SULEV150	California LEV-IV SULEV150	
ZEV	California ZEV		L4SULEV170	California LEV-IV SULEV170	
OT	Other		L4SULEV175	California LEV-IV SULEV175	
T1	Federal Tier 1		L4SULEV20	California LEV-IV SULEV20	
PZEV	California PZEV		L4SULEV200	California LEV-IV SULEV200	
L2LEV160	California LEV-II LEV160		L4SULEV230	California LEV-IV SULEV230	
L2ULEV125	California LEV-II ULEV125		L4SULEV25	California LEV-IV SULEV25	
L2SULEV30	California LEV-II SULEV30		L4SULEV30	California LEV-IV SULEV30	
L2LEV395	California LEV-II LEV395		L4SULEV75	California LEV-IV SULEV75	

Certification Summary Information Report

Test Group		VNSXV0000C3A	Evaporative/Refueling Family		--
L2ULEV340	California LEV-II ULEV340		L4SULEV85	California LEV-IV SULEV85	
L2LEV630	California LEV-II LEV630		L4ULEV125	California LEV-IV ULEV125	
L2ULEV570	California LEV-II ULEV570		L4ULEV200	California LEV-IV ULEV200	
L3LEV160	California LEV-III LEV160		L4ULEV250	California LEV-IV ULEV250	
L3ULEV125	California LEV-III ULEV125		L4ULEV270	California LEV-IV ULEV270	
L3ULEV70	California LEV-III ULEV70		L4ULEV40	California LEV-IV ULEV40	
L3ULEV50	California LEV-III ULEV50		L4ULEV400	California LEV-IV ULEV400	
L3SULEV30	California LEV-III SULEV30		L4ULEV50	California LEV-IV ULEV50	
L3SULEV20	California LEV-III SULEV20		L4ULEV60	California LEV-IV ULEV60	
L3LEV395	California LEV-III LEV395		L4ULEV70	California LEV-IV ULEV70	
L3ULEV340	California LEV-III ULEV340		T4B170	Federal Tier 4 MDV Bin 170	
L3ULEV250	California LEV-III ULEV250		T4B150	Federal Tier 4 MDV Bin 150	
L3ULEV200	California LEV-III ULEV200		T4B125	Federal Tier 4 MDV Bin 125	
L3SULEV170	California LEV-III SULEV170		T4B100	Federal Tier 4 MDV Bin 100	
L3SULEV150	California LEV-III SULEV150		T4B85	Federal Tier 4 MDV Bin 85	
L3LEV630	California LEV-III LEV630		T4B75	Federal Tier 4 MDV Bin 75	
L3ULEV570	California LEV-III ULEV570		T4B70	Federal Tier 4 Bin 70	
L3ULEV400	California LEV-III ULEV400		T4B65	Federal Tier 4 Bin 65	
L3ULEV270	California LEV-III ULEV270		T4B60	Federal Tier 4 Bin 60	
L3SULEV230	California LEV-III SULEV230		T4B55	Federal Tier 4 Bin 55	
L3SULEV200	California LEV-III SULEV200		T4B50	Federal Tier 4 Bin 50	
T3B160	Federal Tier 3 Bin 160		T4B45	Federal Tier 4 Bin 45	
T3B125	Federal Tier 3 Bin 125		T4B40	Federal Tier 4 Bin 40	
T3B110	Federal Tier 3 Transitional Bin 110		T4B35	Federal Tier 4 Bin 35	
T3B85	Federal Tier 3 Transitional Bin 85		T4B30	Federal Tier 4 Bin 30	
T3SULEV30	Federal Tier 3 Transitional LEV-II SULEV30 Carryover		T4B25	Federal Tier 4 Bin 25	
T3B70	Federal Tier 3 Bin 70		T4B20	Federal Tier 4 Bin 20	
T3B50	Federal Tier 3 Bin 50		T4B15	Federal Tier 4 Bin 15	
T3B30	Federal Tier 3 Bin 30		T4B10	Federal Tier 4 Bin 10	
T3B20	Federal Tier 3 Bin 20		T4B5	Federal Tier 4 Bin 5	
T3B0	Federal Tier 3 Bin 0		T4B0	Federal Tier 4 Bin 0	
HDV2B395	Federal Tier 3 HD Class 2b Transitional Bin 395				
Transmission Type Code					
AMS	Automated Manual- Selectable (e.g. Automated Manual with paddles)	M	Manual		
A	Automatic	OT	Other		
AM	Automated Manual	SA	Semi-Automatic		
CVT	Continuously Variable	SCV	Selectable Continuously Variable (e.g. CVT with paddles)		
Drive System Code					
4	4-Wheel Drive	P	Part-time 4-Wheel Drive		

Certification Summary Information Report

Test Group		VNSXV0000C3A	Evaporative/Refueling Family		--
F	2-Wheel Drive, Front		A	All Wheel Drive	
R	2-Wheel Drive, Rear				
Additional Terms and Acronyms					
AFC	Alternative Fuel Converter		ICI	Independent Commercial Importer	
CSI	Certificate Summary Information		ORVR	Onboard Refueling Vapor Recovery	
DF	Deterioration Factor		SIL	Shift Indicator Light	
Evap	Evaporation, Evaporative		Trans	Transmission	

9. OBD System Description

Refer to the confidential section.

10. Description of Alternate-fueled Vehicles

N.A.

11. AECD Description

Refer to the confidential section.

SEC12(2)-(c)

12. Description of Vehicles Covered by Certificate and Test Parameter

(2) Shifting

(c) Manual transmission

N.A.

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

SEC12(3)

12. Description of Vehicles Covered by Certificate and Test Parameter

(3) List of Certified Vehicles

Durability Group VNSXEEVNN310
Test Group VNSXV0000C3A

[Vehicle Identification]

Carline	Trim Line	Trans./OD	Engine Code	Fuel	ETW (lbs)	SIL	Battery Capacity (kWh)	Vehicle Class	Sales Area 50S	CAN
ARIYA FWD 63kWh	SV FWD	Auto (Fixed single Speed)	EVAAN	Electricity	4500	N.A.	66	Canada LDV		X

[Propulsion system]

-Motor						-Traction Inverter		
Model	Type	Rated Power (kW)	Rated Torque (Nm)	Maximum Speed (rpm)	Number of Motor per vehicle	Drive type	Type	Modulation
AM67	Alternating Current 3-phase	160 @5950-13000rpm	300 @0-4392rpm	13520	1	2-wheel Drive, front	DC/AC 3phase	PWM controlled

-Battery

Refer to the confidential section. Sec16(9)-(a)

-Regenerative Braking

Type	Braking Source	Driver controlled Regen Braking
Electrical Regen Brake	Front Wheels	N.A.

-Standard Charger

Type	Input Voltage (V)
Conductive On-board	AC 100-240 (<32A)

-Charging system
Refer to the attachment.

[Other system]

-Climate control system

The climate control system equipped with electric motor-driven compressor/ Heat-Pump + Air PTC heater system.

The system uses R-1234yf refrigerant and operates on 12volts DC/ 270 volts DC.

The vehicle are also equipped with a "pre-conditioning" system that turns on air conditioning system before passengers enter the car.

The vehicle is not equipped with a fuel-fired heating system.



VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

Charging system information



Charging system information (Summary of owner's manual)

Type of charging	Charge port	Charge connector	Control box	Power	Instructions
AC Level 2: Normal charge (AC 220-240 volt)		 Normal charge connector			Use the charging device (AC 220-240 volt) that is installed in your home.
		 Normal charge connector	 Domestic plug	 Electrical outlet	Use the L1 & L2 EVSE. Use only a 220-240 volt, 50 amp, dedicated outlet installed by a qualified electrician.


NORMAL-WBTA0002X

Charging system information (2)

Charging system information (Summary of owner's manual)

Type of charging	Charge port	Charge connector	Control box	Power	Instructions
AC Level 1: Trickle charge (AC 110-120 volt)		 Normal charge connector		 Electrical outlet	Use the L1&L2-EVSE. Use only a 110-120 volt, 15 amp, dedicated outlet installed by a qualified electrician.

NORMAL-WBTA0033X

Type of charging	Charge port	Charge connector	Control box	Power	Instructions
DC Level 3: Quick Charge ONLY Not compatible with NACS Level 1/2 charging.		 Quick charge connector			Public charging stations

NORMAL-WBTA0028X

Charging system information (3)

Charging system information (Summary of owner's manual)

This vehicle is an electric vehicle and it requires electricity to operate. The LI-ion battery is the only source of power to operate the vehicle.

It is important to conserve power and plan your charging needs when you drive to avoid completely discharging the LI-ion battery.

There are the following methods of charging the LI-ion battery:

- AC Level 2: Normal charge
- AC Level 1: Trickle charge
- DC Level 3: DC Fast Charge

The time to completely charge the vehicle LI-ion battery varies based on the state of charge of the LI-ion battery, condition

and age of the LI-ion battery, temperature of the LI-ion battery, ambient temperature and condition of the power source connected to the vehicle, and whether the electric equipment (such as the air conditioner, which consumes electric power) is used.

AC Level 2: Normal charge

NISSAN recommends using normal charging for usual charging of the vehicle. Use of DC Fast Charge should be minimized in order to help prolong LI-ion battery life.

Normal charging uses L1 & L2 EVSE (Electric Vehicle Supply Equipment) (if so equipped), or an SAE J1772 compliant

charging device connected to a dedicated AC 220 - 240 volt circuit. L1 & L2 EVSE (if so equipped) is provided with the vehicle (if so equipped). The charging device is a home charging dock installed in your home by a qualified electrician. It is recommended that you visit a NISSAN certified ARIYA dealer. For additional information, see "How to normal charge (AC 220-240 volt) by charging device" (P.47) or "How to normal charge (AC 220-240 volt) by L1 & L2 EVSE (if so equipped)" (P.57).

AC Level 1: Trickle charge

Trickle charging is not recommended for regular use because it takes more time than normal charging. Trickle charge can

be used when it is necessary to perform an emergency charge at a destination such as a friend's house.

Trickle charge uses the EVSE (Electric Vehicle Supply Equipment) (if so equipped) provided with the vehicle to connect the vehicle to an AC 110-120 volt, 15A dedicated outlet. The outlet should be protected by a circuit breaker to avoid overloading the circuit or other electrical hazard.

For additional information, see "How to trickle charge (AC 110-120 volt) by L1 & L2 EVSE (if so equipped)" (P.49).

DC Level 3: DC Fast Charge

A vehicle equipped with a DC Fast Charge port is compatible with the NACS (J3400) connectors on charging stations. Charging stations are UL certified and safe to use in the US.

DC Fast Charging is possible (even several times a day). If the battery temperature is hot, in order to protect the battery, power of the DC Fast Charging will be limited.

Public charging:

This vehicle is compatible with any public charging station that is SAE J3400 compliant. If you attempt to charge from a noncompliant charging station, you may not receive a complete charge, or you

may not be able to charge at all due to hardware and software differences. NISSAN is working with states, municipalities, utility companies and others to assist in the preparation of markets and infrastructure. However, NISSAN makes no representations that public charging stations will be available in locations where you wish to operate the vehicle, nor can NISSAN predict the period of time it may take for public charging infrastructure to be developed in your area. Depending on where you live or drive, there may not be sufficient public charging stations available to meet your particular needs for driving range and charging away from your home. Trip planning is therefore

important, and you should plan trips with these facts in mind.

Even when charging the LI-ion battery using a charger capable of more than the vehicle's maximum charging power, the maximum power from the charger will be limited to the vehicle's maximum charging power, it will be changed based on the vehicle status.

During charging the power limit to the vehicle may change depending on the capacity of the LI-ion battery. This is normal and does not indicate a malfunction.

The time needed to charge the LI-ion battery using the DC Fast Charger depends

on many factors including the LI-ion battery temperature and the type of DC Fast Charger used.

It may take more time to charge the LI-ion battery using the DC Fast Charger if the vehicle is parked in a cold location for a long time.


It may take more time to charge the LI-ion battery using the DC Fast Charger if the temperature of the LI-ion battery is high or low.

Charging system information (4)

Charging system information (Summary of owner's manual)

<Equipments for Normal charge/ Trickle charge>

Normal

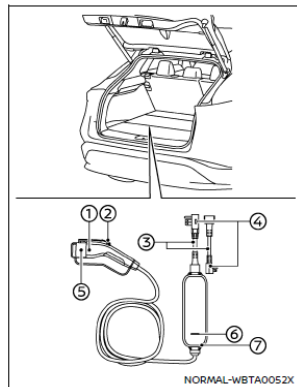

To start normal charging


- ① Charge Connector
- ② Release Button
- ③ Genuine NISSAN exchangeable plug
- ④ Plug
- ⑤ Cap
- ⑥ Indicator light

⑦ Control box

NOTE:
Charge schedule, remote charge and immediate charge can be performed in the normal charge mode. For additional information, see "charging methods" (P.74).

1. Push the P (Park) position switch to place the vehicle in the P (Park) position and apply the parking brake.
2. When charging the Li-Ion battery, place the power switch in the OFF position.
3. Open the Normal Charge Port (J1772) lid and cap on the driver side of vehicle. For additional information, see "Charge port lid" (P.304).
4. Take out the EVSE (if so equipped) from the luggage compartment.

When your vehicle is equipped with the exchangeable plug, connect the exchangeable plug for AC 240 volt to the control box.



To connect the exchangeable plug to the control box:

Align the mark of the plug ① with the mark of the control box ② as shown in the illustration.

Insert the plug into the control box.

Rotate it until a click sounds.

Pull the cable to ensure if it is securely connected.


To remove the exchangeable plug from the control box:

Rotate the plug of the exchangeable plug backward.

5. Connect the electrical plug to the AC 220 - 240 volt, 50A dedicated electrical

outlet. If it is connected normally, the green light on the EVSE (if so equipped) control box indicator light illuminates.

Trickle

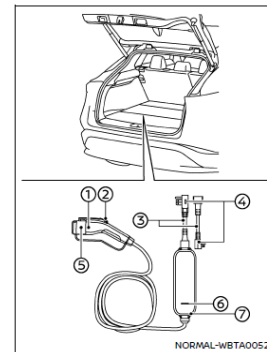

To start trickle charging:


- ① Charge Connector
- ② Release Button
- ③ Genuine NISSAN exchangeable plug
- ④ Plug
- ⑤ Cap
- ⑥ Indicator light

⑦ Control box

NOTE:
Charge schedule, remote charge and immediate charge can be performed in the trickle charge mode. For additional information, see "charging methods" (P.74).

1. Push the P (Park) position switch to place the vehicle in the P (Park) position and apply the parking brake.
2. When charging the Li-Ion battery, place the power switch in the OFF position.
3. Open the Normal Charge Port (J1772) lid and cap on the driver side of vehicle. For additional information, see "Charge port lid" (P.304).
4. Take out the EVSE (if so equipped) from the luggage compartment.

When your vehicle is equipped with the exchangeable plug, connect the exchangeable plug for AC 120 volt to the control box.



To connect the exchangeable plug to the control box:

Align the mark of the plug ① with the mark of the control box ② as shown in the illustration.

Insert the plug into the control box.

Rotate it until a click sounds.

Pull the cable to ensure if it is securely connected.

To remove the exchangeable plug from the control box:

Rotate the plug of the exchangeable plug backward.


5. Connect the electrical plug to the AC 110 - 120 volt, 15A dedicated electrical

outlet. If it is connected normally, the green light on the EVSE (if so equipped) control box indicator light illuminates.

Charging system information (5)

Charging system information (Summary of owner's manual)

CHARGING METHODS

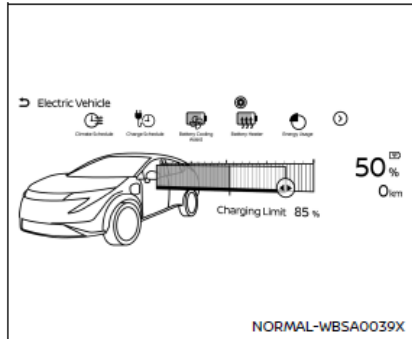

Example

The Electric Vehicle screen allows you to use the following features:

Available items may vary depending on models, specifications, software versions and conditions.

- State of charge gauge, driving range, charge remaining time (while-charging)
- Charge Limit (%)
- Climate Schedule
- Charge Schedule
- Battery Cooling Assist
- Battery Heater
- Energy Usage
- Battery Temperature Management Status
- Charging Stations
- Plug-In Reminder
- Amperage Limit

12. Description of Vehicles Covered by Certificate and Test Parameters

(4) Test Parameter

Durability Group VNSXEEVNN310
Test Group VNSXV0000C3A

Carline	Trim		ETW (lbs)	Tire		Axle Ratio	N/V Ratio	TRLHP	Coastdown Time (sec.)	Single Roll Dyno Terms			Shift Schedule ID		Test Proc	Cooling Fan	Special Test	Sales Area	
	Line	Trans.		Size	Type					A	B	C	City	Hwy		Config	Proc	50S	CAN
ARIYA FWD 63kWh	SV FWD	Auto (Fixed single Speed)	4500	235/55R19	All season	11.090	133.4	11.9	23.46	32.81	-0.2388	0.02729	FTA	HWA	Part1066	*1	*2*3*4*5*6*7*8		X

- *1 The road speed fan to all test cycles.
- *2 Set in maintenance mode. Refer to Type B of SEC16(10)-2.
- *3 After setting maintenance mode, turn off VDC in the System section of VDC Setting.
- *4 After setting maintenance mode, turn off Emergency Braking in the Emergency Assist section of Driver Assistance.
- *5 After setting maintenance mode, turn off Speed Limit Sign in the Traffic Sign Assist section of Driver Assistance.
- *6 After setting maintenance mode, turn off Speed Limit Warning in the Traffic Sign Assist section of Driver Assistance.
- *7 After setting maintenance mode, turn off Rear Auto Braking in the Parking Assist section of Driver Assistance.
- *8 Cancel the automatic P position function by Nissan development tool.

12. Description of Vehicles Covered by Certificate and Test Parameter

(4) Test Parameter

Testing Related Information

-Charging procedure

- 1) Confirm the vehicle is shut off by checking the meter screen is turned off.
- 2) Push open the charge port door on the vehicle.
- 3) Remove the charge connector from the holster.
- 4) Fully insert the charge connector into the charge port.
- 5) Charging begins automatically. The Plug in indicator light comes on the meter screen and start flashing.
- 6) When the vehicle is fully charged, the Plug in indicator light will stop flashing and turn solid.
- 7) Remove the charge connector from the charge port. Make sure to firmly secure the charge connector in its holster.
- 8) Close the charge port door on the vehicle.

-Load setting for dyno procedure

- 1) With depressing the brake pedal, push the “START” switch. The vehicle is set in "Ready" condition.
- 2) Shift into “N” position with depressing the brake.
- 3) Start the Load Set
- 4) When the load set is finished, push the "START" switch once to shut off vehicle system

-Safe handling of battery system Information

When working on high voltage cable, wear antistatic boots and insulated gloves. And remove the Shut Down switch.

If high voltage battery is damaged, there is a risk of short circuit to vehicle body due to leakage of electrolyte, and it is necessary to beware of electric shock.

When damaged, the battery may emit white fumes (vaporized electrolyte) due to short circuit.

- > If this happens, cool the battery with hose streams.
- > Since electrolyte is flammable, fire sources are prohibited.
- > Electrolyte liquid and vapor are not toxic, but must not be directly inhaled in large quantities.

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

12. Description of Vehicles Covered by Certificate and Test Parameter

(4) Test Parameter

Testing Related Information

-System Warning Device Information

This EV has 2 indicating devices for warnings specific to EV.

"FAIL" as warning device for the existence of a vehicle malfunction.

"SLOW DOWN" which is marked with the figure of TURTLE as warning device for the lowering of acceleration performance.

TYPE		FAIL	SLOW DOWN
Symbol			
	Traveling	IMPOSSIBLE	POSSIBLE
	Repair	Required	Not-required
	Acceleration performance	Depend upon condition	SLOW DOWN
	User's responsibility	Repair	Charging or Cooling the Vehicle

-Emergency procedures

When an accident happens

- > Stop the car to the safe place.
- > Turn key off
- > Rescue injured persons if there any.
- > Please call emergency (911).

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

14. Request for Certification


Request for Certificate to EPA

Test Group	VNSXV0000C3A
Exhaust emission control system number	1 of 1
Evaporative/Refueling Family	N.A.
Carline	ARIYA FWD 63kWh

Nissan Motor Co., Ltd. requests that EPA issue a 2027 model year certificate of conformity for the above specified test group and evaporative/refueling family combination more fully described in this application. This combination complies with the following applicable emission standard

Federal	X
California & 177 States	

This combination complies with all applicable regulations contained within 40 CFR Part86, the application is current as of this date.
The exhaust and evaporative/refueling emission test results support this request for certificate.



Takane Hayashi
Senior Manager
Regulation and Homologation Department

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

SEC15(1)

15. Other Information

(1) Fee Filing Form

Refer to the attached Fee Filing Form.

VNSXV0000C3A

Issue date: Refer to cover page

Revision date:

US EPA Fee Form

[Help and EPA Instructions](#)

* Required Field

General Information

Date: 02/18/2026

Process Code *

Submit New Fee Filing Form

Manufacturer Code *

NSX

Manufacturer Name *

NISSAN MOTOR CO., LTD.

Contact Name *

Farrukh Khan

Contact Email Address *

KhanF@nrd.nissan-usa.com

Contact Phone *

248-488-4649

Calendar Year complete application submitted to EPA *

2026

calendar year in which the complete certification application is received, not the model year.

Engine Family / Evaporative Family / Test Group *

VNSXV0000C3A

Certificate Request Type (Industry Sector Code)

Certificate Request Type *

- ☒ On-Highway LDV, LTD, MDVPV, HDV Chassis Cert (Federal) (A, B, D, J, T, V)
- ☐ On-Highway HDE Dyno Cert (Federal) (E, H)
- ☐ On-Highway LD ICI, MDPV ICI, HDV ICI (A, B, D, J, T, V)
- ☐ On-Highway Motorcycle (C)
- ☐ On-Highway HDV Evap (F)
- ☐ On-Highway LDV, LTD, MDVPV, HDV Chassis Cert (California-Only) (A, B, D, J, T, V)
- ☐ On-Highway HDE Dyno Cert (California-Only) (E, H)
- ☐ Nonroad CI (L)
- ☐ Nonroad SI (B, S)
- ☐ Locomotive (G, K)
- ☐ All Nonroad Recreational, excluding Marine engines (X, Y)
- ☐ All Marine (Including IMO) (M, N, W)
- ☐ Component Certification for Evaporative Emissions (P)

IMO Name (Required for dual US/IMO Marine Only)

ICI VIN Number (Required for ICIs Only)

Do you qualify for a Reduced Fee? *

No

Amount Owed

\$32,317.00

Payment Type *

Offline Wire

Comments

EPA Form Number 3520-29

OMB Control No. 2060-0545

Approval expires 7/31/2027

The public reporting and recordkeeping burden for this collection of information is estimated to average 12 minutes per response. Send comments on the Agency's need for this information, the accuracy of the provided burden estimates, and any suggested methods for minimizing respondent burden, including through the use of automated collection techniques to the Director, Collection Strategies Division, U.S. Environmental Protection Agency (2822T), 1200 Pennsylvania Ave., NW, Washington, D.C. 20460. Include the OMB control number in any correspondence. Do not send the completed forms to this address.

The content of this document may contain Sensitive But Unclassified (SBU) data and/or Controlled Unclassified Information (CUI).