

# Cabot's Penta-Wood-Seal No. 3110

**SEALS, PRIMES AND PRESERVES WOOD**

**CONTAINS 5% TECHNICAL PENTACHLOROPHENOL**

**ACTIVE INGREDIENTS**

Pentachlorophenol	4.15%
Other Chlorophenols	.60%
Pine Oil	2.00%
Petroleum Solvents	83.00%

**INERT INGREDIENTS:** 10.25%

100.00%

**WARNING** — KEEP OUT OF THE REACH OF CHILDREN  
SEE BACK PANEL FOR FURTHER WARNING STATEMENTS  
**ONE U. S. GALLON — 3.785 LITERS**

---

## WARNING

Keep away from heat and open flame. Do not get on skin. Do not breathe vapor or spray mist. Do not get in eyes or on clothing. Close container after each use. Harmful or fatal if swallowed. Do not induce vomiting. Call physician immediately. Before smoking or eating and after using, clean hands thoroughly. Do not use this product indoors, or any other confined areas, where the vapors may concentrate and cause injury to plant or animal life. Vapors will cause injury if adequate ventilation is not insured.

This product is toxic to fish and wildlife. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste and container. Apply this product only as specified on this label. E.P.A. Reg. No. 43-27.

*Samuel Cabot*

*Incorporated*

MANUFACTURING CHEMISTS SINCE 1877  
BOSTON, MASSACHUSETTS 02108

Cabot's Penta-Wood-Seal is a powerful toxic priming solution for preserving wood, keeping out moisture and preventing decay. It contains an efficient fungicide which prevents the attack of fungi, termites, bacteria, and other decay-causing organisms. It seals the surface completely against moisture, thus reducing the possibility of the wood warping, swelling, checking or cracking.

Cabot's Penta-Wood-Seal should be used to seal and preserve sash, doors, trim, framing timbers, siding, millwork, etc.

Cabot's Penta-Wood-Seal forms an excellent foundation and priming coat for paint. It meets Federal Specification TT-W-572.

### DIRECTIONS

The material to be treated should be dipped in the Penta-Wood-Seal whenever practical. A minimum dip of three minutes is recommended.

This material may also be applied with a paint brush or a spray gun, but these methods of application are recommended only when dipping is impossible. Dipping gives deeper penetration and greater absorption.


In brushing or spraying two flowing coats should be used.

### COVERING CAPACITY

The coverage will vary depending on the nature and density of the wood. In general, one gallon of Penta-Wood-Seal will treat about 45 standard size window sash. It takes 7 to 8 gallons to treat 1000 board feet of one-inch lumber, 3 to 4 gallons to treat 1000 board feet of two-inch lumber. These quantities are based on a three minute dip and more will be required for longer dipping.

~~These stains are in compliance with the requirements of Los Angeles County Air Pollution Rules 66 and 66-1 and San Francisco Bay Area Pollution Regulation #3. Also complies with Philadelphia Air Management Regulation X Non-Photochemically Reactive.~~

## Clean Your Brushes with Cabot's Brush Cleaner

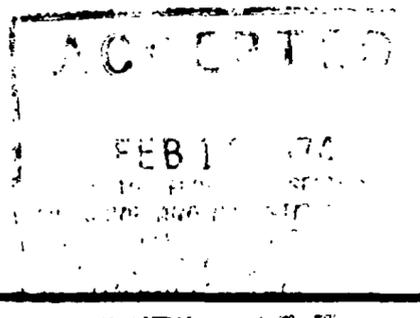

SELLER MAKES NO WARRANTY, EXPRESSED OR IMPLIED, CONCERNING THE USE OF THIS PRODUCT OTHER THAN INDICATED ON THE LABEL. BUYER ASSUMES ALL RISK OF USE AND/OR HANDLING OF THIS MATERIAL WHEN SUCH USE AND/OR HANDLING IS CONTRARY TO LABEL INSTRUCTIONS

LITHO IN U.S.A. D.N. CORP.