

**Water Repellent
Protects and Preserves
Against Mildew and Rot**

* These stains meet Federal Specification
TT-W-572 B, Par. 3.7 for water repellency.


Five Year Limited Warranty

When applied according to the directions on our label, if this Cabot product cracks, peels, or blisters within five years after purchase, Samuel Cabot Inc. will furnish any necessary additional product free of charge, or will refund the purchase price. This warranty does not include labor or cost of labor for the application of the product. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.


Samuel Cabot

Incorporated
MANUFACTURING CHEMISTS SINCE 1877
BOSTON, MASSACHUSETTS 02108
E.P.A. EST. 43-MA-1

2M 1 80

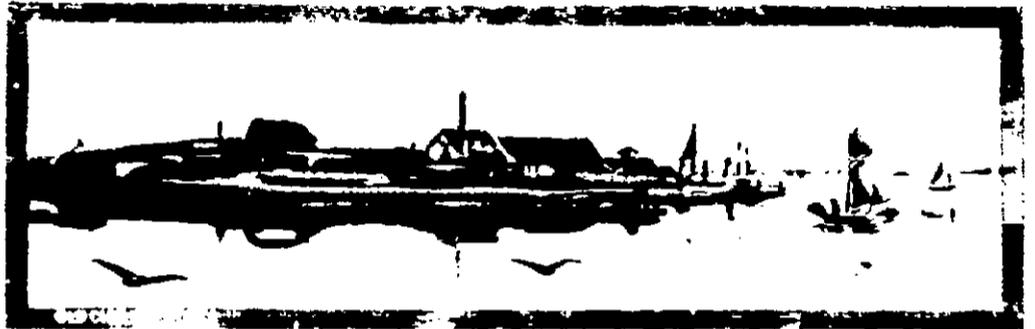

Cabot's[®] Semi-Solid Stains

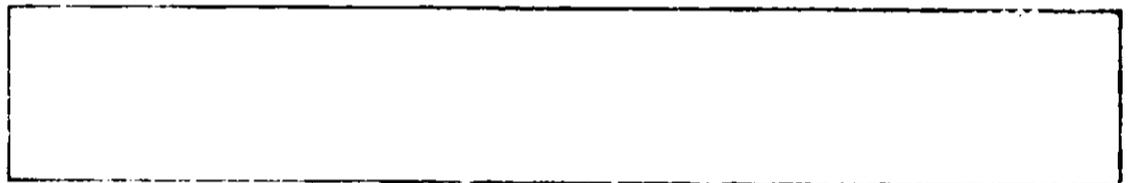

Wood Preserving

ONE U.S. GALLON — 3.785 LITERS

KEEP OUT OF THE REACH OF CHILDREN

**WARNING: COMBUSTIBLE — HARMFUL OR FATAL IF SWALLOWED!
SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.**

ACTIVE INGREDIENTS	
bis(tributyltin) oxide	0.5%
INERT INGREDIENT	99.5%
	100.00%

25

PF
HA

F
O
E
N
E
U
F
C
S
P
S
O
C
A
E
T
S
O
P
C
O
V
E
N
E

Cabot's Semi-Solid Stains

Cabot's® Semi-Solid Stains are penetrating oil-base stains with considerable hiding power, yet their attractive flat finish enhances the texture of any wood surface. These stains are for use on exterior horizontal or vertical siding, clapboards, and rough wood such as shingles and rough-sawn siding. These wood-preserving stains protect against rot, mildew discoloration, warping, and swelling. Fade-resistant pigments, water repellency, and an effective mildewcide will protect the wood surface and add years to the life of the wood.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER WHICH IS INCONSISTENT WITH THE INSTRUCTIONS ON THIS LABEL.

THE SURFACE: These stains should not be used on any previously painted or sealed surface. Do not thin the stain. Do not stain when the temperature is below 40°F. The surface must be clean and dry for at least 36 hours.

STIRRING: Stir the stains thoroughly before applying them, and stir them frequently while applying to maintain a uniform solution. If the job requires more than one can of stain, mix all together in one large container.

APPLICATION: Apply by brush, spray, or dipping. Two coats are recommended for best appearance and durability. When staining vertical siding, begin at the top with several boards and go all the way to the bottom. On horizontal siding, begin at one edge and follow through to a break at a door, window, or corner.

Colors may vary slightly according to the color and porosity of the wood surfaces. A sample brushout is recommended.

DRYING TIME: For shingles and rough wood surfaces, allow 24 hours between coats. For clapboards and smooth siding, allow 3-5 days between coats if possible.

PAINT OVER SEMI-SOLID STAINS: Cabot's O.V.T. Solid Color Stains or Cabot's Latex Solid Color Stains go very well over these stains which make excellent priming coats.

COVERING CAPACITY: On smooth surfaces like siding: 250 square feet per gallon, average. On rough sawn siding and shingles: 150 square feet per gallon. Dipping and 1 brush coat: 2 to 3 gallons per square of 16" or 18" shingles. For maximum durability, two coats are recommended.

STORAGE AND DISPOSAL: Do not reuse empty container. Wrap container in plastic and put in trash collection. Do not use, pour, spill or store near heat or open flame. Avoid storage near feed or food products.

These stains are in compliance with the requirements of the California Air Resource Board Model Rule for Architectural Coatings. Also complies with the Philadelphia Air Management Regulation V—Non-Photochemical, reactive.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

Harmful or fatal if swallowed or absorbed through skin, or on clothing. May cause skin irritation. Close container after each use. Wear rubber gloves and protective clothing when handling freshly treated lumber. Wear a fresh air respirator when spraying. Do not use product indoors — for exterior use only. Do not treat wood intended for indoor use. Keep product away from domestic animals.

FIRST AID

Change contaminated clothing at once. Wash skin with soap and water. If swallowed do not induce vomiting. Drink promptly a large quantity of milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Get immediate medical attention. In case of eye contact, flush with water for 15 minutes and get medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Keep out of lakes, streams and ponds. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

COMBUSTIBLE: Do not use, pour, spill or store near heat or open flame. Avoid storage near feed or food products. Vapors will cause injury if adequate ventilation is not maintained.

E.P.A. Reg. No. 43-73