


52-176

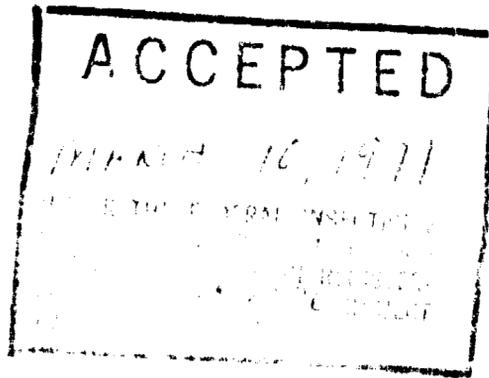

812

FOR INDUSTRIAL AND INSTITUTIONAL USE ONLY

pyrosect®

ACTIVE INGREDIENTS	100%
Petroleum Hydrocarbons	98.90%
*Technical Piperonyl Butoxide	1.00%
Pyrethrins	0.10%

*Consists of 80% of (butylcarbityl) (6-propylpiperonyl) ether and 20% of related compounds

CAUTION: Keep Out Of Reach Of Children.

Food should be removed or covered during treatment. Do not take internally. Use only when the plant is not in operation. Store away from heat or open flame.

WEST

USEPA Reg. No. 52-176

manufactured by

WEST CHEMICAL PRODUCTS, INC.

42 IS 1ST STREET, LONG ISLAND CITY, N.Y. 11101

PYROSECT is recommended for use in mills, elevators, granaries, warehouses, and food storage areas. PYROSECT kills exposed stages of granary weevils, rice weevils, confused flour beetles, red rust flour beetles, cadelles, saw-toothed grain beetles, spider beetles, angoumois grain moth, mediterranean flour moth, meal worms, drugstore beetles, and grain mites. PYROSECT is also effective as a space spray for use in the control of flies, mosquitoes, gnats, wasps and hornets.

DIRECTIONS FOR USE:

Surface spraying—Apply PYROSECT using the WEST 124-S Sprayer at the rate of 1 gallon per 1,000 square feet or as a "dew-like mist". Spray floors, walls and other surfaces of bins, storage and handling areas thoroughly, with particular attention to cracks or crevices. Waste grain, dust, dirt and debris should be removed and destroyed, and storage areas cleaned before spraying. Apply PYROSECT to conveyors, processing and handling equipment, such as reel sifters, purifiers, conveyors, sifters, and hoppers. Spray thoroughly around the bases of heavy machinery and equipment. For in-transit protection and control, treat truck beds, box cars, and ships' holds before loading, with emphasis on cracks, crevices, recesses and other hiding or breeding areas.

Fogging—For control of flying insects, fog PYROSECT at the rate of 1 gallon per 50,000 cubic feet using the WEST 1600 Fogger, or the Spacemaster Jet-Fogger. Keep doors and windows closed for at least ten minutes after treatment. Be sure that all ventilating equipment is turned off.

CLASSIFIED BY UNDERWRITERS' LABORATORIES, INC. AS TO FIRE HAZARD ONLY. PYROSECT MIST SPRAY CLASSIFIED CO-25 BETWEEN PARAFFIN OIL AND KEROSENE IN RESPECT TO FIRE HAZARD. SEE UL INDEX OF CLASSIFIED PRODUCTS

INDEX

ETHER	100-110
GASOLINE	90-100
KEROSENE	30-40
PARAFFIN	10-20

2977 RA-870-5
PRINTED IN U.S.A.