

100
100

DIRECTIONS FOR USE

RESIDOL-PLUS is a highly effective new formulation for use in cockroach control. It has superior flushing action, and prolonged residual action. It is effective against cockroaches resistant to certain chlorinated hydrocarbon and organic phosphate insecticides.

Use RESIDOL-PLUS to control infestations in piers, warehouses, hotels, restaurants, hospitals (when the patients are out of the area), theaters, schools, offices and housing developments. Avoid treatment of animals when making applications in zoos.

To control cockroaches, treat the infested area with special attention to cracks, crevices, around sinks, under surfaces and other hard-to-get-at places.

Apply RESIDOL-PLUS at the rate of 1 gallon per 1,000 square feet. Use the WEST 124-S Sprayer adjusted to the fine flat fan pattern.

Apply RESIDOL-PLUS to harborages and breeding areas of the cockroaches or to surfaces where they congregate or crawl. Apply RESIDOL-PLUS to cracks, corners, perimeters of rooms, behind baseboards; around window frames and door frames; behind escutcheon plates; under stoves and sinks; to the under surfaces of shelves, drawers and work tables; to elevator pits and shafts; behind wooden or metal panels; at seams, joints; around electric motors and compressors; laundry carts; garbage areas and cans; warm, dark, moist areas void spaces; hidden surface and quiet undisturbed areas. Repeat treatment as necessary to prevent or control infestation. Remove pets and cover fish bowls before spraying. Do not spray animals.

For Cockroach Control in Meat and Poultry Processing Plants, apply RESIDOL-PLUS only in inedible areas. Spraying loading docks and outside areas. Spraying loading docks and outside areas where the insects congregate will aid in preventing reinfestation. Good sanitation and proper waste disposal are essential in any effective control program.

Treat food processing plants early in the season before canning and the processing starts. Repeat treatment as necessary, when plant is not in operation. Spraying pallets, loading docks and outside areas where the cockroaches congregate, will aid in preventing infestation.

The use of RESIDOL-PLUS to control cockroaches around research animals will not reduce microsomal liver enzyme activity of these animals.


CRACK AND CREVICE TREATMENTS ONLY:

Food Handling Establishments — (places other than private residences in which exposed food is held, processed, prepared or served) and **Food Areas** — Application limited to crack and crevice treatment only. Includes areas for receiving, storage, packing, (canning, bottling, wrapping, boxing) preparing edible waste storage and enclosed processing systems (mills, dairies, edible oils, syrups). Serving areas (when food is exposed and facility is in operation also would be considered a food area).

Apply in small amounts directly into cracks and crevices using equipment capable of delivering a pin stream of insecticide in points between different ele-

0871-C094

(Continued on right panel)

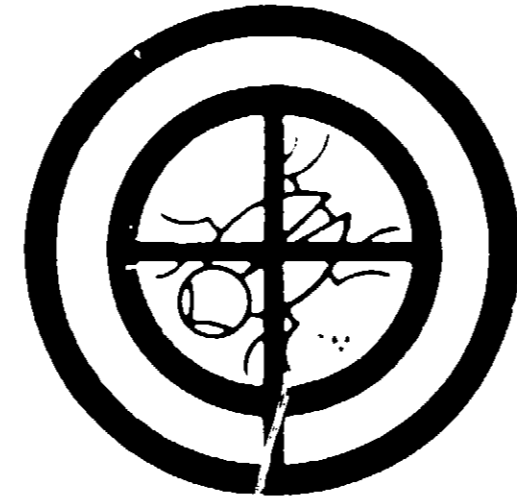

FOR INDUSTRIAL AND INSTITUTIONAL USE ONLY

0871

residol-[®]plus*

ACTIVE INGREDIENTS:

Petroleum Distillates	83.50%
** 2- (1-Methylethoxy) phenol methylcarbamate	1.00%
Coconut Oil	0.50%
INERT INGREDIENT	15.00%
	100.00%

*Contains Baygon® - Registered trademark of Farbenfabriken Bayer A.G. Chemagro Corporation licensee.

**U.S. Pat. No. 3,111,539. This material used under license from Chemagro Corporation.

ADDITIONAL PATENT PENDING

THIS PRODUCT HAS BEEN AUTHORIZED BY USDA FOR USE IN FEDERALLY INSPECTED MEAT, POULTRY, RABBIT AND EGG PROCESSING PLANTS.

EPA Reg. 52-215-AA

EPA Est. 52-NY-1

CAUTION: Keep Out Of Reach Of Children
MAY BE HARMFUL IF SWALLOWED, INHALED OR ABSORBED THROUGH THE SKIN. (See right panel for additional cautions.)

NET CONTENTS:



MANUFACTURED BY

WEST CHEMICAL PRODUCTS, INC. NEW YORK, N.Y. 11101 Branches in principal cities.

plants of const
cleanings lead
equipment legs
junction or sw
floor to applic
After applicati
from starting m
position

Care should be
onto exposed
into the air, a
processing sur
Applications of
handling estab
crevice treatm

SPOT TREATME
Food Handling
private residen
processed, pre
Facilities wher
dining room
be prepared or

Apply as a spo
as baseboards,
cracks and cre
be contacted b
in operation or

GENERAL TREA
Food Handling
private residen
processed, pre
Includes garba
sewers entries
machine rooms
and storage

Apply to base
faces behind a
lets and simi
which they may

CAUTION: Avoi
quate ventilati
with skin, eye
using and before
tion of food, f
handling surface
treated surface
not store belo
If poisoning oc
To Physician--

Do not use in s
This product is
taminate water
of wastes.

Do not reuse e
ditioner or des

CLASSIFIED
INC. AS TO
CLASSIFIED
AND KEROSE
SEE UL INDE

ETHER
GASOLI
KEROSE
PARAFF

FOR INDUSTRIAL AND INSTITUTIONAL USE ONLY **0871**

Residol-[®] plus*

ACTIVE INGREDIENTS:

Petroleum Distillates	83.50%
**2- (1-Methylethoxy) phenol methylcarbamate	1.00%
Coconut Oil	0.50%
INERT INGREDIENT	15.00%
	100.00%

*Contains Baygon®—Registered trademark of Farbenfabriken Bayer A.G., Chemagro Corporation licensee

**U.S. Patent No. 3,111,539. This material used under license from Chemagro Corporation

ADDITIONAL PATENT PENDING

THIS PRODUCT HAS BEEN AUTHORIZED BY USDA FOR USE IN FEDERALLY INSPECTED MEAT, POULTRY, RABBIT AND EGG PROCESSING PLANTS.

EPA Reg. 52-215-AA

EPA Est. 52-NY-1

CAUTION: Keep Out Of Reach Of Children
MAY BE HARMFUL IF SWALLOWED, INHALED OR ABSORBED
THROUGH THE SKIN. (See right panel for additional cautions.)

NET CONTENTS:

BY
CAL PRODUCTS, INC. NEW YORK, N.Y. 11101 Branches in principal cities.

ments of construction, between equipment and floors, openings leading to voids and hollow spaces in walls, equipment legs and bases, conduits, motor housings, junction or switch boxes where cockroaches hide. Prior to application de-energize electrical equipment. After application allow time for oil to evaporate before starting motors or placing switches in the "ON" position.

Care should be taken to avoid depositing the product onto exposed surfaces or introducing the material into the air. Avoid contamination of food or food processing surfaces.

Applications of this product in the food areas of food handling establishments, other than as a crack and crevice treatment are not permitted.

SPOT TREATMENT ONLY:

Food Handling Establishments—(Places other than private residences in which exposed food is held, processed, prepared or served) and **Serving Areas**—Facilities where prepared foods are served, such as dining rooms, but excluding areas where foods may be prepared or held.

Apply as a spot treatment to selective surfaces such as baseboards, under elements of construction into cracks and crevices. Avoid treating surfaces likely to be contacted by food. (Do not apply when facility is in operation or foods are exposed.)

GENERAL TREATMENT:

Food Handling Establishments—(Places other than private residences in which exposed food is held, processed, prepared or served) and **Non-Food Areas**. Includes garbage rooms, lavatories, floor drains (to sewers, entries and vestibules, offices, locker rooms, machine rooms, boiler rooms, garages, mop closets and storage (after canning or bottling).

Apply to baseboard areas around water pipes, surfaces behind and beneath sinks, lockers, tables, pallets and similar areas where insects hide or through which they may enter.

CAUTION: Avoid breathing spray mist. Provide adequate ventilation of area being treated. Avoid contact with skin, eyes or clothing. Wash thoroughly after using and before smoking or eating. Avoid contamination of food, food processing equipment, and food handling surfaces. Do not allow children to contact treated surfaces until surfaces are completely dry. Do not store below 32°F. Do not use as a space spray. If poisoning occurs, get prompt medical aid.

To Physician—atropine sulfate is antidotal.

Do not use in serving areas while food is exposed.

This product is toxic to fish and wildlife. Do not contaminate water by cleaning of equipment, or disposal of wastes.

Do not reuse empty container. Return to drum reconditioner or destroy by perforating or crushing.

CLASSIFIED BY UNDERWRITERS' LABORATORIES INC. AS TO FIRE HAZARD ONLY. RESIDOL-PLUS CLASSIFIED 25 TO 30 BETWEEN PARAFFIN OIL AND KEROSENE IN RESPECT TO FIRE HAZARD. SEE UL INDEX OF CLASSIFIED PRODUCTS.

ETHER	INDEX	100-110
GASOLINE		90-110
KEROSENE		30-40
PARAFFIN		10-20

MADE IN U.S.A.