


TANK TRUCK SHIPPING LABEL

IMPORTANT: Attach to shipping papers and give to user at time of delivery.

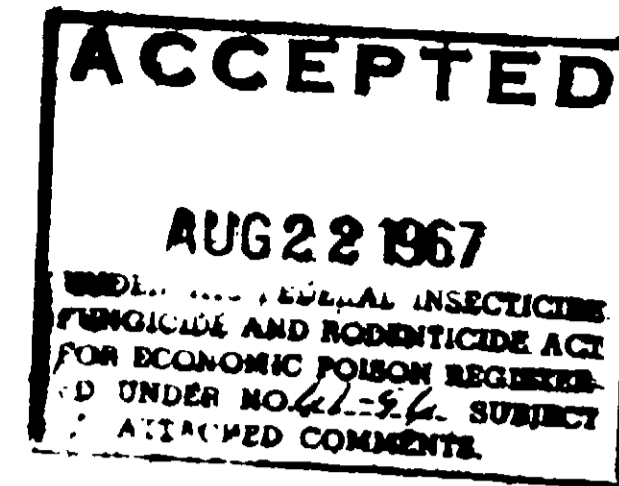

KOLINEUM®

REFINED COAL TAR CREOSOTE

NET CONTENTS — U. S. GALLONS _____

ACTIVE INGREDIENTS:

REFINED COAL TAR CREOSOTE 99.0%

INERT INGREDIENTS (MAX.) 1.0%

USDA Reg. No. 61-96

CAUTION! HARMFUL IF SWALLOWED. CAUSES SKIN IRRITATION.

Avoid prolonged or repeated contact with skin.

Avoid prolonged breathing of vapor or spray mist.

Use with adequate ventilation.

WATER USED FOR DOMESTIC CONSUMPTION, IRRIGATION OR FISH AND WILDLIFE MUST NOT BE CONTAMINATED BY CLEANING EQUIPMENT OR DISPOSAL OF WASTE AND CONTAINERS.

WARRANTY: We warrant this material to comply with our published specifications and to be of good merchantable quality and such as will regularly pass in the trade for goods within the description, and further warrant such goods to be fit for the normal purposes for which such goods are used. We assume no responsibility that the goods concerned in this contract are fit for any particular purpose for which they are being bought outside of the general purposes of goods of the description.

KOPPERS COMPANY, INC., PITTSBURGH, PENNSYLVANIA 15219

TPL 0341 705M1

MADE IN U. S. A.

MADE IN U.S.A.

NET CONTENTS

U.S. GALLONS

TEL. 912.333.1111

KOLINEUMTM

REFINED COAL TAR CREOSOTE



NET WEIGHT	10.00
NET VOLUME	1.00
NET WEIGHT (kg)	2.27

KOPPERS COMPANY, INC., PITTSBURGH, PENNSYLVANIA 15219

CAUTION! HARMFUL IF SWALLOWED. CAUSES SKIN IRRITATION.

Avoid prolonged or repeated contact with skin.

Avoid prolonged breathing of vapor or spray mist.

Use with adequate ventilation.


FOR INDUSTRIAL USE ONLY

KOPPERS

WOOD PRESERVATIVES

KOLINEUM®

REFINED COAL TAR CREOSOTE

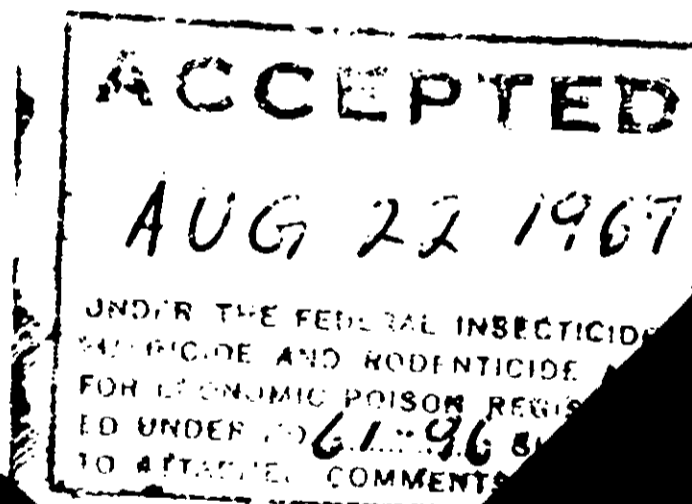

CAUTION-COMBUSTIBLE
N.Y.F.D. C. OF A. NO. 17

DIRECTIONS:

Stir Kolineum® thoroughly before using. Never dilute. If effectiveness is reduced. For best results, follow these directions.

Heat Kolineum to 150° F. Hot Kolineum penetrates deeper and is more effective. In hot weather it may be applied cold with good results on seasoned wood.

HOW TO APPLY AS A WOOD PRESERVATIVE:

Brushing. Apply liberally with brush or mop, hot Kolineum on the surface so as to fill completely all cross cuts, mortises, tenons, and defects. After an interval of 24 hours, or after first application has penetrated, apply a second coat in the same manner to achieve the best results. This is absolutely essential for all material to be used on the ground.

Spraying. Spray Kolineum hot with a spray gun. Spraying effect is best. Spray Kolineum into cracks and crevices. After an interval of 24 hours after first application has penetrated, apply a second coat in the same manner to achieve the best results. This is absolutely essential for all material to be used under or lying on the ground.

Dipping. It is especially necessary that all wood to be treated be completely peeled and well seasoned. Immerse that portion of the wood to be treated in a bath of hot Kolineum for a period of one to two hours.

WARRANTY: We warrant this material to comply with our published specifications as will regularly pass in the trade for goods within the description for which such goods are used. We assume no responsibility that the goods for which they are being bought outside of the general purposes.

KOPPERS COMPANY, INC., PITTSBURGH, PA.

TPL 0361 705M2

CAUTION-COMBUSTIBLE MIXTURE.

N. Y. F. D. C. OF A. NO. 1774

DIRECTIONS:

Stir Kolineum® thoroughly before using. Never dilute. If you do, its effectiveness is reduced. For best results, follow these directions:

Heat Kolineum to 150° F. Hot Kolineum penetrates deeper and is more effective. In hot weather it may be applied cold with good results on dry, seasoned wood.

HOW TO APPLY AS A WOOD PRESERVATIVE:

Brushing. Apply liberally with brush or mop, hot Kolineum flooding surface so as to fill completely all cross cuts, mortises, tenons, checks and defects. After an interval of 24 hours, or after first application has penetrated, apply a second coat in the same manner to achieve the best results. This is absolutely essential for all material to be used under or lying on the ground.

Spraying. Spray Kilineum hot with a spray gun. Spraying effectively drives Kolineum into cracks and crevices. After an interval of 24 hours or after first application has penetrated, apply a second coat in the same manner to achieve the best results. This is absolutely essential for all material to be used under or lying on the ground.

Dipping. It is especially necessary that all wood to be treated be completely peeled and well seasoned. Immerse that portion of timber to be treated in a bath of hot Kolineum for a period of one to two hours.

INGREDIENTS:

Active ingredients	
Retined Coal Tar Creosote	99 0%
Inert Ingredients (max.)	1 0%

USDA Reg. No. 61-96

CAUTION! HARMFUL IF SWALLOWED. CAUSES SKIN IRRITATION.

Avoid prolonged or repeated contact with skin. Avoid prolonged breathing of vapor or spray mist.

Use with adequate ventilation.

KEEP OUT OF REACH OF CHILDREN

SPILLAGE: Flush with water.

CONTAINER DISPOSAL: Empty and flush with water and detergent.

Water used for domestic consumption, irrigation or fish and wildlife must not be contaminated by cleaning equipment or disposal or waste or containers.

WARRANTY: We warrant this material to comply with our published specifications and to be of good merchantable quality and such as will regularly pass in the trade for goods within the description, and further warrant such goods to be fit for the normal purposes for which such goods are used. We assume no responsibility that the goods concerned in this contract are fit for any particular purpose for which they are being bought outside of the general purposes of goods of the description.

KOPPERS COMPANY, INC., PITTSBURGH, PENNSYLVANIA 15219

TPL 0361 705M2

MADE IN U. S. A.

CAUTION -- C
DO NOT USE

N Y F D C U F A No

DIRECTIONS FOR USE ARE

KOLINEUM[®]

REFINED COAL TAR CREOSOTE



20 U.S. GALLONS

200 LITERS - Metric Measure

KOPPERS

WOOD PRESERVATIVES

KOLINEUM®

REFINED COAL TAR CREOSOTE



CAUTION -- COMBUSTIBLE MATERIAL
DO NOT USE NEAR FIRE OR

N. Y. F. D. C. of A. No. 1774

DIRECTIONS FOR USE ARE GIVEN IN MANUFACTURERS LITERATURE

FOR INDUSTRIAL USE

INGREDIENTS:

Active

Refined

Inert

USDA Reg. No. 61


CAUTION! HARMFUL

Avoid prolonged contact

Avoid prolonged breathing

Use with adequate ventilation

Water used for dilution should not be contaminated by other containers.

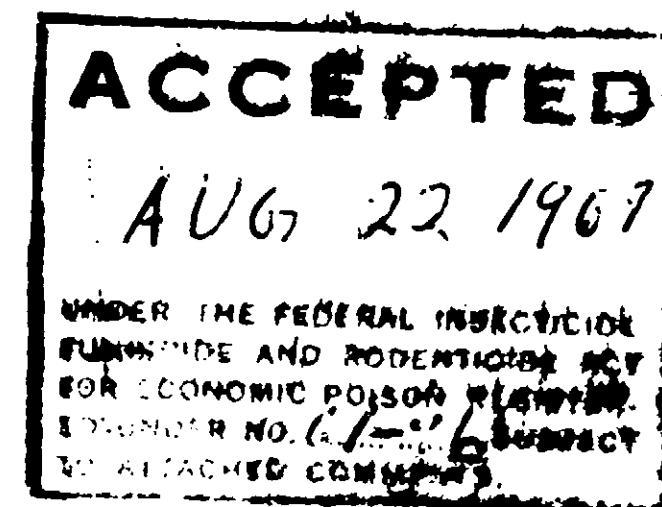

WARRANTY: We warrant this material to comply with our published specifications as will regularly pass in the trade for goods within the description, and for which such goods are used. We assume no responsibility that the goods are for which they are being bought outside of the general purposes of goods.

KOPPERS COMPANY, INC., PITTSBURGH, PA.

TPL 0351 7:5M3

**CAUTION -- COMBUSTIBLE MIXTURE
DO NOT USE NEAR FIRE OR FLAME**

N. Y. F. D. C. of A. No. 1774

DIRECTIONS FOR USE ARE GIVEN IN MANUFACTURES LITERATURE

FOR INDUSTRIAL USE ONLY

INGREDIENTS:

Active Ingredients	
Refined Coal Tar Creosote	99.0%
Inert Ingredients (max.)	1.0%


USDA Reg. No. 61-96

CAUTION! HARMFUL IF SWALLOWED. CAUSES SKIN IRRITATION.

Avoid prolonged or repeated contact with skin.
Avoid prolonged breathing of vapor or spray mist.

Use with adequate ventilation.

Water used for domestic consumption, irrigation or fish and wildlife must not be contaminated by cleaning equipment or disposal of waste and containers.

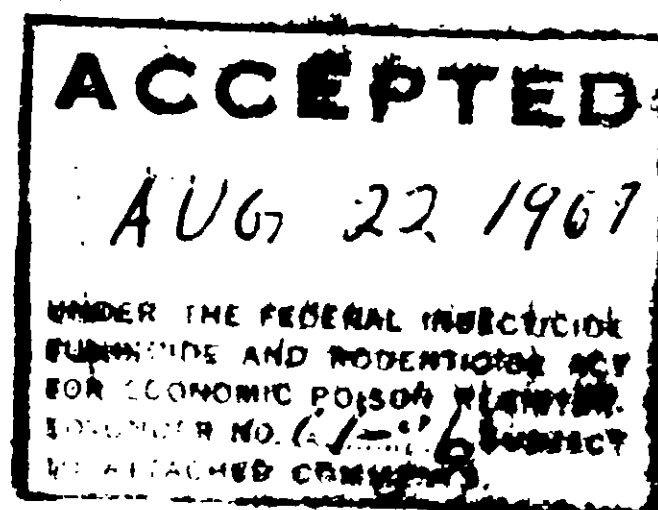

WARRANTY: We warrant this material to comply with our published specifications and to be of good merchantable quality and such as will regularly pass in the trade for goods within the description, and further warrant such goods to be fit for the normal purposes for which such goods are used. We assume no responsibility that the goods concerned in this contract are fit for any particular purpose for which they are being bought outside of the general purposes of goods of the description.

KOPPERS COMPANY, INC., PITTSBURGH, PENNSYLVANIA 15219

TPL 0351 705M3

MADE IN U. S. A.