


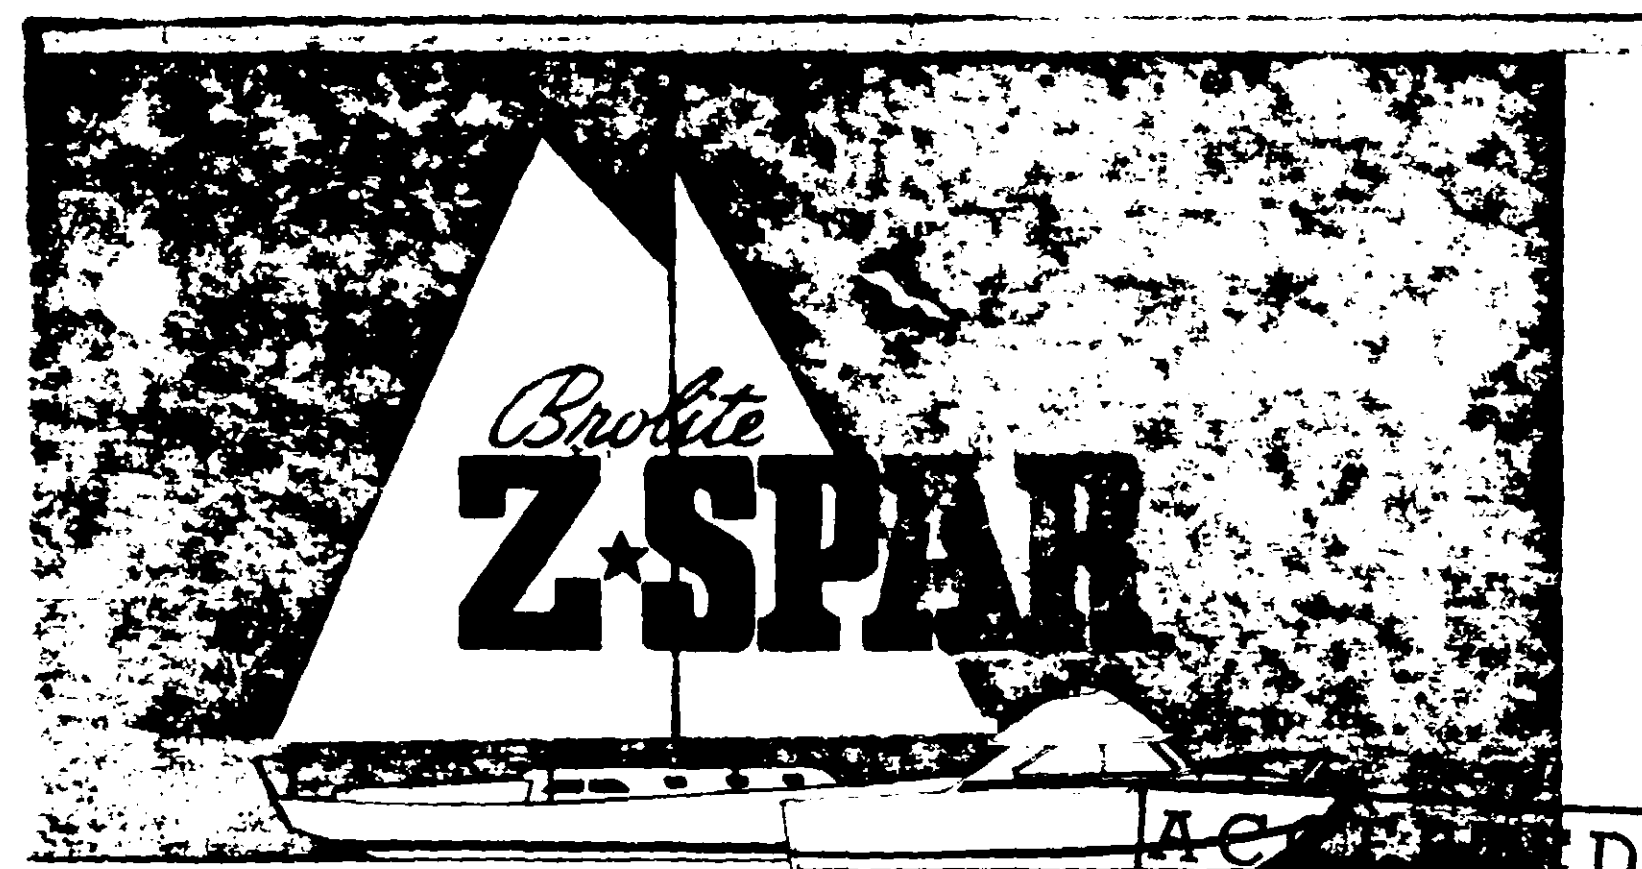

**B-50 Red Multitox  
Antifouling Paint**

NOV 10 1975  
Under the Federal Insecticide,  
Fungicide, and Rodenticide Act,  
as amended, for the pesticide  
registered under  
EPA Reg. No. 61-161

**WARNING!** KEEP OUT OF REACH OF CHILDREN COMBUSTIBLE HARMFUL IF SWALLOWED.  
See Precautions on Back of Label

**NET 1 QUART**

**.95 Liters**

**ACTIVE INGREDIENT**  
Cuprous Oxide 31.5  
**INERT INGREDIENTS** 68.5  
EPA REG. NO. 61-161AA

**MULTITOX ANTIFOULING PAINT:** Highly effective against attachment of barnacles, hydroids, bryozoa, algae and other marine growths. Protects wood boats against borers.

**DIRECTIONS FOR USE:**

**GENERAL:** Be sure surface is clean and dry before painting. When sanding is necessary on surfaces, remove sanding dust by clean air blast, clean soft brushes, or wiping with clean rags, then follow by tack-rag wipe to insure complete removal of sanding dust.

Stir paint well before and during use. Apply generously with brush or roller at package consistency. If thinning is necessary due to evaporation of solvent from the can, use Z-Spar T-10 Thinner. Do not spray as inhalation of spray dust is hazardous. Allow at least 4 hours between coats and a minimum of 6 hours to a maximum of 7 days before launching. Do Not Apply To Any Surface Other Than Boat Bottoms. Clean equipment with Z-Spar T-8, T-10, or T-11 Thinner. Covers approximately 450 sq. ft. per gallon over a smooth surface.

**OLD BOTTOM PAINTS:** Over old paint and two coats of Multitox Paint for best results after scrubbing, cleaning, and removing old paint.

paint. When sanding old bottom paint, always wet sand and take precautions against getting the material in your eyes, nostrils, open cuts, etc. Where excess bottom substrate is visible, prime per instructions for the substrate.

**WOOD BOTTOMS:** Sand wood surface with 80-100 grit wet or dry sandpaper. Apply three coats of Multitox Paint to bare wood. Thin first coat 10% with Z-Spar T-10 Thinner to allow greater penetration. The next two coats should be applied at package consistency. Any metal parts must be properly primed before applying the bottom paint.

**FIBER GLASS BOTTOMS:** Clean hull thoroughly with Z-Spar T-1132 Fiber Glass Prep Solution. Then sand with 220 grit sandpaper to dull and roughen the surface. Apply one coat of P-619 Primer mixed per label instructions. Allow P-619 Primer to dry three hours minimum (four hours when humidity is greater than 65%) to eight hours maximum, and apply two coats of Multitox Paint at package consistency.

**STEEL BOTTOMS:** Sandblast to white metal surface and apply two coats of P-646 Epoxy Primer to a minimum dry film thickness of 6 mils following P-646 Epoxy Primer label instructions. After the second coat of P-646, apply a tie coat of

P-619 Primer followed by two coats of Multitox Paint.

**ALUMINUM BOTTOMS:** Multitox Paint can be used only after the application of adequate barrier protection and is generally not recommended for aluminum. Please obtain detailed Z-Spar instructions before use. Z-Spar Colortox Paint, which does not contain copper and will not present an electrolysis problem, is recommended for aluminum hulls.

**WARNING:** Harmful if swallowed. Do not get in eyes, on skin or on clothing. Wash thoroughly after handling. Avoid breathing of vapors. Do not take internally. Close container after each use.

Use only with adequate ventilation.  
KEEP OUT OF REACH OF CHILDREN

**COMBUSTIBLE — DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME**

CONTAINS AROMATIC HYDROCARBONS AND MINERAL SPIRITS


Do not store near food or feed products. Do not reuse empty container. Destroy it by perforating or crushing. Discard in a safe place. Do not contaminate water by cleaning or disposal. Dispose of waste.

Andrew Brown Division of Koppers Company, Inc. Pittsburgh, Pa. 15212 Irving, Texas 75060 Los Angeles, Ca. 90040  
Marietta, Ga. 30060 Newark, N.J. 07114

OML 5372

ACCEPTED WITH COMMENTS



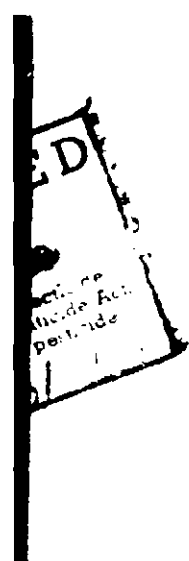

MULTI-PURPOSE ANTI-ACID

DIRECTIONS - READ  
GENERAL

COVERAGE PER COAT -

NUMBER OF COATS

DRYING TIME AT 70°F AND 50% REL. HUMIDITY

THINNER

ANER  
BOTTLE MARK

WATER-BOTTOMS

FIBER GLASS

STEEL-BOTTOMS

ALUMINUM-BOTTOMS

PRECAUTIONS - CONTAINS - RUMAT - RUMAT  
ACID - AND - MALEIC ACID

KEEP - AWAY - FROM - CHILDREN

IF - IN - CONTACT - WITH - EYES - OR - SKIN - CALL - A - PHYSICIAN - IMMEDIATELY - DO - NOT - RUB

NEVER - USE - IN -

K...ers Company, Inc.

... .. Los Angeles, Ca 90040  
... .. NJ 07114  
MADE IN U.S.A.

29 35  
70 15