


WARNING: May be fatal if swallowed. See cautions on right-hand side of label. KEEP OUT OF THE REACH OF CHILDREN.

colite

PAR


SIZE

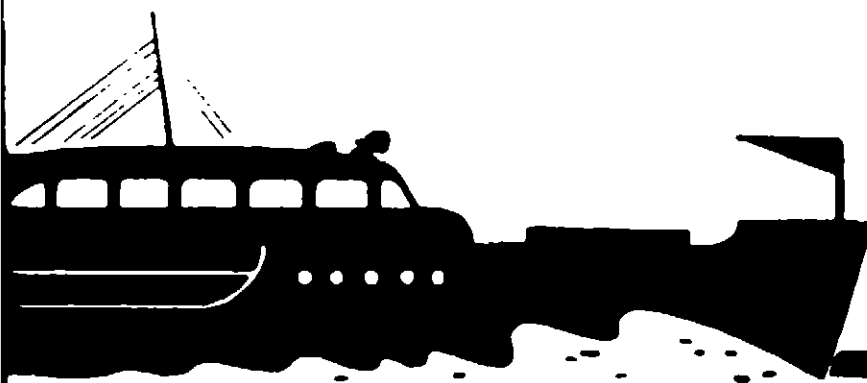

GALLON (5/6 IMPERIAL GALLON)

WARNING! May cause irritation to, or be absorbed through the skin. Avoid contact with skin, eyes, or clothing. Do not breathe spray mist. In case of contact wash skin with soap and water (for eyes flush with water and call physician immediately). Wash contaminated clothing before reuse. Do not take internally. Avoid storage near food or feed products. Keep out of reach of children. **FLAMMABLE** — Keep away from heat, sparks or open flame. Keep container closed when not in use.

WARNING! — Flammable — Keep away from heat and open flame. Keep out of reach of children. Avoid prolonged or repeated breathing of vapors and prolonged or repeated contact with skin. **USE WITH ADEQUATE VENTILATION.** Do not take internally. Before smoking, eating or after using, cleanse hands thoroughly.

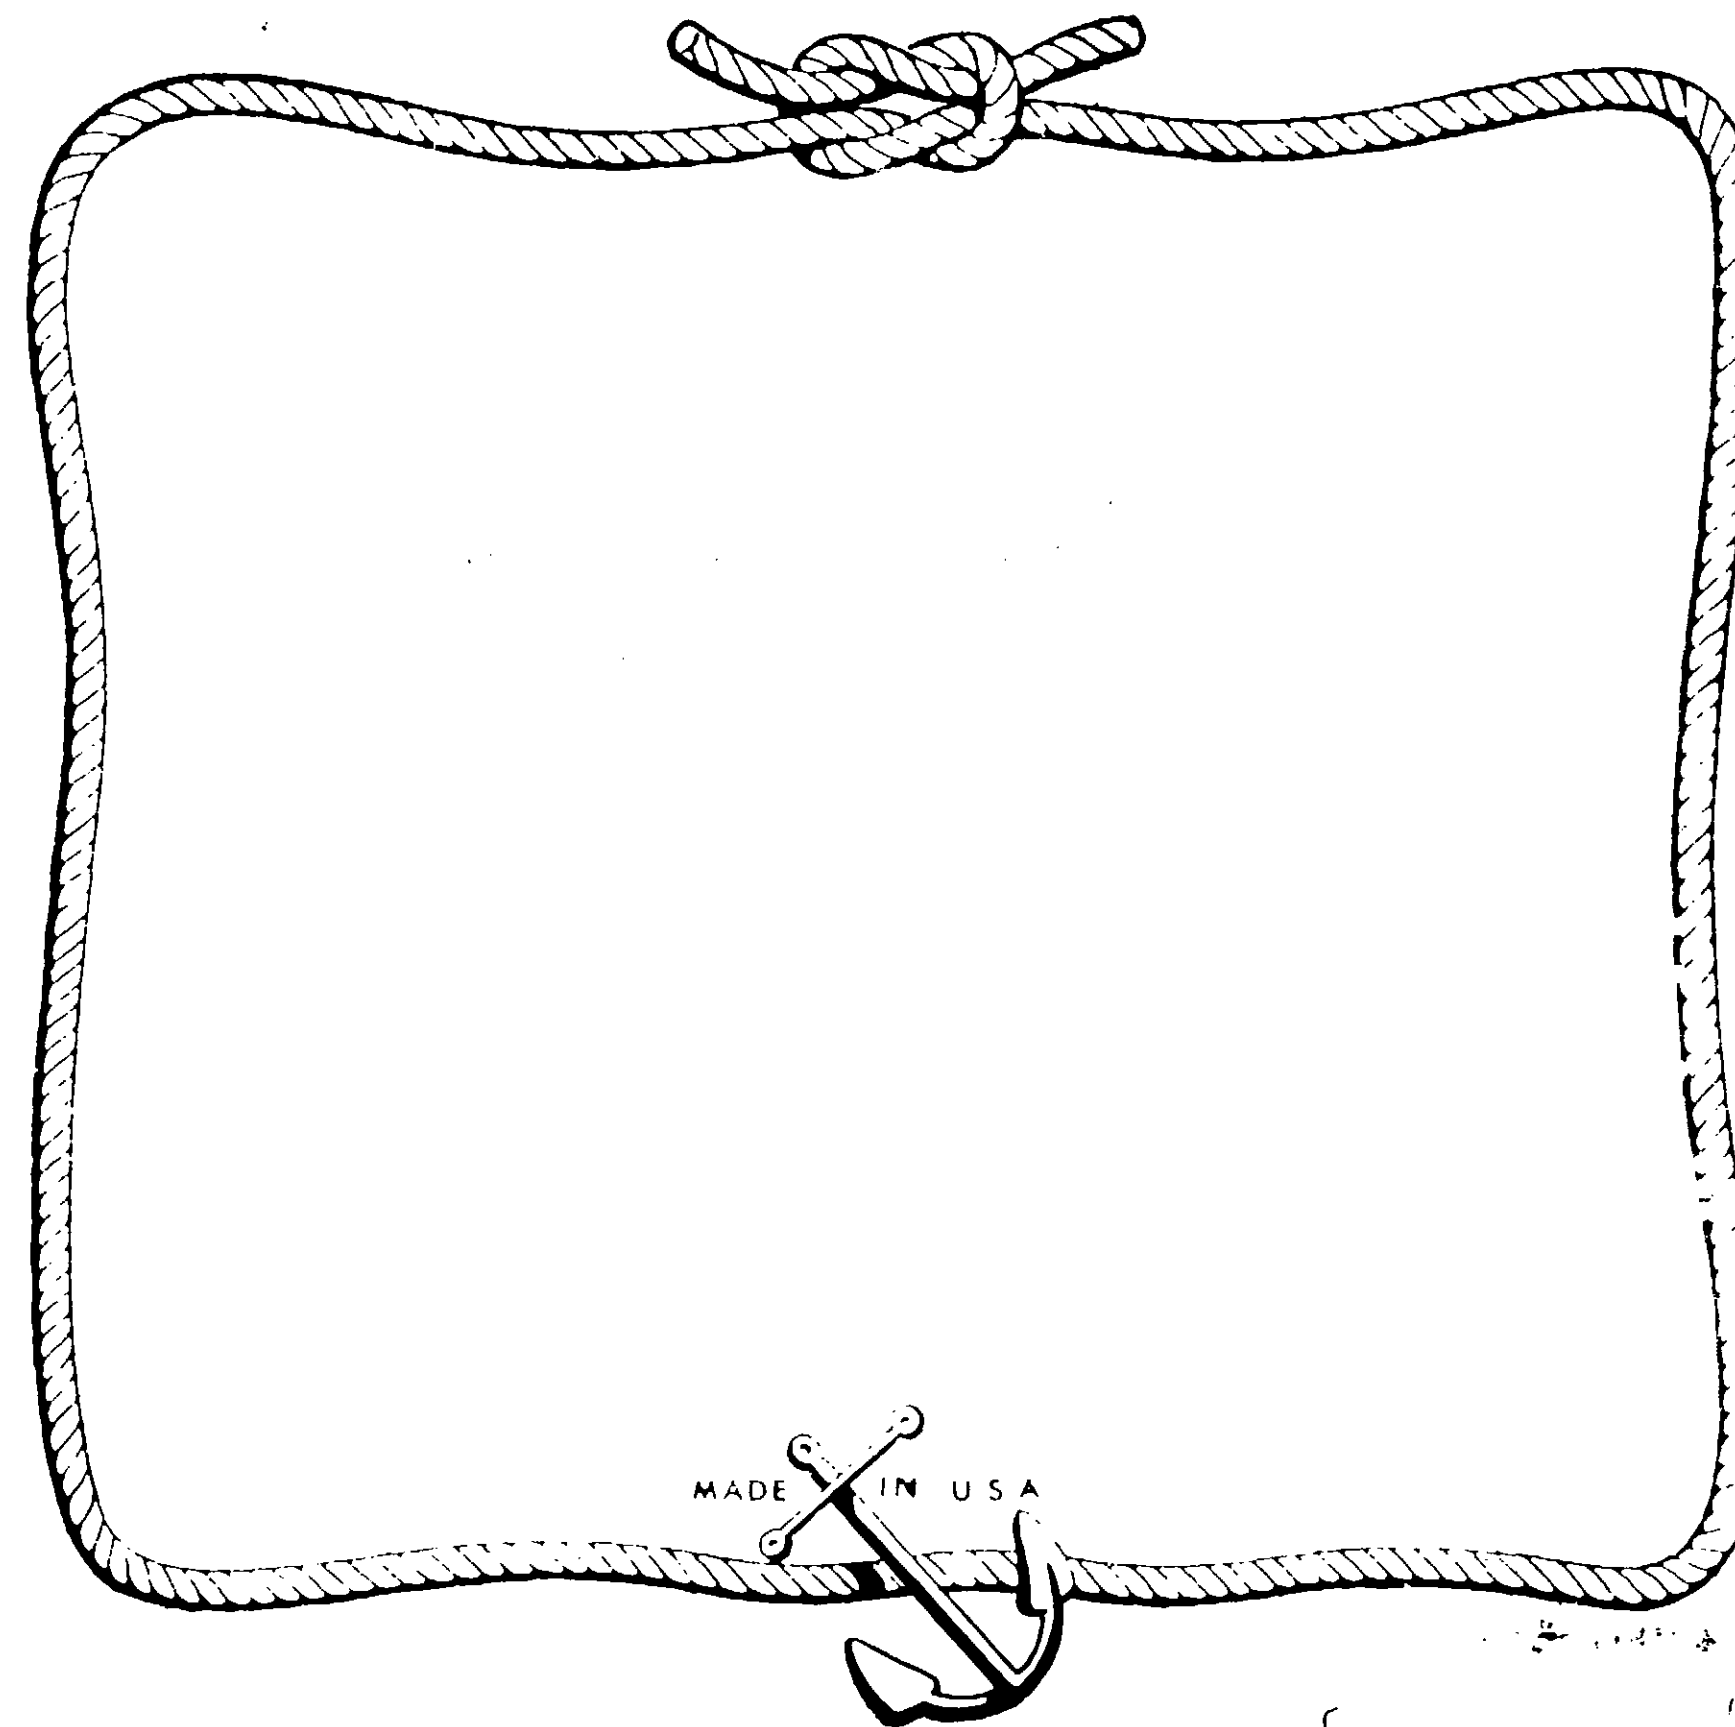

ANDREW BROWN COMPANY

LOS ANGELES, CALIFORNIA

KENT, WASHINGTON

LAUREL, MARYLAND · IRVING, TEXAS

MARIETTA, GEORGIA

ACCEPTED
2-25-72
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON
ED UNDER NO. 805-72

61-100

B-70 SUPERTOX RED ANTI-FOULING

A highly effective hard anti-fouling bottom paint. Protects against attachment of barnacles, hydroids, bryozoa, algae and other marine growth. Protects wood boats against borers. Apply generously with brush at package consistency. Allow at least 4 hours between coats and from 6 hours to 7 days before launching. Do not apply to any surface other than boat bottoms. Clean brushes with Z-Spar #8, #10, or #11 Thinner.

DIRECTIONS

WOOD BOTTOMS: On bare wood apply two or three full coats. Any metal parts must be properly primed before applying B-70 or any cuprous oxide type paint. Over old paint use two coats of B-70 for best results after scrubbing, cleaning and removing any loose paint or dead film of old bottom paint.

STEEL BOTTOMS: Sandblast to white metal surface and apply two coats of P-646 Epoxy Primer to a minimum dry film thickness of 6 mils, following label directions for that product. After the final coat of P-646 Primer has cured from 8 to 24 hours apply two coats of B-70 Supertox Anti-Fouling paint.

FIBERGLASS (Gel Coat) BOTTOMS: Solvent clean thoroughly with Z-Spar #8 or #10 Thinner, sand well with medium grit sandpaper and apply two coats B-70 Supertox Anti-Fouling paint.

ALUMINUM BOTTOMS: This product not recommended for aluminum hulls. Use Z-Spar Colortox.

DANGER: May cause irritation to, or be absorbed through the skin. Do not get on skin, in eyes or on clothing. May cause eye damage. Do not breathe vapor or spray mist. In case of contact wash skin with soap and water (for eyes flush with water and call physician immediately). Wash contaminated clothing before reuse. Do not take internally. Avoid storage near food or feed products. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. **KEEP OUT OF THE REACH OF CHILDREN.**

WARNING—FLAMMABLE: Keep away from heat, sparks or open flame. Keep container closed when not in use.



MADE IN U.S.A.

ANDREW BROWN COMPANY

LOS ANGELES, CALIFORNIA 90022 • KENT, WASHINGTON 98031

IRVING, TEXAS 75060 • MARIETTA, GEORGIA 30060 • LAUREL, MARYLAND 20810


ACTIVE INGREDIENTS:
CUPROUS OXIDE 43.4%
TRIBUTYL TIN FLUORIDE 2.2%
INERT INGREDIENTS 54.4%

DANGER!
May be fatal if swallowed.
See cautions on right
hand side of label.

KEEP OUT OF THE
REACH OF CHILDREN

Brolite
Z*SPAR®

B-71 SUPERTOX BLUE
ANTI-FOULING

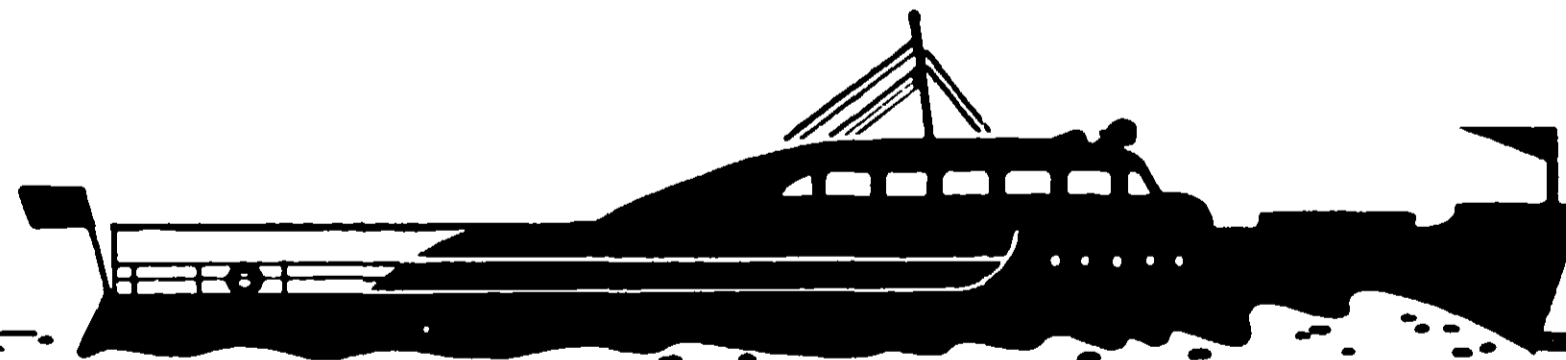

EPA REG.No. 8019-21

NET CONTENTS ONE U.S. GALLON (5/6 IMPERIAL GALLON)

DANGER: May cause irritation to, or be absorbed through the skin. Do not get on skin, in eyes or on clothing. May cause eye damage. Do not breathe vapor or spray mist. In case of contact wash skin with soap and water (for eyes flush with water and call physician immediately). Wash contaminated clothing before reuse. Do not take internally. Avoid storage near food or feed products. Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place. KEEP OUT OF THE REACH OF CHILDREN.

WARNING—FLAMMABLE: Keep away from heat, sparks or open flame. Keep container closed when not in use.



IRVING, T

ACCEPTED WITH COMMENTS

DANGER

is fatal if swallowed. See cautions on right and side of label.

KEEP OUT OF THE REACH OF CHILDREN

lite
Z-SPAR®

**OX BLUE
LING**



DANGER: May cause irritation to, or be absorbed through, the skin. Do not get on skin, eyes, nose, mouth, or clothing. Do not breathe vapor or spray mist in enclosed spaces. Wash thoroughly and wear protective clothing. If vapor and call physician immediately. Keep container locked during storage. Do not take internally. Keep away from food or food products. Do not reuse empty container. Destroy by perforating or crushing. Bury or discard in a safe place. **KEEP OUT OF THE REACH OF CHILDREN.**

WARNING—FLAMMABLE: Keep away from heat, sparks or open flame. Keep container closed when not in use.

**B-71 SUPERTOX BLUE
ANTI-FOULING**

A highly effective hard anti-fouling bottom paint. Protects against attachment of barnacles, hydroids, bryozoa, algae and other marine growth. Protects wood boats against borers. Apply generously with brush at proper age consistency. Allow at least 4 hours between coats and from 6 hours to 7 days before launching. Do not apply to any surface other than boat bottoms. Clean brushes with Z-Spar #8, #10, or #11 Thinner.

DIRECTIONS

WOOD BOTTOMS: On bare wood apply two or three full coats. Any metal parts must be properly primed before applying B-70 or any cuprous oxide type paint. Over old paint use two coats of B-70 for best results after scrubbing, cleaning and removing any loose paint or dead film of old bottom paint.

STEEL BOTTOMS: Sandblast to white metal surface and apply two coats of P-646 Epoxy Primer to a minimum dry film thickness of 6 mils, following label directions for that product. After the final coat of P-646 Primer has cured from 8 to 24 hours apply two coats of B-70 Supertox Anti-Fouling paint.

FIBERGLASS (Gel Coat) BOTTOMS: Solvent clean thoroughly with Z-Spar #8 or #10 Thinner, sand well with medium grit sandpaper and apply two coats B-70 Supertox Anti-Fouling paint.

ALUMINUM BOTTOMS: This product not recommended for aluminum hulls. Use Z-Spar Colortox.

MADE IN U.S.A.

1/6 IMPERIAL GALLON

ANDREW BROWN COMPANY

LOS ANGELES, CALIFORNIA 90022 • KENT, WASHINGTON 98031

IRVING, TEXAS 75060 • MARIETTA, GEORGIA 30060 • LAUREL, MARYLAND 20810


ACTIVE INGREDIENTS:
CUPROUS OXIDE 59.4
TRIBUTYL TIN FLUORIDE 2.0
INERT INGREDIENTS 38.6

DANGER!
May be fatal if swallowed.
See cautions on right
hand side of label.
KEEP OUT OF THE
REACH OF CHILDREN

Z*SPAR®

B-70 SUPERTOX RED
ANTI-FOULING

EPA REG. NO. 8010-01

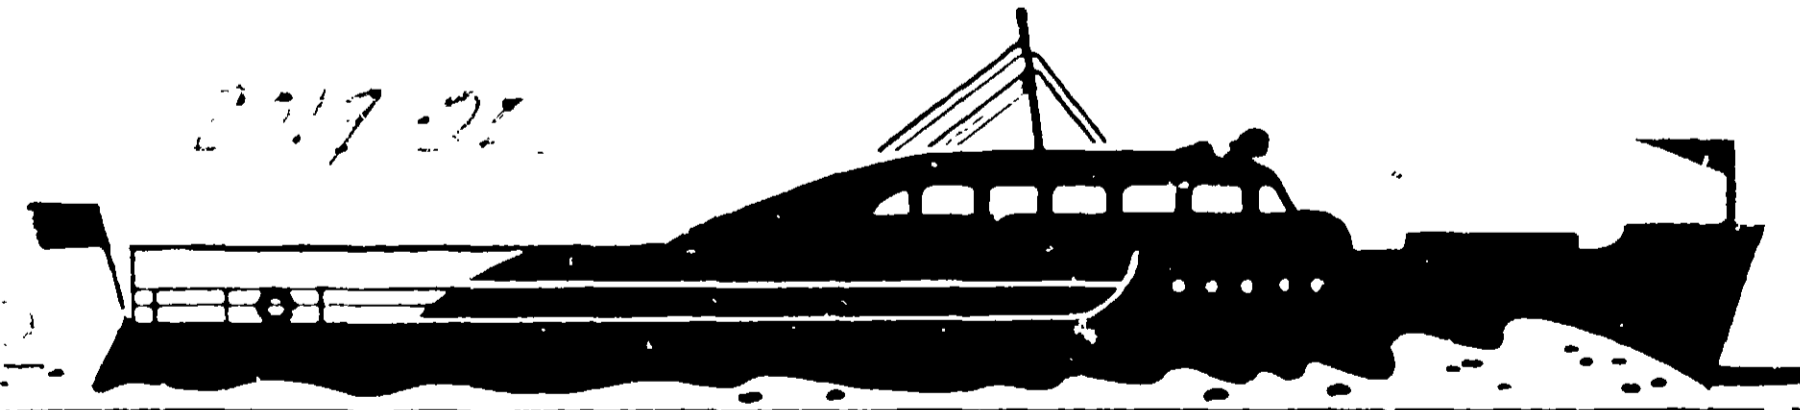

NET CONTENTS ONE U.S. GALLON (5/6 IMPERIAL GALLON)

ACTIVE INGREDIENTS:
CUPROUS OXIDE 69.0%
TRIBUTYL TIN FLUORIDE 1.0%
INERT INGREDIENTS: 30.0%

DANGER!
May be fatal if swallowed.
See cautions on right
hand side of label.
**KEEP OUT OF THE
REACH OF CHILDREN**

White

Z[★]SPAR[®]


B-90 ANTI-FOULING

4-19-72

SEMI-HARD TYPE

8019-22

EPA REG. NO. 8019-22

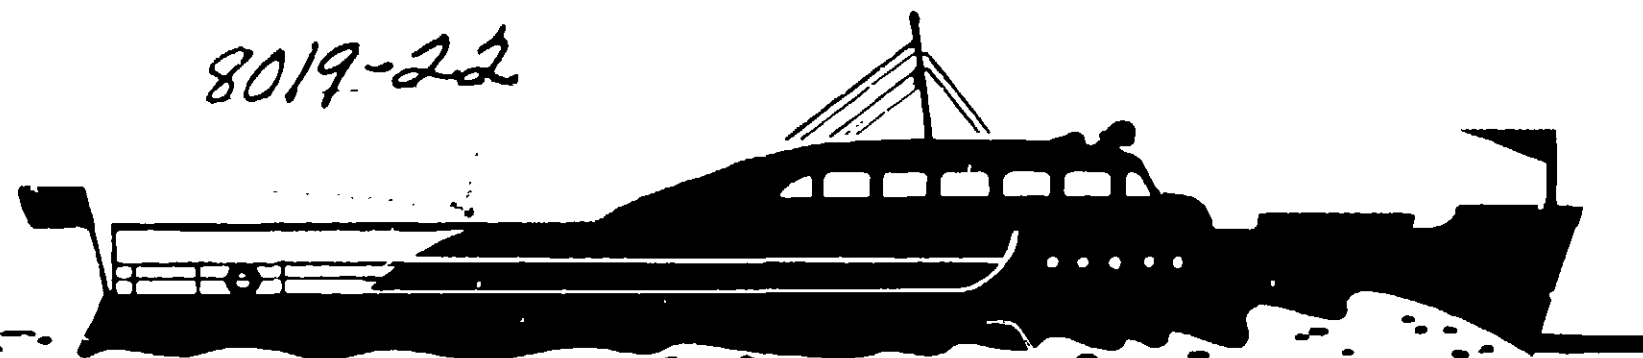

NET CONTENTS ONE U.S. GALLON (5/6 IMPERIAL GALLON)