

E.P.A. Registration No. 150-43

BECK TOWER ALGAE CIDE

FOR CONTROL OF ALGAE IN COOLING TOWERS

150-43

ACTIVE INGREDIENT

Polyoxyethylene (dimethyliminio) ethylene
(d.methyliminio) ethylene dichloride

10.0%

INERT INGREDIENTS

90.0%

CAUTION:

KEEP OUT OF REACH OF CHILDREN

See Side Panel For Other Cautions

NET CONTENTS

1 U. S. GALLON

ANDERSON[®]



BECK T
and fur
cooling
remove
posits. /
of BECI
provide
BECK T
in the
control
fluid ou
of water
CIDE) s
The fre
of bleec
addition

Harmful
flush wh
persists
Do not
or destr
from wa
destroy
from wa
This pro
where it
contain
only as
AND


ER
IDE

ERS 150-43

10.0%

90.0%

NET CONTENTS
1 U. S. GALLON

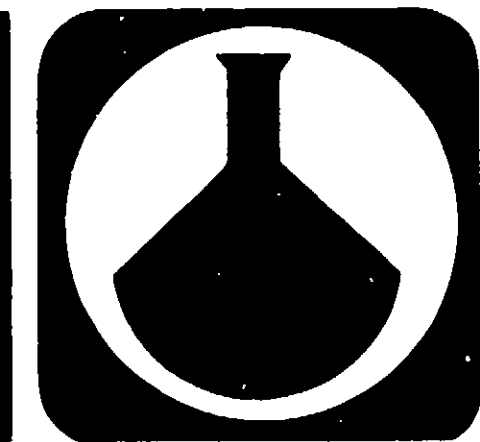

DIRECTIONS

BECK TOWER ALGAECIDE is used to control algae, bacteria and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algae growth, microbiological slime and other deposits. An initial slug addition of 6.13 to 15.32 fluid ounces of **BECK TOWER ALGAECIDE** per 1000 gallons of water to provide a concentration of 48 to 120 parts per million of **BECK TOWER ALGAECIDE** based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.53 to 15.32 fluid ounces of **BECK TOWER ALGAECIDE** per 1000 gallons of water (12 to 120 parts per million of **BECK TOWER ALGAECIDE**) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

CAUTION:

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eyes irritation persists get medical attention. Avoid contamination of food.

"Do not reuse empty drum. Return 30 or 50 gallon drums to reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies. Rinse smaller container thoroughly with water and destroy by perforating or crushing and burying in a safe place away from water supplies."

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water. Do not contaminate water by cleaning or disposing of drums or waste. Use only as directed on label.

ANDERSON CHEMICAL COMPANY

LITCHFIELD, MINNESOTA 55355 • BOX 1041

DES MOINES, IOWA 50319 • 204 S. W. 2ND ST.