


STORAGE: Cylinders and ton containers of chlorine should be stored in a dry area away from sources of heat and protected from direct sunlight and precipitation. They should be segregated from other compressed gases and never stored near hydrocarbons, finely divided metals, turpentine, ether, anhydrous ammonia, or other flammable materials. All storage containers must have a weather resistant label attached near the outlet valve and must not be accessible to general public.

DISPOSAL: All chlorine containers are returnable and should be properly identified with return tags and returned as promptly as possible to supplier according to prescribed instructions and practices recommended by the Chlorine Institute. All valves must be tight and closures or caps secured. It is illegal to ship a leaking chlorine container.

**DO NOT STORE IN DIRECT SUNLIGHT
DO NOT DROP CONTAINER**

**Cross
Section of
Cylinder
Valve**

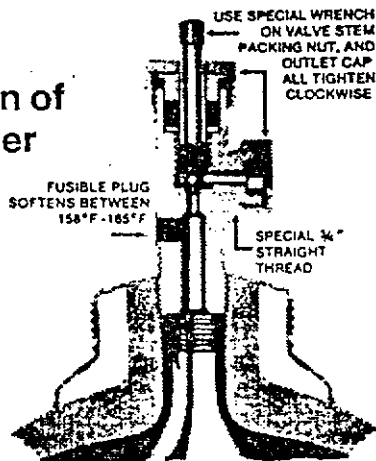

THIS NEEDLE VALVE IS STANDARD FOR CHLORINE—ALL THREADS ARE RIGHT HAND. TURN CLOCKWISE TO TIGHTEN—USE SPECIAL WRENCH.

DO NOT TAMPER WITH THE FUSIBLE SAFETY PLUGS. FUSIBLE METAL MELTS AT 158°F.-165°F.

TO CONNECT TO DISCHARGE LINE UNSCREW VALVE OUT-LET CAP AND ATTACH YOKE CLAMP AND ADAPTER OF SPECIAL UNION—NEVER USE PIPE FITTINGS HAVING STANDARD TAPERED THREAD—USE THE NEW GASKETS EACH TIME CONNECTION IS MADE.


OPEN VALVE BY TURNING TO LEFT (COUNTERCLOCKWISE)—ONE COMPLETE TURN OPENS VALVE WIDE, NEVER EXCEED 1 1/4 TURNS. PACKING NUT MAY BE SLIGHTLY LOOSENED, IF NECESSARY, TO RELIEVE TIGHT VALVE, BUT RETIGHTEN PROMPTLY TO AVOID LEAK.

CLOSE VALVE PROMPTLY WHEN CONTAINER IS EMPTY TO PREVENT WATER AND OTHER FOREIGN SUBSTANCES ENTERING THE CONTAINER.

ALWAYS REPLACE VALVE OUTLET CAP AND VALVE PROTECTION COVER.

PRINTED IN U.S.A.

4/96

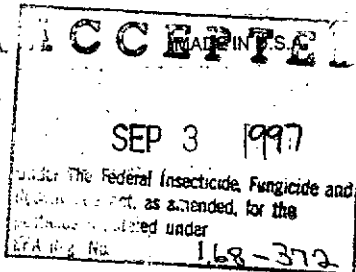

**Great Western
CHLORINE**

UN 1017 (RQ 10/4.54)
**LIQUEFIED GAS UNDER PRESSURE
NON-FLAMMABLE**

FOR USE AS A DISINFECTANT, by experienced personnel only in municipal water supplies, sewage and waste management plants and industrial and commercial swimming pools.

Active Ingredient - Chlorine 99.5%
Inert Ingredients .5%

KEEP OUT OF REACH OF CHILDREN.

DANGER  POISON

FIRST AID

If inhaled, remove to fresh air. Keep patient warm and quiet. If not breathing give artificial respiration immediately, preferably mouth-to-mouth. If breathing is difficult give oxygen. Call a physician. In case of contact, immediately flush eyes or skin with water for at least 15 minutes while removing contaminated clothing and shoes. Call a physician. Wash clothing before reuse. Discard contaminated shoes.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

Hazardous liquid and gas under pressure. May be fatal if inhaled. Causes severe burns. Harmful if absorbed through skin. Keep away from heat and open flame. Do not breathe gas. Use with adequate ventilation. Do not get in eyes or on skin or on clothing. Wash thoroughly after handling. Keep upwind of leak. Evacuate enclosed places until gas has dispersed. Make daily inspections for leaks. Stop leak at once since it will become worse with time.

ENVIRONMENTAL HAZARD

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARD:

Chlorine is a non flammable gas. In the container it is liquefied gas under pressure. Do not heat container. Do not drop container. Chlorine is an oxidizer and should not be stored near flammable materials.

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

It is a violation of federal law to use this product in a manner inconsistent with its labeling. Have available gas masks approved by the U.S. Bureau of Mines or the National Institute for Occupational Safety and Health. Handle and use only in accordance with practice recommended in the Chlorine Manual published by the Chlorine Institute, Inc., New York. Use only in well ventilated areas.

Only specifically designed dispensing equipment should be used in accordance with manufacturers instructions and according to state regulatory agency recommendations for dosages or residual chlorine levels which should be maintained for each specific site of application.

(CONTINUED ON BACK)

PACKAGED BY

**GREAT WESTERN CHEMICAL CO.
SALT LAKE CITY, UTAH, 84104**

NET WT. 48" CYL.-2000 LBS.

E.P.A. REG. NO. 168-372

EPA Est. No. 9768-UT-1