

Ketones 21.3%
Aromatic Hydrocarbons 21.4%

173-R-401 100.0%
4770

GB

EPA Reg. No. 200-57
EPA Est. No. 200-Tx-1

lutely necessary.

LC477101

Keep out of water, ponds, or streams; do not contaminate water by cleaning of equipment or disposal of wastes.

Do not reuse container. Destroy when empty.

CONTAINS KETONES, XYLOL, AND TRIBUTYLTIN OXIDE

WARNING! FLAMMABLE! Keep away from heat, sparks, and open flame. Avoid prolonged contact with skin and breathing of vapor or spray mist. In case of skin contact, flush thoroughly with water, wash with soap and water. Wash contaminated clothing before reuse. In case of eye contact, flush thoroughly with water. Get medical attention. Do not take internally. Close container after each use.



Glidden

ACTIVE INGREDIENT	
bis(Tri-n-butyltin) Oxide	9.3% min.
INERT INGREDIENTS	90.7% max.
	<hr/> 100.0%

MARINE FINISHES

WARNING! FLAMMABLE!
SEE BACK PANEL FOR OTHER CAUTIONS
KEEP OUT OF THE REACH OF CHILDREN

178 - B - 404 BLACK
VINYL - COTE NO - COP
ANTI - FOULING COATING
531 - B - 16 - 100



Made in U.S.A.



ONE GALLON
GLIDDEN COATINGS & RESINS • Cleveland, Ohio 44115
SCM CORPORATION


Glidden

ACCEPTED

DEC 2 1974
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
ED UNDER NO. ACC. 57
TO ATTACHED COMMENT

181-B

178 - B - 404 BLACK
VINYL - COTE NO - COP
ANTI - FOULING COATING
531 - B - 16 - 100

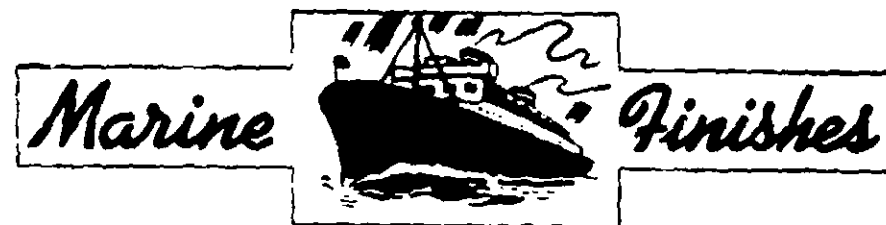

Made in U.S.A.

SCM

3160

