


**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
(and Domestic Animals)**
WARNING



Statement of Practical Treatment

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

Note to physician: Probable mucosal damage may contraindicate the use of gastric lavage.

If on skin: Wash with plenty of soap and water. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.


While spraying and/or sanding boat surface, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

ENVIRONMENTAL HAZARD

This product is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

Commercial Use Only

Made in U.S.A.
©1984 SCM Corp.

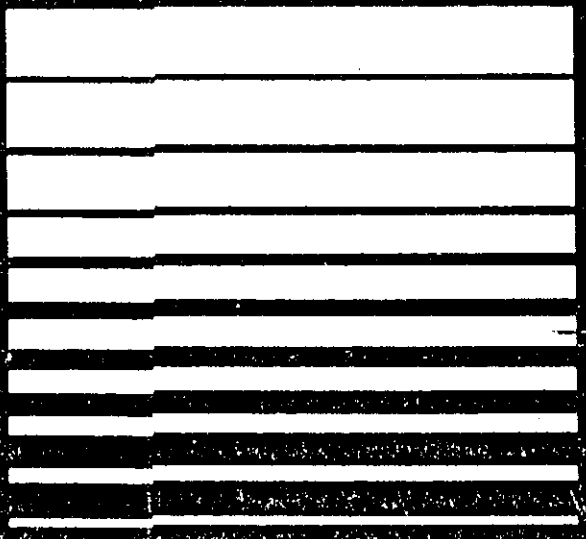

**VINYL-COTE™ COPPER
ANTI-FOULING COAT**

ACCEPTED
SEP 25 1985
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under EPA Reg. No. 200-60

7070

RED (178-R-3)

ACTIVE INGREDIENT	
Cuprous Oxide	52.0%
INERT INGREDIENTS	48.0%
Total (cannot be metal)	100.0%
	(47.1%)

CONTAINS PETROLEUM DISTILLATE

EPA Establishment No. 200-TX-1
EPA Registration No. 200-60

**KEEP OUT OF REACH OF CHILDREN.
WARNING!**

See side panel for additional precautionary statements.

FIVE GALLONS 18.925 L

SCM GLIDDEN COATINGS & RESINS • Cleveland, Ohio
DIVISION OF SCM CORPORATION

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

A fast drying polyvinyl chloride-type copper-containing anti-fouling coating for marine use in both fresh and salt water.

General - Do not apply at film thicknesses in excess of those specified. Do not apply directly to bare metal or wood. Do not apply during fog, mist, or rain. Do not use for potable water or food contact service. Do not add unspecified solvents or mix with other paints. Clean equipment immediately after use with Vinyl-Cote Standard Reducer No. 7090, Hot Weather Reducer No. 7091, or Methyl Ethyl Ketone. Refer to this product's Protective Maintenance Coatings Data Sheet for detailed recommendations, and primer recommendations for painting new surfaces.

Material Preparation - Mix thoroughly using a heavy-duty power mixer with a surface scraping action type blade until smooth and free flowing. Reduce as necessary with Vinyl-Cote Standard Reducer No. 7090 or Hot Weather Reducer No. 7091 to obtain proper atomization and maintain a wet spray film.

USAGE. USER IS THE CURRENT PRO- DATA SHEET AND THIS PRODUCT.

WE MAKE NO EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. WE MAKE NO REFUND OF THE PURCHASE PRICE IN THE EVENT OF CONSEQUENTIAL DAMAGES.

STORAGE AND DISPOSAL

Keep closures tight and upright to prevent leakage. Keep container closed when not in use. Store below 100°F. Do not incinerate closed containers as they may explode when exposed to extreme heat or fire. In case of spillage, absorb and dispose of on site or at an approved waste disposal facility. Do not contaminate water, food, or feed by storage or disposal.

PESTICIDE DISPOSAL

CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved State and local procedures.

Wastes are toxic. Improper disposal of excess spray mixture, or rinsate is a violation of

If these wastes cannot be disposed of by use label instructions, contact your State Environmental Control Agency, or the Hazardous Waste Management Unit at the nearest EPA Regional Office for

tem damage. Intentional misuse by
ating and inhaling the contents may

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

A fast drying polyvinyl chloride-type copper-containing anti-fouling coating for marine use in both fresh and salt water.

General - Do not apply at film thicknesses in excess of those specified. Do not apply directly to bare metal or wood. Do not apply during fog, mist, or rain. Do not use for potable water or food contact service. Do not add unspecified solvents or mix with other paints. Clean equipment immediately after use with Vinyl-Cote Standard Reducer No. 7090, Hot Weather Reducer No. 7091, or Methyl Ethyl Ketone. Refer to this product's Protective Maintenance Coatings Data Sheet for detailed recommendations, and primer recommendations for painting new surfaces.

Material Preparation - Mix thoroughly using a heavy-duty power mixer with a surface scraping action type blade until smooth and free flowing. Reduce as necessary with Vinyl-Cote Standard Reducer No. 7090 or Hot Weather Reducer No. 7091 to obtain proper atomization and maintain a wet spray film.

SAFEST USAGE. USER IS
CONSULT THE CURRENT PRO-
TECTIVE DATA SHEET AND
LABEL FOR THIS PRODUCT.

5588

LIABILITY

holder's specifications. WE MAKE NO
WARRANTY, EXPRESS OR IMPLIED, IN-
CLUDING BUT NOT LIMITED TO, FIT-
NESS FOR PARTICULAR PURPOSE,
MERCHANTABILITY, OR REFUND OF THE PURCHASE
PRICE OR OTHER CONSEQUENTIAL DAMAGES

STORAGE AND DISPOSAL

Keep closures tight and upright to prevent leakage. Keep container closed when not in use. Store below 100°F. Do not incinerate closed containers as they may explode when exposed to extreme heat or fire. In case of spillage, absorb and dispose of on soil or at an approved waste disposal facility. Do not contaminate water, food, or feed by storage or disposal.

PESTICIDE DISPOSAL


CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved State and local procedures.

These wastes are toxic. Improper disposal of excess
spray mixture, or rinsate is a violation of
Federal law. If these wastes cannot be disposed of by use

be harmful or fatal.

ER TYPE ATING

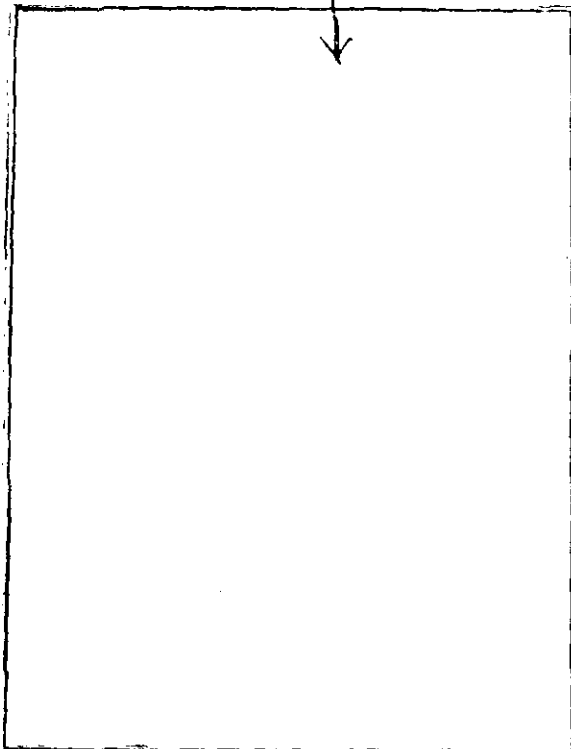

FOR BEST RESULTS AND SAFEST USAGE, USER IS SPECIFICALLY DIRECTED TO CONSULT THE CURRENT PROTECTIVE MAINTENANCE COATINGS DATA SHEET AND MATERIAL SAFETY DATA SHEET FOR THIS PRODUCT. EMERGENCY PHONE: (218) 828-5588

LIMITATION OF LIABILITY

We warrant our product to conform to Glidden's specifications. WE MAKE NO OTHER WARRANTY OR GUARANTEE OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. Liability, if any, is limited to replacement of the product or refund of the purchase price. LABOR OR COST OF LABOR AND OTHER CONSEQUENTIAL DAMAGES ARE HEREBY EXCLUDED.

Ohio 444115

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in with its labeling.

A fast drying polyvinyl chloride-type copper-containing marine use in both fresh and salt water.

General - Do not apply at film thicknesses in excess of not apply directly to bare metal or wood. Do not apply rain. Do not use for potable water or food contact use unspecified solvents or mix with other paints. Clean after use with Vinyl-Cote Standard Reducer No. 7090, H 7091, or Methyl Ethyl Ketone. Refer to this product's Coatings Data Sheet for detailed recommendations, and pri painting new surfaces.

Material Preparation - Mix thoroughly using a heavy-duty surface scraping action type blade until smooth and free necessary with Vinyl-Cote Standard Reducer No. 7090 or 7091 to obtain proper atomization and maintain a wet sp

STORAGE AND DISPOSAL

Keep closures tight and upright to prevent leakage. Keep container closed when not in use closed containers as they may explode when exposed to extreme heat or fire. In case of spill or at an approved waste disposal facility. water, food, or feed by storage or disposa

PESTICIDE DISPOSAL

CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, sanitary landfill, or by other approved State and local procedures.

Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance

WARNING: FLAMMABLE.


MAY IGNITE EXPLOSIVELY.

Keep away from heat, sparks and open flame. Do not smoke. Vapors may ignite explosively. Extinguish all flames, burners, stoves, heaters and pilot lights and disconnect all electrical motors and appliances before use and until all vapors are gone. Use portable explosion-proof lightning and ventilating equipment connected to exterior self-contained power source. Nonexplosion-proof equipment must be placed well away from areas where vapors may collect. Use nonferrous tools and wear conductive and nonsparking shoes in areas where explosion hazards exist. Vapors may spread long distances.

USE ONLY WITH ADEQUATE VENTILATION

Notice: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal.

IR TYPE
ATING

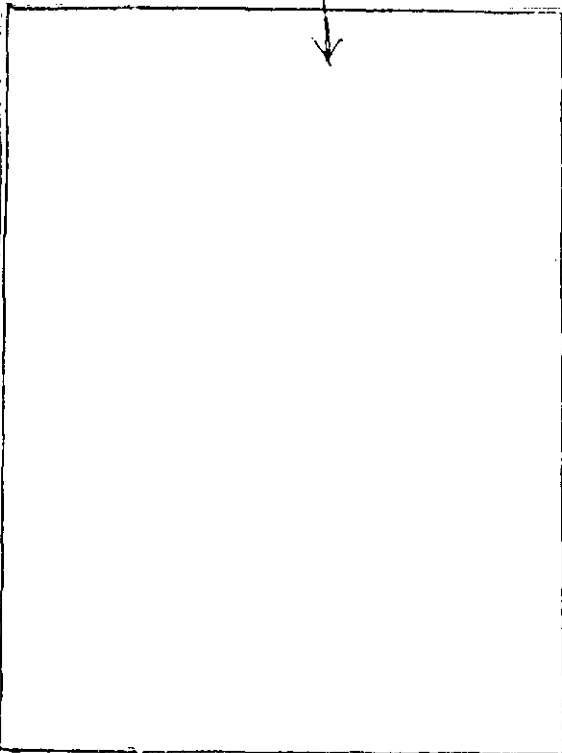

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a with its labeling.

A fast drying polyvinyl chloride-type copper-containing marine use in both fresh and salt water.

General - Do not apply at film thicknesses in excess of not apply directly to bare metal or wood. Do not apply rain. Do not use for potable water or food contact ser unspecified solvents or mix with other paints. Clean e after use with Vinyl-Cote Standard Reducer No. 7090, Hc 7091, or Methyl Ethyl Ketone. Refer to this product's Coatings Data Sheet for detailed recommendations, and *prh painting new surfaces.*

Material Preparation - Mix thoroughly using a heavy-duty surface scraping action type blade until smooth and fre necessary with Vinyl-Cote Standard Reducer No. 7090 or 1 7091 to obtain proper atomization and maintain a wet, sp

STORAGE AND DISPOSAL

Keep closures tight and upright to prevent leakage. Keep container closed when not in u closed containers as they may explode when exposed to extreme heat or fire. In case of spi or at an approved waste disposal facility. water, food, or feed by storage or disposa

PESTICIDE DISPOSAL

CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, sanitary landfill, or by other approved State and local procedures.

FOR BEST RESULTS AND SAFEST USAGE. USER IS SPECIFICALLY DIRECTED TO CONSULT THE CURRENT PROTECTIVE MAINTENANCE COATINGS DATA SHEET AND MATERIAL SAFETY DATA SHEET FOR THIS PRODUCT. EMERGENCY PHONE: (218) 828-5588

LIMITATION OF LIABILITY


We guarantee our product to conform to Glidden's specifications. WE MAKE NO OTHER WARRANTY OR GUARANTEE OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. Liability, if any, is limited to replacement of the product or refund of the purchase price. LABOR OR COST OF LABOR AND OTHER CONSEQUENTIAL DAMAGES ARE HEREBY EXCLUDED.

be placed well away from areas where vapors may collect. Use nonferrous tools and wear conductive and nonsparking shoes in areas where explosion hazards exist. Vapors may spread long distances.

USE ONLY WITH ADEQUATE VENTILATION

Notice: Reports have associated repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents may be harmful or fatal.

**IR TYPE
ATING**

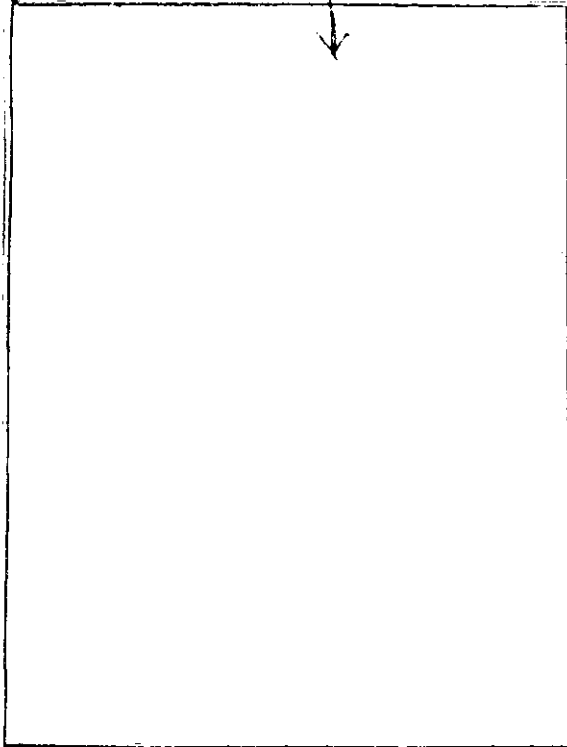

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a way inconsistent with its labeling.

A fast drying polyvinyl chloride-type copper-containing paint for marine use in both fresh and salt water.

General - Do not apply at film thicknesses in excess of not apply directly to bare metal or wood. Do not apply in the presence of rain. Do not use for potable water or food contact surfaces. Do not use with unspecified solvents or mix with other paints. Clean surface after use with Vinyl-Cote Standard Reducer No. 7090, No. 7091, or Methyl Ethyl Ketone. Refer to this product's Coatings Data Sheet for detailed recommendations, and *not for painting new surfaces.*

Material Preparation - Mix thoroughly using a heavy-duty surface scraping action type blade until smooth and free of debris. If necessary with Vinyl-Cote Standard Reducer No. 7090 or No. 7091 to obtain proper atomization and maintain a wet surface.

FOR BEST RESULTS AND SAFEST USAGE, USER IS SPECIFICALLY DIRECTED TO CONSULT THE CURRENT PROTECTIVE MAINTENANCE COATINGS DATA SHEET AND MATERIAL SAFETY DATA SHEET FOR THIS PRODUCT. EMERGENCY PHONE: (216) 828-5588

LIMITATION OF LIABILITY

We guarantee our product to conform to Glidden's specifications. WE MAKE NO OTHER WARRANTY OR GUARANTEE OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. Liability, if any, is limited to replacement of the product or refund of the purchase price. LABOR OR COST OF LABOR AND OTHER CONSEQUENTIAL DAMAGES ARE HEREBY EXCLUDED.

STORAGE AND DISPOSAL

Keep closures tight and upright to prevent leakage. Keep container closed when not in use. Do not use closed containers as they may explode when exposed to extreme heat or fire. In case of spill, clean up immediately. Do not discharge into water, food, or feed by storage or disposal.

PESTICIDE DISPOSAL

CONTAINER DISPOSAL

Triple rinse (or equivalent). Then offer for recycling or reconditioning, sanitary landfill, or by other approved State and local procedures.

Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use...

Surface Preparation - Do not apply directly to metal surfaces. Countersink and caulk all metal fasteners on wood surfaces. All surfaces must be clean, dry and free of all contaminants. May be applied directly to wood. May be applied over clean Vinyl-Cote vinyl products at any time. May be applied over Glidden Hard Boiled Mastic starting one hour after application of the mastic. The mastic must be soft and tacky for this product to develop proper adhesion. Refer to this product's Protective Maintenance Coatings Data Sheet for detailed recommendations on ~~105097005~~ other products.

Application - Best applied by conventional spray. Reduce as required (see Material Preparation) and use minimal atomization pressure in order to reduce dry spray. Use moisture and oil-free air and a pot equipped with separate pot pressure and a'r atomization regulators. Prior to use, flush pot and fluid hose with Vinyl-Cote Standard Reducer No. 7090 or Hot Weather Reducer No. 7091. See Protective Maintenance Coatings Data Sheet for spray equipment recommendations.

Airless spray is not recommended on angular shapes or where the applicator's movement is restricted. Sufficient solvent reduction must be made and excess film build avoided. Brush or roll small areas only.

Coverage - Recommended coverage (theoretical) for unreduced material is 178-201 sq.ft./gallon @ 3.4-3.8 mils dry (8.0-9.0 mils wet) for 178-R-3 Red and 160-178 sq.ft./gallon @ 3.2-3.6 mils dry (9.0-10.0 mils wet) for 178-B-102 Black. When computing working coverage, allow for any solvent addition, application losses, surface irregularities, etc.

Drying - Dries dust free in 15 minutes, to recoat in 30-60 minutes at 77°F, 50% R.H. Vessel may be launched one hour after application is completed. Allow longer drying times under cooler, more moist conditions.

eye irritation. Harmful if absorbed through skin. Avoid contact with eyes or clothing. Wear protective clothing such as gloves, long-sleeved shirt, long pants, and hat. May be fatal if swallowed or inhaled.

vapor; spray mist; dust or chips from sanding. . Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and do not reuse. Wash thoroughly with soap and water after handling.
