


SUPPLEMENTAL LABELING

Boomer 6-3
EMULSIFIABLE INSECTICIDE CONCENTRATE

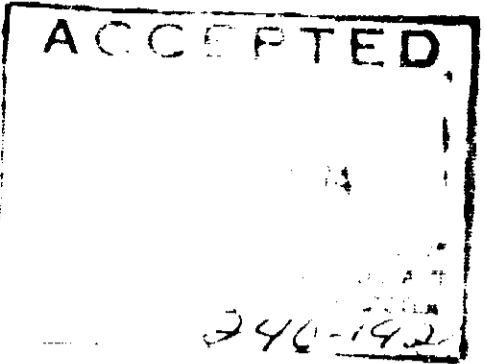

This booklet contains new or supplemental directions for use of this product which may not appear on package label. Follow the instructions carefully.

POISON
NOT FOR HOME USE
USE ONLY AS RECOMMENDED



DANGER
Keep Out of
Reach of
Children



IMPORTANT

READ AND CAREFULLY OBSERVE THE CAUTIONARY STATEMENTS AND ALL OTHER INFORMATION APPEARING ON THE PRODUCT LABEL.

DANGER

Keep all persons out of the operating area and the vicinity where there may be danger of drift. Vacated areas should not be re-entered until the drifted insecticide and volatile residues have dissipated.
EPA Reg. No. 240-192

DIRECTIONS FOR USE

This product is an emulsifiable concentrate that mixes readily with water. However, to apply Boomer 6-3 as an aerial EV spray, follow the following recommendations on equipment and procedure.

Conventional aerial equipment can be used to apply at 10'-12' height, use pumps capable of producing 40-50 PSI. A bleed line 1/8" to 1/4" diameter should be installed on high part of impeller chamber that will release air that may be trapped in chambers. Other end of line should go to spray tank.

NOZZLES

Use 15 to 30 nozzles per acre that spray tips for small aircraft (Piper aircrafts or Stearman's), Spaying Systems 8001, 8015, 8002 or 8003 with 100 mesh screens are satisfactory. Nozzles should be pointed down. Do not use full or hollow cone nozzles. A 70 to 80 mesh screen should be used in the spray system.

BOOM AND NOZZLE PLACEMENT

Distance between left and right side nozzles should be approximately 3/4 of wing span and an Asymmetrical nozzle arrangement should be used at low altitude. A 1/8" to 1/4" diameter line should be attached to both outer ends of the boom and pointed to the spray tank. This line will bleed from compressor and permit a sharp cut off at end of swath.

BYPASS

Use a bypass valve to prevent spraying of the treated area. The bypass line should be sized to permit full flow of the concentrate to the spray tank. The bypass valve should be located in the spray tank or in the line leading to the spray tank.

For early season applications, use a spray solution of 1/2 to 1 ounce of Boomer 6-3 per acre and add 1/2 to 1 quart of water to give a total of 1/2 to 1 quart.

For late season applications, use a spray solution of 1/2 to 1 ounce of Boomer 6-3 per acre and add 1/2 to 1 quart of water to give a total of 1/2 to 1 quart.

Care should be taken to avoid spraying of sensitive areas, but do not spray on or over sensitive areas.

Workers entering the fields within 24 hours after application should wear protective clothing

Do not apply within seven days of hand-picking or harvest.

Do not graze dairy animals or animals being finished for slaughter in treated fields.