

1 1/2 355-178

TANK CAR TAG



PENWALT

CHLORINE

Active ingredient - Liquid Chlorine 100%

DANGER POISON

HAZARDOUS LIQUID & GAS UNDER PRESSURE.

Keep out of reach of children.

MAY BE FATAL IF INHALED. CAUSES IRRITATION. DO NOT HANDLE OR USE UNTIL SAFETY PRECAUTIONS IN THE CHLORINE MANUAL OF THE CHLORINE INSTITUTE, INC., HAVE BEEN READ AND UNDERSTOOD.

Causes severe skin and eye irritation. May produce burns. Do not get in eyes, on skin or on clothing. Keep container closed. Use only with adequate ventilation. Do not heat container. Keep upright of leak; evacuate enclosed places until gas has dispersed. If inhaled, remove to fresh air. If not breathing give artificial respiration, preferably mouth to mouth. If breathing is difficult, give oxygen. In case of contact immediately flush eyes with plenty of water for at least 15 minutes. Immediately get medical attention. Have ad-

ditional information on this product in the Chlorine Institute Manual.

LIQUID VALVE

Observe the following when operating this valve.

1. Inspect valve frequently. Tighten packing glands when necessary.

2. Before refilling car close all valves. Lubricate and replace "cutoff plug of hand."



SECURE NORTON REQUIRES WITH THIS VALVE. ~~ON TANK CAR~~ AND LEAVE TIGHT ON VALVE.

PENWALT CORPORATION XXXXX-XX-X-X

MAY BE FATAL IF INHALED. CAUSES IRRITATION. DO NOT HANDLE OR USE UNTIL SAFETY PRECAUTIONS IN THE CHLORINE MANUAL OF THE CHLORINE INSTITUTE, INC., HAVE BEEN READ AND UNDERSTOOD.

Causes severe skin and eye irritation. May produce burns. Do not get in eyes, on skin or on clothing. Keep container closed. Use only with adequate ventilation. Do not heat ~~containers~~. Keep upwind of leak; evacuate enclosed places until gas has dispersed. If inhaled, remove to fresh air. If not breathing give artificial respiration, preferably mouth to mouth. If breathing is difficult, give oxygen. In case of contact immediately flush eyes with plenty of water for at least 15 minutes. Immediately get medical attention. Have approved U.S. Bureau of Mines Gas Masks available. Make daily inspection for leaks. Stop leak at once since it will become greater with time.


Write for copy of our Chlorine Bulletin and Wall Chart outlining recommended practice for handling chlorine containers

MANUFACTURED BY

PENNWALT CORPORATION
PHILADELPHIA, PA. 19102
Net weight Tank or TONS E.P.A. REG. NO. 335-178

LIQUID V

Observe the following this
1. Inspect valves frequently
ing glands when necessary
2. Before removing car or
Lubricate and replace
SECURE
NOTIFY INSURANCE AND
CORPORATION

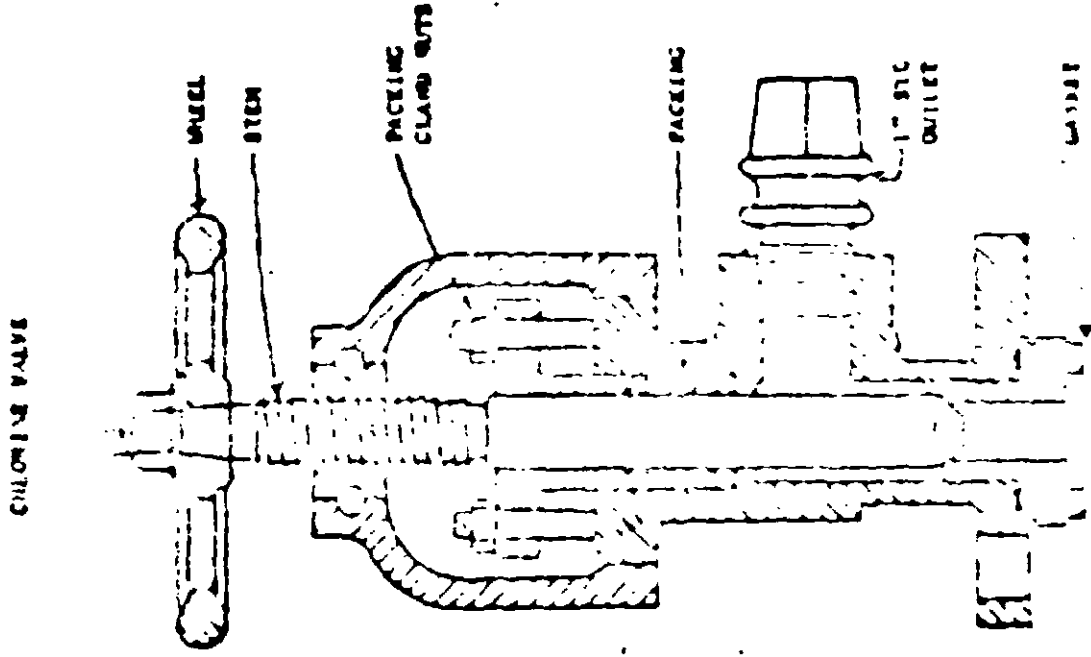

FRONT

ACCEPTED
MAY 23 1973
FOR THE...
ED UNDER...
TO A...

BACK