

TOP

**PENTASEAL  
WATER REPELLENT  
WOOD PRESERVATIVE**



**STOPS ROT AND  
DECAY**

**PROTECTS AGAINST  
WARPING, SWELLING,  
SHRINKING AND  
CHECKING**

**KILLS TERMITES,  
POWDER POST BEETLES**


**PAINTABLE**

**WARNING**

May cause skin irritation. Harmful if  
swallowed. Do not breathe vapor fumes  
or spray mist. Avoid contact with eyes,  
skin or clothing. In case of contact wash  
copiously with warm water. Flammable.  
Do not use near open flame.

**KEEP OUT OF REACH OF CHILDREN**

**ZEHRUNG CHEMICAL CO.  
PORTLAND, OREGON**

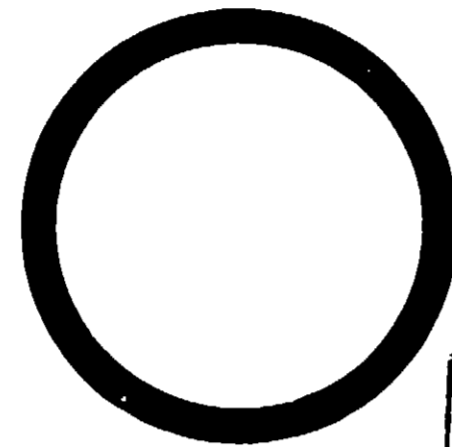

**ACCEPTED**  
OCT 30 1967  
U.S. DEPARTMENT OF AGRICULTURE  
OFFICE OF PEST CONTROL  
WASHINGTON, D.C. 20250  
ED. 341-37  
TO ATTACHED LABELS

**ZEHRUNG**



**ONE U.S. GALLON**

**Active Ingredients:**

*Pentachlorophenol	4.37%
*Other Chlorophenols	0.63%
Petroleum Hydrocarbons	87.70%
Inert Ingredients	7.30%
	100.00%

\*Equivalent to 5.2% technical pentachlorophenol as  
defined by Federal Specifications TT-W-570  
U.S.D.A. Reg. No. 341.37


**READY TO USE**  
RTU • 1/4 • 1  
U.S.D.A. Reg. No. 341-37

**WARNING! KEEP OUT OF REACH OF CHILDREN  
FLAMMABLE - SEE BACK PANEL FOR ADDITIONAL CAUTIONS**

**Paintable!**

**pentaseal**

**WATER REPELLENT & WOOD PRESERVATIVE**

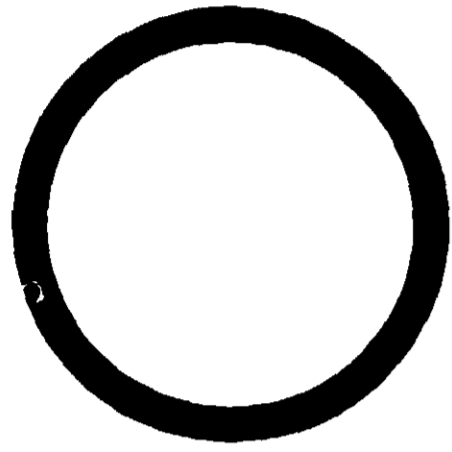

### DIRECTIONS

Best results will be had by soaking the wood for at least 3 minutes, but if not possible apply liberally with at least two flowing coats by brush or spray. Cover all possible surfaces. Allow at least 24 hours drying time before top coats of paint are applied.

### USES

Pentaseal treated wood will prevent decay, rot, blue mold and mildew, kill boring insects and provide a clean, odorless, sealed surface to receive oil stain, paint or varnish. The water-resistant surface protects wood from warping, checking, staining, swelling and shrinking caused by moisture changes.

Use Pentaseal treatment on shingles, doors, windows and frames, joists, sills, plates, stairs, porches, steps, subflooring, interior trim, furniture, wall paneling, fences, flooring, cabinets, screens, storm sash and most other wood around the home.

Kill powder post beetles and termites in furniture, flooring and structural lumber with applications of Pentaseal. Such insects will not attack wood so treated.

### MOSS ON WOOD ROOFS AND MASONRY

Brush or spray applications kill moss and water-repels the surface. Avoid spray drift to nearby plants which would be defoliated or killed. Do not use on composition roofs.

MARCH 1967 SHERWIN WILLIAMS CD3 1098 A

RED

#### CUSTOMER:

Please examine the sketch, engraving, or black and white proofs with care before approving same. Sketches, engravings and negatives for proofs, furnished by us remain the property of The Sherwin-Williams Company, Cleveland, Ohio, and it will not be responsible after the return of proofs with your signature for any errors, omissions or necessary corrections overlooked by you. By approving this sketch, engraving or black and white proofs from the original design, the undersigned customer holds The Sherwin-Williams Company harmless for all damages or claims that may be made against it for non-compliance with Local, State or Federal laws and regulations, or for conflict with rights of third parties in connection with trademarks, designs, labels, copyrights, patents, or unfair competition. Allowances must be made for variations in colors on sketches and color proofs since colors cannot always be exactly reproduced. Reasonable allowances must be made for normal variation in color when lithographing design. Changes are to be made by written memorandum only. In case of sketches do not make changes by marking defacing, mutilating or using up sketches.

If no changes are to be made, please mark 'OK' after each item below

Order No.	OK	Date		Type of Con
Design	OK			
Color Sequence:	OK			
Spelling	OK			
Approved by	H. H. Williams		Dates:	1/18/67

CD.

+