


CAUTION
KEEP OUT OF REACH OF CHILDREN
(OTHER WARNINGS ON BACK PANEL)

ACTIVE INGREDIENTS

Cuprous Oxide 65.0%

INERT INGREDIENTS

P E T T I T
MARINE PAINT 35.0%
ANTI FOULING 100.0%

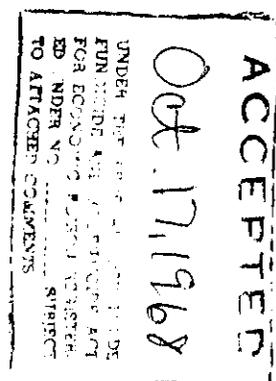

TRINIDAD 75
BLUE
1275

USDA REG. NO. 390-34

390-34

PETTIT PAINT COMPANY, INC.

BELLEVILLE, N.J.

TRINIDAD 75

TRINIDAD 75 is an effective hard racing antifouling boat bottom paint for tropical waters. It can be applied over racing finishes. A small test area of TRINIDAD 75 on aged hard racing finishes is recommended to determine adhesion and compatibility to the old finish. Old, soft, or semi hard antifouling paints should be removed for best adhesion. Allow a minimum of 2 hours cure time between coats. After the final coat is applied, the boat may be launched after 3 hours minimum to within 2 months maximum.

FIBERGLASS: Wash fiberglass with PETTIT's #120 BRUSHING THINNER to remove parting agent grease and dirt. Sand thoroughly with medium grit sandpaper to dull the glossy fiberglass surface. No undercoat is required before using TRINIDAD 75 on fiberglass. Apply 2 coats of TRINIDAD 75.

WOODEN HULLS: Old antifouling paint should be scraped to bare wood. PETTIT's VINYLCLIDE RED or aged non-antifouling hard racing finishes should be sanded thoroughly. If priming is necessary, apply one coat of PETTIT's RED LEAD PRIMER and let dry 24 hours. Scuff sand. Then apply 2 coats of TRINIDAD 75.

STEEL HULLS: Remove all rust and scale from metal surface by scraping and wire brushing. Wash the surface with PETTIT's #120 BRUSHING THINNER to remove grease and imbedded dirt. Apply one coat of PETTIT's VINYL METAL PRIMER to bare metal and let dry 4 hours. Follow with 2 coats of PETTIT's VINYL RED UNDERCOATER and let dry 2 hours between coats and 4 hours before applying 2 coats of TRINIDAD 75.

SANDING AND THINNING: USE PETTIT's #120 BRUSHING THINNER

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS.

DANGER

POISON

HARMFUL OR FATAL IF SWALLOWED. COMBUSTIBLE.

CONTAINS COPPER AND PETROLEUM DISTILLATE. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces which may be used by children. Avoid prolonged contact with skin and breathing vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use.

Use with adequate ventilation. KEEP OUT OF REACH OF CHILDREN.