

CAUTION COMBUSTIBLE MIXTURE

N Y F D C of A No. 174

DIRECTIONS FOR USE

This product is a ready to use penetrating preservative coating designed for the groundline treatment of standing poles and for the treatment of the groundline area of poles in the yard that will be relocated or that have been in storage for prolonged periods. This product is also useful for the treatment of piling cut-offs.

Standing Poles: Use this product only on poles-in-line found by qualified inspector to be satisfactory for continued service. Dig a trench around the pole to the depth determined by the inspector to be necessary for the application of the preservative treatment. This may vary from 12 inches in wet areas to 18 inches or more in arid regions. Scrape away dirt and decayed wood from pole surface. With a brush, pack, or scoop or mechanical applicator apply a coating a minimum of 1/4 inch thick from the bottom of the trench to a predetermined height—2 inches to 12 inches above ground line to suit local conditions. Cover the treated area with a suitable plastic coated paper to increase the effectiveness of the treatment. Alternately, apply this product to a suitable wrapping material, and staple this wrapper to the pole before back-filling the trenched area.


For best results, in general the moisture content of wood should be less than 30% when the preservative coating is applied.

Piling Cut-Offs: Treat the cut-end with a coating 1/4 inch to 1/2 inch thick.

Yard Poles: Poles that have been held in storage for a prolonged period or used poles to be relocated, may be treated in decay vulnerable zones in a manner similar to that described for standing poles, taking care to remove dirt and decayed wood before applying treatment.

NOTICE

Avoid contamination of feed or foodstuffs. Do not reuse container. Return to drum reconditioner or destroy and bury in a safe place. Do not contaminate water by cleaning equipment or disposal of waste and containers. Treated sawdust and other wood wastes should not come in contact with domestic animals, or be used as mulch where it will come in contact with useful living plants.

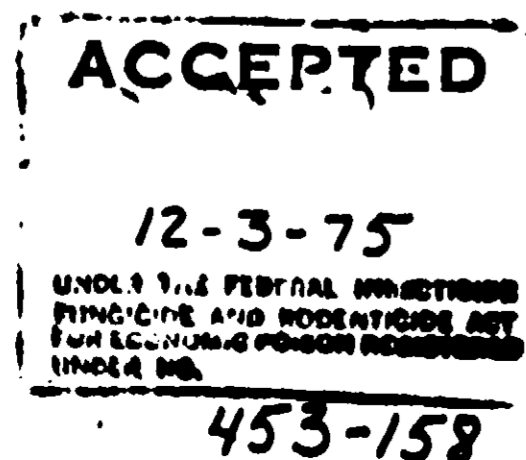

KOPPERS

C WOOD PRESERVATIVE AT-8242

For control of rot in poles at ground level. Also aids in the prevention of termites.



WOOD TREATING CHEMICALS DEPT.

KOPPERS COMPANY, INC.

5137 SOUTHWEST AVENUE, ST. LOUIS, MISSOURI 63110

WARNING:

See side panel for other warnings.

KEEP OUT OF REACH OF CHILDREN

READ "LIMIT OF WARRANTY AND LIABILITY"
BEFORE BUYING OR USING.

IF SUCH TERMS ARE NOT ACCEPTABLE, RETURN
AT ONCE UNOPENED.

EPA Reg. No. 453-158
EPA Est. 453-MO-1

ACTIVE INGREDIENTS	
Pentachlorophenol	8.96%
Other Chlorophenols	1.04%
Coal Tar Creosote	15.00%
Sodium Fluoride	15.00%
Aromatic Petroleum	
Hydrocarbons	53.68%
INERT INGREDIENTS	
	6.32%
TOTAL	100.00%

*1.42% Pentachlorophenol as defined in Federal Spec. FFW 500

NET WEIGHT

POUNDS

WARNING

MAY BE FATAL IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN. CAUSES SKIN AND EYE IRRITATION. MAY CAUSE DELAYED CHEMICAL BURNS.

Do not get in eyes, on skin or on clothing. Do not breathe vapor.

Wear protective clothing and rubber gloves when handling this product or freshly treated lumber. Use only with adequate ventilation.

FIRST AID: If swallowed induce vomiting by sticking finger down throat or by giving soapy or strong salty water to drink. Repeat until vomit is clear. Call a physician. Never give anything by mouth to an unconscious person.

FIRST AID: In case of contact, wash skin with soap and water, for eyes, flush with water for at least 15 minutes and get medical attention.

NOTE TO PHYSICIAN: This product is a metabolic stimulant, causes hyperthermia. Treat symptomatically.

ENVIRONMENTAL CAUTIONS: This product is toxic to fish and wildlife. Keep out of any body of water. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

Vapors may cause injury if adequate ventilation is not insured. Do not use this product indoors, or any other confined areas, where the vapors may concentrate and cause injury to plant or animal life. Keep containers closed when not in use.

Care should be taken to prevent drip or spray from contacting ornamental shrubs, trees, grass, and other desirable vegetation.

LIMIT OF WARRANTY AND LIABILITY

This company warrants that this material conforms to the chemical description on the label and is reasonably fit for the purposes referred to in the directions for use. This product is sold subject to the understanding that the buyer assumes all risks of the use or handling which may result in loss or damage which are beyond the control of the seller, such as for example incompatibility with other products and the manner of its use or application. NO OTHER EXPRESSED OR IMPLIED WARRANTY OF FITNESS OR MERCHANTABILITY IS MADE. The exclusive remedy of the buyer, and the limit of liability of this company or any other seller for any and all losses, injuries or damages resulting from the use or handling of this product shall be the purchase price paid by the user or buyer for the quantity of this product involved. The buyer and all users are deemed to have accepted the terms of this notice which may not be varied by any verbal or written agreement.

FPL 1235 R06