

KOPPERS

DIRECTIONS FOR USE

This product is a ready-to-use penetrating preservative coating, designed for the groundline treatment of standing poles and for the treatment of the groundline area of poles in the yard that will be relocated or that have been in storage for prolonged periods. This product is also useful for the treatment of piling cut-offs.

Standing Poles: Use this product only on poles-in-line found by qualified inspector to be satisfactory for continued service. Dig a trench around the pole to the depth determined by the inspector to be necessary for the application of the preservative treatment. This may vary from 12 inches in wet areas to 18 inches or more in arid regions. Scrape away dirt and decayed wood from pole surface. With a brush, paddle, scoop or mechanical applicator apply a coating a minimum of 1/4 inch thick from the bottom of the trench to a predetermined height—2 inches to 12 inches above ground line to suit local conditions. Cover the treated area with a suitable plastic coated paper to increase the effectiveness of the treatment. Alternately, apply this product to a suitable wrapping material, and staple this wrapper to the pole before back-filling the trenched area.

For best results, in general the moisture content of wood should be less than 30% when the preservative coating is applied.

Piling Cut-Offs: Treat the cut end with a coating 1/2 inch to 1 inch thick.

Yard Poles: Poles that have been held in storage for a prolonged period or used poles to be relocated may be treated in decay vulnerable zones in a manner similar to that described for standing poles, taking care to remove dirt and decayed wood before applying treatment.


NOTICE

Avoid contamination of feed or foodstuffs. Do not reuse container. Return to dealer, recycler or destroy and bury in a safe place. Do not contaminate water by cleaning equipment or disposal of waste and containers. Treated sawdust and other wood wastes should not come in contact with domestic animals or be used as mulch. Store in a well-ventilated area, away from children and pets.

POLE-TREAT 15 PENETRATING PRESERVATIVE COATING



For the prevention of decay and termites in standing poles.

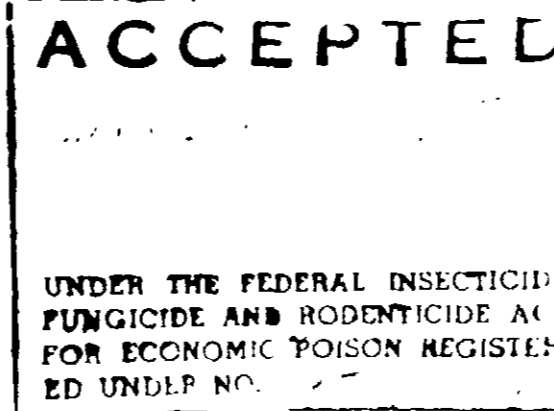

WOOD TREATING CHEMICALS DEPT.

KOPPERS COMPANY, INC.

5137 SOUTHWEST AVENUE, ST. LOUIS, MISSOURI 63110

WARNING: KEEP OUT OF REACH OF CHILDREN.

See side panel for other warnings.

READ "LIMIT OF WARRANTY AND LIABILITY" BEFORE BUYING OR USING.

IF SUCH TERMS ARE NOT ACCEPTABLE, RETURN AT ONCE UNOPENED.

EPA Reg. No. 453-171

EPA Est. 453-MO-1

ACTIVE INGREDIENTS	
Pentachlorophenol*	13.44%
Other Chlorophenols & Related Compounds*	1.56%
Coal Tar Creosote	15.00%
Aromatic Petroleum Hydrocarbons	63.87%
INERT INGREDIENTS	
	6.13%
Total	100.00%

*Equivalent to 100% Trinitro-Cresol (2,4,6-Trinitrophenol) as defined in Federal Reg. 171.55(b)

WARNING

MAY BE FATAL IF SWALLOWED. HARMFUL IF INHALED OR ABSORBED THROUGH SKIN. CAUSES SKIN IRRITATION. MAY PRODUCE DELAYED CHEMICAL BURNS.

Use only with adequate ventilation. Do not get on face, on skin or on clothing. Wash thoroughly after handling.

Wear protective clothing and rubber gloves when handling the freshly treated lumber.

FIRST AID: If swallowed induce vomiting by striking finger down throat or by giving soapy or strong salty water to drink. Repeat until vomit is clear. Call a physician. Never give anything by mouth to an unconscious person.

FIRST AID: In case of contact, wash skin with soap and water. For eyes, flush with water for at least 15 minutes and get medical attention.

NOTE TO PHYSICIAN: This product is a metabolic stimulant causes hyperthermia. Treat symptomatically.

ENVIRONMENTAL CAUTIONS: This product is toxic to fish and wildlife. Keep out of lakes, streams and ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

Vapors may cause injury if adequate ventilation is not ensured. Do not use this product indoors, or any other enclosed areas, where the vapors may concentrate and cause injury to plant or animal life. Keep containers closed when not in use.

LIMIT OF WARRANTY AND LIABILITY

This company warrants that this material conforms to the general description on this label and is reasonably fit for the uses specified in the directions for use. This warranty is void where it is understood that the buyer has assumed all risks of use or handling which may result in loss or damage which are beyond the control of the seller, such as, for example, compatibility with other products and the character of the wood treated. NO OTHER EXPRESSED OR IMPLIED WARRANTY OF FITNESS OR MERCHANTABILITY IS MADE. The exclusive remedy of the buyer and the limit of liability of this company or any other seller for any and all claims, injuries or damage resulting from the use or handling of this product shall be the purchase price paid by the buyer or buyer for the quantity of this product involved. The buyer and all users are deemed to have accepted the terms of this notice which may not be varied by any verbal or written agreement.

NET CONTENTS

POUNDS