



### DIRECTIONS FOR USE

Wear synthetic rubber gloves or plastic coated gloves in handling solutions and freshly treated lumber.

Lumber should be anti stain treated within 24 hours after cutting. Delayed application may permit interior stain. Freshly sprayed or dipped lumber should be protected from rain washing. Tanks should be covered by a roof to prevent the addition of rain water and consequent dilution of the solution.

Be sure that vats and spray equipment are cleaned regularly to remove sawdust and other debris.

**MIXING INSTRUCTIONS**—Mix one gallon of this product per 80 to 100 gallons of water for lumber 2" or less in thickness to protect against sap staining organisms during protracted storage periods.


Lumber should be totally immersed or sprayed so as to insure all surfaces are treated. For lumber thicker than 2", or where temperature and humidity conditions promote severe sapstain, use double strength solution. In spray applications, less solution is applied to wood than in dip applications, and therefore the solution strength should be increased for spray treatment using the 1 to 80 ratio.

Put about 1/2 of the water to be used in the mixing tank. Add the correct amount of this product and rinse container into the tank. Add the balance of water needed and mix thoroughly.

When using proportioning pumps for mixing, this product should be maintained at temperatures higher than 50 degrees F. to prevent inaccurate mixing due to viscosity changes. Minor proportioning rate changes can be affected by changing the setting on the pump dial.

### NOTICE

Avoid contamination of food or foodstuffs. Do not reuse container. Return to drum conditioner or destroy and bury in a safe place. Do not contaminate water by cleaning equipment or disposal of waste and containers. Treated sawdust and other wood wastes should not come in contact with domestic animals or be used as mulch where it will come in contact with useful living plants.

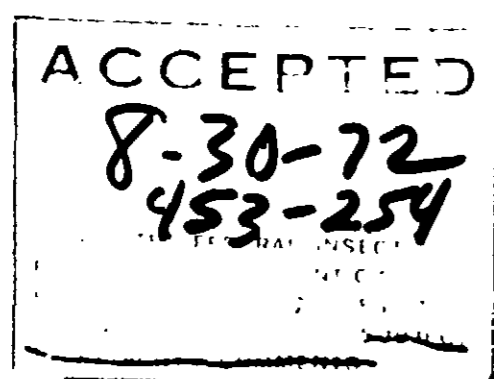

# Liquid NOXTANE 1

## wood fungicide

For control of sapstain and mold on freshly cut species of lumber, including Douglas Fir, White Fir, Southern Yellow and Western Pines, and Hemlock.

### WOOD TREATING CHEMICALS

DEPARTMENT OF **KOPPERS** COMPANY, INC.  
5137 SOUTHWEST AVENUE • ST. LOUIS, MISSOURI 63110

### WARNING: KEEP OUT OF REACH OF CHILDREN

See side panel for other warnings.

READ LIMIT OF WARRANTY AND LIABILITY BEFORE BUYING OR USING

IF SUCH TERMS ARE NOT ACCEPTABLE RETURN AT ONCE UNOPENED

USDA Reg. No. 453-254

NET 55 U.S. GALLONS

#### ACTIVE INGREDIENTS

Sodium pentachlorophenate	18.00%
Sodium Salts of other chlorophenols	12.03%
Sodium metaborate (anhydrous)	6.78%
INERT INGREDIENTS	62.89%
	100.00%

### WARNING

**MAY BE FATAL IF SWALLOWED. HARMFUL IF INHALED OR ABSORBED THROUGH SKIN. CAUSES SKIN IRRITATION. MAY PRODUCE DELAYED CHEMICAL BURNS.**

Do not breathe spray mist. Use only with adequate ventilation. Do not get in eyes, on skin or on clothing. Wash thoroughly after handling.

Wear protective clothing and rubber gloves when handling the freshly treated lumber.

**FIRST AID:** If swallowed induce vomiting by sticking finger down throat or by giving soapy or strong salty water to drink. Repeat until vomit is clear. Call a physician. Never give anything by mouth to an unconscious person.

**FIRST AID:** In case of contact wash skin with soap and water, for eyes, flush with water for at least 15 minutes and get medical attention.

**NOTE TO PHYSICIAN:** This product is a metabolic stimulant, causes hyperthermia. Treat symptomatically.

This product is toxic to fish and wildlife. Keep out of lakes, streams, and ponds.

Apply this product only as directed on the label.

Vapors may cause injury if adequate ventilation is not insured. Do not use this product indoors, or any other confined areas, where the vapors may concentrate and cause injury to plant or animal life.

### LIMIT OF WARRANTY AND LIABILITY

This company warrants that the material conforms to the chemical description on the label and is suitable for the purposes referred to in the directions for use. This product is sold subject to the understanding that the buyer assumes all risks of use or handling which may result in loss or damage which are beyond the control of this company, such as, for example, mixing with other products and the manner of its use. Liability to the buyer is LIMITED TO THE IMPLIED WARRANTY OF FITNESS FOR ORDINARY PURPOSES IS MADE. The responsibility of the buyer is the limit of liability of this company in any case of loss, injury, and all losses, injuries or damages resulting from the use or handling of the product shall be the purchase price paid by the user or buyer for the quantity of this product received. The buyer and all users are advised to read and understand the terms of the notice which must be read before buying, using or written agreement.