

KOPPERS

DIRECTIONS FOR USE

This product is a clear, colorless liquid useful for the protection of wood against fungal growths which cause rot and stain. It is effective against powder post beetles and carpenter ants, and contains water repellent to aid in the control of shrinking, swelling, and checking, grain raising and warping.

WOOD PRESERVATION AND TIMBERING TREATMENT

For best results this product should be applied so as to effect maximum penetration into the wood, and a heavy absorption especially at joints and where grain changes. A minimum treatment period is recommended for millwork by either open tank treatment or pressure immersion of the wood in the solution. A quantity is recommended for five minutes per inch of thickness for the entire surface of dimensioned lumber, millwork, etc. Where the treatment of the end grain is required, a greater quantity may be used. There is a limit to the amount of product that can be absorbed by the end grain of a piece of wood.

Where open tank treatment is impractical, as in the case of an existing structure, two successive applications of this product should be applied. The first should be a heavy application of the product, followed by a second application of a diluted solution.

For protection of wood in contact with soil, the wood should be treated with this product so that the entire surface is covered with a heavy coating.

For protection of wood in contact with soil, the wood should be treated with this product so that the entire surface is covered with a heavy coating.

This product is effective on applications to wood for the control of timber and powder post flycatcher beetles. In these cases it will be effective only in the areas of the wood contacted by the solution. Therefore, thoroughness of treatment is essential to good control.

TERMITE CONTROL: For protection of new wood prior to installation, see instructions above. Care must be exercised that the solution does not contact asphaltic products (tar paper, composition shingles, or other such items) or that it is not applied in such a way that it will stain plaster or other surfaces. Treatment of the wood is supplemental to soil treating.

POWDER POST BEETLE CONTROL: Lumber, flooring or other items infested with powder post beetles can be controlled by immersing the wood in this product for a minimum of 5 minutes per inch of the knots. Care there is a potential hazard from dermal contact after treatment of floors, furniture and the like, re-waxing of these items after treatment with a heavy duty paste wax after the solvent has evaporated, is necessary to insure against this hazard.

Fence posts, poles, foundation timbers, and heavy wooden members should be free of bark, dry and well seasoned and immersed in the product (dilute product) for a period of 32 to 48 hours to be an effective wood preserver.

Lumber intended to be in contact with the soil should be dipped for a minimum of 3 minutes, or if treated by the brush or spray method, receive two or more thorough coats of the product.

NOTICE


Avoid contact with eyes, food or hand-suffs. Do not breathe vapors. Return to dealer for refund or return to factory for a full refund. Do not use in contact with water. Do not use in contact with other products. Do not use in contact with other products. Do not use in contact with other products. Do not use in contact with other products.

WOODTOX. PRE-PRIME-T CONCENTRATE



WATER REPELLENT WOOD PRESERVATIVE

Specially formulated for treatment of millwork prior to factory or field priming. Diluted product meets NWMA standards and Federal Specification TT W-572B, Comp. A.

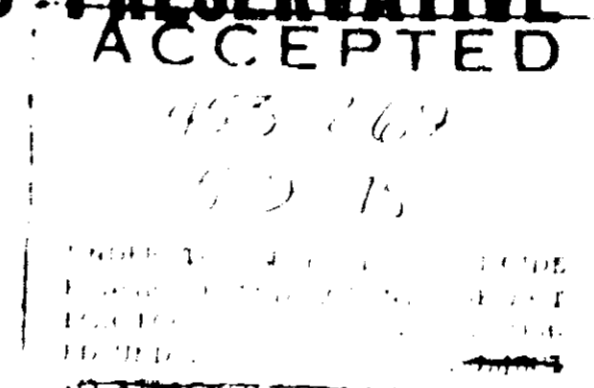

DILUTION: Before using dilute at the ratio of one part of concentrate to four parts by volume of a material such as kerosene or equivalent, or only of weight not more than 5.28 lbs. per gal. to make a ready to use solution containing not less than 5.2% Technical Pentachlorophenol by weight. The diluent should have an end point no greater than 50° F. for quick drying and paintability. Agitate thoroughly before using.

WOOD TREATING CHEMICALS DEPT.

KOPPERS COMPANY, INC.

5137 SOUTHWEST AVENUE, ST. LOUIS, MISSOURI 63110

WARNING: KEEP OUT OF REACH OF CHILDREN

See side panel for other warnings.

READ LIMIT OF WARRANTY AND LIABILITY BEFORE BUYING OR USING. IF SUCH TERMS ARE NOT ACCEPTABLE, RETURN AT ONCE UNOPENED.

EPA Reg. No. 453-269
EPA Est. 453-MO-1

ACTIVE INGREDIENTS:	
Pentachlorophenol*	19.35%
Other Chlorophenols and Related Compounds*	2.25%
INERT INGREDIENTS	
Total	78.40%
	100.00%

*22.5% Technical Pentachlorophenol as defined in Federal Specification TT W-579

NET CONTENTS U.S. GALLONS

WARNING

MAY BE FATAL IF SWALLOWED. HARMFUL IF INHALED OR ABSORBED THROUGH SKIN. CAUSES SEVERE IRRITATION. MAY PRODUCE DELAYED CHEMICAL BURNS. COMBUSTIBLE.

Do not breathe spray mist. Use only with adequate ventilation. Do not get in eyes, on skin, or on clothing. Wash thoroughly after handling.

Do not use, pour, spill or store near heat or open flame.

Wear protective clothing and rubber gloves when handling the freshly treated lumber.

FIRST AID: If swallowed induce vomiting by taking a few drops down throat or by spraying up. If inhaled, get fresh air. If on skin, wash with soap and water. If in eyes, flush with water. If on clothing, remove and give anything by mouth to an attending physician.

FIRST AID: In case of contact with eyes, flush with water for 15 minutes. If on skin, wash with soap and water. If on clothing, remove and give anything by mouth to an attending physician.

NOTE TO PHYSICIAN: This product contains Pentachlorophenol. See also MSDS for further information.

ENVIRONMENTAL CAUTIONS: Do not use in areas where it may be harmful to plants or animals. Do not use in areas where it may be harmful to the environment. Do not use in areas where it may be harmful to the environment.

Vapors may cause irritation of the respiratory tract. Do not use in enclosed areas. Do not use in areas where the vapors may be harmful to plants or animals. Do not use in areas where it may be harmful to the environment.

LIMIT OF WARRANTY AND LIABILITY

This company warrants that this material conforms to the chemical description on the label and is reasonably fit for the purposes referred to in the directions for use. This product is sold subject to the understanding that the buyer assumes all risks of use or handling which may result in loss or damage which are beyond the control of the seller, such as, for example, incompatibility with other products, and the manner of its use or application. NO OTHER EXPRESSED OR IMPLIED WARRANTY OF FITNESS OR MERCHANTABILITY IS MADE. The exclusive remedy of the buyer and the limit of liability of this company or any other seller for any and all losses, injuries or damages resulting from the use or handling of this product shall be the purchase price paid by the user or buyer for the quantity of this product involved. The buyer and all users are deemed to have accepted the terms of this notice which may not be varied by any verbal or written agreement.