



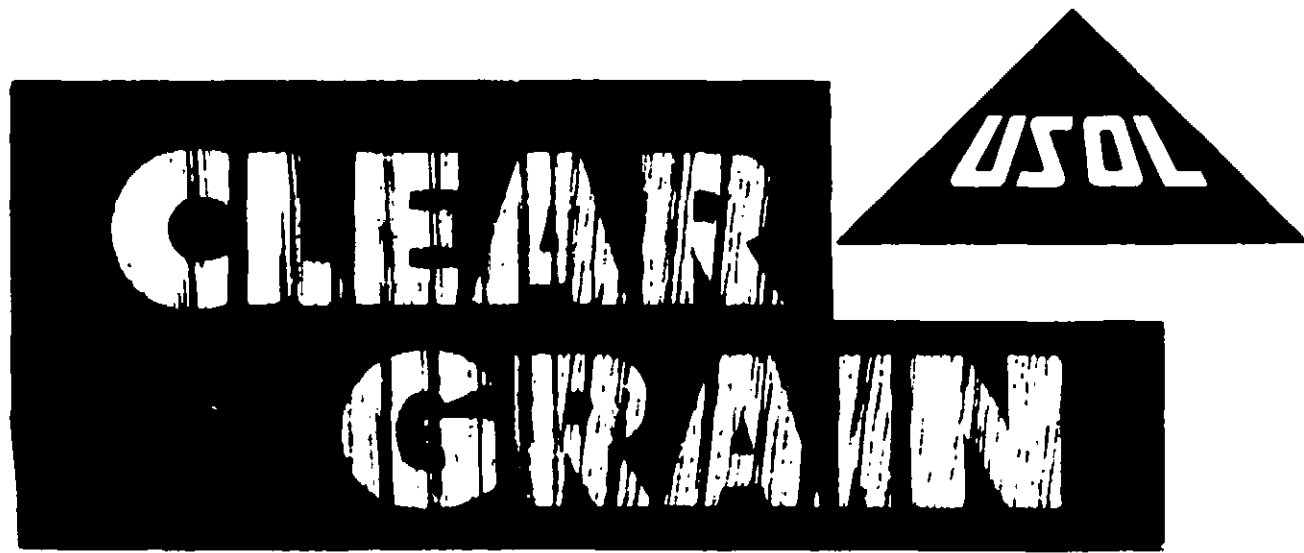

U.S.D.A. Reg. No. 458-13

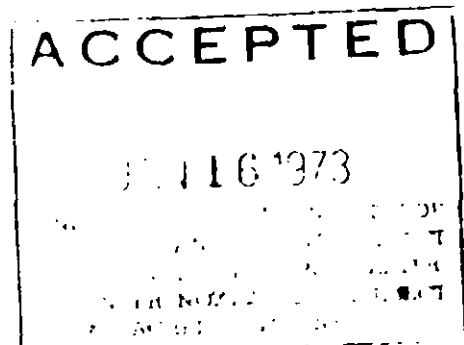

DIRECTIONS

NATURAL WOOD FINISH and WOOD PRESERVATIVE

D FINISH PRESERVATIVE

Apply USOL CLEAR GRAIN to any dry, unpainted, well seasoned wood

Use as received without dilution. Shake well!

Flow on liberally with brush, mop or paint sprayer. Do not spread out thin.

Apply two coats, several days apart. First coat will penetrate deeply. Second coat will provide added surface protection.

Apply a third coat in about one year and after that whenever needed

Dries fast with a smooth surface. Can be painted over when thoroughly dry. (Painting is not necessary to protect the wood.)

FEATURES

- **BEAUTIFIES** — Clear, free-flowing protective oil that retains rich natural color of newly cut wood. Enhances finish by allowing wood grain to show through. CLEAR GRAIN is not a stain or varnish.
- **PROTECTS** — Preservative formula stops wood rot and fungus growth. Repels wood-destroying insects. Impervious to weather; will not dry out, crack or peel. Saves repair costs.
- **USOL CLEAR GRAIN** can be used as a paint thinner. Can also be painted over, if desired — though this is not necessary to protect the wood.

IF IT'S MADE OF WOOD — USOL CLEAR GRAIN WILL PROTECT IT

New-wood beauty plus lasting protection for Siding • Fences • Log Cabins • Picnic Tables • Flooring • Sash and Frames • Garage Doors • Rustic Furniture • Park Shelters

WARNING: KEEP OUT OF REACH OF CHILDREN

See WARNINGS on other panel!

NET CONTENTS ONE GALLON

MANUFACTURED BY

STANDARD TAR PRODUCTS CO.

2456 West Cornell St Milwaukee, Wis. 53209

ALL TYPES of WOOD

ish — Keeps Looking

asily • Dries Quickly

4 25%
75%
3.00%
8 00%
28.00%
14.00%
42.00%

REACH OF CHILDREN

ONE GALLON

ED BY

PRODUCTS CO.

Milwaukee, Wis. 53209

INDEX NO

SIZE STYLE ARTIST