




E.P.A. Reg. No. 458-10

# PENTA

## WATER REPELLENT WOOD PRESERVATIVE

Ready to use • Brush, Spray or Dip

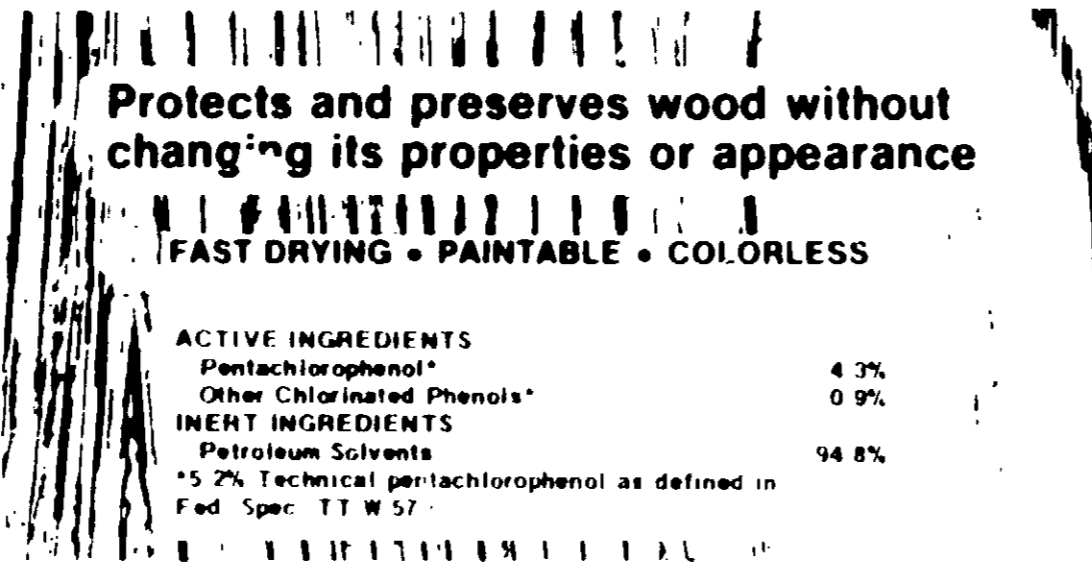

### WARNING: KEEP OUT OF REACH OF CHILDREN

See side panel for additional warnings

NET CONTENTS ONE GALLON

MANUFACTURED BY

### STANDARD TAR PRODUCTS CO.

2458 West Cornell St Milwaukee, Wis 53209

### WARNING

Do not use near open flame  
• May be fatal if swallowed or absorbed thru skin  
• Causes skin irritation  
• Do not breathe vapor or spray mist • Do not get in eyes, on skin, or on clothing  
• Wear rubber gloves and protective clothing when using • Wash thoroughly after handling

Keep away from children, domestic animals, and food stuffs

This product is toxic to fish and wildlife • Keep out of lakes, streams or ponds • Do not contaminate water by cleaning of equipment, or disposal of wastes • Apply this product only as specified on this label

Do not reuse empty container • Destroy it by perforating or crushing • Bury or discard in safe place

Do not use near open flame  
• May be fatal if swallowed or absorbed thru skin  
• Causes skin irritation  
• Do not breathe vapor or spray mist • Do not get in eyes, on skin, or on clothing  
• Wear rubber gloves and protective clothing when using • Wash thoroughly after handling

### DIRECTIONS

Wood should be dry, unfinished, well seasoned and bark free

If coating with a mop or brush, apply two drenching coats especially at saw cuts, joints or where end grain exists.

If dipping, soak five minutes or more for each inch of thickness. Wood which will contact the ground should be soaked at least half an hour. Posts, poles and timbers should soak for 24 to 48 hours

Allow treated surface to dry 48 to 72 hours before painting or varnishing.



# PENTA

## WATER REPELLENT WOOD PRESERVATIVE

### FEATURES

- STOPS wood rot, mold and fungus growth.
- SHEDS water and moisture to prevent shrinking, grain raising and warping.
- SOAKS in deeply with no blooming or sludging, and dries fast.
- SERVES as base coat under paint and varnish.
- SAVES replacement costs and repainting expenses.

### COLORLESS, FAST-DRYING PRESERVATIVE FOR ALL TYPES OF WOOD

Exterior: Doors and Frames • Window Sash • Porch Decking, Rails, Uprights • Garden Furniture, Lattices • Fence Boards and Dividers • Ladders • Shingles • Fence and Gate Posts • Wood in Contact with Masonry or Soil

#### COVERAGE

One gallon 200 sq ft approx  
Five to 10 gallons 1 000 board ft approx

### WARNING: KEEP OUT OF REACH OF CHILDREN

See WARNINGS on other panel

NET CONTENTS ONE GALLON

MANUFACTURED BY

### STANDARD TAR PRODUCTS CO.

2458 West Cornell St Milwaukee, Wis 53209



CUSTOMER <b>MIDWAY CAN CO</b> GALLON 7/8" INSIDE SOLDER YELLOW BASE, RED & BLACK PRINTS & VARNISH		DESIGN NO. <b>CD 135 1615</b> DATE <b>6/22/73</b>	
ART NO. <b>SW 5822</b> ARTIST <b>WDN</b>		CHECKED BY <b>BN</b>	
DESIGN COPY LEGAL		REVISIONS 1/13 4-782 4-1078 A 1782	

3796