

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER
KEEP OUT OF REACH OF CHILDREN**

Corrosive. Causes irreversible eye damage. Causes skin irritation. Harmful if inhaled. Harmful if swallowed. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals.

- Do not get in eyes, on skin, on clothing.
- Avoid breathing vapor. Do not swallow.
- Wear goggles, protective clothing, and butyl or nitrile gloves.
- Wash thoroughly with soap and water after handling.
- Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING

AQUCARTM 514 Water Treatment Microbiocide solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about 27°F (-3°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (26.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral-wound stainless steel with TEFLON® is suitable for gaskets and packing.

LIMITED WARRANTY AND DISCLAIMER

Seller warrants that the product conforms to its chemical description as contained on this label and is reasonably fit for the purposes stated on this label when used in accordance with directions under normal conditions of use. THE WARRANTIES MADE IN THIS PARAGRAPH ARE SELLER'S SOLE WARRANTIES WITH RESPECT TO THE PRODUCT AND ARE MADE EXPRESSLY IN LIEU OF AND EXCLUDE ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER EXPRESS OR IMPLIED REPRESENTATIONS AND WARRANTIES.


BEFORE HANDLING OR USING, READ AND UNDERSTAND CURRENT MATERIAL SAFETY DATA SHEET FOR THIS PRODUCT.

ACCEPTED

OCT 12 2001

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. **464-700**

NOTICE
Do Not Ship or Store with Food, Feeds, Drugs, or Clothing

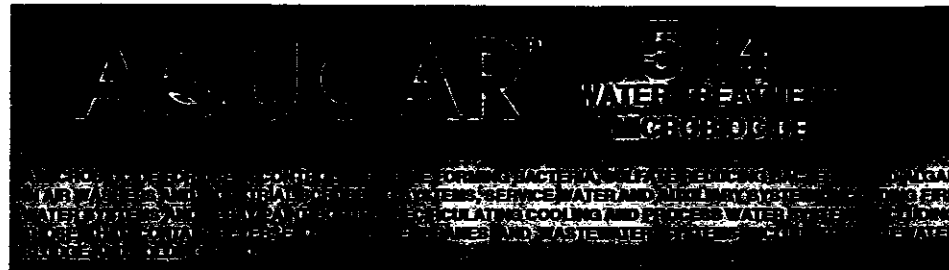

Active Ingredient: Glutaraldehyde 14.0%
Alkyl C₁₄ 50%, C₁₂ 40%, C₁₆ 10%
dimethyl benzyl ammonium chloride 2.5%
Inert Ingredients: 83.5%
100.0%

**KEEP OUT OF REACH OF CHILDREN
DANGER
FIRST AID**

If swallowed:

- Call a poison control center or a doctor immediately for treatment advice.
- DO NOT INDUCE VOMITING.
- Do not give anything to drink.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- After at least 15 minutes of rinsing or after it is judged that nearly all of the contamination has been removed, contact an Ophthalmologist before attempting to remove the contact lens(es).
- Call a poison control center or a doctor immediately for treatment advice.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or a doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, and then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or a doctor for further treatment advice.

NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

Have the MSDS and, if available, the product container or label with you when calling a poison control center or a doctor, or going for treatment.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.



THE DOW CHEMICAL COMPANY
Midland, Michigan 48674 U.S.A.
1-300-258-CHEM
Trademark of THE DOW CHEMICAL COMPANY

EPA Reg. No. 464-
EPA Est. No. 10352-WV-2
L1434E (G 06/01)
Made In USA
PE0601

Net Contents: 5 or 55 gallons

CONTAINER SIZE	CONTAINER SIZE
55 GALLONS	5 GALLONS
484 POUNDS	44 POUNDS
NET WEIGHT	NET WEIGHT

IN CASE OF AN EMERGENCY endangering life or property involving this product, call collect 989-636-4400.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**AIR WASHERS AND INDUSTRIAL SCRUBBING SYSTEMS/
RECIRCULATING COOLING AND PROCESS WATER SYSTEMS**

This product may be used only in industrial air washers and air washer systems which have mist-eliminating components.

AQUCARTM 514 Water Treatment Microbiocide should be added to a water treatment system at a point of uniform mixing such as the basin area. Addition may be made intermittently (SLUG DOSE) or continuously. Badly fouled systems can be shock treated with AQUCARTM 514 Water Treatment Microbiocide. Under these conditions, blowdown should be discontinued for up to 24 hours.

AQUCARTM 514 Water Treatment Microbiocide can be used in industrial process water systems that contain ultra filtration units and non-medical reverse osmosis membranes (where approved for compatibility by the membrane manufacturer) and associated distribution systems.

INTERMITTENT (SLUG DOSE) METHOD

Initial Dose: When the system is noticeably fouled, add 4.2 to 8.5 fluid ounces of AQUCARTM 514 Water Treatment Microbiocide per 100 gallons of water in the system. Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 1.7 to 4.2 fluid ounces of AQUCARTM 514 Water Treatment Microbiocide per 100 gallons of water in the system weekly, or as needed to maintain control.

Badly fouled systems must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD

Initial Dose: When the system is noticeably fouled, apply 4.2 to 8.5 fluid ounces of AQUCARTM 514 Water Treatment Microbiocide per 100 gallons of water in the system.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of 0.8 to 4.2 fluid ounces of AQUCARTM 514 Water Treatment Microbiocide per 100 gallons of water in the system per day.

Badly fouled systems must be cleaned before treatment is begun.

SERVICE WATER AND AUXILIARY SYSTEMS

(Fire water systems and spray paint booths)

AQUCARTM 514 Water Treatment Microbiocide should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point that will allow for uniform mixing throughout the system.

HEAT TRANSFER SYSTEMS

(Evaporative Condensers, Dairy Sweetwater Systems, Hydrostatic Sterilizers and Retorts, and Pasteurizers and Warmers and Once-Through Cooling Water Systems)

AQUCARTM 514 Water Treatment Microbiocide should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point of uniform mixing such as a basin area, sump area or other reservoir or collecting area from which the treated water will be circulated uniformly throughout the system.

INDUSTRIAL WASTEWATER SYSTEMS

(Wastewater Systems, Wastewater Sludge and Wastewater Holding Tanks)

AQUCARTM 514 Water Treatment Microbiocide should be added to a wastewater system or sludge at a convenient point of uniform mixing such as the digester. Add 20 to 96 fluid ounces (1.25 pints to 3 quarts) (1,600 to 7,700 ppm) AQUCARTM 514 Water Treatment Microbiocide per 100 gallons of wastewater or sludge.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinseate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Metal Containers or Plastic Containers: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other procedures approved by state and local authorities. **Plastic Containers:** May be incinerated, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke. **Metal Containers:** Must not be incinerated. Do not cut or weld on or near metal containers.

464-700

10-12-2001

11