DIRECTIONS

INFUCO DIBROME may be used in the [illegible] treatment of [illegible] any [illegible] equipment [illegible] equipment generally [illegible]

Run equipment [illegible] possible before shutting down. Excessive [illegible] tanks in machines or [illegible] prevent the fumigant from reaching all parts of the equipment.

Eliminate drafts in and the equipment by closing off connections to any dust collectors which have openings to the outside of the building. Take any other steps necessary to prevent air movement inside the equipment.

Open enough windows in the mill building during the application of INFUCO DIBROME to allow adequate ventilation. Immediately after application, close all doors and windows to reduce drafts in the building during the exposure period.

INFUCO DIBROME may be applied with suitable automatic application equipment or with a portable hand operated applicator calibrated to deliver accurate dosages. Use a "closed system" applicator only. Use as indicated in the dosage table, paying particular attention to dead cutters where insect pests tend to gather. Deliver the desired dosages to the various pieces of equipment through properly bored quarter-inch holes. Apply INFUCO DIBROME so that the [illegible] from the [illegible]

[illegible]

NET CONTENTS GALLONS

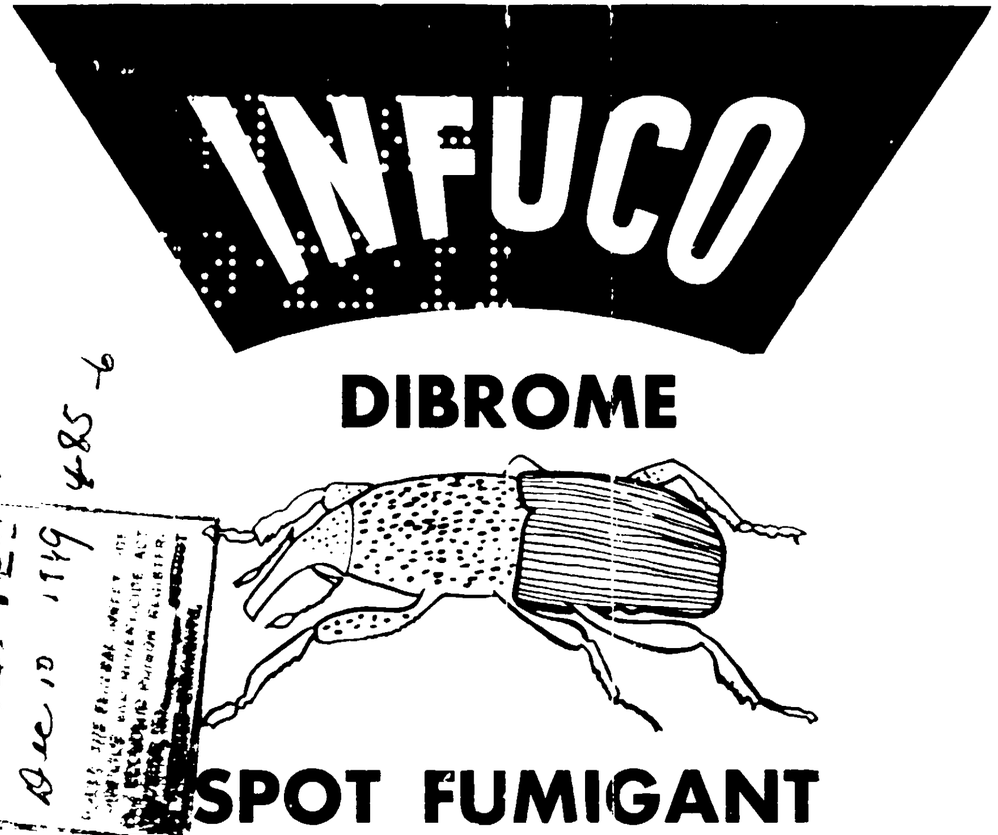

ACTIVE INGREDIENTS	100%
Ethylene dibromide	70%
Methyl bromide	30%

INFUCO DIBROME is recommended as a spot fumigant for the control of confused flour beetle, red flour beetle, flat grain beetle, Indian meal moth, Cadelle and Mediterranean flour moth infestations in mill equipment such as elevator boots and belts, conveyors, bins, purifiers, sifters, rolls and dusters.

DANGER

POISON

KEEP OUT OF REACH OF CHILDREN. HAZARDOUS LIQUID AND VAPOR. MAY BE FATAL IF INHALED OR SWALLOWED. ABSORBED THROUGH THE SKIN. CONTACT WITH LIQUID MAY PRODUCE BURNS. [illegible] and other warning [illegible]

Manufactured for

THE INDUSTRIAL FUMIGANT COMPANY

KANSAS CITY, MO. 64101

SUGGESTED DOSAGES OF INFUCO DIBROME

Machinery Unit	Elevator Boots	Conveyors		[illegible]ter [illegible]tions	Dust Trunks
Application Point	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
Dosage in Fluid Ounces	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

Machinery Unit	Bran and Shorts Dusters	Purifier	Spouts	Rolls Each Side	Elevator Heads
Application Point	[illegible] Hole at Top [illegible] Air Spouting	[illegible] Spout Above	[illegible] Hand Spout	[illegible] Spouts Above	[illegible]
Dosage in Fluid Ounces	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

WARNING: Store in tightly closed [illegible] away from dwelling.

[illegible] containers or fumigating equipment [illegible] INFUCO DIBROME may be severely corrosive to certain metals.

[illegible] INFUCO DIBROME [illegible] rubber [illegible]

DANGER

HAZARDOUS LIQUID AND VAPOR
MAY BE FATAL IF INHALED OR SWALLOWED
ABSORBED THROUGH THE SKIN
CONTACT WITH LIQUID MAY PRODUCE BURNS

Do Not Breathe Vapor
Wear approved gas mask when releasing gas in confined area or entering an area under gas
Do not Get in Eyes, on Skin, or Clothing
Keep Away from Heat • Keep Container Closed
SEND FOR A DOCTOR IN CASE OF ACCIDENT

FIRST AID

[illegible]

In case of eye contact, flush eyes with plenty of water for at least 15 minutes and get medical attention.

In case of skin contact, wash with soap and water, remove and wash clothing before re-use. Do not wear shoes until free of all DIBROME odor.