

518-6

11-19-1964

1/2

1516 VOL GRAY GREEN B&K

1 — U.S. QT. LIQUID


clear

CUPRINOL® WOOD PRESERVATIVE

STOPS ROT • PREVENTS TERMITES

WATER REPELLENT • QUICK DRYING

ACCEPTED
 11-19-64
 518-6
 UNDER THE FEDERAL INSECTICIDE AND FUNGICIDE ACT FOR ECONOMIC POISON REGISTERED UNDER NO. 518-6 TO ATTACH COMMENTS.

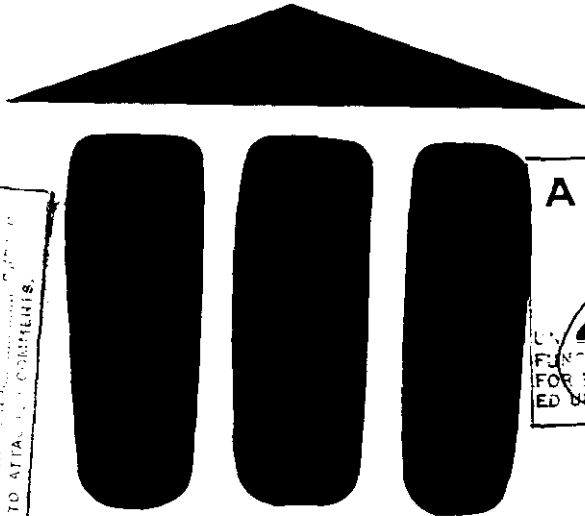

ACCEPTED
 NOV 12 1964
 UNDER THE FEDERAL INSECTICIDE AND FUNGICIDE ACT FOR ECONOMIC POISON REGISTERED UNDER NO. 518-6

ACTIVE INGREDIENTS:
 Zinc Naphthenate 24.00%
 Dieldrin® 50%
 INERT INGREDIENTS 75.50%
 Total 100.00%

0.43% Hexachloroepoxyoctahydroendo, exo-dimethano-naphthalene and 0.07% related compounds.

WARNING: KEEP OUT OF REACH OF CHILDREN.
 READ CAUTIONS ON BACK. USDA Reg. No. 518-6

SEAM

2/2

SEAM

CUPRINOL® WOOD PRESERVATIVE

CUPRINOL is world famous for prolonging the life and performance of wood by reducing rot, termite damage, mildew, warping, checking, and swelling. CUPRINOL greatly reduces the probability of paint peeling.

CLEAR CUPRINOL gives wood a beautiful, long-lasting, natural finish which needs no additional protection. By adding universal oil tints to CLEAR CUPRINOL, a wide range of preservative colors may be achieved. If desired, paint, stain, varnish or clear finish may be applied over CLEAR CUPRINOL.

Treated wood is nontoxic to plant life after drying.

CUPRINOL is available in CLEAR, GREEN, REDWOOD STAIN, and BROWN STAIN. GREEN CUPRINOL is recommended for wood in contact with the soil or under copper bottom paint.

DIRECTIONS

Apply by brush, roller, spray, or dip to clean bare wood. Use one generous coat under finishes. When no finish is to be used, two generous coats applied within 10 minutes or a 3-minute dip is recommended. The more preservative absorbed by the wood, the longer and more effective the protection. CUPRINOL dries to the touch rapidly. Allow approximately 24 hours before applying paint or finish.

Clean CUPRINOL from hands, brushes, etc., with mineral spirits or turpentine.

COVERAGE: 400 sq. ft. per gallon average, depending on wood porosity and surface roughness.

CAUTION: COMBUSTIBLE MIXTURE C. of A. NO 1798. The solvent used in CUPRINOL has a flash point of 105° F. Do not use near any burning or glowing materials, heaters or sparks. Use in a well-ventilated place.

WARNING: Harmful if swallowed, inhaled or absorbed through skin. Avoid breathing of dust, or spray mist. Avoid contact with skin, eyes, or clothing. In case of contact with skin or eyes flush with plenty of water; for eyes, get medical attention. Wash with soap and water after handling and before eating or smoking; wear clean clothing. Avoid contamination of feed and foodstuffs. Keep out of reach of children. To protect fish and wildlife, do not contaminate streams, lakes or ponds with this material.

BY THE MAKERS OF:

POLYSEAMSEAL®	Adhesive Caulk	HY STRIP®	Wax Remover
CUPRINOL®	Wood Preservatives	STAT®	Brush Keeper
TM-4®	Washaway Paint Remover	EVEN-EVEN®	Stains
TM-3®	Paint Remover		

**Darworth Incorporated
Simsbury, Connecticut**



©

