

518-6

3-9-1965

1/2


Best available copy

ACCEPTED
 3-9-65
 518-6
 UNDER THE FEDERAL INSECTICIDE AND FUNGICIDE ACT FOR CHEMICAL FOR ON WEEDS
 ATTACHED TO LABEL

1 — U.S. QT. LIQUID

clear

CUPRINOL® WOOD PRESERVATIVE

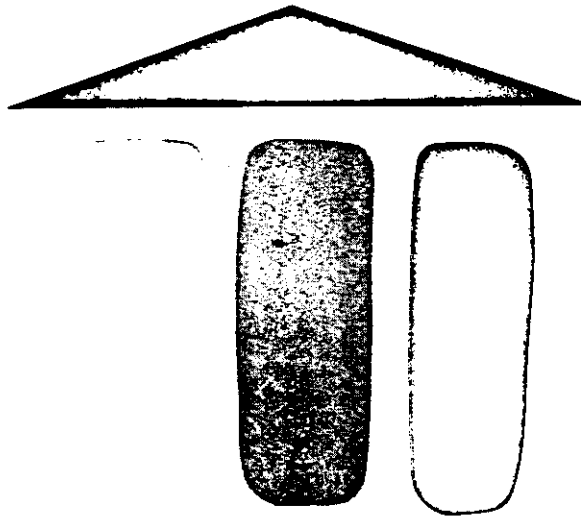

ACTIVE INGREDIENTS:
 Zinc Naphthenate 24.00% *0.43% Hexachloroepoxyoctahydro-endo-
 (equivalent to metallic zinc 2%) 50% exo-dimethano-naphthalene and 0.07%
 Dieldrin* 75.50% related compounds.
 INERT INGREDIENTS Total 100.00%

WARNING: KEEP OUT OF REACH OF CHILDREN.
 READ CAUTIONS ON BACK. USDA Reg. No. 518-6

c/e

ACCEPTED
3-9-65
518-6
UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND ROENTGENIC ACT
FOR ECONOMIC POISON REGISTERED
ED UNDER NO. SUBJECT
TO ATTACHED COMMENTS.

CUPRINOL® WOOD PRESERVATIVE

CUPRINOL is world famous for prolonging the life and performance of wood by reducing rot, termite damage, mildew, warping, checking, and swelling. CUPRINOL greatly reduces the probability of paint peeling.

CLEAR CUPRINOL gives wood a beautiful, long-lasting, natural finish which needs no additional protection. By adding universal oil tints to CLEAR CUPRINOL, a wide range of preservative colors may be achieved. If desired, paint, stain, varnish or clear finish may be applied over CLEAR CUPRINOL.

Treated wood is nontoxic to plant life after drying.

CUPRINOL is available in CLEAR, GREEN, REDWOOD STAIN, and BROWN STAIN. GREEN CUPRINOL is recommended for wood in contact with the soil or under copper bottom paint.

DIRECTIONS

Apply by brush, roller, spray, or dip to clean bare wood. Use one generous coat under finishes. When no finish is to be used, two generous coats applied within 10 minutes or a 3 minute dip is recommended. The more preservative absorbed by the wood, the longer and more effective the protection. CUPRINOL dries to the touch rapidly. Allow approximately 24 hours before applying paint or finish.

Clean CUPRINOL from hands, brushes, etc., with mineral spirits or turpentine.

COVERAGE: 400 sq. ft. per gallon average, depending on wood porosity and surface roughness.

CAUTION: COMBUSTIBLE MIXTURE C of A. NO 1798. The solvent used in CUPRINOL has a flash point of 105 F. Do not use near any burning or glowing materials, heaters or sparks. Use in a well-ventilated place.

WARNING: Harmful if swallowed, inhaled or absorbed through skin. Avoid breathing of dust, or spray mist. Avoid contact with skin, eyes, or clothing. In case of contact with skin or eyes, flush with plenty of water; for eyes, get medical attention. Wash with soap and water after handling and before eating or smoking, wear clean clothing. Avoid contamination of feed and foodstuffs. Keep out of reach of children. To protect fish and wildlife, do not contaminate streams, lakes or ponds with this material.

BY THE MAKERS OF:

- | | | | |
|---------------|------------------------|---------------|--------------|
| POLYSEAMSEAL* | Adhesive Caulk | HY STRIP* | Wax Remover |
| CUPRINOL* | Wood Preservatives | STAT | Brush Keeper |
| TM-4* | Washaway Paint Remover | EVEN EVEN* | Stains |
| | TM-3* | Paint Remover | |

**Darworth Incorporated
Simsbury, Connecticut**

